

LSEG Quantitative Analytics

Database Schema for US Insider Data

Version 1.1



LSEG DATA &
ANALYTICS

Contents

1 Introduction.....	3
In This Document.....	3
Intended Readership.....	3
Table Name Conventions	3
Pervasive and Oracle.....	3
Zero Values and Nulls.....	3
Service and Support	4
Feedback	5
Your Personal Information	5
2. United States Insider Filing Data	6
InsCode: United States Insider Codes	7
InsFData: Insider Data Values	7
InsFDCNInfo: Insiders Profile Identifier Changes.....	8
InsFIndRet: Insider Historical Transaction Returns.....	9
InsFNatAcq: Insider Nature of Acquisition Data	9
InsFProInfo: Insider Profiles.....	10
InsFRoles: Insider Roles.....	10
InsInfo: Security-level Identifying Information.....	11
InsInfoChg: Security-level Identifying Information	11
InsItem: Insider Filing and Insider Trading Models.....	12
3. United States Insider Trading Data.....	13
InsTMv1: Insider Trading Model (Version 1) Items	14
InsTMv2Dly: Daily Insider Trading Model (Version 2) Items	14
InsTMv2Wk: Weekly Insider Trading Model (Version 2) Items.....	14

1 Introduction

In This Document

This document provides schema information about the **US Insider** data tables in Quantitative Analytics.

NOTE

For information about the other Quantitative Analytics tables, refer to the other Database Schema documents posted on the [Quantitative Analytics](#) product page on [MyAccount](#).

The documentation for each table includes these main elements:

- **Vendor Database or License Name** – This element provides the vendor database or license name. Vendor databases generally correspond to vendor licensing options.
- **Table Name: Table Title** – This element provides the table name and title, followed by a description of the table contents.
- **Update Cycle** – This element indicates the frequency of updates from the data vendor. (For specific information about when this update is posted for your use, refer to your update logs. The update log schema description is available in the Database Schema for Quantitative Analytics Core Tables document.)
- **Adjusted** – This element indicates whether the data is stored adjusted, unadjusted, or if adjustment is not applicable (N/A).
- **Indexes, Index Fields** – This element lists the table's index(es) (for example, pkey_CSGCAD) and the index fields. The primary index contains a "pkey_" or "PK_" prefix. Clustered indexes are noted.
- **Field, Type, Nullable, Definition** – This element describes the table's fields, including field names, data types, and whether each field is nullable. The data types in Snowflake have equivalents available. For example, an *int* in SQL Server is a *number* in Snowflake.

Intended Readership

This document is intended for Quantitative Analytics clients licensed to use **US Insider** data through LSEG. Note that the tables described in this document may be covered by several licenses; your access to the data in these tables is dependent on the licenses you have. Readers should have basic knowledge of Microsoft SQL Server 2016.

Table Name Conventions

In Quantitative Analytics, database tables are grouped by name. Generally, the first few letters of the table name refer to the data vendor or licensing group. For example, all tables that begin with **INS*** are **US Insider** data tables.

Pervasive and Oracle

This document is specific to Microsoft SQL Server 2016. If you are accessing the data directly through the Pervasive database, you may encounter slight differences in index names and data types. Please note that references to Pervasive and Actian are synonymous.

If you are accessing the data through Oracle, note that field names that correspond to Oracle reserved words are appended with an underscore. For example, field names "Number", "Synonym", and "UID" become "Number_", "Synonym_", and "UID_" in Oracle.

Zero Values and Nulls

Null values are usually recorded as "NULL". Occasionally, a table may contain a value of "-99999" or "-9999"; in these cases, there is no recorded data for that period. (It is null.) If the table contains a "0" value, the data was reported as having a "0" value.

Service and Support

[MyAccount](#) is the LSEG portal that provides a single access point for timesaving support services, along with billing, user management, and information.

Statement of Service

The [Quantitative Analytics Service Description](#) is available on the [Quantitative Analytics](#) product page at MyAccount.

Subscribe to Support Channels

You are encouraged to [subscribe](#) to the following support channels to keep informed of changes to products and data, and to be notified of any service issues or change. Please see the *Alerts and Notifications* section in the *Quantitative Analytics Service Description* available on the [Quantitative Analytics](#) product page at MyAccount for detailed instructions.

- **Change Notifications**
 - **Product Change Notifications (PCNs)** detail new, enhanced, or changed functionality, which may require your action, in products that you use.
 - **Data Notifications (DNs)** alert you to upcoming changes to real-time and historical data across all asset classes that are relevant to you.
 - **RIC Change Events** inform you of planned changes to RICs. RIC is the market level identifier key unique to LSEG used to identify securities.
- **Service Alerts**
Alert you about planned maintenance and unplanned service issues affecting your products and services, and be notified via SMS or email.

Documentation

You can access product documentation on the [Quantitative Analytics](#) product page at MyAccount.

Get Support

For support using Quantitative Analytics, please use one of the following methods:

Online

Access [Get Support](#) either via the blue [Get Support](#) button at the top right of each page or by selecting *Get Support* located under *Help and Support* on the left navigation pane at MyAccount.

From the *Get Support* page, choose *Get Product and Content Support* and then select the appropriate category from the next page. Complete the request making sure to include the following:

- Under Product, select Quantitative Analytics from the dropdown list.
- In the **How can we help you?** text box, include the following information:
 - Content set name (i.e. Worldscope)
 - Date applicable to a content inquiry
 - Table names and relevant fields
 - Security code (i.e. QA-ID, PermID, Sedol, InfoCode, etc.)
 - Script used to generate the output
 - Any other supporting detail

Telephone

Region	Telephone	Options
AMERS	+01 866 427 8390	Option 1 – Product Support Option 2 – Technical Support
EMEA	+44 203 341 1036	
APAC	+65 6403 7436	

Feedback


We invite your comments, corrections, and suggestions about this document: access the [Feedback](#) option under [Get Support](#) at MyAccount. Your feedback helps us continue to improve our user assistance.

Your Personal Information

LSEG is committed to the responsible handling and protection of personal information. We invite you to review our [Privacy Statement](#), which describes how we collect, use, disclose, transfer, and store personal information when needed to provide our services and for our operational and business purposes.

2. United States Insider Filing Data

This diagram shows the relationship between the US Insider Filing Data tables.

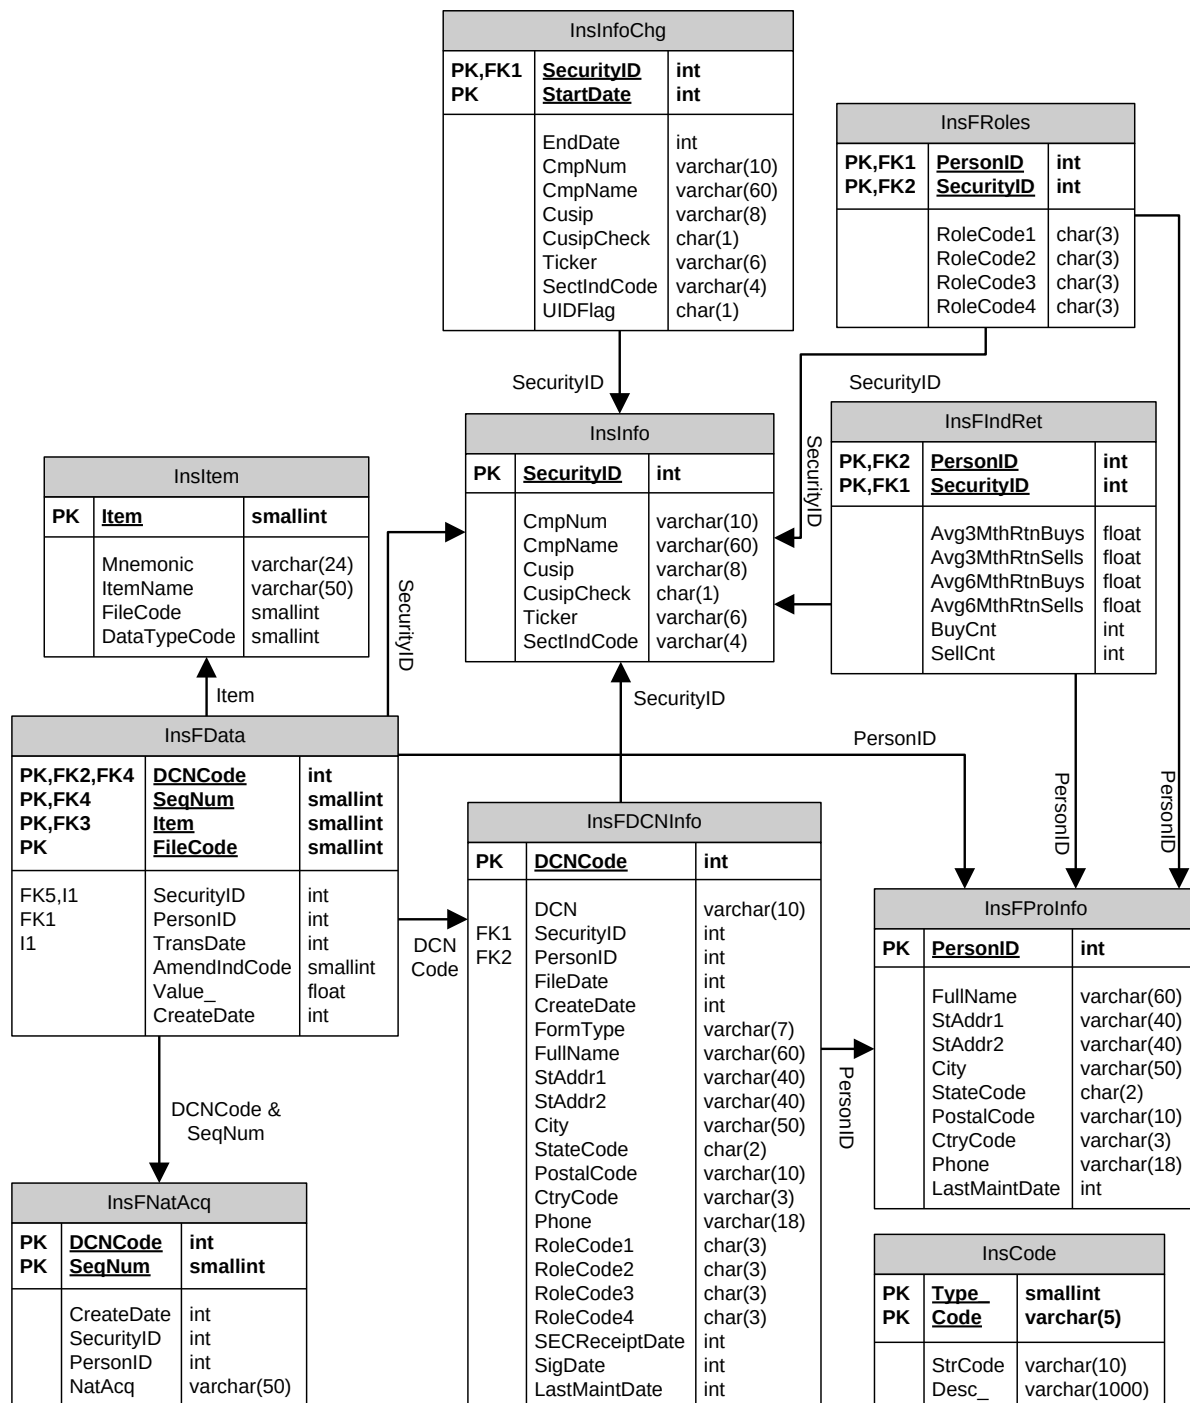

InsCode: United States Insider Codes

This table provides descriptions for the coded fields in the US Insider tables.

NOTE

This table is shared between the US Insider Filing and US Insider Trading Data tables.

Update Cycle: Daily

Adjusted: N/A

Indexes		Index Fields	
pkey_InsCode (clustered)		Type_, Code	
Field	Type	Nullable	Description
Type_	smallint	N	Type_ identifies the reference type. Types are defined where Type_ = 0 and Code identifies Type_.
Code	varchar(5)	N	Code is described by Desc_. Code is cross-referenced from other tables.
StrCode	varchar(10)	Y	StrCode is the character code provided by the vendor, if applicable. If not available, StrCode is the same as Code.
Desc_	varchar(1000)	Y	Desc_ is the description of code.

InsFData: Insider Data Values

This table provides the data values for all Insider items.

Update Cycle: Daily

Adjusted: Unadjusted

Indexes		Index Fields	
pkey_InsFData (clustered)		DCNCode, SeqNum, Item, FileCode	
Field	Type	Nullable	Description
DCNCode	int	N	DCNCode is the Document Control Number code. This is a LSEG generated code.
SeqNum	smallint	N	SeqNum is an identifier for each of the individual transactions on a form, as a single filing may contain multiple transactions. You can use SeqNum in conjunction with the DCNCode to uniquely identify every record.
Item	smallint	N	Item is the unique item number. Item cross-references with InsItem .
FileCode	smallint	N	FileCode is a LSEG assigned number indicating the file type, such as, TableOne, TableTwo, Form144, and so on. Cross-reference FileCode with InsCode where FileCode = InsCode.Code and InsCode.Type_ = 14.
SecurityID	int	Y	SecurityID is a LSEG internally assigned unique identifier for a security. This identifier enables you to link company data, regardless of changes in company name or ticker symbol.
PersonID	int	Y	PersonID is a LSEG internally assigned unique identifier for an individual insider. This identifier ensures that an insider is not represented multiple times within his or her own company (for example as John Ronald Smith, John R. Smith, and so on). This unique identifier also enables you to accurately track an individual's transactions over time.
TransDate	int	Y	For Forms 3, 4, and 5, TransDate is either the date of the transaction or the date of the holdings report. For Form 144, this is the best estimate of the future sale date.
AmendIndCode	smallint	Y	AmendIndCode indicates whether a record represents an amendment made to an earlier filing. Amended filings are noted with an A. Otherwise, the field is blank.
Value_	float	Y	Value_ is the item value.
CreateDate	int	Y	CreateDate is the creation date of the record, in the format YYYYMMDD.

InsFDCNInfo: Insiders Profile Identifier Changes

This table contains a history of identifier changes for the Insider profile, based on the document control number (DCN).

Update Cycle: Daily

Adjusted: N/A

Indexes		Index Fields	
pkey_InsFDCNInfo (clustered)		DCNCode	

Field	Type	Nullable	Description
DCNCode	int	N	DCNCode is the Document Control Number code. This is a LSEG generated code.
DCN	varchar(10)	Y	DCN is the Document Control Number. This is a unique number assigned to each document that enables you to track the information back to the original source.
SecurityID	int	Y	SecurityID is a LSEG internally assigned unique identifier for a security. This identifier enables you to link company data, regardless of changes in company name or ticker symbol.
PersonID	int	Y	PersonID is a LSEG internally assigned unique identifier for an individual insider. This identifier ensures that an insider is not represented multiple times within his or her own company (for example as John Ronald Smith, John R. Smith, and so on). This unique identifier also enables you to accurately track an individual's transactions over time.
FileDate	int	Y	FileDate is the date the file was created, in the format YYYYMMDD.
CreateDate	int	Y	CreateDate is the creation date of the record, in the format YYYYMMDD.
FormType	varchar(7)	Y	FormType is the type of form the insider filed, with possible values of 3, 4, 5, or 144.
FullName	varchar(60)	Y	FullName is the filing insider's complete name displayed as last name, first name, middle name, and suffix.
StAddr1	varchar(40)	Y	StAddr1 is the insider's reported street address.
StAddr2	varchar(40)	Y	StrAddr2 is the insider's reported suite or building number. A post office box number may also be included, if provided.
City	varchar(50)	Y	City is the insider's reported city of residence.
StateCode	char(2)	Y	StateCode is the two-character abbreviation for the insider's reported state of residence. This field applies only for domestic addresses. InsFDCNInfo.StateCode cross-references with InsCode .Code where Type_ = 7.
PostalCode	varchar(10)	Y	PostalCode is the insider's reported US zip code or international postal code.
CtryCode	varchar(3)		CtryCode identifies the insider's reported country of residence. InsFDCNInfo.CtryCode cross-references with InsCode .Code where Type_ = 8.
Phone	varchar(18)	Y	Phone is the insider's phone number, if provided.
RoleCode1	char(3)	Y	Role Codes 1-4 are the insider's roles or positions within the company, as reported on the filing. InsFDCNInfo.RoleCode* cross-references with InsCode .Code where Type_ = 1.
RoleCode2	char(3)	Y	
RoleCode3	char(3)	Y	
RoleCode4	char(3)	Y	
SECReceiptDate	int	Y	SECReceiptDate is the date the filing was received by the Securities and Exchange Commission, in the format YYYYMMDD. This is the SEC Stamp Date.
SigDate	int	Y	SigDate is the date that the filing was signed by the insider or by a person authorized to sign on behalf of the insider, in the format YYYYMMDD.
LastMaintDate	int	Y	LastMaintDate is the last day that a record was modified, in the format YYYYMMDD.

InsFndRet: Insider Historical Transaction Returns

This table contains information on a stock's historical performance following an insider's transactions. When calculating returns, similar transactions are aggregated into a seven-day period.

Update Cycle: Daily

Adjusted: Unadjusted

Indexes		Index Fields	
pkey_InsFndRet (clustered)		PersonID, SecurityID	

Field	Type	Nullable	Description
PersonID	int	N	PersonID is a LSEG internally assigned unique identifier that allows for consistent and accurate identification of individual insiders. This identifier ensures that an insider is not represented multiple times (for example, John Ronald Smith, John R. Smith, etc.) within his or her own company. This unique identifier also allows you to accurately track an individual's transactions over time.
SecurityID	int	N	SecurityID is a LSEG internally assigned unique identifier for a security. This identifier enables you to link company data, regardless of changes in company name or ticker symbol.
Avg3MthRtnBuys	float	Y	Avg3MthRtnBuys is the average three-month performance returns following a given insider's purchase decisions.
Avg3MthRtnSells	float	Y	Avg3MthRtnSells is the average three-month performance returns following a given insider's sell decisions.
Avg6MthRtnBuys	float	Y	Avg6MthRtnBuys is the average six-month performance returns following a given insider's purchase decisions.
Avg6MthRtnSells	float	Y	Avg6MthRtnSells is the average six-month performance returns following a given insider's sell decisions.
BuyCnt	int	Y	The number of historic buy decisions by the insider.
SellCnt	int	Y	The number of historic sell decisions by the insider.

InsFNatAcq: Insider Nature of Acquisition Data

Use this table to retrieve nature of acquisition data for Form 144 filings.

Update Cycle: Daily

Adjusted: N/A

Indexes		Index Fields	
pkey_InsFNatAcq (clustered)		DCNCode, SeqNum	

Field	Type	Nullable	Description
DCNCode	int	N	DCNCode is the Document Control Number code. This is a LSEG generated code.
SeqNum	smallint	N	SeqNum is an identifier for each of the individual transactions on a form, as a single filing may contain multiple transactions. You can use SeqNum in conjunction with the DCN to uniquely identify every record.
CreateDate	int	Y	CreateDate is the creation date of the record, in the format YYYYMMDD.
SecurityID	int	Y	SecurityID is a LSEG internally assigned unique identifier for a security. This identifier enables you to link company data, regardless of changes in company name or ticker symbol.
PersonID	int	Y	PersonID is a LSEG internally assigned unique identifier for an individual insider. This identifier ensures that an insider is not represented multiple times within his or her own company (for example as John Ronald Smith, John R. Smith, and so on). This unique identifier also enables you to accurately track an individual's transactions over time.
NatAcq	varchar(50)	Y	NatAcq describes how the shares were acquired by the insider. For example, shares may have been acquired through the exercise of stock options or by the founder during an initial public offering.

InsFProInfo: Insider Profiles

This table contains the current profile for all insiders.

Update Cycle: Daily

Adjusted: N/A

Indexes		Index Fields	
pkey_InsFProInfo (clustered)		PersonID	

Field	Type	Nullable	Description
PersonID	int	N	PersonID is a LSEG internally assigned unique identifier for an individual insider. This identifier ensures that an insider is not represented multiple times within his or her own company (for example as John Ronald Smith, John R. Smith, and so on). This unique identifier also enables you to accurately track an individual's transactions over time.
FullName	varchar(60)	Y	FullName is the filing insider's complete name in the order of last name, first name, middle name, and suffix.
StAddr1	varchar(40)	Y	StAddr1 is the insider's reported street address.
StrAddr2	varchar(40)	Y	StrAddr2 is the insider's reported suite or building number. A post office box number may also be included, if provided.
City	varchar(50)	Y	City is the insider's reported city of residence.
StateCode	char(2)	Y	StateCode is the two-character abbreviation for the insider's reported state of residence. This field applies only for domestic addresses. InsFProInfo.StateCode cross-references with InsCode .Code where Type_ = 7.
PostalCode	varchar(10)	Y	PostalCode is the insider's reported US zip code or international postal code.
CtryCode	varchar(3)	Y	CtryCode identifies the insider's reported country of residence. InsFProInfo.CtryCode cross-references with InsCode .Code where Type_ = 8.
Phone	varchar(18)	Y	Phone is the insider's phone number, if provided.
LastMaintDate	int	Y	LastMaintDate is the last day that a record was modified, in the format YYYYMMDD.

InsFRoles: Insider Roles

Use this table to retrieve information on the roles for each insider within a company.

Update Cycle: Daily

Adjusted: N/A

Indexes		Index Fields	
pkey_InsFRoles (clustered)		PersonID, SecurityID	

Field	Type	Nullable	Description
PersonID	int	N	PersonID is a LSEG internally assigned unique identifier for an individual insider. This identifier ensures that an insider is not represented multiple times within his or her own company (for example as John Ronald Smith, John R. Smith, and so on). This unique identifier also enables you to accurately track an individual's transactions over time.
SecurityID	int	N	SecurityID is a LSEG internally assigned unique identifier for a security. This identifier enables you to link company data, regardless of changes in company name or ticker symbol.
RoleCode1	char(3)	Y	Role Codes 1-4 are the insider's roles or positions within the company, as reported on the filing. InsFRoles.RoleCode* cross-references with InsCode .Code where Type_ = 1.
RoleCode2	char(3)	Y	
RoleCode3	char(3)	Y	
RoleCode4	char(3)	Y	

InsInfo: Security-level Identifying Information

This table contains security-level identifying information.

NOTE

This table is shared between the US Insider Filing and US Insider Trading Data tables.

Update Cycle: Daily

Adjusted: N/A

Indexes		Index Fields	
pkey_InsInfo (clustered)		SecurityID	

Field	Type	Nullable	Description
SecurityID	int	N	SecurityID is a LSEG internally assigned unique identifier for a security. This identifier enables you to link company data, regardless of changes in company name or ticker symbol.
CmpNum	varchar(10)	Y	CmpNum is the internal company number.
CmpName	varchar(60)	Y	CmpName is the name of the company or issuer at the time of the filing.
Cusip	varchar(8)	Y	Cusip is the CUSIP number. It is a unique identifier for issuers and issues of securities and financial instruments. Issuer CUSIP refers to the company. Issue CUSIP refers to the security type, for example, common stock or preferred stock.
CusipCheck	char(1)	Y	CusipCheck is the CUSIP check digit. This is the ninth digit of the CUSIP number and it provides a means of mathematically verifying the accuracy of the CUSIP issuer and issue numbers.
Ticker	varchar(6)	Y	Ticker is the ticker symbol of the company with which the insider is affiliated at the time of the transaction. If the company is inactive at the time that the data is run, the ticker field is blank.
SectIndCode	varchar(4)	Y	SectIndCode is the Sector/Industry code. This identifies the sector and industry in which the company primarily operates. Cross-reference SectIndCode with InsCode where SectIndCode = InsCode.Code and InsCode.Type_ = 6.

InsInfoChg: Security-level Identifying Information

Use this table to retrieve historical changes to security-level identifying information on a go-forward basis.

Update Cycle: Daily

Adjusted: N/A

Indexes		Index Fields	
pkey_InsInfoChg (clustered)		SecurityID, StartDate	

Field	Type	Nullable	Description
SecurityID	int	N	SecurityID is a LSEG internally assigned unique identifier for a security. This identifier enables you to link company data, regardless of changes in company name or ticker symbol.
StartDate	int	N	StartDate is the first date the record is active.
EndDate	int	Y	EndDate is the last date the record is active. If the record is currently active, then this is NULL.
CmpNum	varchar(10)	Y	CmpNum is the internal company number.
CmpName	varchar(60)	Y	CmpName is the name of the company or issuer at the time of the filing.
Cusip	varchar(8)	Y	Cusip is the CUSIP number. It is a unique identifier for issuers and issues of securities and financial instruments. Issuer CUSIP refers to the company. Issue CUSIP refers to the security type, for example, common stock or preferred stock.
CusipCheck	char(1)	Y	CusipCheck is the CUSIP check digit. This is the ninth digit of the CUSIP number and it provides a means of mathematically verifying the accuracy of the CUSIP issuer and issue numbers.

Field	Type	Nullable	Description
Ticker	varchar(6)	Y	Ticker is the ticker symbol of the company with which the insider is affiliated at the time of the transaction. If the company is inactive at the time that the data is run, the ticker field is blank.
SectIndCode	varchar(4)	Y	SectIndCode is the Sector/Industry code. This identifies the sector and industry in which the company primarily operates. Cross-reference SectIndCode with InsCode where SectIndCode = InsCode.Code and InsCode.Type_ = 6.
UIDFlag	char(1)	Y	UIDFlag is for internal use only.

InsItem: Insider Filing and Insider Trading Models

This table provides identifying information for each data item in the Insider Filing and Insider Trading models.

Update Cycle: Daily

Adjusted: N/A

Indexes	Index Fields
pkey_InsItem (clustered)	Item


Field	Type	Nullable	Description
Item	smallint	N	Item is the unique LSEG generated code that uniquely identifies each data item.
Mnemonic	varchar(24)	Y	Mnemonic is the LSEG generated character code that uniquely identifies each data item.
ItemName	varchar(50)	Y	ItemName is the item description.
FileCode	smallint	Y	FileCode is a LSEG assigned number indicating the file type, such as, TableOne, TableTwo, Form144, and so on. Cross-reference FileCode with InsCode where FileCode = InsCode.Code and InsCode.Type_ = 14.
DataTypeCode	smallint	Y	DataTypeCode identifies the SQL data type for each field. Cross-reference DataTypeCode with InsCode where DataTypeCode = InsCode.Code and InsCode.Type_ = 13.

3. United States Insider Trading Data

This diagram shows the relationship between the US Insider Trading data tables.

NOTE

The InsItem table and the InsInfo table are shared between the US Insider Filing data tables and the US Insider Trading data tables.

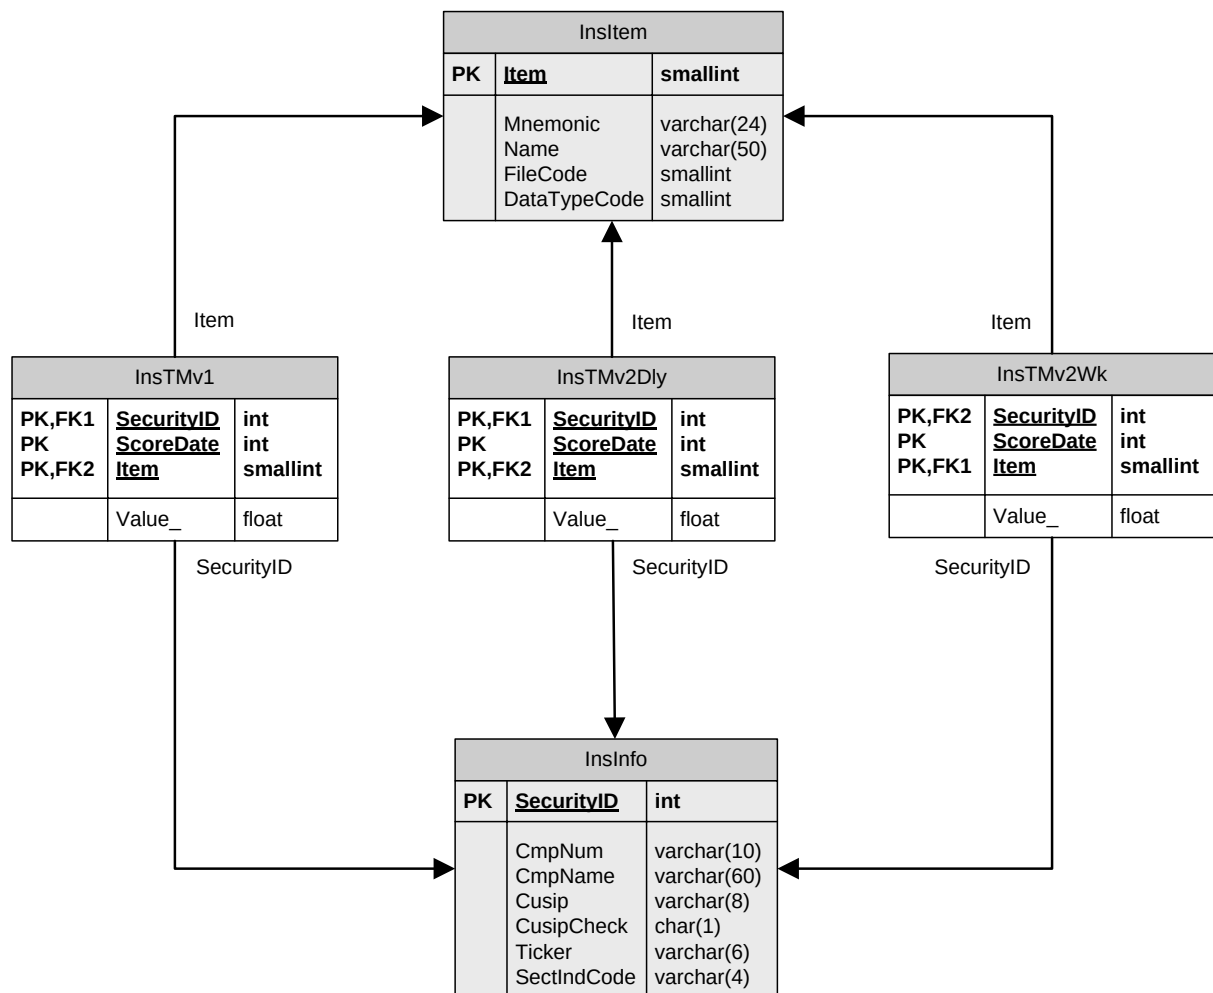

InsTMv1: Insider Trading Model (Version 1) Items

This table contains the data values for the Insider Trading Model (Version 1) items.

Update Cycle: Weekly

Adjusted: Unadjusted

Indexes		Index Fields	
pkey_InsTMv1 (clustered)		SecurityID, ScoreDate, Item	
Field	Type	Nullable	Description
SecurityID	int	N	SecurityID is a LSEG internally assigned unique identifier for a security. This identifier enables you to link company data, regardless of changes in company name or ticker symbol.
ScoreDate	int	N	ScoreDate is the week ending date of the score, in the format YYYY-MM-DD.
Item	smallint	N	Item is the unique item number. Item cross-references with InsItem .
Value_	float	Y	Value_ is the item value.

InsTMv2Dly: Daily Insider Trading Model (Version 2) Items

This table contains the data values for the Insider Trading Model (Version 2) items on a daily basis.

Update Cycle: Daily

Adjusted: Unadjusted

Indexes		Index Fields	
pkey_InsTMv2Dly (clustered)		SecurityID, ScoreDate, Item	
Field	Type	Nullable	Description
SecurityID	int	N	SecurityID is a LSEG internally assigned unique identifier for a security. This identifier enables you to link company data, regardless of changes in company name or ticker symbol.
ScoreDate	int	N	ScoreDate is the week ending date of the score, in the format YYYY-MM-DD.
Item	smallint	N	Item is the unique item number. Item cross-references with InsItem .
Value_	float	Y	Value_ is the item value.

InsTMv2Wk: Weekly Insider Trading Model (Version 2) Items

This table contains the data values for the Insider Trading Model (Version 2) items on a weekly basis.

Update Cycle: Weekly

Adjusted: N/A

Indexes		Index Fields	
pkey_InsTMv2Wk (clustered)		SecurityID, ScoreDate, Item	
Field	Type	Nullable	Description
SecurityID	int	N	SecurityID is a LSEG internally assigned unique identifier for a security. This identifier enables you to link company data, regardless of changes in company name or ticker symbol.
ScoreDate	int	N	ScoreDate is the week ending date of the score, in the format YYYY-MM-DD.
Item	smallint	N	Item is the unique item number. Item cross-references with InsItem .
Value_	float	Y	Value_ is the item value.

Copyright © 2024 London Stock Exchange Group plc and its group of companies (LSEG) and/or its affiliates. All rights reserved. The LSEG content received through this service is the intellectual property of LSEG or its third party suppliers. Republication or redistribution of content provided by LSEG is expressly prohibited without the prior written consent of LSEG, except where permitted by the terms of the relevant LSEG service agreement. Neither LSEG nor its third party suppliers shall be liable for any errors, omissions or delays in content, or for any actions taken in reliance thereon. LSEG and its logo are trademarks of LSEG.

For more information visit us at www.lseg.com



LSEG DATA &
ANALYTICS