

biber

A backend bibliography processor for biblatex

François Charette, Philip Kime
firminus@ankabut.net,
Philip@kime.org.uk

Version biber 0.9.6 (biblatex 1.7)
22nd September 2011

Contents

1 Important Changes

Please see the `Changes` file which accompanies `biber` for the details on changes in each version. This section is just for important things like incompatible changes which users should be aware of.

0.9.6

Matching of citation keys and datasource entry keys is now *case-sensitive*. This is to enforce consistency across the entire `biblatex` and `biber` processing chain. All of the usual referencing mechanisms in LaTeX are case-sensitive and so is the matching in `biblatex` of citations to entries in the `.bbl` file generated by `biber`. It is inconsistent and messy to enforce case-insensitivity in only `biber`'s matching of citations keys to datasource entry keys. If `biber` detects what looks like a case mismatch between citation keys, it will warn you.

Summary of warnings/errors is now a new format. When `biber` finishes writing the `.bbl`, it gives a summary count of errors/warnings. It used to do this in the same format as `bibtex`, for compatibility. Now it uses a more consistent and easier to parse format which matches all other `biber` messages. Please note if you need to support `biber` in an external tool. I have updated the notes on AUCTeX support below to reflect this.

2 Introduction

2.1 About

`biber` is conceptually a `bibtex` replacement for `biblatex`. It is written in Perl with the aim of providing a customised and sophisticated data preparation backend for `biblatex`. You do *not* need to install Perl use `biber`—binaries are provided for many operating systems via the main TeX distributions (TeXLive, MacTeX, MiKTeX) and also via download from SourceForge. Functionally, `biber` offers a superset of `bibtex`'s capabilities but is tightly coupled with `biblatex` and cannot be used as a stand-alone tool with standard `.bst` styles. `biber`'s role is to support `biblatex` by performing the following tasks:

biber version	biblatex version
0.9.6	1.7x
0.9.5	1.6x
0.9.4	1.5x
0.9.3	1.5x
0.9.2	1.4x
0.9.1	1.4x
0.9	1.4x

Table 1: biber/biblatex compatibility matrix

- Parsing data from data sources
- Processing cross-references, entry sets, related entries
- Generating data for name, name list and name/year disambiguation
- Structural validation according to biblatex data model
- Sorting reference lists
- Outputting data to a .bbl for biblatex to consume

2.2 Requirements

biber is distributed primarily as a stand-alone binary and is included in TeXLive, MacTeX and MiKTeX. If you are using any of these distributions, you do not need any additional software installed to use biber. You do *not* need a Perl installation at all to use the binary distribution of biber¹.

biber is developed on SourceForge² and this is the primary location for development releases, forums and bugfixes etc. It is included into TeXLive from the SourceForge releases.

2.3 Compatibility Matrix

biber versions are closed coupled with biblatex versions. You need to have the right combination of the two. biber will warn you during processing if it encounters information which comes from the wrong biblatex version. Table ?? shows a compatibility matrix for the recent versions.

2.4 License

biber is released under the free software Artistic License 2.0³

¹If you prefer, you can run biber as a normal Perl program and doing this *does* require you to have a Perl interpreter installed. See section ??.

²<http://sourceforge.net/projects/biblatex-biber/>

³<http://www.opensource.org/licenses/artistic-license-2.0.php>

2.5 History

`bibtex` has been the default (only ...) integrated choice for bibliography processing in TeX for a long time. It has well known limitations which stem from its data format, data model and lack of Unicode support⁴. The `.bst` language for writing bibliography styles is painful to learn and use. It is not a general programming language and this makes it really very hard to do sophisticated automated processing of bibliographies.

`biblatex` was a major advance for LaTeX users as it moved much of the bibliography processing into LaTeX macros. However, `biblatex` still used `bibtex` as a sorting engine for the bibliography and also to generate various labels for entries. `bibtex`'s capabilities even for this reduced set of tasks was still quite restricted due to the lack of Unicode support and the more and more complex programming issues involved in label preparation and file encoding.

`biber` was designed specifically for `biblatex` in order to provide a powerful backend engine which could deal with any required tasks to do with `.bbl` preparation. Its main features are:

- Deals with the full range of UTF-8
- Sorts in a completely customisable manner, using when available, CLDR collation tailoring
- Allows for per-entrytype options
- Automatically encodes the `.bbl` into any supported encoding format⁵
- Processes all bibliography sections in one pass of the tool
- Handles UTF-8 citekeys and filenames (given a suitable fully UTF-8 compliant TeX engine)
- Creates entry sets dynamically and allow easily defined static entry sets, all processed in one pass
- Flexible user-customisable crossreference field inheritance model
- Handles complex auto-expansion and contraction of names and namelists (See section 4.11.4 of the `biblatex` manual for an excellent explanation with examples, this is quite an impressive feature ...)
- Support for related entries, to enable generic treatment of things like 'translated as', 'reprinted as', 'reprint of' etc. (`biblatex` support coming in `biblatex 2.x`)
- Extensible modular data sources architecture for ease of adding more data source types
- Support for remote data sources
- Customisable labels (`biblatex` support coming in `biblatex 2.x`)

⁴In fact, there is now a Unicode version

⁵'Supported' here means encodings supported by the Perl Encode module

- Multiple bibliography lists in the same section with different sorting and filtering (`biblatex` support coming in `biblatex 2.x`)
- User-definable mapping and suppression of fields and entrytypes in data sources. You can use this to, for example, ignore all `ABSTRACT` fields completely. See section ??
- No more restriction to a static data model of specific fields and entrytypes. (`biblatex` support coming in `biblatex 2.x`)
- Structural validation of the data against the data model with a customisable validation model (`biblatex` support coming in `biblatex 2.x`)

Figure ?? shows the main functional units of processing in `biber`. The most difficult tasks which `biber` performs are the processing of `biblatex`'s `uniquename` and `uniquelist` options⁶, the sorting of lists⁷ and the initial data parse and remap into an internal data model. `biber` is getting on for around 20,000 lines of mostly OO Perl and relies on certain splendid Perl modules such as `Unicode::Collate`, `Text::BibTeX` and `XML::LibXML`.

2.6 Performance

`biber` can't really be compared with `bibtex` in any meaningful way performance-wise. `biber` is written in Perl and does a *great* deal more than `bibtex` which is written in C. One of `biber`'s test cases is a 2150 entry, 15,000 line `.bib` file which references a 630 entry macros file with a resulting 160 or so page (A4) formatted bibliography. This takes `biber` under 3 minutes to process on on a reasonable computer. This is perfectly acceptable, especially for a batch program.

2.7 Acknowledgements

François Charette originally wrote `biber`. Philip Kime joined in the development in 2009.

3 Use

Firstly, please note that `biber` will *not* attempt to sanitise the content of `bibtex` data sources. That is, don't expect it to auto-escape any TeX special characters like `'&'` or `'%'` which it finds in, for example, your `TITLE` fields. It used to do this in earlier versions in some cases but as of version 0.9, it doesn't because it's fraught with problems and leads to inconsistent expectations and behaviour between different data

⁶A rather tricky unbounded loop but with a guaranteed eventual stable exit state.

⁷This is a complex, arbitrary multi-field Schwartzian Transform which has to deal with potentially different case and order settings for every field.

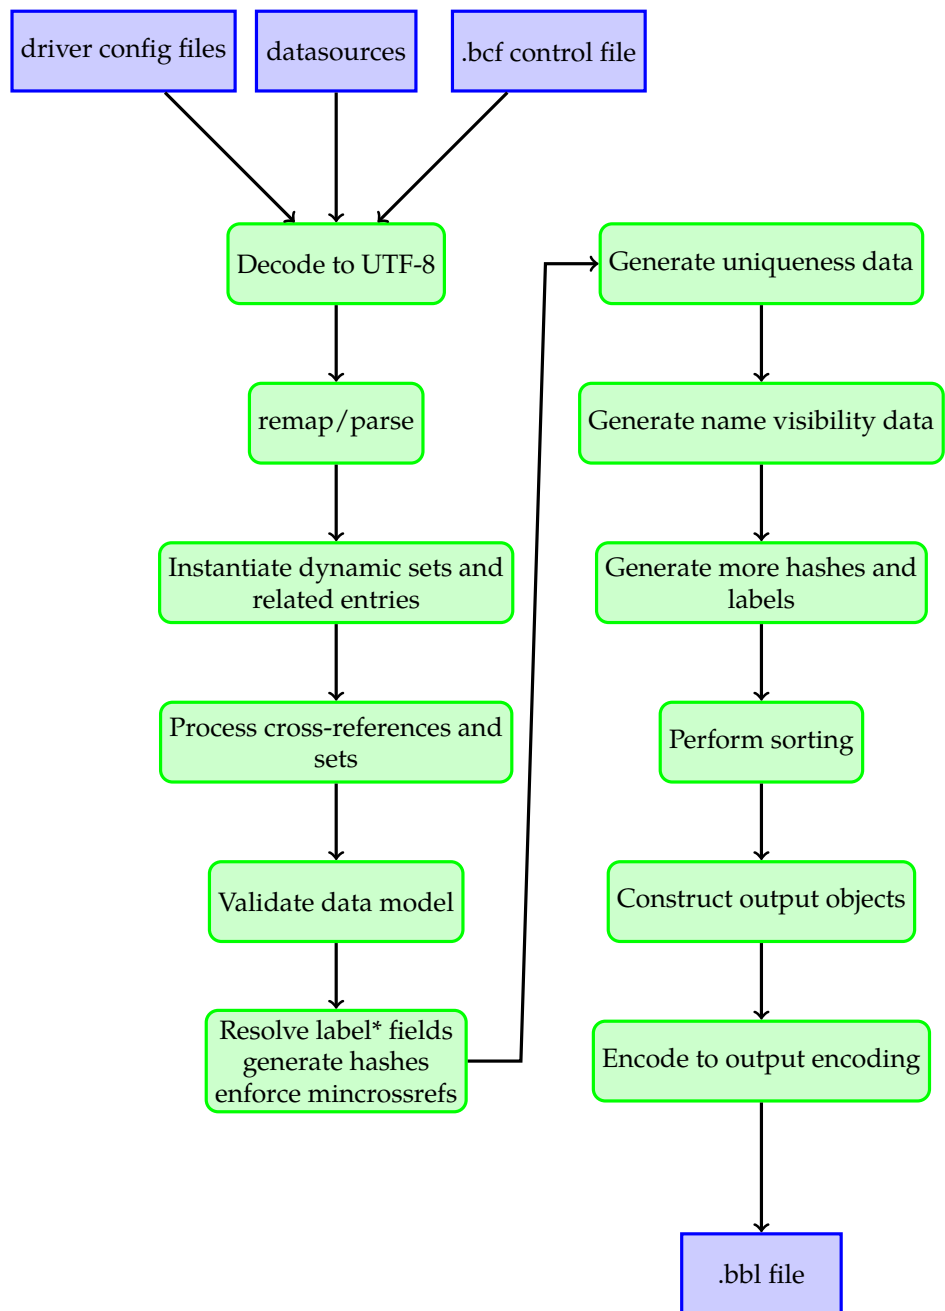


Figure 1: Overview of `biber`'s main functional units

source types. In your `bibtex` data sources, please make sure your entries are legal TeX code.

Running `biber --help` will display all options and a brief description of each. This is the most useful brief source of usage information. `biber` returns an exit code of 0 on success or 1 if there was an error.

Most `biber` options can be specified in long or short format. When mentioning options below, they are referred to as ‘long form|short form’ when an option has both a long and short form. As usual with such options, when the option requires an argument, the long form is followed by an equals sign ‘=’ and then the argument, the short form is followed by a space and then the argument. For example, the `--configfile|-g` option can be given in two ways:

```
biber --configfile=somefile.conf
biber -g somefile.conf
```

With the `backend=biber` option, `biblatex` switches its backend interface and passes all options and information relevant to `biber`’s operation in a control file with extension `.bcf`⁸. This is conceptually equivalent to the `.aux` file which LaTeX uses to pass information to `bibtex`. The `.bcf` file is XML and contains many options and settings which configure how `biber` is to process the bibliography and generate the `.bbl` file.

The usual way to call `biber` is simply with the `.bcf` file as the only argument. `biblatex` always writes the control file with a `.bcf` extension. Specifying the ‘`.bcf`’ extension to `biber` is optional. Assuming a control file called `test.bcf`, the following two commands are equivalent:

```
biber test.bcf
biber test
```

3.1 Options and config file

`biblatex` options which `biber` needs to know about are passed via the `.bcf` file. See Table ?? for the `biblatex` options which `biber` uses and also for the scopes which are supported for each option. `biber` also has its own options which are set using the following resource chain, given in decreasing precedence order:

```
command line options →
  biber.conf file →
    .bcf file →
      biber hard-coded defaults
```

⁸BibLaTeX Control File

<code>biblatex</code> option	Global	Per-type	Per-entry
<code>alphaothers</code>	✓	✓	
<code>dataonly</code>		✓	✓
<code>inheritance</code>	✓		
<code>labelalpha</code>	✓	✓	
<code>labelalphatemplate</code>	✓	✓	
<code>labelnamespec</code>	✓	✓	
<code>labelnumber</code>	✓	✓	
<code>labeleyear</code>	✓	✓	
<code>labeleyearspec</code>	✓	✓	
<code>maxalphanames</code>	✓	✓	✓
<code>maxbibnames</code>	✓	✓	✓
<code>maxcitenames</code>	✓	✓	✓
<code>maxitems</code>	✓	✓	✓
<code>minalphanames</code>	✓	✓	✓
<code>minbibnames</code>	✓	✓	✓
<code>mincitenames</code>	✓	✓	✓
<code>minitems</code>	✓	✓	✓
<code>presort</code>	✓	✓	✓
<code>singletitle</code>	✓	✓	
<code>skipbib</code>		✓	✓
<code>skiplab</code>		✓	✓
<code>skiplos</code>		✓	✓
<code>sortalphaothers</code>	✓	✓	
<code>sortexclusion</code>		✓	
<code>sorting</code>	✓		
<code>sortlos</code>	✓		
<code>structure</code>	✓		
<code>uniquelist</code>	✓	✓	✓
<code>uniqueusername</code>	✓	✓	✓
<code>useauthor</code>	✓	✓	✓
<code>useeditor</code>	✓	✓	✓
<code>useprefix</code>	✓	✓	✓
<code>usetranslator</code>	✓	✓	✓

Table 2: `biblatex` options which `biber` uses

Users do not need to care directly about the contents or format of the `.bcf` file as this is generated from the options which they specify via `biblatex`. The config file is a place to set commonly used command-line options and also to set options which cannot be set on the command line.

The configuration file is by default called `biber.conf` but this can be changed using the `--configfile|-g` option. Unless `--configfile|-g` is used, the config file is looked for in the following places, in decreasing order of preference:

`biber.conf` in the current directory →

`$HOME/.biber.conf` →

`$XDG_CONFIG_HOME/biber/biber.conf` →

`$HOME/Library/biber/biber.conf` (Mac OSX only)

`$APPDATA/biber.conf` (Windows only) →

the output of `'kpsewhich biber.conf'` (if available on the system)

The config file format is a very flexible one which allows users to specify options in most common formats, even mixed in the same file. It's easier to see an example. Here is a config file which displays the `biber` defaults:

```
bblencoding      UTF-8
bibencoding      UTF-8
collate          1
<collate_options>
  level          3
</collate_options>
debug            0
fastsort         0
mincrossrefs     2
nolog            0
nostdmacros      0
<nosort>
  # ignore prefices like 'al-' when sorting name fields
  type_names     \A\p{L}{2}\p{Pd}
  # ignore diacritics when sorting author
  type_names     [\x{2bf}\x{2018}]
</nosort>
onlylog          0
quiet            0
sortcase         true
sortlocale       en_US.utf8
```



```

sortupper      true
trace          0
validate_control 0
validate_structure 0
wraplines      0

```

You can see here that options with multiple key/value pairs of their own like `--collate_options|-c` can be specified in Apache config format. Please see the documentation for the `Config::General` Perl module⁹ if you really need details. In practice, if you use a config file at all for `biber`, it will contain very little as you will usually set all options by setting options in `biblatex` which will pass them to `biber` via the `.bcf` file.

The `--collate_options|-c` option takes a number of key/value pairs as value. See section ?? for details.

3.1.1 The `map` option

The supplied data source drivers implement a default mapping from data source entrytypes and fields into the default `biblatex` data model¹⁰. If you want to override or augment the driver mappings you can use the `map` option which makes it possible to, for example, have a data source with non-standard entrytypes or fields and to have these automatically mapped into other entrytypes/fields without modifying your data source. Essentially, what this does it to alter the source data stream which `biber` uses to build the internal `biblatex` data model. So, you are not constrained such that you must map into the `biblatex` data model. Of course, if you don't, it's likely that your exotic new fields will be ignored by `biber` because they are not valid in the `biblatex` data model. In `biblatex 2.x`, you will be able to redefine the internal `biblatex` data model and pass this to `biber` which will use it internally. Figure ?? is a graphical overview of the data flow for data model information. In `biblatex 2.x`, the greyed static `biblatex` data model will be replaced by a dynamic data model read from the `.bcf` control file. See Figure ?? for a more complete overview of `biber`'s processing steps.

The `map` option can only be set in the config file and not on the command line as it has a complex structure. This option allows you to perform various data source mapping (aliasing) tasks:

- Map data source entrytypes to different entrytypes, optionally also adding new fields to the entry.

⁹<http://search.cpan.org/search?query=Config::General&mode=all>

¹⁰The `biblatex` data model is currently static and defined in the `biblatex` manual. In the future (`biblatex 2.x`), the data model will be dynamically defined by the user.

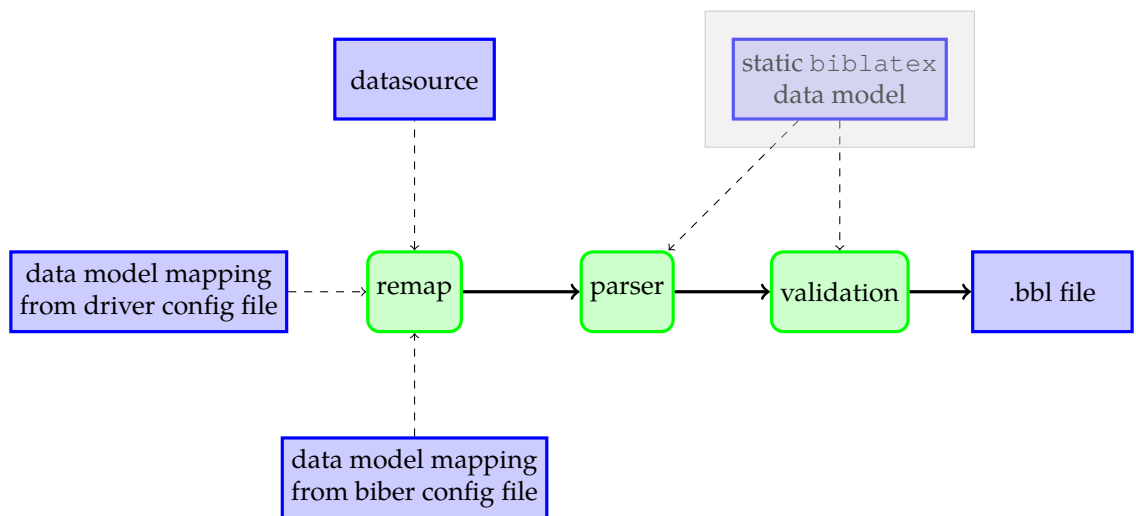


Figure 2: Model data flow in biber

- Map data source fields to different fields, optionally also adding new fields to the entry. This is basically a one→many field mapping. You can also limit field mappings to specific data source entrytypes.
- As a special case of the above, you can map data source fields to null, effectively removing them from the input stream.

The format of the `map` option in the config file is described below, followed by examples which will make everything clear. Items in **red** are not literal, they are descriptive meta-values which are explained in the accompanying text. Items in **blue** are optional within their parent section. The entire `map` option is not case sensitive *apart from the angle-bracketed section names which must be lower-cased as shown*. The examples below use uppercase for variable names and setting in places, for clarity. The general structure is:

```

<map>
  <driver1>
    BMAP_OVERWRITE 1|0
    ...
  </driver1>
    BMAP_OVERWRITE 1|0
    :
  <drivern>
    BMAP_OVERWRITE 1|0
    ...
  </drivern>
</map>

```

Here, `driver1...drivern` are the names of valid biber data source drivers (see section ??). Reserved tokens with special meanings for this option have the prefix ‘BMAP_’ and are described below. Each driver section contains one or more of the following subsections:

- Entrytype mapping
- Simple global field mapping
- Extended global field mapping
- Entrytype specific field mapping

Entrytype mapping

```
<entrytype source-entrytype>
  BMAP_TARGET target-entrytype
  <alsoset>
    target-field1 target-value1
    :
    target-fieldn target-valuen
  </alsoset>
</entrytype>
```

An entrytype specification maps the data source entrytype `source-entrytype` into a different entrytype `target-entrytype`. The literal string `BMAP_TARGET` is a constant and must be used to specify the target entrytype. The `alsoset` section is optional and specifies one or more `target-fields` to set in the entry, along with their `target-values`. The literal token `BMAP_ORIGENTRYTYPE` can be used as the `target-value` and it resolves to the data source entrytype name. The literal token `BMAP_NULL` can be used as the `target-value` and this serves to delete the `target-field`. If the option `BMAP_OVERWRITE` is true (set to ‘1’), then any existing fields which the `alsoset` section mentions will be overwritten. If this option is missing or false (set to ‘0’), then the field will not be set and the existing field value will remain. In both cases, warnings will be issued about the conflicting field, saying whether it will be overwritten or not. An example:

```
<map>
  <bibtex>
    BMAP_OVERWRITE 1
    <entrytype CONVERSATION>
      BMAP_TARGET CUSTOMA
      <alsoset>
        USERA BMAP_ORIGENTRYTYPE
        USERB BMAP_NULL
        NOTE "Auto-created this field"
      </alsoset>
```

```

    </entrytype>
    <entrytype RECORD>
        BMAP_TARGET MUSIC
    </entrytype>
</bibtex>
</map>

```

This would turn a CONVERSATION entrytype in all bibtex data sources into a CUSTOMA entrytype and would automatically set the USERA field in the entry to 'conversation' and the NOTE field to 'Auto-created this field'. The USERB field would be deleted. The USERA, USERB and NOTE fields will be overwritten if present in the entry. Also, the example turns a RECORD entrytype into a MUSIC entrytype.

Simple global field mapping

```

<globalfield>
    source-field1 target-field1
    :
    source-fieldn target-fieldn
</globalfield>

```

This maps data source fields to different fields, regardless of the entrytypes in which they occur (hence 'global'). You may use the special `target-field` constant `BMAP_NULL` to map a field to null, that is, to ignore it. This essentially has the effect of treating the field as if it did not exist in the data source. For example (to add to the previous example, so that you can see a more complete mapping example. The previously discussed example settings are greyed):

```

<map>
  <bibtex>
    BMAP_OVERWRITE 1
    <entrytype CONVERSATION>
      BMAP_TARGET CUSTOMA
      <alsoset>
        USERA BMAP_ORIGENTRYTYPE
        NOTE "Auto-created this field"
      </alsoset>
    </entrytype>
    <entrytype RECORD>
      BMAP_TARGET MUSIC
    </entrytype>
  <globalfield>
    ABSTRACT BMAP_NULL
    PARTICIPANT NAMEA
  </globalfield>

```

```

</bibtex>
<ris>
  <globalfield>
    N2 BMAP_NULL
  </globalfield>
</ris>
</map>

```

Here, we have specified that we should ignore (map to BMAP_NULL) any ABSTRACT fields and that we should map all PARTICIPANT fields to the NAMEA field. We have also specified that we should ignore the N2 field in ris data sources (this is often used for abstracts in RIS).

Extended Global field mapping

```

<globalfield source-field>
  BMAP_TARGET target-field
  <alsoset>
    target-field1 target-value1
    :
    target-fieldn target-valuen
  </alsoset>
</globalfield>

```

Unlike the simple global mapping, this form maps only one `source-field`. You must specify the `target-field` using the constant BMAP_TARGET. The `alsoset` section is optional and specifies one or more `target-fields` to set in the entry, along with their `target-values`. The literal token BMAP_ORIGFIELD can be used as the `target-value` and it resolves to the data source field name. Continuing our example configuration:

```

<map>
  <bibtex>
    BMAP_OVERWRITE 1
    <entrytype CONVERSATION>
      BMAP_TARGET CUSTOMA
      <alsoset>
        USERA BMAP_ORIGENTRYTYPE
        NOTE "Auto-created this field"
      </alsoset>
    </entrytype>
    <entrytype RECORD>
      BMAP_TARGET MUSIC
    </entrytype>
  </globalfield>

```

```

        ABSTRACT BMAP_NULL
        PARTICIPANT NAMEA
    </globalfield>
    <globalfield PUBMEDID>
        BMAP_TARGET EPRINT
        <alsoset>
            EPRINTTYPE BMAP_ORIGFIELD
            NOTE "Auto-created this field"
        </alsoset>
    </globalfield>
</bibtex>
<ris>
    <globalfield>
        N2 BMAP_NULL
    </globalfield>
</ris>
</map>

```

Here, in all entries, the PUBMEDID field becomes the EPRINT field and the EPRINTTYPE field is set to 'pubmedid'. The NOTE field is set to 'Auto-created this field'.

Entrytype specific field mapping

```

<field source-field>
    BMAP_PERTYPE source-entrytype1
    :
    BMAP_PERTYPE source-entrytypen
    BMAP_TARGET target-field
    <alsoset>
        target-field1 target-value1
        :
        target-fieldn target-valuen
    </alsoset>
</field>

```

Here we map the data source `source-field` to the `target-field` but only if it occurs within one of the data source entrytypes `source-entrytype1` ... `source-entrytypen`. The source entrytype restrictions must be specified using the BMAP_PERTYPE token. The target field must be specified using the BMAP_TARGET token. The `alsoset` section is optional and specifies one or more `target-fields` to set in the entry, along with their `target-values`. The literal token BMAP_ORIGFIELD can be used as the `target-value` and it resolves to the data source field name. If there is a global field mapping and also an entrytype specific mapping which both apply to the same field, the more specific has precedence. This is so you can, for example, choose to map a field globally in one way but deal with it another way in certain entrytypes. Continuing the example:

```

<map>
  <bibtex>
    BMAP_OVERWRITE 1
    <entrytype CONVERSATION>
      BMAP_TARGET CUSTOMA
      <alsoset>
        USERA BMAP_ORIGENTRYTYPE
        NOTE "Auto-created this field"
      </alsoset>
    </entrytype>
    <entrytype RECORD>
      BMAP_TARGET MUSIC
    </entrytype>
    <globalfield>
      ABSTRACT BMAP_NULL
      PARTICIPANT NAMEA
    </globalfield>
    <globalfield PUBMEDID>
      BMAP_TARGET EPRINT
      <alsoset>
        EPRINTTYPE BMAP_ORIGFIELD
        NOTE "Auto-created this field"
      </alsoset>
    </globalfield>
    <field NOTE>
      BMAP_PERTYPE ARTICLE
      BMAP_PERTYPE BOOK
      BMAP_TARGET BMAP_NULL
      <alsoset>
        ADDENDUM "A string"
      </alsoset>
    </field>
  </bibtex>
  <ris>
    <globalfield>
      N2 BMAP_NULL
    </globalfield>
  </ris>
</map>

```

Here we have specified that within data source entrytypes ARTICLE and BOOK, the field NOTE should be ignored and the ADDENDUM field should be set to 'A string'.

For data sources other than bibtex, (e.g. ris, endnotexml and zoterordfxml), the source entrytypes and fields are usually very differently modelled and named. For example, here is how to drop the 'subject' fields from various entrytypes in Zotero XML RDF format data sources:

```

<map>
  <zoterordfxml>
    <field "dc:subject">
      BMAP_PERTYPE journalArticle
      BMAP_PERTYPE book
      BMAP_PERTYPE bookSection
      BMAP_TARGET BMAP_NULL
    </field>
  </zoterordfxml>
</map>

```

Or here, mapping journal articles into REPORT entries for Endnote XML format data sources.

```

<map>
  <endnotexml>
    <entrytype "journal Article">
      BMAP_TARGET REPORT
    </entrytype>
  </endnotexml>
</map>

```

3.1.2 The `nosort` option

The value of the `nosort` option can only be set in the config file and not on the command line. This is because the values are Perl regular expressions and would need special quoting to set on the command line. This can get a bit tricky on some OSes (like Windows) so it's safer to set them in the config file. In any case, it's unlikely you would want to set them for particular `biber` runs; they would more likely be set as your personal default and thus they would naturally be set in the config file anyway. `nosort` allows you to ignore parts of a field for sorting. This is done using Perl regular expressions which specify what to ignore in a field. You can specify as many patterns as you like for a specific field. Also available are some field type aliases so you can, for example, specify patterns for all name fields or all title fields. These field types all begin with the string `'type_'`, see Table ??.

For example, this option can be used to ignore diacritic marks and prefixes in names which should not be considered when sorting. Given (the default):

```

<nosort>
  type_names      \A\p{L}{2}\p{Pd}
  type_names      [\x{2bf}\x{2018}]
</nosort>

```

and the `bibtex` data source entry:

Alias	Fields
type_name	author afterword annotator bookauthor commentator editor editora editorb editorc foreword holder introduction namea nameb namec shortauthor shorteditor translator
type_title	booktitle eventtitle issuetitle journaltitle maintitle origtitle title

Table 3: `nosort` option field type aliases

```
AUTHOR = {{al-Hasan}}, °Alī},
```

the prefix ‘al-’ and the diacritic ‘°’ will not be considered when sorting. See the Perl regular expression manual page for details of the regular expression syntax¹¹.

If a `nosort` option is found for a specific field, it will override any option for a type which also covers that field.

Here is another example. Suppose you wanted to ignore ‘The’ at the beginning of a `TITLE` field when sorting, you could add this to your `biber.conf`:

```
<nosort>
  title      \AThe\s+
</nosort>
```

If you wanted to do this for all title fields listed in Table ??, then you would do this:

```
<nosort>
  type_title \AThe\s+
</nosort>
```

Note: `nosort` can be specified for most fields but not for things like dates and special fields as that wouldn’t make much sense.

3.2 Input/Output File Locations

3.2.1 Control file

The control file is normally passed as the only argument to `biber`. It is searched for in the following locations, in decreasing order of priority:

- Absolute filename →
- In the `--output_directory`, if specified →
- Relative to current directory →
- Using `kpsewhich`, if available

3.2.2 Data sources

Local data sources of type ‘file’ are searched for in the following locations, in decreasing order of priority:

- Absolute filename →
- In the `--output_directory`, if specified →

¹¹<http://perldoc.perl.org/perlre.html>

Relative to current directory→
In the same directory as the control file→
Using `kpsewhich` for supported formats, if available

Remote file data sources (beginning with `http://` or `ftp://`) are retrieved to a temp file and processed as normal. Users do not specify explicitly the bibliography database files; they are passed in the `.bcf` control file, which is constructed from the `biblatex '\addbibresource{ }'` macros.

3.3 Logfile

By default, the logfile for `biber` will be named `\jobname.blg`, so, if you run

```
biber <options> test.bcf
```

then the logfile will be called `'test.blg'`. Like the `.bbl` output file, it will be created in the `--output_directory|-c`, if this option is defined. You can override the logfile name by using the `--logfile` option:

```
biber --logfile=lfname test.bcf
```

results in a logfile called `'lfname.blg'`.

Warning: be careful if you are expecting `biber` to write to directories which you don't have appropriate permissions to. This is more commonly an issue on non-Windows OSes. For example, if you rely on `kpsewhich` to find your database files which are in system TeX directories, you may well not have write permission there so `biber` will not be able to write the `.bbl`. Use the `--outfile|-O` option to specify the location to write the `.bbl` to in such cases.

3.4 Collation and Localisation

`biber` takes care of collating the bibliography for `biblatex`. It writes entries to the `.bbl` file sorted by a completely customisable set of rules which are passed in the `.bcf` file by `biblatex`. `biber` has two ways of performing collation:

`--collate|-C`

The default. This option makes `biber` use the `Perl Unicode::Collate` module for collation which implements the full UCA (Unicode Collation Algorithm). It also has CLDR (Common Locale Data Repository) tailoring to deal with cases which are not covered by the UCA. It is a little slower than `--fastsort|-f` but the advantages are such that it's rarely worth using `--fastsort|-f`

`--fastsort|-f`

Biber will sort using the OS locale collation tables. The drawback for this method is that special collation tailoring for various languages are not implemented in the collation tables for many OSes. For example, few OSes correctly sort 'å' before 'ä' in the Swedish (`sv_SE`) locale. If you are using a common latin alphabet, then this is probably not a problem for you.

The locale used for collation is determined by the following resource chain which is given in decreasing precedence order:

```
--collate_options|-c (e.g. -c 'locale => "de_DE"') →  
--sortlocale|-l →  
  LC_COLLATE environment variable →  
  LANG environment variable →  
  LC_ALL environment variable
```

With the default `--collate|-C` option, the locale will be used to look for a collation tailoring for that locale. It will generate an informational warning if it finds none. This is not a problem as the vast majority of collation cases are covered by the standard UCA and many locales neither have nor need any special collation tailoring.

With the `--fastsort|-f` option, the locale will be used to locate an OS locale definition to use for the collation. This may or may not be correctly tailored, depending on the locale and the OS.

Collation is by default case sensitive. You can turn this off globally using the biber option `--sortcase=false` or from biblatex using its option `sortcase=false`. The option can also be defined per-field so you can sort some fields case sensitively and others case insensitively. See the biblatex manual.

`--collate|-C` by default collates uppercase before lower. You can reverse this globally for all sorting using the biber option `--sortupper=false` or from biblatex by using its option `sortupper=false`. The option can also be defined per-field so you can sort some fields uppercase before lower and others lower before upper. See the biblatex manual. Be aware though that some locales rightly enforce a particular setting for this (for example, Danish). You will be able to override it but biber will warn you if you do. `sortupper` has no effect when using `--fastsort|-f`—you are at the mercy of what your OS locale does.

There are in fact many options to `Unicode::Collate` which can tailor the collation in various ways in addition to the locale tailoring which is automatically per-

formed. Users should see the the documentation to the module for the various options, most of which the vast majority of users will never need¹². Options are passed using the `--collate_options|-c` option as a single quoted string, each option separated by comma, each key and value separated by `'=>'`. See examples.

3.4.1 Examples

`biber`

Call `biber` using all settings from the `.bcf` generated from the LaTeX run. Case sensitive UCA sorting is performed taking the locale for tailoring from the environment if no `sortlocale` is defined in the `.bcf`

`biber --sortlocale=de_DE`

Override any locale setting in the `.bcf` or the environment.

`biber --fastsort`

Use slightly quicker internal sorting routine. This uses the OS locale files which may or may not be accurate.

`biber --sortcase=false`

Case insensitive sorting.

`biber --sortupper=false --collate_options="backwards => 2"`

Collate lowercase before upper and collate French accents in reverse order at UCA level 2.

3.5 Encoding of files

`biber` takes care of reencoding the data source data as necessary. In normal use, `biblatex` passes its `bibencoding` option value to `biber` via the `.bcf` file. It also passes the value of its `texencoding` option (which maps to `biber`'s `bbencoding|-E` option) the default value of which depends on which TeX engine and encoding packages you are using (see `biblatex` manual for details).

`biber` performs the following tasks:

1. Decodes the data source into UTF-8 if it is not UTF-8 already
2. Decodes LaTeX character macros into UTF-8 if `--bbencoding|-E` is UTF-8
3. Encodes the output so that the `.bbl` is in the encoding that `--bbencoding|-E` specifies
4. Warns if it is asked to output to the `.bbl` any UTF-8 decoded LaTeX character macros which are not in the `--bbencoding|-E` encoding. Replaces with a suitable LaTeX macro

Normally, you do not need to set the encoding options on the `biber` command line as they are passed in the `.bcf` via the information in your `biblatex` environment.

¹²For details on the various options, see <http://search.cpan.org/search?query=Unicode%3A%3ACollate&mode=all>

However, you can override the `.bcb` settings with the command line. The resource chain for encoding settings is, in decreasing order of preference:

```
--bibencoding|-e and --bblencoding|-E →  
  biber config file →  
    .bcb control file
```

3.5.1 LaTeX macro decoding

As mentioned above, `biber` sometimes converts LaTeX character macros into UTF-8. In fact there are two situations in which this occurs.

1. When `--bblencoding|-E` is UTF-8
2. Always for internal sorting purposes

This decoding is very useful but take note of the following two scenarios, which relate to each of the two situations in which LaTeX macro decoding occurs:

Decoding when output is UTF-8

If you are using PDFLaTeX and `\usepackage[utf8]{inputenc}`, it is possible that the UTF-8 characters resulting from `biber`'s internal LaTeX character macro decoding break `inputenc`. This is because `inputenc` does not implement all of UTF-8, only a commonly used subset.

An example—if you had `\DJ` in your `.bib` data source, `biber` decodes this correctly to 'Ð' and this breaks `inputenc` because it doesn't understand that UTF-8 character. The real solution here is to switch to a TeX engine with full UTF-8 support like XeTeX or LuaTeX as these don't use or need `inputenc`. However, you can also try the `--bblsafechars` option which will try to convert any UTF-8 chars into LaTeX macros on output. For information on the `--bblsafechars` option, see section ??.

Decoding for internal sorting

If your `bblencoding` is not UTF-8, and you are using some UTF-8 equivalent LaTeX character macros in your `.bib` data source, then some `.bbl` fields (currently only `\sortinit{}`) might end up with invalid characters in them, according to the `.bbl` encoding. This is because some fields must be generated from the final sorting data which is only available after the LaTeX character macro decoding step.

For example, suppose you are using PDFLaTeX with `\usepackage[latin1]{inputenc}` and the following `bibtex` data source entry:

```
@BOOK{citekey1,
```

```
AUTHOR = {{\v S}imple, Simon},
}
```

With normal LaTeX character macro decoding, the `{\v S}` is decoded into ‘Š’ and so with name-first sorting, `\sortinit{}` would be ‘Š’. This is an invalid character in latin1 encoding and so the `.bbl` would be broken. In such cases when `\sortinit{}` is a char not valid in the `bblencoding`, `biber` tries to replace the character with a suitable LaTeX macro. The solution is really to use UTF-8 `.bbl` encoding whenever possible. In extreme cases where even with UTF-8 encoding, the char is not recognised by LaTeX due to an incomplete UTF-8 implementation (as with `inputenc`), this might also mean switching TeX engines to one that supports full UTF-8.

3.5.2 LaTeX macro encoding

The opposite of decoding; converting UTF-8 characters into LaTeX macros. You can force this with the `--bblsafechars` option which will do a generally good job of making your `.bbl` plain ASCII. It can be useful in certain edge cases where your bibliography introduces characters which can’t be handled by your main document. See section ?? above for an example such case.

A common use case for LaTeX macro encoding is when the bibliography data source is not ASCII but the `.tex` file is and so this case is automated for you: if the `biblatex` option ‘`texencoding`’ (which corresponds to the `biber` option ‘`--bblencoding|-E`’) is set to an ASCII encoding (‘`ascii`’ or ‘`x-ascii`’) and ‘`--bibencoding|-e`’ is not ASCII, `biber` will automatically set `--bblsafechars`.

See also the `biber --help` output for the `--bblsafecharsset` and `--decodecharsset` options which can customise the set of conversion rules to use. The characters and macros which `biber` maps during encoding and decoding are documented¹³.

3.5.3 Examples

```
biber          Set bibencoding and bblencoding from the config file or .bcf
biber --bblencoding=latin2
               Encode the .bbl as latin2, overriding the .bcf
biber --bblsafechars
               Set bibencoding and bblencoding from the config file or .bcf. Force encoding
               of UTF-8 chars to LaTeX macros using default conversion set
```

¹³<https://sourceforge.net/projects/biblatex-biber/files/biblatex-biber/0.9.6/documentation/utf8-macro-map.html>

```

biber --bblencoding=ascii
    Encode the .bbl as ascii, overriding the .bcf. Automatically sets --bblsafechars
    to force UTF-8 to LaTeX macro conversion
biber --bblencoding=ascii --bblsafecharsset=full
    Encode the .bbl as ascii, overriding the .bcf. Automatically sets --bblsafechars
    to force UTF-8 to LaTeX macro conversion using the full set of conversions
biber --decodecharsset=full
    Set bibencoding and bblencoding from the config file or .bcf. Use the full
    LaTeX macro to UTF-8 conversion set because you have some more obscure charac-
    ter macros in your .bib data source which you want to sort correctly
biber -u
    Shortcut alias for biber --bibencoding=UTF-8
biber -U
    Shortcut alias for biber --bblencoding=UTF-8

```

3.6 Editor Integration

Here is some information on how to integrate `biber` into some of the more common editors

3.6.1 Emacs

Emacs has the very powerful AUCTeX mode for editing TeX and running compilations. BibTeX is already integrated into AUCTeX and it is quite simple to add support for `biber`. Use the Emacs Customise interface to modify the `TeX-command-list` variable and add a Biber command.

```

M-x customize-variable
TeX-command-list

```

and then `Ins` somewhere a new command that looks like Figure ??.

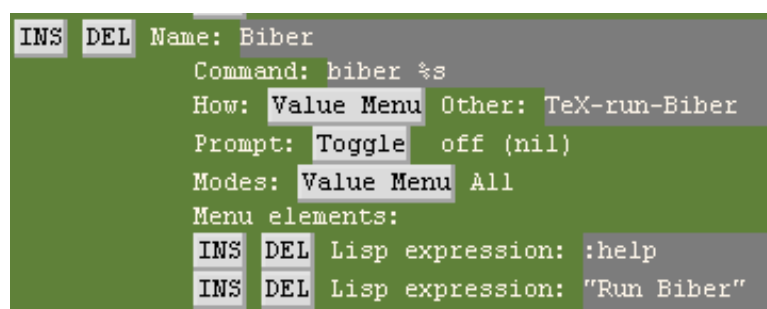


Figure 3: Screenshot of AUCTeX command setup for `biber`

Alternatively, you can add it directly in lisp to your `.emacs` like this:

```
(add-to-list 'TeX-command-list
  (quote
    ("Biber" "biber %s" TeX-run-Biber nil t :help "Run Biber")))
```

However you add the command to `TeX-command-list`, customise the actual Biber command parameters as you want them, using `'%s'` as the LaTeX file name place holder. Then define the following two functions in your `.emacs`.

```
(eval-after-load "tex"
  (quote (defun TeX-run-Biber (name command file)
    "Create a process for NAME using COMMAND to format FILE with Biber."
    (let ((process (TeX-run-command name command file)))
      (setq TeX-sentinel-function 'TeX-Biber-sentinel)
      (if TeX-process-asynchronous
          process
          (TeX-synchronous-sentinel name file process))))
  )

(eval-after-load "tex"
  (quote (defun TeX-Biber-sentinel (process name)
    "Cleanup TeX output buffer after running Biber."
    (goto-char (point-max))
    (cond
     ;; Check whether Biber reports any warnings or errors.
     ((re-search-backward (concat
                           "^INFO - \\(WARNINGS\\|ERRORS\\): \\([0-9]+\\)") nil
                          t)
      (message (concat "Biber finished with %s %s. "
                       "Type `%s' to display output.")
               (match-string 2) (downcase (match-string 1)))
      (substitute-command-keys
       "\\<TeX-mode-map>\\[TeX-recenter-output-buffer]"))
     ((re-search-backward (concat
                           "^FATAL") nil t)
      (message (concat "Biber had a fatal error and did not finish! "
                       "Type `%s' to display output.")
               (substitute-command-keys
                "\\<TeX-mode-map>\\[TeX-recenter-output-buffer]")))
     (t
      (message (concat "Biber finished successfully. "
                       "Run LaTeX again to get citations right."))))
    (setq TeX-command-next TeX-command-default))
  )
)
```

You'll then see a Biber option in your AUCTeX command menu or you can just `C-c C-c` and type Biber.

3.6.2 TeXworks

It's very easy to add biber support to TeXworks. In the Preferences, select the Typesetting tab and then add a new Processing Tool as in Figure ??.

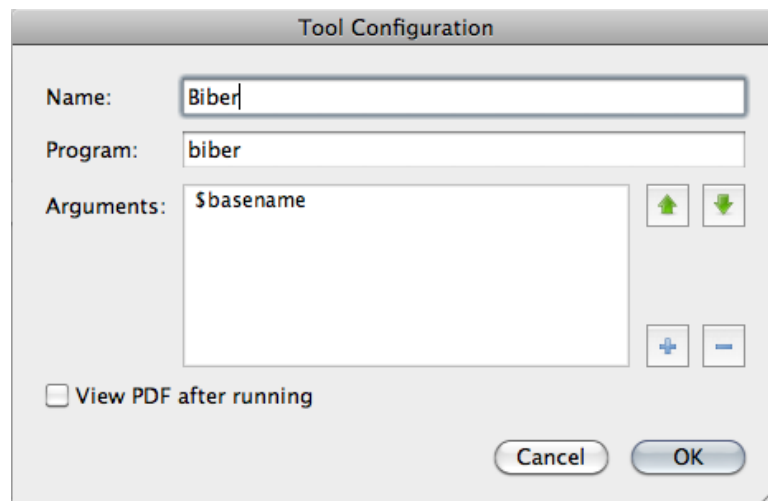


Figure 4: Screenshot of TeXworks processing tool setup for Biber

3.7 BibTeX macros and the MONTH field

BibTeX defines macros for month abbreviations like 'jan', 'feb' etc. biber also does this, defining them as numbers since that is what biblatex wants. In case you are also defining these yourself (although if you are only using biblatex, there isn't much point), you will get macro redefinition warnings from the btparse library. You can turn off biber's macro definitions to avoid this by using the option `--nostdmacros`.

biber will look at any MONTH field in a bibtex data source and if it's not a number as biblatex expects (because it wasn't one of the macros as mentioned above or these macros were disabled by `--nostdmacros`), it will try to turn it into the right number in the .bbl. If you only use biblatex with your bibtex data source files, you should probably make any MONTH fields be the numbers which biblatex expects.

3.8 Biber data source drivers

`biber` uses a modular data source driver model to provide access to supported data sources. The drivers are responsible for mapping driver entry types and fields to the `biblatex` model. This is aided by a driver configuration file (`.dcf`). The information in this file for each driver can be found in the driver documentation folder on SourceForge¹⁴. This file shows you which handlers the driver uses for different fields and what certain entry types and fields are aliased to in the `biblatex` data model. This is not fantastically useful to know without knowing also what the named driver handlers do specifically but there is a ‘description’ section which mentions any special handling and general comments on the driver. You should read the documentation for the drivers you use to get an idea of how `biber` handles your data. Data model mapping is an imprecise art and the drivers are where the necessarily messy parts of `biber` live. Most data source models are not designed with typesetting in mind and are usually not fine-grained enough to provide the sorts of information that `biblatex` needs. `biber` does its best to obtain as much meaningful information from a data source as possible. Currently supported data sources drivers are:

- `bibtex` — BibTeX data files
- `endnotexml` — Endnote XML export format, version \geq Endnote X1
- `ris` — Research Information Systems format
- `zoterordfxml` — Zotero RDF XML format, version 2.0.9

4 Binaries

`biber` is a Perl application which relies heavily on quite a few modules. It is packaged as a stand-alone binary using the excellent `PAR::Packer` module which can pack an entire `Perl` tree plus dependencies into one file which acts as a stand-alone binary and is indistinguishable from such to the end user. You can also simply download the `Perl` source and run it as a normal `Perl` program which requires you to have a working `Perl` 5.10+ installation and the ability to install the pre-requisite modules. You would typically only do this if you wanted to keep up with all the bleeding-edge git commits before they had been packaged as a binary. Almost all users will not want to do this and should use the binaries from their TeX distribution or downloaded directly from SourceForge in case they need to use a more recent binary than is included in their TeX distribution.

The binary distributions of `biber` are made using the `Perl PAR::Packer` module. They can be used as a normal binary but have some behaviour which is worth noting:

¹⁴<https://sourceforge.net/projects/biblatex-biber/files/biblatex-biber/0.9.6/documentation/drivers>

- Don't be worried by the size of the binaries. `PAR::Packer` essentially constructs a self-extracting archive which unpacks the needed files first.
- On the first run of a new version (that is, with a specific hash), they actually unpack themselves to a temporary location which varies by operating system. This unpacking can take a little while and only happens on the first run of a new version. **Please don't kill the process if it seems to take some time to do anything on the first run of a new binary.** If you do, it will not unpack everything and it will almost certainly break `biber`. You will then have to delete your binary cache (see section ?? below) and re-run the `biber` executable again for the first time to allow it to unpack properly.

4.1 Binary Caches

`PAR::Packer` works by unpacking the required files to a cache location. It only does this on the first run of a binary by computing a hash of the binary and comparing it with the cache directory name which contains the hash. So, if you run several versions of a binary, you will end up with several cached trees which are never used. This is particularly true if you are regularly testing new versions of the `biber` binary. It is a good idea to delete the caches for older binaries as they are not needed and can take up a fair bit of space. The caches are located in a temporary location which varies from OS to OS. The cache name is:

```
par-<username>/cache-<hash> (Linux/Unix/OSX)
par-<username>\cache-<hash> (Windows)
```

The temp location is not always obvious but these are sensible places to look (where * can vary depending on username):

- `/var/folders/*/*/*/` (OSX, local GUI login shell)
- `/var/tmp/` (OSX (remote ssh login shell), Unix)
- `/tmp/` (Linux)
- `C:\Documents and Settings\<username>\Local Settings\Temp` (Windows/Cygwin)
- `C:\Windows\Temp` (Windows)

To clean up, you can just remove the whole `par-<username>` directory/folder and then run the current binary again.

4.2 Binary Architectures

Binaries are available for many architectures, directly on SourceForge and also via TeXLive:

- linux_x86_32
- linux_x86_64
- MSWin32
- cygwin32
- darwin_x86_64
- darwin_x86_i386
- freebsd_x86¹⁵
- freebsd_amd64¹⁶
- solaris_x86¹⁷

If you want to run development versions, they are usually only regularly updated for the core architectures which are not flagged as third-party built above. If you want to regularly run the latest development version, you should probably git clone the relevant branch and run `biber` as a pure perl program directly.

4.3 Installing

These instructions only apply to manually downloaded binaries. If `biber` came with your TeX distribution just use it as normal.

Download the binary appropriate to you OS/arch¹⁸. Below I assume it's on your desktop.

You have to move the binary to somewhere in you command-line or TeX utility path so that it can be found. If you know how to do this, just ignore the rest of this section which contains some instructions for users who are not sure about this.

4.3.1 OSX

If you are using the TexLive MacTeX distribution:

```
sudo mv ~/Desktop/biber /usr/texbin/
sudo chmod +x /usr/texbin/biber
```

If you are using the macports TexLive distribution:

¹⁵Binary maintained by third party. See README in binary download directory for this platform for support/contact details. Usually, the binary maintainer is also the binary build provider for TexLive.

¹⁶Binary maintained by third party. See README in binary download directory for this platform for support/contact details. Usually, the binary maintainer is also the binary build provider for TexLive.

¹⁷Binary maintained by third party. See README in binary download directory for this platform for support/contact details. Usually, the binary maintainer is also the binary build provider for TexLive.

¹⁸<https://sourceforge.net/projects/biblatex-biber>

```
sudo mv ~/Desktop/biber /opt/local/bin/  
sudo chmod +x /opt/local/bin/biber
```

The ‘sudo’ commands will prompt you for your password.

4.3.2 Windows

The easiest way is to just move the executable into your `C:\Windows` directory since that is always in your path. A more elegant is to put it somewhere in your TeX distribution that is already in your path. For example if you are using MiKTeX:

```
C:\Program Files\MiKTeX 2.8\miktex\bin\
```

4.3.3 Unix/Linux

```
sudo mv ~/Desktop/biber /usr/local/bin/biber  
sudo chmod +x /usr/local/bin/biber
```

Make sure `/usr/local/bin` is in your `PATH`. Search Google for ‘set PATH linux’ if unsure about this. There are many pages about this, for example: <http://www.cyberciti.biz/faq/unix-linux-adding-path/>

4.4 Building

Instructions for those who want/need to build an executable from the Perl version. For this, you will need to have Perl 5.10+ with the following modules:

- All biber pre-requisites
- `PAR::Packer` and all dependencies

You should have the latest CPAN versions of all required modules as biber is very specific in some cases about module versions and depends on recent fixes in many cases. You can see if you have the biber Perl dependencies by the usual

```
perl ./Build.PL
```

invocation in the biber Perl distribution tree directory. Normally, the build procedure for the binaries is as follows¹⁹:

- Get the biber source tree from SF and put it on the architecture you are building for
- cd to the root of the source tree

¹⁹On UNIXequse systems, you may need to specify a full path to the scripts e.g. `./Build`

- `perl Build.PL` (this will check your module dependencies)
- `Build test`
- `Build install` (may need to run this as `sudo` on UNIXesque systems)
- `cd dist/<arch>`
- `build.sh` (`build.bat` on Windows)

This leaves a binary called `'biber-<arch>'` (also with a `'.exe'` extension on Windows/Cygwin) in your current directory. The tricky part is constructing the information for the build script. There are two things that need to be configured, both of which are required by the `PAR::Packer` module:

1. A list of modules/libraries to include in the binary which are not automatically detected by the `PAR::Packer` dependency scanner
2. A list of extra files to include in the binary which are not automatically detected by the `PAR::Packer` dependency scanner

To build `biber` for a new architecture you need to define these two things as part of constructing new build scripts:

- Make a new subfolder in the `dist` directory named after the architecture you are building for. This name is arbitrary but should be fairly obvious like `'solaris-sparc-64'`, for example.
- Copy the `biber.files` file from an existing build architecture into this directory.
- For all of the files with absolute pathnames in there (that is, ones we are not pulling from the `biber` tree itself), locate these files in your `Perl` installation tree and put the correct path in the file.
- Copy the build script from a vaguely similar architecture (i.e. Windows/non-Windows ...) to your new architecture directory.
- Change the `--link` options to point to where the required libraries reside on your system.
- Change the `--output` option to name the resulting binary for your architecture.
- Run the build script

The `--link` options can be a little tricky sometimes. It is usually best to build without them once and then run `ldd` (or OS equivalent) on the binary to see which version/location of a library you should link to. You can also try just running the binary and it should complain about missing libraries and where it expected to find them. Put this path into the `--link` option. The `--module` options are the same for all architectures and do not need to be modified. On architectures which have or can have case-insensitive file systems, you should use the build script from either Windows or OSX as a reference as these include a step to copy the main `biber` script

to a new name before packing the binary. This is required as otherwise a spurious error is reported to the user on first run of the binary due to a name collision when it unpacks itself.

See the PAR wiki page²⁰ for FAQs and help on building with PAR: :Packer. Take special note of the FAQs on including libraries with the packed binary²¹.

4.4.1 Testing a binary build

You can test a binary that you have created by copying it to a machine which preferably doesn't have perl at all on it. Running the binary with no arguments will unpack it in the background and display the help. To really test it without having LaTeX available, get the two quick test files from SourceForge²², put them in a directory and run biber in that directory like this:

```
biber --validate_control --convert_control test
```

This will run biber normally on the test files plus it will also perform an XSLT transform on the .bcf and leave an HTML representation of it in the same directory thus testing the links to the XML and XSLT libraries as well as the bibtex parsing libraries. The output should look something like this (may be differences of biber version and locale of course but there should be no errors or warnings).

```
INFO - This is biber 0.9.6
INFO - Logfile is 'test.blg'
INFO - BibLaTeX control file 'test.bcf' validates
INFO - Converted BibLaTeX control file 'test.bcf' to 'test.bcf.html'
INFO - Reading 'test.bcf'
INFO - Found 1 citekeys in bib section 0
INFO - Processing bib section 0
INFO - Looking for bibtex format file 'test.bib' for section 0
INFO - Found bibtex data file 'test.bib'
INFO - Decoding LaTeX character macros into UTF-8
INFO - Sorting list 'MAIN' keys
INFO - No sort tailoring available for locale 'en_GB.UTF-8'
INFO - Sorting list 'SHORTHANDS' keys
INFO - No sort tailoring available for locale 'en_GB.UTF-8'
INFO - Writing 'test.bbl' with encoding 'UTF-8'
INFO - Output to test.bbl
```

²⁰http://par.perl.org/wiki/Main_Page

²¹<http://par.perl.org/wiki/FAQ>, section entitled 'My PAR executable needs some dynamic libraries'

²²<https://sourceforge.net/projects/biblatex-biber/files/biblatex-biber/testfiles>

There should now be these new files in the directory:

```
test.bcf.html  
test.blg  
test.bbl
```