

biber

A backend bibliography processor for biblatex

François Charette, Philip Kime
firmicus@ankabut.net,
Philip@kime.org.uk

Version biber 0.7.3 (biblatex 1.1b)
31st January 2011

Contents

1	Introduction	1			
1.1	About	1	2.4	Collation and Localisation	8
1.2	Requirements	1	2.5	Encoding of files	10
1.3	License	2	2.6	Limitations	12
1.4	History	2	2.7	Editor Integration	13
1.5	Acknowledgements . . .	3	2.8	Cross-references	15
2	Use	3	3	Binaries	16
2.1	Options and config file .	4	3.1	Binary Caches	16
2.2	Input/Output File Locations	7	3.2	Binary Architectures . .	17
2.3	Logfile	8	3.3	Installing	17
			3.4	Building	18

1 Introduction

1.1 About

biber is conceptually a bibtex replacement for biblatex. It is written in Perl with the aim of providing a customised and sophisticated data preparation backend for biblatex. Functionally, it offers a superset of bibtex's capabilities but is tightly coupled with biblatex and cannot be used as a stand-alone tool with standard .bst styles.

1.2 Requirements

biber is distributed in two ways. There is a Perl source version which requires you to have a working Perl installation (preferably version 5.12 but no less than 5.10) and the ability to install the pre-requisite modules. Also provided are binaries for major OSes built with the Perl PAR::Packer module and utilities.

Currently there are binaries available for:

- OSX Intel 64-bit
- Windows

- Linux 32-bit
- Linux 64-bit

These should work on any fairly recent OS version. Both binaries and Perl source are available on SourceForge¹.

1.3 License

`biber` is released under the free software Artistic License 2.0²

1.4 History

`bibtex` has been the default (only ...) integrated choice for bibliography processing in TeX for a long time. It has well known limitations which stem from its data format, data model and lack of Unicode support³. The `.bst` language for writing bibliography styles is painful to learn and use. It is not a general programming language and this makes it really very hard to do sophisticated automated processing of bibliographies.

`biblatex` was a major advance for LaTeX users as it moved much of the bibliography processing into LaTeX macros. However, `biblatex` still used `bibtex` as a sorting engine for the bibliography and also to generate various labels for entries. `bibtex`'s capabilities even for this reduced set of tasks was still quite restricted due to the lack of Unicode support and the more and more complex programming issues involved in label preparation and file encoding.

`biber` was designed specifically for `biblatex` in order to provide a powerful backend engine which could deal with any required tasks to do with `.bbl` preparation. Its main features are:

- Deals with the full range of UTF-8
- Sorts in a completely customisable manner, using when available, CLDR collation tailorings
- Allows for per-entrytype options
- Automatically encodes the `.bbl` into any supported encoding format⁴
- Processes all bibliography sections in one pass of the tool
- Handles UTF-8 citekeys and filenames (given a suitable fully UTF-8 compliant TeX engine)
- Creates entry sets dynamically and allow easily defined static entry sets, all processed in one pass

¹<http://sourceforge.net/projects/biblatex-biber/>

²<http://www.opensource.org/licenses/artistic-license-2.0.php>

³In fact, there is now a Unicode version

⁴'Supported' here means encodings supported by the Perl Encode module

- Flexible user-customisable crossreference field inheritance model⁵
- Support for related entries, to enable generic treatment of things like ‘translated as’, ‘reprinted as’, ‘reprint of’ etc.⁶
- Handles very complex auto-expansion and contraction of names and namelists⁷
- Extensible modular data sources architecture for ease of adding more data source types.

1.5 Acknowledgements

François Charette originally wrote `biber`. Philip Kime joined in the development in 2009.

2 Use

Firstly, running `biber --help` will display all options and a brief description of each. This is the most useful brief source of usage information. `biber` returns an exit code of 0 on success or 1 if there was an error.

Most `biber` options can be specified in long or short format. When mentioning options below, they are referred to as ‘long form|short form’ when an option has both a long and short form. As usual with such options, when the option requires an argument, the long form is followed by an equals sign ‘=’ and then the argument, the short form is followed by a space and then the argument. For example, the `--bibdata|-d` option can be given in two ways:

```
biber --bibdata=somefile.bib
biber -d somefile.bib
```

With the `backend=biber` option, `biblatex` switches its backend interface and passes all options and information relevant to `biber`’s operation in a control file with extension `.bcf`⁸. This is conceptually equivalent to the `.aux` file which LaTeX uses to pass information to `bibtex`. The `.bcf` file is XML and contains many options and settings which configure how `biber` is to process the bibliography and generate the `.bbl` file.

The usual way to call `biber` is simply with the `.bcf` file as the only argument. The ‘`.bcf`’ extension of the control file is not optional. `biblatex` always outputs a control file with the `.bcf` extension. Specifying the ‘`.bcf`’ extension to `biber` is optional. Assuming a control file called `test.bcf`, the following two commands are equivalent:

⁵In BibLaTeX 1.2

⁶In BibLaTeX 1.2

⁷In BibLaTeX 1.3

⁸BibLaTeX Control File

```
biber test.bcf
biber test
```

2.1 Options and config file

biber sets its options using the following resource chain which is given in decreasing precedence order:

```
command line options →
  .bcf file →
    biber.conf file →
      biber hard-coded defaults
```

Users do not need to care directly about the contents or format of the `.bcf` file as this is generated from the options which they specify for `biblatex`. To override the `.bcf` options or to provide option settings when no `.bcf` file is used (see for example the `--allentries|-a` and `--bibdata|-d` options), users may use either a configuration file or the command line to set options.

The configuration file is by default called `biber.conf` but this can be changed using the `--configfile|-g` option. Unless `--configfile|-g` is used, the config file is looked for in the following places, in decreasing order of preference:

```
biber.conf in the current directory →
$HOME/.biber.conf →
$XDG_CONFIG_HOME/biber/biber.conf →
$HOME/Library/biber/biber.conf (Mac OSX only)
$APPDATA/biber.conf (Windows only) →
  the output of kpsewhich biber.conf (if available on the system)
```

The config file format is a very flexible one which allows users to specify options in most common formats, even mixed in the same file. It's easier to see an example. Here is a config file which displays the biber hard-coded defaults:

```
allentries          0
bibdata             undef
bbencoding           UTF-8
bibencoding          UTF-8
collate              1
<collate_options>
```

```

        level          3
</collate_options>
debug          0
fastsort       0
mincrossrefs   2
nolog          0
<nosort>
  # ignore prefices like 'al-' when sorting name fields
  type_names    \A\p{L}{2}\p{Pd}
  # ignore diacritics when sorting author
  type_names    [\x{2bf}\x{2018}]
</nosort>
onlylog        0
quiet          0
sortcase       true
sortlocale     en_US.utf8
sortupper      true
trace          0
validate_control 0
validate_structure 0
wraplines      0

```

You can see here that options with multiple key/value pairs of their own like `--collate_options|-c` can be specified in Apache config format. Please see the documentation for the `Config::General` Perl module⁹ if you really need details. In practise, if you use a config file at all for `biber`, it will contain very little as you will usually set all options by setting options in `biblatex` which will pass them to `biber` via the `.bcf` file.

The `--collate_options|-c` option takes a number of key/value pairs as value. See section 2.4 for details.

2.1.1 The `nosort` option

The value of the `nosort` option can only be set in the config file and not on the command line. This is because the values are Perl regular expressions and would need special quoting to set on the command line. This can get a bit tricky on some OSes (like Windows) so it's safer to set them in the config file. In any case, it's unlikely you would want to set them for particular `biber` runs; they would more likely be set as your personal default and thus they would naturally be set in the config file anyway. `nosort` allows you to ignore parts of a field for sorting. This is done using `perl` regular expressions which specify what to ignore in a field. You

⁹<http://search.cpan.org/search?query=Config::General&mode=all>

Alias	Fields
type_name	author afterword annotator bookauthor commentator editor editora editorb editorc foreword holder introduction namea nameb namec shortauthor shorteditor translator
type_title	booktitle eventtitle issuetitle journaltitle maintitle origtitle title

Table 1: nosort option field type aliases

can specify as many patterns as you like for a specific field. Also available are some field type aliases so you can, for example, specify patterns for all name fields or all title fields. These field types all begin with the string ‘type_’, see Table 1.

For example, this option can be used to ignore diacritic marks and prefices in names which should not be considered when sorting. Given (the default):

```
<nosort>
  type_names      \A\p{L}{2}\p{Pd}
  type_names      [\x{2bf}\x{2018}]
</nosort>
```

and the .bib entry:

```
author      = {{al-Hasan}, Alī},
```

the prefix ‘al-’ and the diacritic ‘c’ will not be considered when sorting. See the `perl` regular expression manual page for details of the regular expression syntax¹⁰.

If a `nosort` option is found for a specific field, it will override any option for a type which also covers that field.

Here is another example. Suppose you wanted to ignore ‘The’ at the beginning of a `TITLE` field when sorting, you could add this to your `biber.conf`:

```
<nosort>
  title      \AThe\s+
</nosort>
```

If you wanted to do this for all title fields listed in Table 1, then you would do this:

```
<nosort>
  type_title \AThe\s+
</nosort>
```

Note: `nosort` can be specified for most fields but not for things like dates and special fields as that wouldn’t make much sense.

2.2 Input/Output File Locations

2.2.1 Control file

The control file is normally passed as the only argument to `biber` (unless using `--allentries|-a` and `--bibdata|-d`). It is searched for in the following locations, in decreasing order of priority:

Absolute filename →

 In the `--output_directory`, if specified →

 Relative to current directory →

 Using `kpsewhich`, if available

2.2.2 Database files

Bibliography database files are searched for in the following locations, in decreasing order of priority:

Absolute filename →

 In the `--output_directory`, if specified →

¹⁰<http://perldoc.perl.org/perlre.html>

Relative to current directory→
In the same directory as the control file→
Using `kpsewhich`, if available

Unless using the `--bibdata|-d` option, users usually do not specify explicitly the bibliography database files; they are normally passed in the `.bcf` control file, taken from the `biblatex \bibliography{}` command arguments.

2.3 Logfile

By default, the logfile for biber will be named `\jobname.blg`, so, if you run

```
biber <options> test.bcf
```

then the logfile will be called `'test.blg'`. Like the `.bbl` output file, it will be created in the `--output_directory|-c`, if this option is defined. If there is no `.bcf` file on the command line (for example, when using the `--allentries|-a` and `--bibdata|-d` options), then the logfile name will default to `'biber.blg'`. You can override the logfile name by using the `--logfile` option:

```
biber --logfile=lfname test.bcf
```

results in a logfile called `'lfname.blg'`.

Warning: be careful if you are expecting biber to write to directories which you don't have appropriate permissions to. This is more commonly an issue on non-Windows OSes. For example, if you rely on `kpsewhich` to find your database files which are in system TeX directories, you may well not have write permission there so biber will not be able to write the `.bbl`. Use the `--outfile|-O` option to specify the location to write the `.bbl` to in such cases.

2.4 Collation and Localisation

biber takes care of collating the bibliography for biblatex. It writes entries to the `.bbl` file sorted by a completely customisable set of rules which are passed in the `.bcf` file by biblatex. biber has two ways of performing collation:

`--collate|-C`

The default. This option makes biber use the `Unicode::Collate` module for collation which implements the full UCA (Unicode Collation Algorithm). It also has CLDR (Common Locale Data Repository) tailoring to deal with cases which are

not covered by the UCA. It is a little slower than `--fastsort|-f` but the advantages are such that it's rarely worth using `--fastsort|-f`

`--fastsort|-f`

Biber will sort using the OS locale collation tables. The drawback for this method is that special collation tailoring for various languages are not implemented in the collation tables for many OSes. For example, few OSes correctly sort 'å' before 'ä' in the Swedish (`sv_SE`) locale. If you are using a common latin alphabet, then this is probably not a problem for you.

The locale used for collation is determined by the following resource chain which is given in decreasing precedence order:

```
--collate_options|-c (e.g. -c 'locale => "de_DE"' ) →  
--sortlocale|-l →  
  LC_COLLATE environment variable →  
  LANG environment variable →  
  LC_ALL environment variable
```

With the default `--collate|-C` option, the locale will be used to look for a collation tailoring for that locale. It will generate an informational warning if it finds none. This is not a problem as the vast majority of collation cases are covered by the standard UCA and many locales neither have nor need any special collation tailoring.

With the `--fastsort|-f` option, the locale will be used to locate an OS locale definition to use for the collation. This may or may not be correctly tailored, depending on the locale and the OS.

Collation is by default case sensitive. You can turn this off using the `biber` option `--sortcase=false` or from `biblatex` using its option `sortcase=false`.

`--collate|-C` by default collates uppercase before lower. You can reverse this using the `biber` option `--sortupper=false` or from `biblatex` by using its option `sortupper=false`. Be aware though that some locales rightly enforce a particular setting for this (for example, Danish). You will be able to override it but `biber` will warn you if you do. `sortupper` has no effect when using `--fastsort|-f`—you are at the mercy of what your OS locale does.

There are in fact many options to `Unicode::Collate` which can tailor the collation in various ways in addition to the locale tailoring which is automatically performed. Users should see the the documentation to the module for the various options, most of which the vast majority of users will never need¹¹. Options are passed using the `--collate_options|-c` option as a single quoted string, each option separated by comma, each key and value separated by `'=>'`. See examples.

2.4.1 Examples

```
biber
    Call biber using all settings from the .bcf generated from the LaTeX run. Case
    sensitive UCA sorting is performed taking the locale for tailoring from the environ-
    ment if no sortlocale is defined in the .bcf
biber --sortlocale=de_DE
    Override any locale setting in the .bcf or the environment.
biber --fastsort
    Use slightly quicker internal sorting routine. This uses the OS locale files which
    may or may not be accurate.
biber --sortcase=false
    Case insensitive sorting.
biber --sortupper=false --collate_options="backwards => 2"
    Collate lowercase before upper and collate French accents in reverse order at UCA
    level 2.
```

2.5 Encoding of files

`biber` takes care of reencoding the `.bib` data as necessary. In normal use, `biblatex` passes its `bibencoding` option value to `biber` via the `.bcf` file. It also passes the value of its `texencoding` option (which maps to `biber`'s `bblencoding|-E` option) the default value of which depends on which TeX engine and encoding packages you are using (see `biblatex` manual for details). `biber` performs the following tasks:

1. Decodes the `.bib` into UTF-8 if it is not UTF-8 already
2. Decodes LaTeX character macros into UTF-8 if `--bblencoding|-E` is UTF-8
3. Encodes the output so that the `.bbl` is in the encoding that `--bblencoding|-E` specifies
4. Warns if it is asked to output to the `.bbl` any UTF-8 decoded LaTeX character macros which are not in the `--bblencoding|-E` encoding. Replaces with a suitable LaTeX macro

¹¹For details on the various options, see <http://search.cpan.org/search?query=Unicode%3A%3ACollate&mode=all>

Normally, you do not need to set the encoding options on the `biber` command line as they are passed in the `.bcf` via the information in your `biblatex` environment. However, you can override the `.bcf` settings with the command line or config file. The resource chain for encoding settings is, in decreasing order of preference:

```
--bibencoding|-e and --bblencoding|-E →  
  biber config file →  
    .bcf control file
```

2.5.1 LaTeX macro decoding

As mentioned above, `biber` sometimes converts LaTeX character macros into UTF-8. In fact there are two situations in which this occurs.

1. When `--bblencoding|-E` is UTF-8
2. Always for internal sorting purposes

This decoding is very useful but take note of the following two scenarios, which relate to each of the two situations in which LaTeX macro decoding occurs:

Decoding when output is UTF-8

If you are using PDFLaTeX and `\usepackage[utf8]{inputenc}`, it is possible that the UTF-8 characters resulting from `biber`'s internal LaTeX character macro decoding break `inputenc`. This is because `inputenc` does not implement all of UTF-8, only a commonly used subset.

An example—if you had `\DJ` in your `.bib`, `biber` decodes this correctly to ‘Đ’ and this breaks `inputenc` because it doesn’t understand that UTF-8 character. The real solution here is to switch to a TeX engine with full UTF-8 support like XeTeX or LuaTeX as these don’t use or need `inputenc`. However, you can also try the `--bblsafechars` option which will try to convert any UTF-8 chars into LaTeX macros on output. The `biblatex` option ‘`texencoding=ascii`’ (which corresponds to the `biber` option ‘`--bblencoding|-E`’) will automatically set `--bblsafechars`.

See also the `biber --help` output for the `--bblsafecharsset` option which can customise the set of conversion characters to use.

Decoding for internal sorting

If your `bblencoding` is not UTF-8, and you are using some UTF-8 equivalent LaTeX character macros in your `.bib`, then some `.bbl` fields (currently only `\sortinit{}`) might end up with invalid characters in them, according to the `.bbl` encoding. This is because some fields must be generated from the final sorting data which is only available after the LaTeX character macro decoding step.

For example, suppose you are using PDFLaTeX with `\usepackage[latin1]{inputenc}` and the following `bibtex` data source entry:

```
@BOOK{citekey1,
  AUTHOR = {{\v S}imple, Simon},
}
```

With normal LaTeX character macro decoding, the `{\v S}` is decoded into ‘Š’ and so with name-first sorting, `\sortinit{}` would be ‘Š’. This is an invalid character in latin1 encoding and so the `.bbl` would be broken. In such cases when `\sortinit{}` is a char not valid in the `bblencoding`, biber tries to replace the character with a suitable LaTeX macro. The solution is really to use UTF-8 `.bbl` encoding whenever possible. In extreme cases where even with UTF-8 encoding, the char is not recognised by LaTeX due to an incomplete UTF-8 implementation (as with `inputenc`), this might also mean switching TeX engines to one that supports full UTF-8.

2.5.2 Examples

```
biber
    Set bibencoding and bblencoding from the config file or .bcf.
biber --bblencoding=latin2
    Encode the .bbl as latin2, overriding the .bcf.
biber --bblsafechars
    Set bibencoding and bblencoding from the config file or .bcf. Force encoding
    of UTF-8 chars to LaTeX macros using default conversion set.
biber --bblencoding=ascii
    Encode the .bbl as ascii, overriding the .bcf. Automatically sets --bblsafechars
    to force UTF-8 to LaTeX macro conversion.
biber --bblencoding=ascii --bblsafecharsset=full
    Encode the .bbl as ascii, overriding the .bcf. Automatically sets --bblsafechars
    to force UTF-8 to LaTeX macro conversion using the full set of conversions
biber --decodecharsset=full
    Set bibencoding and bblencoding from the config file or .bcf. Use the full
    LaTeX macro to UTF-8 conversion set because you have some more obscure charac-
    ter macros in your .bib which you want to sort correctly
biber -u
    Shortcut alias for biber --bibencoding=UTF-8
biber -U
    Shortcut alias for biber --bblencoding=UTF-8
```

2.6 Limitations

Currently, users are restricted to a one-one mapping from datasource entry types/fields to the biblatex supported entry type/fields. This is mitigated a little by the

type/field aliases which `biblatex` supports. In the future, users will be able to customise the data source driver config in order to define their own entry type/field aliases so that there is more flexibility in mapping data source entry type/fields to internal `biblatex` types/fields.

Currently it is not possible to automatically expand name lists to their minimally unique truncation which is required by some styles (APA for example). This is quite a hard problem, a solution to which is implemented in an experimental `biber` branch but which also needs `biblatex` support, envisaged for version 2.x. It requires an enhanced `.bbl` format, amongst other things.

2.7 Editor Integration

Here is some information on how to integrate `biber` into some of the more common editors

2.7.1 Emacs

Emacs has the very powerful AUCTeX mode for editing TeX and running compilations. BibTeX is already integrated into AUCTeX and it is quite simple to add support for `biber`. Use the Emacs Customise interface to modify the `TeX-command-list` variable and add a Biber command.

```
M-x customise-variable
TeX-command-list
```

and then `Ins` somewhere a new command that looks like Figure 1.

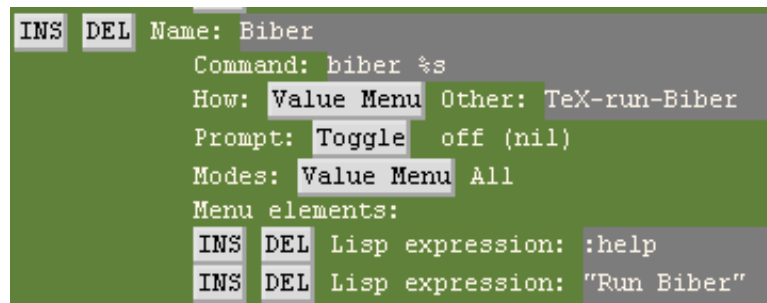


Figure 1: Screenshot of AUCTeX command setup for Biber

Alternatively, you can add it directly in lisp to your `.emacs` like this:

```
(add-to-list 'TeX-command-list
  (quote
    ("Biber" "biber %s" TeX-run-Biber nil t :help "Run Biber")))
```

However you add the command to `TeX-command-list`, customise the actual Biber command parameters as you want them, using `'%s'` as the LaTeX file name placeholder. Then define the following two functions in your `.emacs`.

```
(eval-after-load "tex"
  (quote (defun TeX-run-Biber (name command file)
    "Create a process for NAME using COMMAND to format FILE with Biber."
    (let ((process (TeX-run-command name command file)))
      (setq TeX-sentinel-function 'TeX-Biber-sentinel)
      (if TeX-process-asynchronous
          process
          (TeX-synchronous-sentinel name file process))))
  )

(eval-after-load "tex"
  (quote (defun TeX-Biber-sentinel (process name)
    "Cleanup TeX output buffer after running Biber."
    (goto-char (point-max))
    (cond
     ;; Check whether Biber reports any warnings or errors.
     ((re-search-backward (concat
                           "^ (There \\(?:was\\|were\\) \\([0-9]+\\) "
                           "\\(warnings?\\|error messages?\\))") nil t)
      ;; Tell the user their number so that she sees whether the
      ;; situation is getting better or worse.
      (message (concat "Biber finished with %s %s. "
                       "Type '%s' to display output.")
               (match-string 1) (match-string 2)
               (substitute-command-keys
                "\\<TeX-mode-map>\\[TeX-recenter-output-buffer]")))
      (t
       (message (concat "Biber finished successfully. "
                        "Run LaTeX again to get citations right."))))
    (setq TeX-command-next TeX-command-default))
  )
)
```

You'll then see a Biber option in your AUCTeX command menu or you can just `C-c C-c` and type Biber.

2.7.2 TeXworks

It's very easy to add biber support to TeXworks. In the Preferences, select the Typesetting tab and then add a new Processing Tool as in Figure 2.

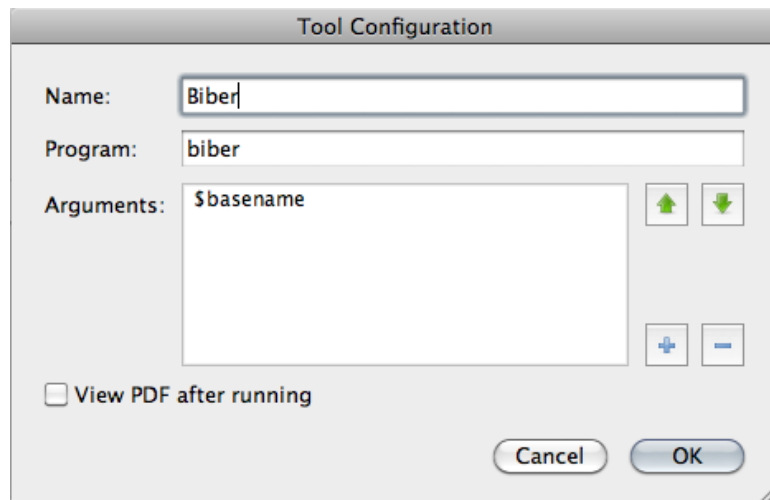


Figure 2: Screenshot of TeXworks processing tool setup for Biber

2.8 Cross-references

`biblatex` supports the `CROSSREF` field in bibliography databases and because `biber` performs the actual processing of such fields, it can do this in a customisable way. Currently, the customisable interface via user `biblatex` macros and the `.bcf` file is not yet implemented but the internal code in `biber` is ready for this. The purpose of this section is to describe the current hard-coded `biber` defaults. By default, the cross-reference target (child) will inherit all of the source (parent) fields if they are not already defined in the target. Table 2 shows the current custom mappings which apply. These custom cross-reference mappings will overwrite the target fields, if they exist. In future, the fully customisable interface will allow:

- Choice of overwriting target fields with source fields
- Choice of whether or not to, by default, inherit all fields from the source
- Mapping of any source field to any target field
- Mapping of field(s) in any source to specific targets
- Mapping of field(s) in specific sources to any targets
- Many-to-one and one-to-many field mappings
- Skipping inheritance of specific source fields

The custom cross-reference mappings will make it possible to overcome the problems with the traditional `bibtex` handling of cross-references which are mentioned in section 2.4.1 of the `biblatex` manual. As mentioned above, only the hard-coded mappings in Table 2 are currently implemented.

Source	Target	Source field	→	Target field
PROCEEDINGS	INPROCEEDINGS	TITLE	→	BOOKTITLE
		SUBTITLE	→	BOOKSUBTITLE
		TITLEADDON	→	BOOKTITLEADDON
COLLECTION	INCOLLECTION	TITLE	→	BOOKTITLE
		SUBTITLE	→	BOOKSUBTITLE
		TITLEADDON	→	BOOKTITLEADDON
BOOK	INBOOK	TITLE	→	BOOKTITLE
		SUBTITLE	→	BOOKSUBTITLE
		TITLEADDON	→	BOOKTITLEADDON
		AUTHOR	→	BOOKAUTHOR

Table 2: Custom cross-reference mappings

3 Binaries

The binary distributions of biber are made using the Perl `PAR::Packer` module. They can be used as a normal binary but have some behaviour which is worth noting:

- Don't be worried by the size of the binaries. `PAR::Packer` essentially constructs a self-extracting archive which unpacks the needed files first and so the binaries look larger than what actually runs in memory.
- On the first run of a new version (that is, with a specific hash), they actually unpack themselves to a temporary location which varies by operating system. This unpacking can take a little while and only happens on the first run of a new version. **Please don't kill the process if it seems to take some time to do anything on the first run of a new binary.** If you do, it will not unpack everything and it will almost certainly break `biber`. You will then have to delete your binary cache (see section 3.1 below) and re-run the `biber` executable again for the first time to allow it to unpack properly.

3.1 Binary Caches

`PAR::Packer` works by unpacking the required files to a cache location. It only does this on the first run of a binary by computing a hash of the binary and comparing it with the cache directory name which contains the hash. So, if you run several versions of a binary, you will end up with several cached trees which are never used. This is particularly true if you are regularly testing new versions of the `biber` binary. It is a good idea to delete the caches for older binaries as they are not needed and can take up a fair bit of space. The caches are located in a temporary

location which varies from OS to OS. The cache name is:

par-<username>/cache-<hash> (Linux/Unix/OSX)
par-<username>\cache-<hash> (Windows)

The temp location is not always obvious but these are sensible places to look (where * can vary depending on username:

- /var/folders/*/*/-Tmp-/ (OSX, local GUI login shell)
- /var/tmp/ (OSX, remote ssh login shell)
- /tmp/ (Linux)
- C:\Documents and Settings\<username>\Local Settings\Temp (Windows)
- C:\Windows\Temp (Windows)

To clean up, you can just remove the whole par-<username> directory/folder and then run the current binary again.

3.2 Binary Architectures

Binaries are available for the following architectures:

- linux_x86_32 — Linux x86 32-bit (built on Ubuntu 9.04)
- linux_x86_64 — Linux x86 64-bit (built on Ubuntu 9.04)
- MSWin — Windows. Should work on 32 or 64 bit (built on XP)
- darwin_x86_64 — OSX Intel 64-bit (built on OSX 10.6)

3.3 Installing

These instructions only apply to manually downloaded binaries. If biber came with your TeX distribution just use it as normal.

Download the binary appropriate to you OS/arch¹². Below I assume it's on your desktop.

You have to move the binary to somewhere in you command-line or TeX utility path so that it can be found. If you know how to do this, just ignore the rest of this section which contains some instructions for users who are not sure about this.

3.3.1 OSX

If you are using the TexLive MacTeX distribution:

¹²<https://sourceforge.net/projects/biblatex-biber>

```
sudo mv ~/Desktop/biber /usr/texbin/  
sudo chmod +x /usr/texbin/biber
```

If you are using the macports TexLive distribution:

```
sudo mv ~/Desktop/biber /opt/local/bin/  
sudo chmod +x /opt/local/bin/biber
```

The ‘sudo’ commands will prompt you for your password.

3.3.2 Windows

The easiest way is to just move the executable into your C:\Windows directory since that is always in your path. A more elegant is to put it somewhere in your TeX distribution that is already in your path. For example if you are using MiKTeX:

```
C:\Program Files\MiKTeX 2.8\miktex\bin\
```

3.3.3 Unix/Linux

```
sudo mv ~/Desktop/biber /usr/local/bin/biber  
sudo chmod +x /usr/local/bin/biber
```

Make sure /usr/local/bin is in your PATH. Search Google for ‘set PATH linux’ if unsure about this. There are many pages about this, for example: <http://www.cyberciti.biz/faq/unix-linux-adding-path/>

3.4 Building

Instructions for those who want/need to build an executable from the Perl version. For this, you will need to have a recent Perl, preferably 5.12 at least with the following modules:

- PAR
- PAR::Packer
- All biber pre-requisites

You should have the latest CPAN versions of all required modules as biber is very specific in some cases about module versions and depends on recent fixes in many cases. You can see if you have the biber Perl dependencies by the usual

```
perl ./Build.PL
```

invocation in the biber Perl distribution tree directory. Normally, the build procedure for the binaries is as follows¹³:

- Get the biber source tree from SF and put it on the architecture you are building for
- `cd` to the root of the source tree
- `perl Build.PL` (this will check your module dependencies)
- `Build test`
- `Build install` (may need to run this as `sudo` on UNIXesque systems)
- `cd dist/<arch>`
- `build.sh` (`build.bat` on Windows)

This leaves a binary called `'biber-<arch>'` (also with a `'.exe'` extension on Windows) in your current directory. The tricky part is constructing the information for the build script. There are two things that need to be configured, both of which are required by the `PAR::Packer` module:

1. A list of modules/libraries to include in the binary which are not automatically detected by the `PAR::Packer` dependency scanner
2. A list of extra files to include in the binary which are not automatically detected by the `PAR::Packer` dependency scanner

To build biber for a new architecture you need to define these two things as part of constructing new build scripts:

- Make a new subfolder in the `dist` directory named after the architecture you are building for. This name is arbitrary but should be fairly obvious like `'solaris-sparc-64'`, for example.
- Copy the `biber.files` file from an existing build architecture into this directory.
- For all of the files with absolute pathnames in there (that is, ones we are not pulling from the biber tree itself), locate these files in your Perl installation tree and put the correct path in the file.
- Copy the build script from a vaguely similar architecture (i.e. Windows/non-Windows ...) to your new architecture directory.
- Change the `--link` options to point to where the required libraries reside on your system.
- Change the `--output` option to name the resulting binary for your architecture.
- Run the build script

¹³On UNIXesque systems, you may need to specify a full path to the scripts e.g. `./Build`

The `--link` options can be a little tricky sometimes. It is usually best to build without them once and then run `ldd` (or Windows equivalent) on the binary to see which version/location of a library you should link to. You can also try just running the binary and it should complain about missing libraries and where it expected to find them. Put this path into the `--link` option. The `--module` options are the same for all architectures and do not need to be modified. On architectures which have or can have case-insensitive file systems, you should use the build script from either Windows or OSX as a reference as these include a step to copy the main `biber` script to a new name before packing the binary. This is required as otherwise a spurious error is reported to the user on first run of the binary due to a name collision when it unpacks itself.