

biber

A backend bibliography processor for biblatex

François Charette, Philip Kime
firmicus@ankabut.net,
Philip@kime.org.uk

Version biber 0.9.7 (biblatex 1.7)
20th November 2011

Contents

1	Important Changes	1	3.3	Logfile	21
2	Introduction	2	3.4	Collation and Localisation	22
2.1	About	2	3.5	Encoding of files	24
2.2	Requirements	2	3.6	Editor Integration	27
2.3	Compatibility Matrix	2	3.7	Bib \TeX macros and the MONTH field	27
2.4	License	3	3.8	Biber data source drivers	28
2.5	History	3	4	Binaries	29
2.6	Performance	6	4.1	Binary Caches	29
2.7	Acknowledgements	6	4.2	Binary Architectures	30
3	Use	6	4.3	Installing	31
3.1	Options and config file	7	4.4	Building	32
3.2	Input/Output File Locations	21			

1 Important Changes

Please see the `Changes` file which accompanies Biber for the details on changes in each version. This section is just for important things like incompatible changes which users should be aware of.

0.9.6

Matching of citation keys and datasource entry keys is now *case-sensitive*. This is to enforce consistency across the entire BibLaTeX and Biber processing chain. All of the usual referencing mechanisms in LaTeX are case-sensitive and so is the matching in BibLaTeX of citations to entries in the `.bbl` file generated by Biber. It is inconsistent and messy to enforce case-insensitivity in only Biber's matching of citations keys to datasource entry keys. If Biber detects what looks like a case mismatch between citation keys, it will warn you.

Summary of warnings/errors is now a new format. When Biber finishes writing the `.bbl`, it gives a summary count of errors/warnings. It used to do this in the same format as BibTeX, for compatibility. Now it uses a more consistent and easier

to parse format which matches all other Biber messages. Please note if you need to support Biber in an external tool. I have updated the notes on AUCT_EX support below to reflect this.

2 Introduction

2.1 About

Biber is conceptually a Bib_T_EX replacement for Bib_L_AT_EX. It is written in Perl with the aim of providing a customised and sophisticated data preparation backend for Bib_L_AT_EX. You do *not* need to install Perl use Biber—binaries are provided for many operating systems via the main T_EX distributions (T_EXLive, MacT_EX, MiK_T_EX) and also via download from SourceForge. Functionally, Biber offers a superset of Bib_T_EX’s capabilities but is tightly coupled with Bib_L_AT_EX and cannot be used as a stand-alone tool with standard `.bst` styles. Biber’s role is to support Bib_L_AT_EX by performing the following tasks:

- Parsing data from data sources
- Processing cross-references, entry sets, related entries
- Generating data for name, name list and name/year disambiguation
- Structural validation according to Bib_L_AT_EX data model
- Sorting reference lists
- Outputting data to a `.bbl` for Bib_L_AT_EX to consume

2.2 Requirements

Biber is distributed primarily as a stand-alone binary and is included in T_EXLive, MacT_EX and MiK_T_EX. If you are using any of these distributions, you do not need any additional software installed to use Biber. You do *not* need a Perl installation at all to use the binary distribution of Biber¹.

Biber is developed on SourceForge² and this is the primary location for development releases, forums and bugfixes etc. It is included into T_EXLive from the SourceForge releases.

2.3 Compatibility Matrix

Biber versions are closed coupled with Bib_L_AT_EX versions. You need to have the right combination of the two. Biber will warn you during processing if it encounters information which comes from the wrong Bib_L_AT_EX version. Table 1 shows a compatibility matrix for the recent versions.

¹If you prefer, you can run Biber as a normal Perl program and doing this *does* require you to have a Perl interpreter installed. See section 4.

²<http://sourceforge.net/projects/biblatex-biber/>

Biber version	Bib \LaTeX version
0.9.6	1.7x
0.9.5	1.6x
0.9.4	1.5x
0.9.3	1.5x
0.9.2	1.4x
0.9.1	1.4x
0.9	1.4x

Table 1: Biber/Bib \LaTeX compatibility matrix

2.4 License

Biber is released under the free software Artistic License 2.0³

2.5 History

Bib \TeX has been the default (only ...) integrated choice for bibliography processing in \TeX for a long time. It has well known limitations which stem from its data format, data model and lack of Unicode support⁴. The `.bst` language for writing bibliography styles is painful to learn and use. It is not a general programming language and this makes it really very hard to do sophisticated automated processing of bibliographies.

Bib \LaTeX was a major advance for \LaTeX users as it moved much of the bibliography processing into \LaTeX macros. However, Bib \LaTeX still used Bib \TeX as a sorting engine for the bibliography and also to generate various labels for entries. Bib \TeX 's capabilities even for this reduced set of tasks was still quite restricted due to the lack of Unicode support and the more and more complex programming issues involved in label preparation and file encoding.

Biber was designed specifically for Bib \LaTeX in order to provide a powerful backend engine which could deal with any required tasks to do with `.bbl` preparation. Its main features are:

- Deals with the full range of UTF-8
- Sorts in a completely customisable manner using, when available, CLDR collation tailoring
- Allows for per-entrytype options
- Automatically encodes the `.bbl` into any supported encoding format⁵

³<http://www.opensource.org/licenses/artistic-license-2.0.php>

⁴In fact, there is now a Unicode version

⁵'Supported' here means encodings supported by the Perl `Encode` module

- Processes all bibliography sections in one pass of the tool
- Handles UTF-8 citekeys and filenames (given a suitable fully UTF-8 compliant T_EX engine)
- Creates entry sets dynamically and allows easily defined static entry sets, all processed in one pass
- ‘Syntactic’ inheritance via new XDATA entrytype and field. This can be thought of as a field-based generalisation of the BibT_EX @STRING functionality (which is also supported).
- ‘Semantic’ inheritance via a generalisation of the BibT_EX crossreference mechanism. This is highly customisable by the user—it is possible to choose which fields to inherit for which entrytypes and to inherit fields under different names etc.
- Handles complex auto-expansion and contraction of names and namelists (See section 4.11.4 of the BibL^AT_EX manual for an excellent explanation with examples, this is quite an impressive feature ...)
- Extensible modular data sources architecture for ease of adding more data source types
- Support for remote data sources
- User-definable mapping and suppression of fields and entrytypes in data sources. You can use this to, for example, ignore all ABSTRACT fields completely. See section 3.1.1
- Support for related entries, to enable generic treatment of things like ‘translated as’, ‘reprinted as’, ‘reprint of’ etc. (BibL^AT_EX support coming in BibL^AT_EX 2.x)
- Customisable labels (BibL^AT_EX support coming in BibL^AT_EX 2.x)
- Multiple bibliography lists in the same section with different sorting and filtering (BibL^AT_EX support coming in BibL^AT_EX 2.x)
- No more restriction to a static data model of specific fields and entrytypes. (BibL^AT_EX support coming in BibL^AT_EX 2.x)
- Structural validation of the data against the data model with a customisable validation model (BibL^AT_EX support coming in BibL^AT_EX 2.x)

Figure 1 shows the main functional units of processing in Biber. The most difficult tasks which Biber performs are the processing of BibL^AT_EX’s `uniquename` and `uniquelist` options⁶, the sorting of lists⁷ and the initial data parse and remap into an internal data model. Biber is getting on for around 20,000 lines of mostly OO Perl and relies on certain splendid Perl modules such as `Unicode::Collate`, `Text::BibTeX` and `XML::LibXML`.

⁶A rather tricky unbounded loop but with a guaranteed eventual stable exit state.

⁷This is a complex, arbitrary multi-field Schwartzian Transform which has to deal with potentially different case and order settings for every field.

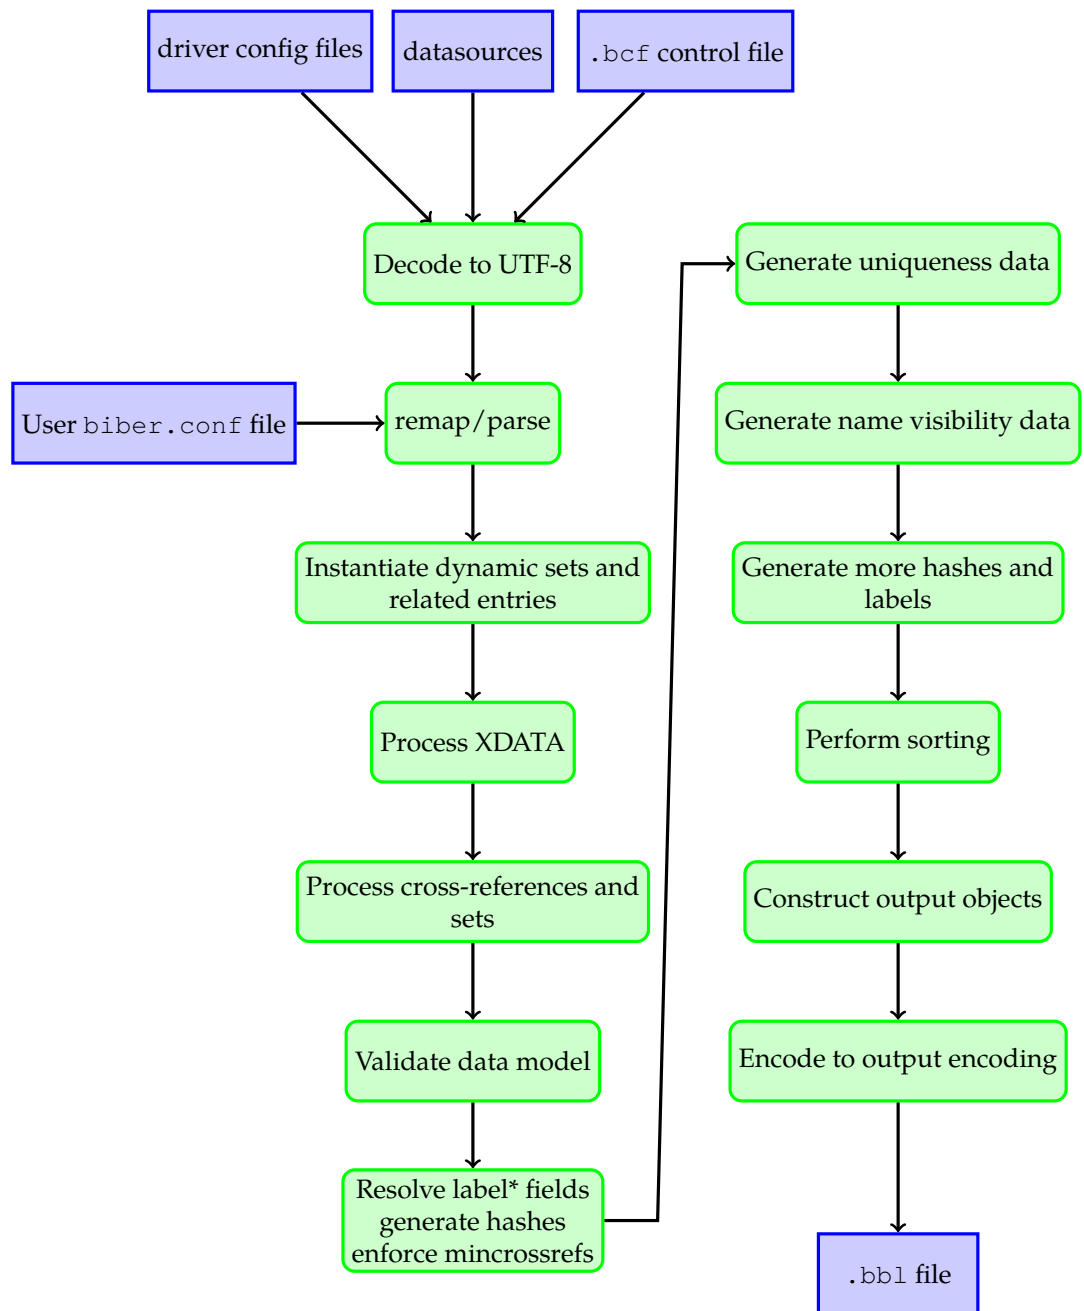


Figure 1: Overview of Biber's main functional units

2.6 Performance

Biber can't really be compared with Bib_TE_X in any meaningful way performance-wise. Biber is written in Perl and does a *great* deal more than Bib_TE_X which is written in C. One of Biber's test cases is a 2150 entry, 15,000 line `.bib` file which references a 630 entry macros file with a resulting 160 or so page (A4) formatted bibliography. This takes Biber under 3 minutes to process on a reasonable computer. This is perfectly acceptable, especially for a batch program.

2.7 Acknowledgements

François Charette originally wrote Biber. Philip Kime joined in the development in 2009.

3 Use

Firstly, please note that Biber will *not* attempt to sanitise the content of Bib_TE_X data sources. That is, don't expect it to auto-escape any _TE_X special characters like `'&'` or `'%'` which it finds in, for example, your `TITLE` fields. It used to do this in earlier versions in some cases but as of version 0.9, it doesn't because it's fraught with problems and leads to inconsistent expectations and behaviour between different data source types. In your Bib_TE_X data sources, please make sure your entries are legal _TE_X code.

Running `biber --help` will display all options and a brief description of each. This is the most useful brief source of usage information. Biber returns an exit code of 0 on success or 1 if there was an error.

Most Biber options can be specified in long or short format. When mentioning options below, they are referred to as '`long form|short form`' when an option has both a long and short form. As usual with such options, when the option requires an argument, the long form is followed by an equals sign `'=`' and then the argument, the short form is followed by a space and then the argument. For example, the `--configfile|-g` option can be given in two ways:

```
biber --configfile=somefile.conf
biber -g somefile.conf
```

With the `backend=biber` option, Bib_L_TE_X switches its backend interface and passes all options and information relevant to Biber's operation in a control file with extension `.bcf`⁸. This is conceptually equivalent to the `.aux` file which _L_TE_X uses to pass information to Bib_TE_X. The `.bcf` file is XML and contains many options and

⁸Bib_L_TE_X Control File

settings which configure how Biber is to process the bibliography and generate the `.bbl` file.

The usual way to call Biber is simply with the `.bcf` file as the only argument. Bib_{La}T_EX always writes the control file with a `.bcf` extension. Specifying the `' .bcf '` extension to Biber is optional. Assuming a control file called `test.bcf`, the following two commands are equivalent:

```
biber test.bcf
biber test
```

3.1 Options and config file

Bib_{La}T_EX options which Biber needs to know about are passed via the `.bcf` file. See Table 2 for the Bib_{La}T_EX options which Biber uses and also for the scopes which are supported for each option. Biber also has its own options which are set using the following resource chain, given in decreasing precedence order:

```
command line options →
  biber.conf file →
    .bcf file →
      Biber hard-coded defaults
```

Users do not need to care directly about the contents or format of the `.bcf` file as this is generated from the options which they specify via Bib_{La}T_EX. The config file is a place to set commonly used command-line options and also to set options which cannot be set on the command line.

The configuration file is by default called `biber.conf` but this can be changed using the `--configfile|-g` option. Unless `--configfile|-g` is used, the config file is looked for in the following places, in decreasing order of preference:

```
biber.conf in the current directory →
$HOME/.biber.conf →
$XDG_CONFIG_HOME/biber/biber.conf →
$HOME/Library/biber/biber.conf (Mac OSX only)
$APPDATA/biber.conf (Windows only) →
the output of 'kpsewhich biber.conf' (if available on the system)
```

Bib \LaTeX option	Global	Per-type	Per-entry
alphaothers	✓	✓	
dataonly		✓	✓
inheritance	✓		
labelalpha	✓	✓	
labelalphatemplate	✓	✓	
labelnamespec	✓	✓	
labelnumber	✓	✓	
labeleyear	✓	✓	
labeleyearspec	✓	✓	
maxalphanames	✓	✓	✓
maxbibnames	✓	✓	✓
maxcitenames	✓	✓	✓
maxitems	✓	✓	✓
minalphanames	✓	✓	✓
minbibnames	✓	✓	✓
mincitenames	✓	✓	✓
minitems	✓	✓	✓
presort	✓	✓	✓
singletitle	✓	✓	
skipbib		✓	✓
skiplab		✓	✓
skiplos		✓	✓
sortalphaothers	✓	✓	
sortexclusion		✓	
sorting	✓		
sortlos	✓		
structure	✓		
uniquelist	✓	✓	✓
uniqueusername	✓	✓	✓
useauthor	✓	✓	✓
useeditor	✓	✓	✓
useprefix	✓	✓	✓
usetranslator	✓	✓	✓

Table 2: Bib \LaTeX options which Biber uses

The config file format is a very flexible one which allows users to specify options in most common formats, even mixed in the same file. Below is an example config file which displays the Biber defaults:

```
bblencoding          UTF-8
bibencoding          UTF-8
collate              1
<collate_options>
  level              3
</collate_options>
debug                0
fastsort             0
mincrossrefs         2
nolog                0
nostdmacros          0
<nosort>
  # ignore prefices like 'al-' when sorting name fields
  type_names         \A\p{L}{2}\p{Pd}
  # ignore diacritics when sorting author
  type_names         [\x{2bf}\x{2018}]
</nosort>
onlylog              0
quiet                0
sortcase             true
sortlocale            en_US.utf8
sortupper            true
trace                0
validate_control      0
validate_structure    0
wraplines            0
```

You can see that options with multiple key/value pairs of their own like `--collate_options|-c` can be specified in Apache config format. Please see the documentation for the `Config::General` Perl module⁹ if you need details. In practice, the most commonly used options will be set via Bib_{La}TeX macros in your document and automatically passed to Biber via the `.bcf` file. Certain options apply only to Biber and can only be set in the config file, particularly the more complex options.

⁹<http://search.cpan.org/search?query=Config::General&mode=all>

3.1.1 The `map` option

The supplied data source drivers implement a default mapping from data source entrytypes and fields into the Bib_{La}T_EX data model¹⁰. If you want to override or augment the driver mappings you can use the `map` option which makes it possible to, for example, have a data source with non-standard entrytypes or fields and to have these automatically mapped into other entrytypes/fields without modifying your data source. Essentially, this alters the source data stream which Biber uses to build the internal Bib_{La}T_EX data model. So, you are not constrained such that you must map into the Bib_{La}T_EX data model. Of course, if you don't, it's likely that your exotic new fields will be ignored by Biber because they are not valid in the Bib_{La}T_EX data model. In Bib_{La}T_EX 2.x, you will be able to re-define the internal Bib_{La}T_EX data model and pass this to Biber which will use it internally. Figure 2 is a graphical overview of the data flow for data model information. In Bib_{La}T_EX 2.x, the greyed static Bib_{La}T_EX data model will be replaced by a dynamic data model read from the `.bcf` control file. See Figure 1 for a more complete overview of Biber's processing steps.

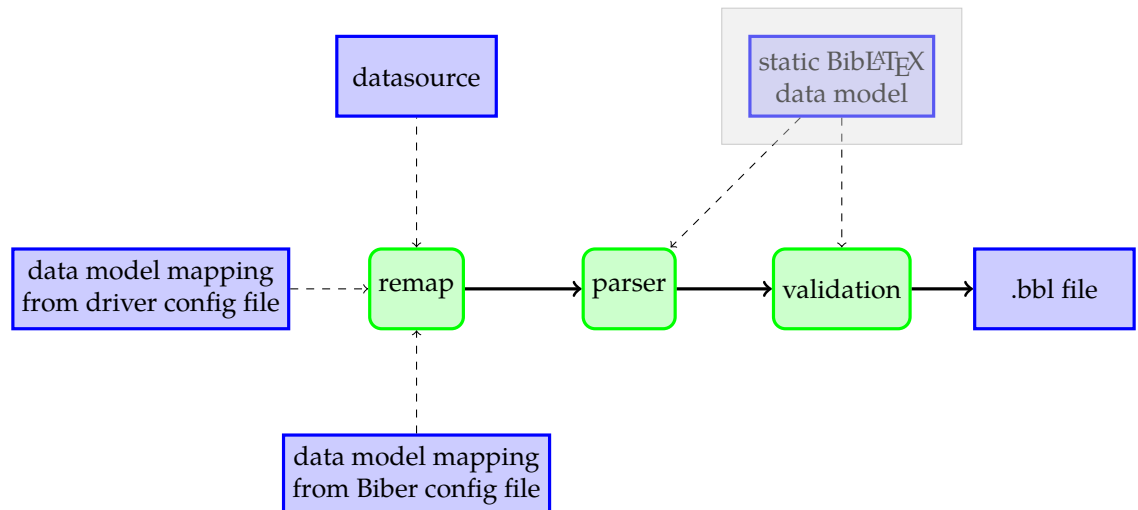


Figure 2: Model data flow in Biber

The `map` option can only be set in the config file and not on the command line as it has a complex structure. This option allows you to perform various data source mapping tasks which can be useful for pre-processing data which you do not generated yourself:

¹⁰The Bib_{La}T_EX data model is currently static and defined in the Bib_{La}T_EX manual. In the future (Bib_{La}T_EX 2.x), the data model will be dynamically defined by the user.

- Map data source entrytypes to different entrytypes, optionally also adding new fields to the entry.
- Map data source fields to different fields, optionally also adding new fields to the entry. This is basically a one→many field mapping. You can also limit field mappings to specific data source entrytypes.
- As a special case of the above, you can map data source fields to null, effectively removing them from the input stream.
- Modify the contents of a field using standard Perl regular expression match and replace.

The format of the `map` option in the config file is described below, followed by examples which will make everything clear. Items in **red** are not literal, they are descriptive meta-values which are explained in the accompanying text. Items in **blue** are optional within their parent section. The entire `map` option is not case sensitive *apart from the angle-bracketed section names which must be lower-cased as shown*. The examples below use uppercase for variable names and setting in places, for clarity. The general structure is:

```
<map>
  <driver1>
    BMAP_OVERWRITE 1|0
    ...
  </driver1>
    BMAP_OVERWRITE 1|0
    :
  <drivern>
    BMAP_OVERWRITE 1|0
    ...
  </drivern>
</map>
```

Here, `driver1...drivern` are the names of valid Biber data source drivers (see section 3.8). Reserved tokens with special meanings for this option have the prefix `'BMAP_'` and are described below. Each driver section contains one or more of the following subsections:

- Entrytype mapping
- Simple global field mapping
- Extended global field mapping
- Entrytype specific field mapping

Entrytype mapping

```
<entrytype source-entrytype>
```

```

BMAP_TARGET target-entrytype
BMAP_PERSOURCE source1
      :
BMAP_PERSOURCE sourcen
<alsoset>
  target-field1 target-value1
      :
  target-fieldn target-valuen
</alsoset>
</entrytype>

```

An entrytype specification maps the data source entrytype `source-entrytype` into a different entrytype `target-entrytype`. `source-entrytype` can be the string `'*`' which means 'all entrytypes'.

The literal string `BMAP_TARGET` is a constant and may be used to specify the target entrytype if you wish to map an entrytype into another entrytype. There can be one or more `BMAP_SOURCE` settings which mention a data `source` name value from one of the `\addresource` macro values. This restricts the mapping section to only entries coming from the named data sources.

The `alsoset` section is optional and specifies one or more `target-fields` to set in the entry, along with their `target-values`. The literal token `BMAP_ORIGENTRYTYPE` can be used as the `target-value` and it resolves to the data source entrytype name. The literal token `BMAP_NULL` can be used as the `target-value` and this serves to delete the `target-field`. If the option `BMAP_OVERWRITE` is true (set to '1'), then any existing fields which the `alsoset` section mentions will be overwritten. If this option is missing or false (set to '0'), then the field will not be set and the existing field value will remain. In both cases, warnings will be issued about the conflicting field, saying whether it will be overwritten or not. An example:

```

<map>
  <bibtex>
    BMAP_OVERWRITE 1
    <entrytype *>
      BMAP_PERSOURCE examples.bib
      BMAP_PERSOURCE examples2.bib
      <alsoset>
        KEYWORDS "keyw1, keyw2"
      </alsoset>
    </entrytype>
    <entrytype CONVERSATION>
      BMAP_TARGET CUSTOMA
      <alsoset>
        USERA BMAP_ORIGENTRYTYPE
        USERB BMAP_NULL
        NOTE "Auto-created this field"
      </alsoset>
    </entrytype>
  </bibtex>
</map>

```

```

        </also>
    </entrytype>
    <entrytype RECORD>
        BMAP_TARGET MUSIC
    </entrytype>
</bibtex>
</map>

```

This would add a `KEYWORDS` field with value `'keyw1, keyw2'` to entries of any entrytype which are found in either the `examples1.bib` or `examples2.bib` files. This assumes that the Bib_{La}TeX source contains `\addresource{example1.bib}` and `\addresource{example2.bib}`. Also, this would turn a `CONVERSATION` entrytype in all Bib_{La}TeX data sources into a `CUSTOMA` entrytype and would automatically set the `USERA` field in the entry to `'conversation'` and the `NOTE` field to `'Auto-created this field'`. The `USERB` field would be deleted. The `USERA`, `USERB` and `NOTE` fields will be overwritten if present in the entry. Also, the example turns a `RECORD` entrytype into a `MUSIC` entrytype.

Simple global field mapping

```

<globalfield>
  BMAP_PERSOURCE source1
  :
  BMAP_PERSOURCE sourcen
  source-field1 target-field1
  :
  source-fieldn target-fieldn
</globalfield>

```

This maps data source fields to different fields, regardless of the entrytypes in which they occur (hence 'global'). You may use the special `target-field` constant `BMAP_NULL` to map a field to null, that is, to ignore it. This essentially has the effect of treating the field as if it did not exist in the data source.

There can be one or more `BMAP_PERSOURCE` settings which mention a data `source` name value from one of the `\addresource` macro values. This restricts the mapping section to only entries coming from the named data sources.

For example (to add to the previous example, so that you can see a more complete mapping example. The previously discussed example settings are greyed):

```

<map>
  <bibtex>
    BMAP_OVERWRITE 1
    <entrytype *>
      BMAP_PERSOURCE examples.bib

```

```

    BMAP_PERSOURCE examples2.bib
    <alsoset>
      KEYWORDS "keyw1, keyw2"
    </alsoset>
  </entrytype>
  <entrytype CONVERSATION>
    BMAP_TARGET CUSTOMA
    <alsoset>
      USERA BMAP_ORIGENTRYTYPE
      NOTE "Auto-created this field"
    </alsoset>
  </entrytype>
  <entrytype RECORD>
    BMAP_TARGET MUSIC
  </entrytype>
  <globalfield>
    ABSTRACT BMAP_NULL
    PARTICIPANT NAMEA
  </globalfield>
</bibtex>
<ris>
  <globalfield>
    BMAP_PERSOURCE examples.ris
    N2 BMAP_NULL
  </globalfield>
</ris>
</map>

```

Here, we have specified that we should ignore (map to BMAP_NULL) any ABSTRACT fields and that we should map all PARTICIPANT fields to the NAMEA field. We have also specified that we should ignore the N2 field in ris data sources (this is often used for abstracts in RIS), but only if found in entries coming from the 'examples.ris' data source.

Extended Global field mapping

```

<globalfield source-field>
  BMAP_PERSOURCE source1
  :
  BMAP_PERSOURCE sourcen
  BMAP_TARGET target-field
  BMAP_MATCH source-match
  BMAP_REPLACE source-replace
  <alsoset>
    target-field1 target-value1
    :

```

```

    target-fieldn target-value,,
</also>
</globalfield>

```

Unlike the simple global mapping, this form maps only one `source-field`. You may specify the `target-field` using the constant `BMAP_TARGET`. You may specify `source-match` and `source-replace` using the constants `BMAP_MATCH` and `BMAP_REPLACE` respectively. While `BMAP_TARGET` and `BMAP_MATCH/BMAP_REPLACE` are both optional, at least one of them must be present, obviously, or you aren't doing anything to the field. `BMAP_MATCH` specifies a Perl regular expression to match against the source field contents. You may use (and almost certainly will want to use) parentheses for back-references in `BMAP_REPLACE`. Do not quote the regular expressions in any way—it's not necessary.

There can be one or more `BMAP_SOURCE` settings which mention a data `source` name value from one of the `\addresource` macro values. This restricts the mapping section to only entries coming from the named data sources.

The `also` section is optional and specifies one or more `target-fields` to set in the entry, along with their `target-values`. The literal token `BMAP_ORIGFIELD` can be used as the `target-value` and it resolves to the data source field name. Continuing our example configuration:

```

<map>
  <bibtex>
    BMAP_OVERWRITE 1
    <entrytype *>
      BMAP_PERSOURCE examples.bib
      BMAP_PERSOURCE examples2.bib
    <also>
      KEYWORDS "keyw1, keyw2"
    </also>
  </entrytype>
  <entrytype CONVERSATION>
    BMAP_TARGET CUSTOMA
    <also>
      USERA BMAP_ORIGENTRYTYPE
      NOTE "Auto-created this field"
    </also>
  </entrytype>
  <entrytype RECORD>
    BMAP_TARGET MUSIC
  </entrytype>
</globalfield>
  ABSTRACT BMAP_NULL
  PARTICIPANT NAMEA
</globalfield>

```

```

    <globalfield PUBMEDID>
      BMAP_TARGET EPRINT
      BMAP_MATCH \A\d*(.+)
      BMAP_REPLACE \L$1
    <alsoset>
      EPRINTTYPE BMAP_ORIGFIELD
      NOTE "Auto-created this field"
    </alsoset>
  </globalfield>
</bibtex>
<ris>
  <globalfield>
    BMAP_PERSOURCE examples.ris
    N2 BMAP_NULL
  </globalfield>
</ris>
</map>

```

Here, in all entries, the PUBMEDID field becomes the EPRINT field and the EPRINTTYPE field is set to 'pubmedid'. The NOTE field is set to 'Auto-created this field'. The contents of the EPRINT field have leading numbers stripped and the remainder of the contents lowercased.

Entrytype specific field mapping

```

<field source-field>
  BMAP_PERSOURCE source1
  :
  BMAP_PERSOURCE sourcen
  BMAP_PERTYPE source-entrytype1
  :
  BMAP_PERTYPE source-entrytypen
  BMAP_TARGET target-field
  BMAP_MATCH source-match
  BMAP_REPLACE source-replace
  <alsoset>
    target-field1 target-value1
    :
    target-fieldn target-valuen
  </alsoset>
</field>

```

Here we map the data source `source-field` to the `target-field` but only if it occurs within one of the data source entrytypes `source-entrytype1` ... `source-entrytypen`. The source entrytype restrictions must be specified using the BMAP_PERTYPE token. The target field may be specified using the BMAP_TARGET

token. You may specify `source-match` and `source-replace` using the constants `BMAP_MATCH` and `BMAP_REPLACE` respectively. While `BMAP_TARGET` and `BMAP_MATCH/BMAP_REPLACE` are both optional, at least one of them must be present, obviously, or you aren't doing anything to the field. `BMAP_MATCH` specifies a Perl regular expression to match against the source field contents. You may use (and almost certainly will want to use) parentheses for back-references in `BMAP_REPLACE`. Do not quote the regular expressions in any way—it's not necessary.

There can be one or more `BMAP_SOURCE` settings which mention a data `source` name value from one of the `\addresource` macro values. This restricts the mapping section to only entries coming from the named data sources.

The `also` section is optional and specifies one or more `target-fields` to set in the entry, along with their `target-values`. The literal token `BMAP_ORIGFIELD` can be used as the `target-value` and it resolves to the data source field name. If there is a global field mapping and also an entrytype specific mapping which both apply to the same field, the more specific has precedence. This is so you can, for example, choose to map a field globally in one way but deal with it another way in certain entrytypes. Continuing the example:

```
<map>
  <bibtex>
    BMAP_OVERWRITE 1
    <entrytype *>
      BMAP_PERSOURCE examples.bib
      BMAP_PERSOURCE examples2.bib
      <also>
        KEYWORDS "keyw1, keyw2"
      </also>
    </entrytype>
    <entrytype CONVERSATION>
      BMAP_TARGET CUSTOMA
      <also>
        USERA BMAP_ORIGENTRYTYPE
        NOTE "Auto-created this field"
      </also>
    </entrytype>
    <entrytype RECORD>
      BMAP_TARGET MUSIC
    </entrytype>
    <globalfield>
      ABSTRACT BMAP_NULL
      PARTICIPANT NAMEA
    </globalfield>
    <globalfield PUBMEDID>
      BMAP_TARGET EPRINT
      BMAP_MATCH \A\d*(.+)
  </bibtex>
</map>
```

```

        BMAP_REPLACE \L$1
    <alsoset>
        EPRINTTYPE BMAP_ORIGFIELD
        NOTE "Auto-created this field"
    </alsoset>
</globalfield>
<field NOTE>
    BMAP_PERSOURCE example.bib
    BMAP_PERTYPE ARTICLE
    BMAP_PERTYPE BOOK
    BMAP_TARGET BMAP_NULL
    <alsoset>
        ADDENDUM "A string"
    </alsoset>
</field>
</bibtex>
<ris>
    <globalfield>
        BMAP_PERSOURCE examples.ris
        N2 BMAP_NULL
    </globalfield>
</ris>
</map>

```

Here we have specified that within data source entrytypes `ARTICLE` and `BOOK` coming from the data source `example.bib`, the field `NOTE` should be ignored and the `ADDENDUM` field should be set to `'A string'`.

For data sources other than BibTeX, (e.g. `ris`, `endnotexml` and `zoterordfxml`), the source entrytypes and fields are usually very differently modelled and named. For example, here is how to drop the `'subject'` fields from various entrytypes in Zotero XML RDF format data sources:

```

<map>
    <zoterordfxml>
        <field "dc:subject">
            BMAP_PERTYPE journalArticle
            BMAP_PERTYPE book
            BMAP_PERTYPE bookSection
            BMAP_TARGET BMAP_NULL
        </field>
    </zoterordfxml>
</map>

```

Or here, mapping journal articles into `REPORT` entries for Endnote XML format data sources within a particular data source.

```

<map>

```

```

<endnotexml>
  <entrytype "journal Article">
    BMAP_PERSOURCE enote.xml
    BMAP_TARGET REPORT
  </entrytype>
</endnotexml>
</map>

```

3.1.2 The `nosort` option

The value of the `nosort` option can only be set in the config file and not on the command line. This is because the values are Perl regular expressions and would need special quoting to set on the command line. This can get a bit tricky on some OSes (like Windows) so it's safer to set them in the config file. In any case, it's unlikely you would want to set them for particular Biber runs; they would more likely be set as your personal default and thus they would naturally be set in the config file anyway. `nosort` allows you to ignore parts of a field for sorting. This is done using Perl regular expressions which specify what to ignore in a field. You can specify as many patterns as you like for a specific field. Also available are some field type aliases so you can, for example, specify patterns for all name fields or all title fields. These field types all begin with the string `'type_'`, see Table 3.

For example, this option can be used to ignore diacritic marks and prefixes in names which should not be considered when sorting. Given (the default):

```

<nosort>
  type_names      \A\p{L}{2}\p{Pd}
  type_names      [\x{2bf}\x{2018}]
</nosort>

```

and the BibTeX data source entry:

```
AUTHOR = {{al-Hasan}, °Alī},
```

the prefix `'al-'` and the diacritic `'°'` will not be considered when sorting. See the Perl regular expression manual page for details of the regular expression syntax¹¹.

If a `nosort` option is found for a specific field, it will override any option for a type which also covers that field.

Here is another example. Suppose you wanted to ignore `'The'` at the beginning of a `TITLE` field when sorting, you could add this to your `biber.conf`:

```

<nosort>
  title          \AThe\s+
</nosort>

```

¹¹<http://perldoc.perl.org/perlre.html>

Alias	Fields
type_name	author afterword annotator bookauthor commentator editor editora editorb editorc foreword holder introduction namea nameb namec shortauthor shorteditor translator
type_title	booktitle eventtitle issuetitle journaltitle maintitle origtitle title

Table 3: `nosort` option field type aliases

If you wanted to do this for all title fields listed in Table 3, then you would do this:

```
<nosort>
  type_title      \AThe\s+
</nosort>
```

Note: `nosort` can be specified for most fields but not for things like dates and special fields as that wouldn't make much sense.

3.2 Input/Output File Locations

3.2.1 Control file

The control file is normally passed as the only argument to `biber`. It is searched for in the following locations, in decreasing order of priority:

Absolute filename →

In the `--output_directory`, if specified →

Relative to current directory →

Using `kpsewhich`, if available

3.2.2 Data sources

Local data sources of type 'file' are searched for in the following locations, in decreasing order of priority:

Absolute filename →

In the `--output_directory`, if specified →

Relative to current directory →

In the same directory as the control file →

Using `kpsewhich` for supported formats, if available

Remote file data sources (beginning with `http://` or `ftp://`) are retrieved to a temp file and processed as normal. Users do not specify explicitly the bibliography database files; they are passed in the `.bcf` control file, which is constructed from the `BibLaTeX` `'\addbibresource{ }'` macros.

3.3 Logfile

By default, the logfile for `biber` will be named `\jobname.blg`, so, if you run

```
biber <options> test.bcf
```

then the logfile will be called 'test.blg'. Like the .bbl output file, it will be created in the `--output_directory|-c`, if this option is defined. You can override the logfile name by using the `--logfile` option:

```
biber --logfile=lfname test.bcf
```

results in a logfile called 'lfname.blg'.

Warning: be careful if you are expecting Biber to write to directories which you don't have appropriate permissions to. This is more commonly an issue on non-Windows OSes. For example, if you rely on `kpsewhich` to find your database files which are in system \TeX directories, you may well not have write permission there so Biber will not be able to write the .bbl. Use the `--outfile|-O` option to specify the location to write the .bbl to in such cases.

3.4 Collation and Localisation

Biber takes care of collating the bibliography for Bib \LaTeX . It writes entries to the .bbl file sorted by a completely customisable set of rules which are passed in the .bcf file by Bib \LaTeX . Biber has two ways of performing collation:

`--collate|-C`

The default. This option makes Biber use the Perl `Unicode::Collate` module for collation which implements the full UCA (Unicode Collation Algorithm). It also has CLDR (Common Locale Data Repository) tailoring to deal with cases which are not covered by the UCA. It is a little slower than `--fastsort|-f` but the advantages are such that it's rarely worth using `--fastsort|-f`

`--fastsort|-f`

Biber will sort using the OS locale collation tables. The drawback for this method is that special collation tailoring for various languages are not implemented in the collation tables for many OSes. For example, few OSes correctly sort 'å' before 'ä' in the Swedish (`sv_SE`) locale. If you are using a common latin alphabet, then this is probably not a problem for you.

The locale used for collation is determined by the following resource chain which is given in decreasing precedence order:

```
--collate_options|-c (e.g. -c 'locale => "de_DE"') →  
--sortlocale|-l →
```

LC_COLLATE environment variable →
LANG environment variable →
LC_ALL environment variable

With the default `--collate|-C` option, the locale will be used to look for a collation tailoring for that locale. It will generate an informational warning if it finds none. This is not a problem as the vast majority of collation cases are covered by the standard UCA and many locales neither have nor need any special collation tailoring.

With the `--fastsort|-f` option, the locale will be used to locate an OS locale definition to use for the collation. This may or may not be correctly tailored, depending on the locale and the OS.

Collation is by default case sensitive. You can turn this off globally using the Biber option `--sortcase=false` or from Bib_{La}T_EX using its option `sortcase=false`. The option can also be defined per-field so you can sort some fields case sensitively and others case insensitively. See the Bib_{La}T_EX manual.

`--collate|-C` by default collates uppercase before lower. You can reverse this globally for all sorting using the Biber option `--sortupper=false` or from Bib_{La}T_EX by using its option `sortupper=false`. The option can also be defined per-field so you can sort some fields uppercase before lower and others lower before upper. See the Bib_{La}T_EX manual. Be aware though that some locales rightly enforce a particular setting for this (for example, Danish). You will be able to override it but Biber will warn you if you do. `sortupper` has no effect when using `--fastsort|-f`—you are at the mercy of what your OS locale does.

There are in fact many options to `Unicode::Collate` which can tailor the collation in various ways in addition to the locale tailoring which is automatically performed. Users should see the the documentation to the module for the various options, most of which the vast majority of users will never need¹². Options are passed using the `--collate_options|-c` option as a single quoted string, each option separated by comma, each key and value separated by `'=>'`. See examples.

3.4.1 Examples

biber

Call biber using all settings from the `.bcf` generated from the _{La}T_EX run. Case sensitive UCA sorting is performed taking the locale for tailoring from the environment if no `sortlocale` is defined in the `.bcf`

biber `--sortlocale=de_DE`

Override any locale setting in the `.bcf` or the environment.

¹²For details on the various options, see <http://search.cpan.org/search?query=Unicode%3A%3ACollate&mode=all>

```
biber --fastsort
    Use slightly quicker internal sorting routine. This uses the OS locale files which
    may or may not be accurate.
biber --sortcase=false
    Case insensitive sorting.
biber --sortupper=false --collate_options="backwards => 2"
    Collate lowercase before upper and collate French accents in reverse order at UCA
    level 2.
```

3.5 Encoding of files

Biber takes care of reencoding the data source data as necessary. In normal use, Bib \LaTeX passes its `bibencoding` option value to Biber via the `.bcf` file. It also passes the value of its `texencoding` option (which maps to Biber's `bbencoding|-E` option) the default value of which depends on which \TeX engine and encoding packages you are using (see Bib \LaTeX manual for details).

Biber performs the following tasks:

1. Decodes the data source into UTF-8 if it is not UTF-8 already
2. Decodes \LaTeX character macros into UTF-8 if `--bbencoding|-E` is UTF-8
3. Encodes the output so that the `.bbl` is in the encoding that `--bbencoding|-E` specifies
4. Warns if it is asked to output to the `.bbl` any UTF-8 decoded \LaTeX character macros which are not in the `--bbencoding|-E` encoding. Replaces with a suitable \LaTeX macro

Normally, you do not need to set the encoding options on the Biber command line as they are passed in the `.bcf` via the information in your Bib \LaTeX environment. However, you can override the `.bcf` settings with the command line. The resource chain for encoding settings is, in decreasing order of preference:

```
--bibencoding|-e and --bbencoding|-E →
    Biber config file →
    .bcf control file
```

3.5.1 \LaTeX macro decoding

As mentioned above, Biber sometimes converts \LaTeX character macros into UTF-8. In fact there are two situations in which this occurs.

1. When `--bbencoding|-E` is UTF-8
2. Always for internal sorting purposes

This decoding is very useful but take note of the following two scenarios, which relate to each of the two situations in which \LaTeX macro decoding occurs:

Decoding when output is UTF-8

If you are using $\text{PDF}\LaTeX$ and `\usepackage[utf8]{inputenc}`, it is possible that the UTF-8 characters resulting from Biber's internal \LaTeX character macro decoding break `inputenc`. This is because `inputenc` does not implement all of UTF-8, only a commonly used subset.

An example—if you had `\DJ` in your `.bib` data source, Biber decodes this correctly to ‘Đ’ and this breaks `inputenc` because it doesn't understand that UTF-8 character. The real solution here is to switch to a \TeX engine with full UTF-8 support like $\text{Xe}\TeX$ or $\text{Lua}\TeX$ as these don't use or need `inputenc`. However, you can also try the `--bblsafechars` option which will try to convert any UTF-8 chars into \LaTeX macros on output. For information on the `--bblsafechars` option, see section 3.5.2.

Decoding for internal sorting

If your `bblencoding` is not UTF-8, and you are using some UTF-8 equivalent \LaTeX character macros in your `.bib` data source, then some `.bbl` fields (currently only `\sortinit{}`) might end up with invalid characters in them, according to the `.bbl` encoding. This is because some fields must be generated from the final sorting data which is only available after the \LaTeX character macro decoding step.

For example, suppose you are using $\text{PDF}\LaTeX$ with `\usepackage[latin1]{inputenc}` and the following Bib \TeX data source entry:

```
@BOOK{citekey1,
  AUTHOR = {{\v S}imple, Simon},
}
```

With normal \LaTeX character macro decoding, the `{\v S}` is decoded into ‘Š’ and so with name-first sorting, `\sortinit{}` would be ‘Š’. This is an invalid character in `latin1` encoding and so the `.bbl` would be broken. In such cases when `\sortinit{}` is a char not valid in the `bblencoding`, Biber tries to replace the character with a suitable \LaTeX macro. The solution is really to use UTF-8 `.bbl` encoding whenever possible. In extreme cases where even with UTF-8 encoding, the char is not recognised by \LaTeX due to an incomplete UTF-8 implementation (as with `inputenc`), this might also mean switching \TeX engines to one that supports full UTF-8.

3.5.2 \LaTeX macro encoding

The opposite of decoding; converting UTF-8 characters into \LaTeX macros. You can force this with the `--bblsafechars` option which will do a generally good job of

making your `.bbl` plain ASCII. It can be useful in certain edge cases where your bibliography introduces characters which can't be handled by your main document. See section 3.5.1 above for an example such case.

A common use case for \LaTeX macro encoding is when the bibliography data source is not ASCII but the `.tex` file is and so this case is automated for you: if the Bib \LaTeX option `'texencoding'` (which corresponds to the Biber option `'--bblencoding|-E'`) is set to an ASCII encoding (`'ascii'` or `'x-ascii'`) and `'--bibencoding|-e'` is not ASCII, Biber will automatically set `--bblsafechars`.

See also the `biber --help` output for the `--bblsafecharsset` and `--decodecharsset` options which can customise the set of conversion rules to use. The characters and macros which Biber maps during encoding and decoding are documented¹³.

3.5.3 Examples

```
biber
    Set bibencoding and bblencoding from the config file or .bcf
biber --bblencoding=latin2
    Encode the .bbl as latin2, overriding the .bcf
biber --bblsafechars
    Set bibencoding and bblencoding from the config file or .bcf. Force encoding
    of UTF-8 chars to  $\LaTeX$  macros using default conversion set
biber --bblencoding=ascii
    Encode the .bbl as ascii, overriding the .bcf. Automatically sets --bblsafechars
    to force UTF-8 to  $\LaTeX$  macro conversion
biber --bblencoding=ascii --bblsafecharsset=full
    Encode the .bbl as ascii, overriding the .bcf. Automatically sets --bblsafechars
    to force UTF-8 to  $\LaTeX$  macro conversion using the full set of conversions
biber --decodecharsset=full
    Set bibencoding and bblencoding from the config file or .bcf. Use the full
     $\LaTeX$  macro to UTF-8 conversion set because you have some more obscure character
    macros in your .bib data source which you want to sort correctly
biber -u
    Shortcut alias for biber --bibencoding=UTF-8
biber -U
    Shortcut alias for biber --bblencoding=UTF-8
```

¹³<https://sourceforge.net/projects/biblatex-biber/files/biblatex-biber/0.9.7/documentation/utf8-macro-map.html>

3.6 Editor Integration

Here is some information on how to integrate Biber into some of the more common editors

3.6.1 Emacs

Emacs has the powerful AUCTEX mode for editing TEX and running compilations. Updated files for AUCTEX 11.86 are available here:

<http://sourceforge.net/projects/biblatex-biber/files/auctex-biber.zip>

Drop the .el files in the .zip file over the ones in your AUCTEX installation tree, delete the corresponding .elc files and run `M-0 M-x byte-recompile-directory` and give the path of your AUCTEX main install directory where the new files reside. Hopefully these modifications will make it into the official AUCTEX distributions soon.

The additions augment AUCTEX in the following ways:

- Adds font-lock support for most BibLATEX macros
- Auto-detects whether you are using Biber with BibLATEX
- Can detect whether dependencies like data sources have changed without them being open in Emacs
- Understands BibLATEX and Biber messages so that AUCTEX will prompt you with the best default command to run next when using `C-cC-c`

3.6.2 TEXworks

It's very easy to add Biber support to TEXworks. In the Preferences, select the Type-setting tab and then add a new Processing Tool as in Figure 3.

3.7 BibTEX macros and the MONTH field

BibTEX defines macros for month abbreviations like 'jan', 'feb' etc. Biber also does this, defining them as numbers since that is what BibLATEX wants. In case you are also defining these yourself (although if you are only using BibLATEX, there isn't much point), you will get macro redefinition warnings from the `btparse` library. You can turn off Biber's macro definitions to avoid this by using the option `--nostdmacros`.

Biber will look at any MONTH field in a BibTEX data source and if it's not a number as BibLATEX expects (because it wasn't one of the macros as mentioned above or

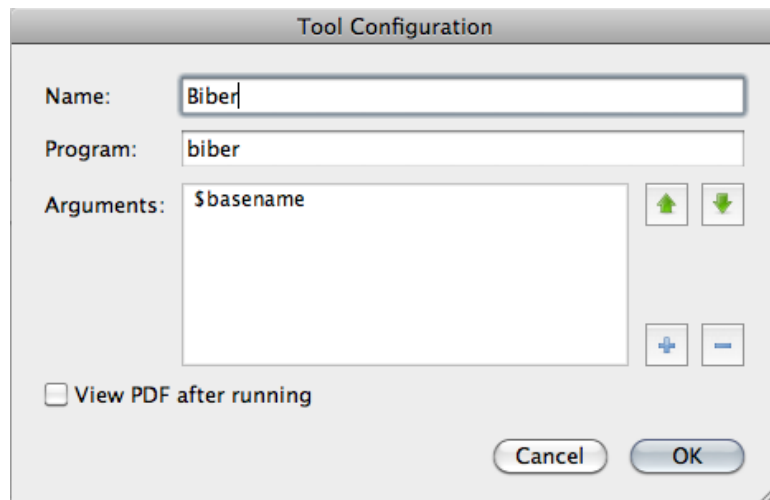


Figure 3: Screenshot of TeXworks processing tool setup for Biber

these macros were disabled by `--nostdmacros`), it will try to turn it into the right number in the `.bbl`. If you only use Bib_LTeX with your Bib_TEX data source files, you should probably make any `MONTH` fields be the numbers which Bib_LTeX expects.

3.8 Biber data source drivers

Biber uses a modular data source driver model to provide access to supported data sources. The drivers are responsible for mapping driver entry types and fields to the Bib_LTeX model. This is aided by a driver configuration file (`.dcf`). The information in this file for each driver can be found in the driver documentation folder on SourceForge¹⁴. This file shows you which handlers the driver uses for different fields and what certain entry types and fields are aliased to in the Bib_LTeX data model. This is not fantastically useful to know without knowing also what the named driver handlers do specifically but there is a ‘description’ section which mentions any special handling and general comments on the driver. You should read the documentation for the drivers you use to get an idea of how Biber handles your data. Data model mapping is an imprecise art and the drivers are where the necessarily messy parts of Biber live. Most data source models are not designed with typesetting in mind and are usually not fine-grained enough to provide the sorts of information that Bib_LTeX needs. Biber does its best to obtain as much meaningful information from a data source as possible. Currently supported data sources drivers are:

- Bib_TEX — Bib_TEX data files

¹⁴<https://sourceforge.net/projects/biblatex-biber/files/biblatex-biber/0.9.7/documentation/drivers>

- `endnotexml` — Endnote XML export format, version \geq Endnote X1
- `ris` — Research Information Systems format
- `zoterordfxml` — Zotero RDF XML format, version 2.0.9

4 Binaries

Biber is a Perl application which relies heavily on quite a few modules. It is packaged as a stand-alone binary using the excellent `PAR::Packer` module which can pack an entire Perl tree plus dependencies into one file which acts as a stand-alone binary and is indistinguishable from such to the end user. You can also simply download the Perl source and run it as a normal Perl program which requires you to have a working Perl 5.14+ installation and the ability to install the pre-requisite modules. You would typically only do this if you wanted to keep up with all the bleeding-edge git commits before they had been packaged as a binary. Almost all users will not want to do this and should use the binaries from their \TeX distribution or downloaded directly from SourceForge in case they need to use a more recent binary than is included in their \TeX distribution.

The binary distributions of biber are made using the Perl `PAR::Packer` module. They can be used as a normal binary but have some behaviour which is worth noting:

- Don't be worried by the size of the binaries. `PAR::Packer` essentially constructs a self-extracting archive which unpacks the needed files first.
- On the first run of a new version (that is, with a specific hash), they actually unpack themselves to a temporary location which varies by operating system. This unpacking can take a little while and only happens on the first run of a new version. **Please don't kill the process if it seems to take some time to do anything on the first run of a new binary.** If you do, it will not unpack everything and it will almost certainly break Biber. You will then have to delete your binary cache (see section 4.1 below) and re-run the Biber executable again for the first time to allow it to unpack properly.

4.1 Binary Caches

`PAR::Packer` works by unpacking the required files to a cache location. It only does this on the first run of a binary by computing a hash of the binary and comparing it with the cache directory name which contains the hash. So, if you run several versions of a binary, you will end up with several cached trees which are never used. This is particularly true if you are regularly testing new versions of the Biber binary. It is a good idea to delete the caches for older binaries as they are not needed and can take up a fair bit of space. The caches are located in a temporary location which varies from OS to OS. The cache name is:

par-<username>/cache-<hash> (Linux/Unix/OSX)
par-<username>\cache-<hash> (Windows)

The temp location is not always obvious but these are sensible places to look (where * can vary depending on username):

- /var/folders/*/*/*/* (OSX, local GUI login shell)
- /var/tmp/ (OSX (remote ssh login shell), Unix)
- /tmp/ (Linux)
- C:\Documents and Settings\<username>\Local Settings\Temp (Windows/Cygwin)
- C:\Windows\Temp (Windows)

To clean up, you can just remove the whole par-<username> directory/folder and then run the current binary again.

4.2 Binary Architectures

Binaries are available for many architectures, directly on SourceForge and also via TeXLive:

- linux_x86_32
- linux_x86_64
- MSWin32
- cygwin32
- darwin_x86_64
- darwin_x86_i386
- freebsd_x86¹⁵
- freebsd_amd64¹⁵
- solaris_x86¹⁵

If you want to run development versions, they are usually only regularly updated for the core architectures which are not flagged as third-party built above. If you want to regularly run the latest development version, you should probably git clone the relevant branch and run Biber as a pure perl program directly.

¹⁵Binary maintained by third party. See README in binary download directory for this platform for support/contact details. Usually, the binary maintainer is also the binary build provider for TeXLive.

4.3 Installing

These instructions only apply to manually downloaded binaries. If Biber came with your \TeX distribution just use it as normal.

Download the binary appropriate to you OS/arch¹⁶. Below I assume it's on your desktop.

You have to move the binary to somewhere in you command-line or \TeX utility path so that it can be found. If you know how to do this, just ignore the rest of this section which contains some instructions for users who are not sure about this.

4.3.1 OSX

If you are using the \TeX Live Mac \TeX distribution:

```
sudo mv ~/Desktop/biber /usr/texbin/  
sudo chmod +x /usr/texbin/biber
```

If you are using the macports \TeX Live distribution:

```
sudo mv ~/Desktop/biber /opt/local/bin/  
sudo chmod +x /opt/local/bin/biber
```

The 'sudo' commands will prompt you for your password.

4.3.2 Windows

The easiest way is to just move the executable into your `C:\Windows` directory since that is always in your path. A more elegant is to put it somewhere in your \TeX distribution that is already in your path. For example if you are using MiK \TeX :

```
C:\Program Files\MiKTeX 2.9\miktex\bin\
```

4.3.3 Unix/Linux

```
sudo mv ~/Desktop/biber /usr/local/bin/biber  
sudo chmod +x /usr/local/bin/biber
```

Make sure `/usr/local/bin` is in your PATH. Search Google for 'set PATH linux' if unsure about this. There are many pages about this, for example: <http://www.cyberciti.biz/faq/unix-linux-adding-path/>

¹⁶<https://sourceforge.net/projects/biblatex-biber>

4.4 Building

Instructions for those who want/need to build an executable from the Perl version. For this, you will need to have Perl 5.14+ with the following modules:

- All Biber pre-requisites
- `PAR::Packer` and all dependencies

You should have the latest CPAN versions of all required modules as Biber is very specific in some cases about module versions and depends on recent fixes in many cases. You can see if you have the Biber Perl dependencies by the usual

```
perl ./Build.PL
```

invocation in the Biber Perl distribution tree directory. Normally, the build procedure for the binaries is as follows¹⁷:

- Get the biber source tree from SF and put it on the architecture you are building for
- `cd` to the root of the source tree
- `perl Build.PL` (this will check your module dependencies)
- `Build test`
- `Build install` (may need to run this as `sudo` on UNIXesque systems)
- `cd dist/<arch>`
- `build.sh` (`build.bat` on Windows)

This leaves a binary called `'biber-<arch>'` (also with a `'.exe'` extension on Windows/Cygwin) in your current directory. The tricky part is constructing the information for the build script. There are two things that need to be configured, both of which are required by the `PAR::Packer` module:

1. A list of modules/libraries to include in the binary which are not automatically detected by the `PAR::Packer` dependency scanner
2. A list of extra files to include in the binary which are not automatically detected by the `PAR::Packer` dependency scanner

To build Biber for a new architecture you need to define these two things as part of constructing new build scripts:

- Make a new subfolder in the `dist` directory named after the architecture you are building for. This name is arbitrary but should be fairly obvious like `'solaris-sparc-64'`, for example.

¹⁷On UNIXesque systems, you may need to specify a full path to the scripts e.g. `./Build`

- Copy the `biber.files` file from an existing build architecture into this directory.
- For all of the files with absolute pathnames in there (that is, ones we are not pulling from the Biber tree itself), locate these files in your Perl installation tree and put the correct path in the file.
- Copy the build script from a vaguely similar architecture (i.e. Windows/non-Windows ...) to your new architecture directory.
- Change the `--link` options to point to where the required libraries reside on your system.
- Change the `--output` option to name the resulting binary for your architecture.
- Run the build script

The `--link` options can be a little tricky sometimes. It is usually best to build without them once and then run `ldd` (or OS equivalent) on the binary to see which version/location of a library you should link to. You can also try just running the binary and it should complain about missing libraries and where it expected to find them. Put this path into the `--link` option. The `--module` options are the same for all architectures and do not need to be modified. On architectures which have or can have case-insensitive file systems, you should use the build script from either Windows or OSX as a reference as these include a step to copy the main Biber script to a new name before packing the binary. This is required as otherwise a spurious error is reported to the user on first run of the binary due to a name collision when it unpacks itself.

See the PAR wiki page¹⁸ for FAQs and help on building with `PAR::Packer`. Take special note of the FAQs on including libraries with the packed binary¹⁹.

4.4.1 Testing a binary build

You can test a binary that you have created by copying it to a machine which preferably doesn't have `perl` at all on it. Running the binary with no arguments will unpack it in the background and display the help. To really test it without having `LATEX` available, get the two quick test files from SourceForge²⁰, put them in a directory and run Biber in that directory like this:

```
biber --validate_control --convert_control test
```

¹⁸http://par.perl.org/wiki/Main_Page

¹⁹<http://par.perl.org/wiki/FAQ>, section entitled 'My PAR executable needs some dynamic libraries'

²⁰<https://sourceforge.net/projects/biblatex-biber/files/biblatex-biber/testfiles>

This will run Biber normally on the test files plus it will also perform an XSLT transform on the `.bcf` and leave an HTML representation of it in the same directory thus testing the links to the XML and XSLT libraries as well as the BibTeX parsing libraries. The output should look something like this (may be differences of Biber version and locale of course but there should be no errors or warnings).

```
INFO - This is Biber 0.9.6
INFO - Logfile is 'test.blg'
INFO - BibLaTeX control file 'test.bcf' validates
INFO - Converted BibLaTeX control file 'test.bcf' to 'test.bcf.html'
INFO - Reading 'test.bcf'
INFO - Found 1 citekeys in bib section 0
INFO - Processing bib section 0
INFO - Looking for BibTeX format file 'test.bib' for section 0
INFO - Found BibTeX data file 'test.bib'
INFO - Decoding LaTeX character macros into UTF-8
INFO - Sorting list 'MAIN' keys
INFO - No sort tailoring available for locale 'en_GB.UTF-8'
INFO - Sorting list 'SHORTHANDS' keys
INFO - No sort tailoring available for locale 'en_GB.UTF-8'
INFO - Writing 'test.bbl' with encoding 'UTF-8'
INFO - Output to test.bbl
```

There should now be these new files in the directory:

```
test.bcf.html
test.blg
test.bbl
```