

EJERCICIO QLIK (ATTUNITY)

DATABASE-TO-DATABASE REPLICATION

Paso 1: MySQL Source Configuration

Manage Endpoint Connections

+ New Endpoint Connection Delete Duplicate View Log...

All Sources Targets

Search 🔍

MySQL Source

✓ Test connection succeeded

Role: ☒ Source ☐ Target

Type: MySQL

☐ Read changes from log stream staging folder

Log stream staging task: No Log Stream tasks

Server: mysqldb

Port: 3306 (0 - 65,535)

Username: root

Password:

▼ Security

SSL Mode: None

CA path:

Secret key path:

Test Connection ✓ Save Cancel Close

Paso 2: Postgres Target Configuration

Manage Endpoint Connections

+ New Endpoint Connection

Delete

Duplicate

View Log...

All

Sources

Targets

Search

→ Postgres Target

→ MySQL Source

✓ Test connection succeeded

Name: Postgres Target

Description:

Role: ☐ Source ☒ Target

Type: PostgreSQL

Host: postgresdb

Port: 5432

Username: qlik

Password:

Database Name: qlikdb

Security

SSL Mode: disable

Test Connection

Save

Cancel

Close

Paso 3: Configure Your Task

New Task ✕

Name i

Description

Replication Profile

Select the profile that best describes your replication use case

☒ Unidirectional

☐ Bidirectional i

☐ Log Stream i

Task Options

Select the replication options for this task



Full Load





Apply Changes



Store Changes

Perform a full load of target tables, then keep them up-to-date by applying changes.

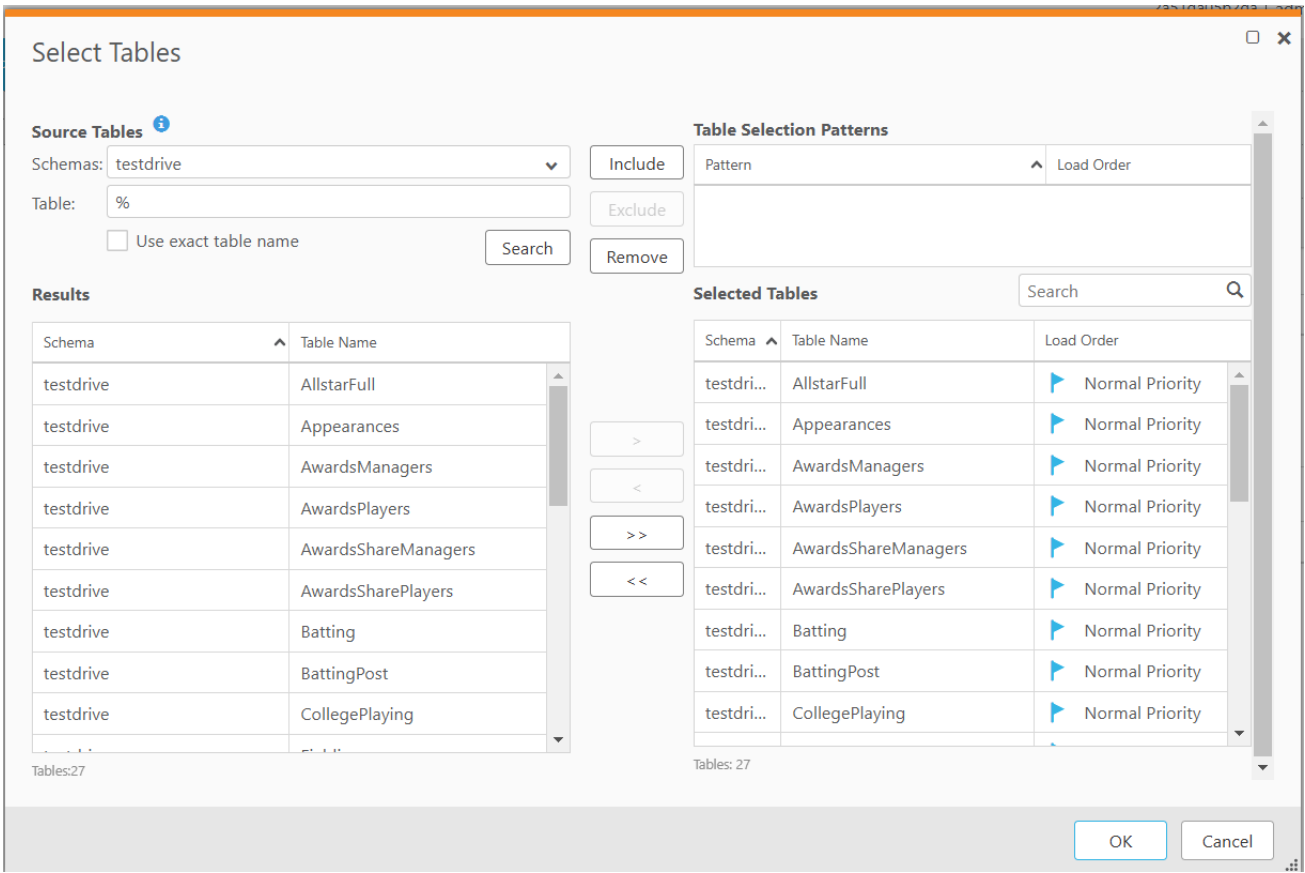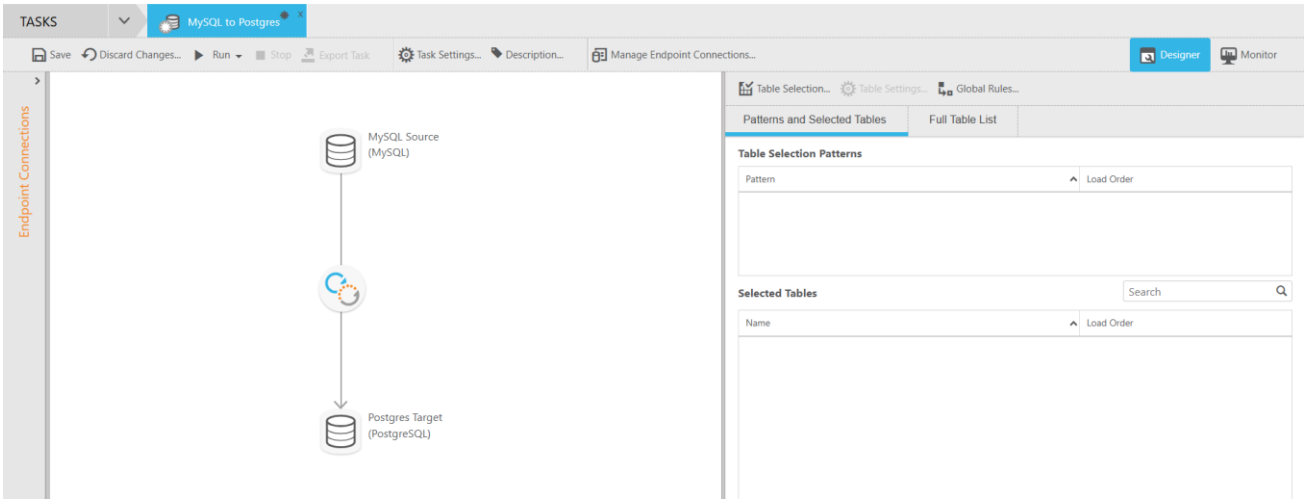

Paso 4: Configure a Transformation

Table Settings - testdrive.Player

General

Transform

Filter

Parallel Load

LOB Column Handling

Source table : testdrive.Player

By default include all columns

Input

Key	Name
	playerID
	birthYear
	birthMonth
	birthDay
	birthCountry
	birthState
	birthCity
	deathYear
	deathMonth
	deathDay
	deathCountry
	deathState
	deathCity

24 Columns

Output

Set Key Column Order

Add Column

Key	Name	Type	Subtype	Expression
	deathCity	WSTRING(64)	Regular	fx
	nameFirst	WSTRING(64)	Regular	fx
	nameLast	WSTRING(64)	Regular	fx
	nameGiven	WSTRING(64)	Regular	fx
	weight	INT4		fx
	height	INT4		fx
	bats	WSTRING(64)	Regular	fx
	throws	WSTRING(64)	Regular	fx
	debut	WSTRING(64)	Regular	fx
	finalGame	WSTRING(64)	Regular	fx
	retroID	WSTRING(64)	Regular	fx
	bbrefID	WSTRING(64)	Regular	fx
	fullName	WSTRING(100)	Regular	fx

25 Columns

Restore Table Defaults

OK

Cancel

General

Transform

Filter

Parallel Load

LOB Column

Expression Builder

Columns

Headers

Variables

Operators

Functions

Search

Q

Column	Type	Subtype
deathMonth	WSTRING(64)	Regular
deathState	WSTRING(64)	Regular
deathYear	WSTRING(64)	Regular
debut	WSTRING(64)	Regular
finalGame	WSTRING(64)	Regular
height	INT4	
nameFirst	WSTRING(64)	Regular
nameGiven	WSTRING(64)	Regular
nameLast	WSTRING(64)	Regular
playerID	WSTRING(64)	Regular
retroID	WSTRING(64)	Regular
throws	WSTRING(64)	Regular
weight	INT4	

1 Build Expression for column 'fullName' type 'WSTRING(100)'

+

-

*

/

%

!=

==

||

AND

OR

\$nameGiven||' ('||\$nameFirst||') '||\$nameLast

2 Parse Expression

Parse Expression

Parameter	Value
nameGiven	first middle
nameFirst	nickname
nameLast	lastname

3 Test Expression

Test Expression

first middle (nickname) lastname

Selected Tables

Search

Name	Load Order
testdrive.ManagersHair	Normal Priority
testdrive.Parks	Normal Priority
testdrive.Pitching	Normal Priority
testdrive.PitchingPost	Normal Priority
testdrive.Player (Changed)	Normal Priority
testdrive.Salaries	Normal Priority
testdrive.Schools	Normal Priority
testdrive.SeriesPost	Normal Priority

Paso 5: Run Your Task

TASKS

MySQL to Postgres

RunStopToolsDescription...Manage Endpoint Connections...

Full LoadChange Processing

Total Completion100%
Ended Date:
Dec 1, 2024
2:10:04 PM
Load Duration:
00:00:13

Tables [Select All]
Completed27Loading0Queued0Error0

Throughput
rec/sec

Tables - Completed

Table Name	Loaded On	Transferred Count	Transferred Volume (MB)	Load Duration	Throughput Records	Throughput Volume (KB/sec)
testdrive.AllstarFull	2:09 PM	5,148	3	00:00:00	0	0
testdrive.Appeara...	2:09 PM	102,761	100	00:00:04	25,690	25,771
testdrive.Awards...	2:09 PM	179	< 1	00:00:00	0	0
testdrive.Awards...	2:09 PM	6,158	3	00:00:00	0	0
testdrive.Awards...	2:09 PM	425	< 1	00:00:00	0	0

MySQL Source (MySQL)

Postgres Target (PostgreSQL)

Messages

Log MessagesNotifications

ErrorsWarningsSearch

0 Log Messages

STREAMING DATA TO KAFKA

Paso 1: MySQL Source Configuration

The screenshot shows the 'Manage Endpoint Connections' window with the 'Sources' tab selected. The 'MySQL Source' is highlighted in the left sidebar. The 'General' tab is active, displaying the following configuration:

- Name:** MySQL Source
- Description:** (empty text box)
- Role:** Source
- Type:** MySQL
- ☐ Read changes from log stream staging folder
- Log stream staging task:** No Log Stream tasks
- Server:** mysqlldb
- Port:** 3306 (range: 0 - 65,535)
- Username:** root
- Password:**
- ☒ **Security**
- SSL Mode:** None

At the bottom, there are three buttons: 'Test Connection' (with a green checkmark icon), 'Save', and 'Discard Changes'. A 'Close' button is located at the bottom right of the window.

Paso 2: Kafka Target Configuration

Manage Endpoint Connections

+ New Endpoint Connection

Delete

Duplicate

View Log...

All

Sources

Targets

Search

Kafka-JSON

MySQL Source

Postgres Target

Test connection succeeded

Format:

JSON

Avro

Compression:

None

Data Message Publishing

Publish the data to:

Specific topic:

Browse...

Separate topic for each table

Partition strategy:

By message key

Message key:

Primary key columns

Metadata Message Publishing

Publish:

Do not publish metadata messages

Wrap data messages with the Replicate Envelope

Test Connection

Save

Cancel

Close

Paso 3: Configure Your Task

New Task ✕

Name ⓘ

Description

Replication Profile
Select the profile that best describes your replication use case

☒ Unidirectional

☐ Bidirectional ⓘ

☐ Log Stream ⓘ

Task Options
Select the replication options for this task



Full Load



Apply Changes



Store Changes

Perform a full load of target tables, then keep them up-to-date by applying changes.

TASKS

MySQL to KafkaMySQL to Postgres

SaveDiscard Changes...RunStopExport TaskTask Settings...Description...Manage Endpoint Connections...

DesignerMonitor

Endpoint Connections

MySQL Source (MySQL)

Kafka-JSON (Kafka)

Table Selection...Table Settings...Global Rules...

Patterns and Selected TablesFull Table List

Table Selection Patterns

PatternLoad Order

Selected Tables

Search

NameLoad Order

TASKS

MySQL to KafkaMySQL to Postgres

SaveDiscard Changes...RunStopExport TaskTask Settings...Description...Manage Endpoint Connections...

DesignerMonitor

Endpoint Connections

MySQL Source (MySQL)

Kafka-JSON (Kafka)

Table Selection...Table Settings...Global Rules...

Patterns and Selected TablesFull Table List

Table Selection Patterns

PatternLoad Order

Selected Tables


Search

NameLoad Order


testdrive.PitchingPostNormal Priority

testdrive.PlayerNormal Priority

testdrive.SeriesPostNormal Priority

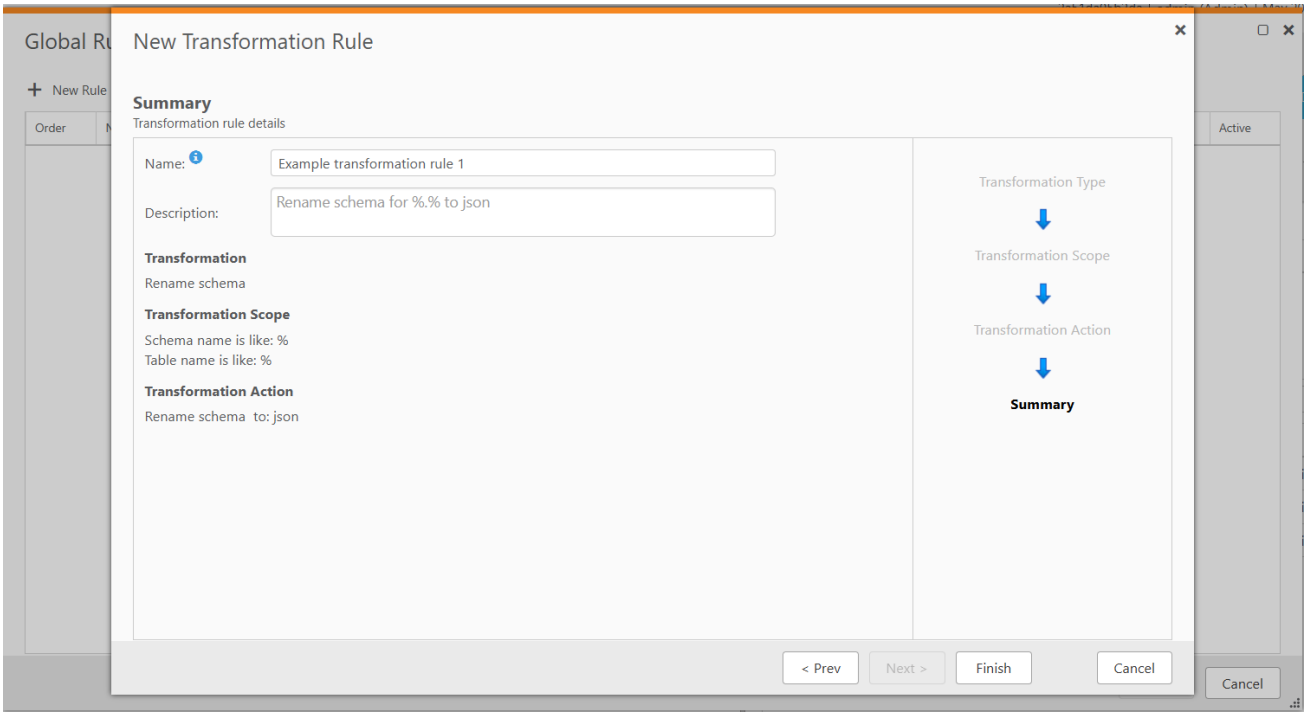

Paso 4: Run Your Task

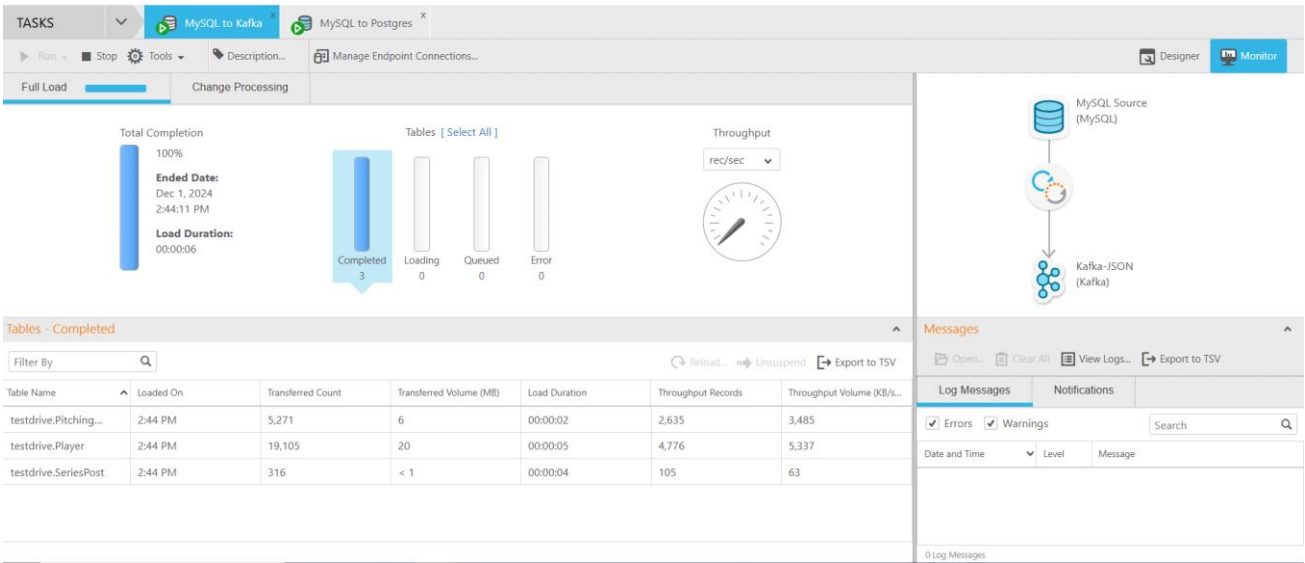

Diferencias entre Qlik y Debezium

La principal diferencia que he visto entre Attunity (Qlik Replicate) y Debezium ha sido la facilidad de uso. En mi opinión, la ventaja principal de cada uno es:

- **Qlik Replicate:** tiene un interfaz más sencilla y amigable para aquellas personas o empresas que no tienen conocimientos técnicos o que desean disponer de un producto funcional sin tener que invertir tiempo en él.
- **Debezium:** es open source, por lo que es gratuito y, además, lo puedes adaptar para que se ajuste al uso que le vas a dar como empresa, debido a su flexibilidad y control técnico.