

# Project - Arno Schmidt

Florian Klement & David Siegl

```
library(knitr)
library(dbplyr)
library(dplyr)
```

```
##
## Attaching package: 'dplyr'
```

```
## The following objects are masked from 'package:dbplyr':
```

```
##
##   ident, sql
```

```
## The following objects are masked from 'package:stats':
```

```
##
##   filter, lag
```

```
## The following objects are masked from 'package:base':
```

```
##
##   intersect, setdiff, setequal, union
```

```
library(foreign)
library(ggrepel)
```

```
## Loading required package: ggplot2
```

```
library(haven)
library(kableExtra)
```

```
## Warning: package 'kableExtra' was built under R version 4.0.5
```

```
##
## Attaching package: 'kableExtra'
```

```
## The following object is masked from 'package:dplyr':
```

```
##
##   group_rows
```

```
library(tidyr)
library(tidyverse)
```

```
## -- Attaching packages ----- tidyverse 1.3.0 --
```

```
## v tibble 3.0.6      v stringr 1.4.0
## v readr  1.4.0      v forcats 0.5.1
## v purrr  0.3.4

## -- Conflicts ----- tidyverse_conflicts() --
## x dplyr::filter()      masks stats::filter()
## x kableExtra::group_rows() masks dplyr::group_rows()
## x dplyr::ident()       masks dbplyr::ident()
## x dplyr::lag()         masks stats::lag()
## x dplyr::sql()         masks dbplyr::sql()
```

```
library(tidygeocoder)
```

```
## Warning: package 'tidygeocoder' was built under R version 4.0.5
```

```
library(ggplot2)
library(maps)
```

```
## Warning: package 'maps' was built under R version 4.0.5
```

```
##
## Attaching package: 'maps'
```

```
## The following object is masked from 'package:purrr':
##
##      map
```

```
library(ggmap)
library(rnaturalearth)
```

```
## Warning: package 'rnaturalearth' was built under R version 4.0.5
```

```
library(rnaturalearthdata)
```

```
## Warning: package 'rnaturalearthdata' was built under R version 4.0.5
```

```
library(rgdal)
```

```
## Warning: package 'rgdal' was built under R version 4.0.5
```

```
## Loading required package: sp
```

```
## Warning: package 'sp' was built under R version 4.0.5
```

```
## rgdal: version: 1.5-23, (SVN revision 1121)
## Geospatial Data Abstraction Library extensions to R successfully loaded
## Loaded GDAL runtime: GDAL 3.2.1, released 2020/12/29
## Path to GDAL shared files: C:/Users/sched/Documents/R/win-library/4.0/rgdal/gdal
## GDAL binary built with GEOS: TRUE
```

```
## Loaded PROJ runtime: Rel. 7.2.1, January 1st, 2021, [PJ_VERSION: 721]
## Path to PROJ shared files: C:/Users/sched/Documents/R/win-library/4.0/rgdal/proj
## PROJ CDN enabled: FALSE
## Linking to sp version:1.4-5
## To mute warnings of possible GDAL/OSR exportToProj4() degradation,
## use options("rgdal_show_exportToProj4_warnings"="none") before loading rgdal.
## Overwritten PROJ_LIB was C:/Users/sched/Documents/R/win-library/4.0/rgdal/proj
```

```
library(readr)
library(maptools)
```

```
## Warning: package 'maptools' was built under R version 4.0.5
```

```
## Checking rgeos availability: TRUE
```

```
library(ggspatial)
```

```
## Warning: package 'ggspatial' was built under R version 4.0.5
```

```
library(sf)
```

```
## Warning: package 'sf' was built under R version 4.0.5
```

```
## Linking to GEOS 3.9.0, GDAL 3.2.1, PROJ 7.2.1
```

```
library(osmdata)
```

```
## Warning: package 'osmdata' was built under R version 4.0.5
```

```
## Data (c) OpenStreetMap contributors, ODbL 1.0. https://www.openstreetmap.org/copyright
```

```
library(rgeos)
```

```
## Warning: package 'rgeos' was built under R version 4.0.5
```

```
## rgeos version: 0.5-5, (SVN revision 640)
## GEOS runtime version: 3.8.0-CAPI-1.13.1
## Linking to sp version: 1.4-5
## Polygon checking: TRUE
```

```
library(igraph)
```

```
## Warning: package 'igraph' was built under R version 4.0.5
```

```
##
## Attaching package: 'igraph'
```

```
## The following object is masked from 'package:rgeos':
##
##     union

## The following objects are masked from 'package:purrr':
##
##     compose, simplify

## The following object is masked from 'package:tibble':
##
##     as_data_frame

## The following object is masked from 'package:tidyr':
##
##     crossing

## The following objects are masked from 'package:dplyr':
##
##     as_data_frame, groups, union

## The following objects are masked from 'package:stats':
##
##     decompose, spectrum

## The following object is masked from 'package:base':
##
##     union
```

```
library(ggraph)
```

```
## Warning: package 'ggraph' was built under R version 4.0.5
```

```
##
## Attaching package: 'ggraph'
```

```
## The following object is masked from 'package:sp':
##
##     geometry
```

```
library(leaflet)
```

```
## Warning: package 'leaflet' was built under R version 4.0.5
```

```
library(htmlwidgets)
```

```
## Warning: package 'htmlwidgets' was built under R version 4.0.5
```

```

locations_lived <- read.csv("./Arno Schmidt_locations_lived.csv")

locations_lived <- locations_lived %>%
  tidygeocoder::geocode(city = location_current, country = country_current, method = 'osm',
    full_results = TRUE, custom_query= list(extratags = 1))

locations_lived_filtered <- locations_lived %>%
  select(i..address, state_original, state_current, country_current, country_original, location_current)

#write.csv(locations_lived_filtered, "Arno Schmidt_locations_lived_latlong.csv")

locations_referenced <- read.csv("./Arno Schmidt_locations_referenced.csv")

locations_referenced <- locations_referenced %>%
  tidygeocoder::geocode(city = location_current, country = country_current, method = 'osm',
    full_results = TRUE, custom_query= list(extratags = 1))

locations_referenced_filtered <- locations_referenced %>%
  select(state_original, state_current, country_current, country_original, location_current, i..location)

#write.csv(locations_referenced_filtered, "Arno Schmidt_locations_referenced_latlong.csv")

locations_lived <- read.csv("./Arno Schmidt_locations_lived_latlong.csv")
locations_referenced <- read.csv("./Arno Schmidt_locations_referenced_latlong.csv")
works <- read.csv("./Arno Schmidt_works.csv")

world <- ne_countries(scale = "medium", returnclass = "sf")

rivers <- readOGR("./layer.riverData", "ne_50m_rivers_lake_centerlines")

## OGR data source with driver: ESRI Shapefile
## Source: "C:\Users\sched\Documents\Uni\Digital Humanities\UE - Intro to GIS\Project\layer.riverData",
## with 462 features
## It has 32 fields
## Integer64 fields read as strings: ne_id

## Warning in readOGR("./layer.riverData", "ne_50m_rivers_lake_centerlines"):
## Dropping null geometries: 461

rivers_f <- fortify(rivers)

lüneburg <- readOGR("./Lüneburger Heide", "Lüneburger Heide")

## OGR data source with driver: ESRI Shapefile
## Source: "C:\Users\sched\Documents\Uni\Digital Humanities\UE - Intro to GIS\Project\Lüneburger Heide"
## with 1 features
## It has 11 fields
## Integer64 fields read as strings: tessellate extrude visibility drawOrder

## Warning in readOGR("./Lüneburger Heide", "Lüneburger Heide"): Z-dimension
## discarded

```

```
lüneburg_f <- fortify(lüneburg)
```

```
## Regions defined for each Polygons
```

```
bundesländer <- readOGR("./Bundesländer", "DEU_adm1")
```

```
## OGR data source with driver: ESRI Shapefile
```

```
## Source: "C:\Users\sched\Documents\Uni\Digital Humanities\UE - Intro to GIS\Project\Bundesländer", layer: "DEU_adm1"
```

```
## with 16 features
```

```
## It has 9 fields
```

```
## Integer64 fields read as strings: ID_0 ID_1
```

```
bundesländer_f <- fortify(bundesländer)
```

```
## Regions defined for each Polygons
```

```
theme_set(theme_bw())
```

```
waterColor = "lightsteelblue2"
```

```
locations_lived_dupl <- locations_lived %>%  
  filter(id != 6)
```

```
xlim=c(4,16.5); ylim=c(47.5,60)
```

```
ggplot(data = world) +
```

```
  geom_sf(fill="white", color="white") +
```

```
  geom_path(data = rivers_f, aes(x = long, y = lat, group = group), color = waterColor, size = .3) +
```

```
  geom_point(data = locations_lived_dupl, aes(x=long, y=lat), color = "red", size = 2) +
```

```
  geom_text_repel(data = locations_lived_dupl, aes(x=long, y=lat, label = location_original), force = 1)
```

```
  coord_sf(xlim = xlim, ylim = ylim, expand = FALSE) +
```

```
  theme(panel.background = element_rect(fill = waterColor)) +
```

```
  annotation_scale(location = "bl", width_hint = 0.25) +
```

```
  coord_sf(xlim = xlim, ylim = ylim, expand = FALSE) +
```


```
  theme(panel.background = element_rect(fill = waterColor),
```

```
        axis.title.y=element_blank(),
```

```
        axis.title.x=element_blank())
```


```
## Coordinate system already present. Adding new coordinate system, which will replace the existing one
```

```
## Scale on map varies by more than 10%, scale bar may be inaccurate
```

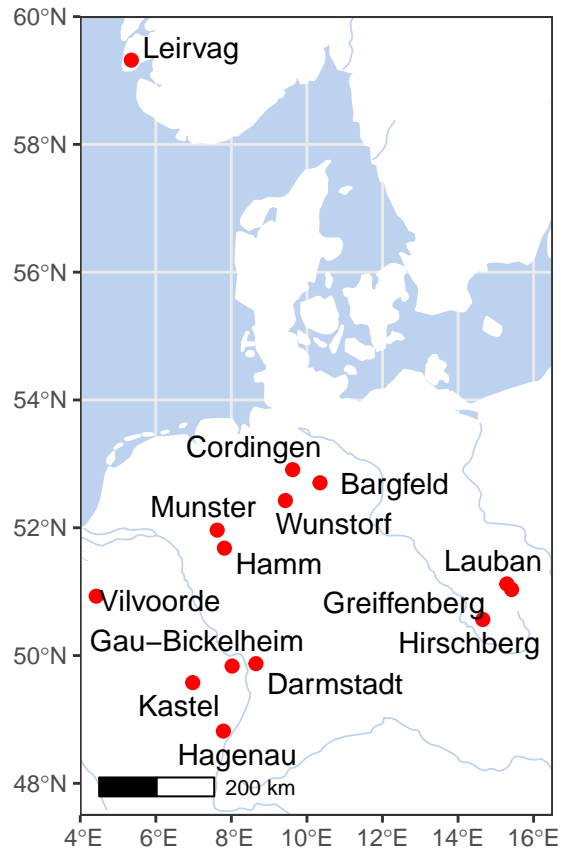

```
xlim=c(4,16.5); ylim=c(47.5,60)
ggplot(data = world) +
  geom_sf(fill="white", color="white") +
  geom_path(data = rivers_f, aes(x = long, y = lat, group = group), color = waterColor, size = .3) +
  geom_path(data = locations_lived, aes(x = long, y = lat), color = "red", size = .3) +
  geom_point(data = locations_lived, aes(x=long, y=lat), color = "black", size = 2) +
  geom_text_repel(data = locations_lived, aes(x=long, y=lat, label = location_original), force = 3, size = 8) +
  coord_sf(xlim = xlim, ylim = ylim, expand = FALSE) +
  theme(panel.background = element_rect(fill = waterColor)) +
  annotation_scale(location = "bl", width_hint = 0.25) +
  coord_sf(xlim = xlim, ylim = ylim, expand = FALSE) +
  theme(panel.background = element_rect(fill = waterColor),
        axis.title.y=element_blank(),
        axis.title.x=element_blank())
```

```
## Coordinate system already present. Adding new coordinate system, which will replace the existing one
## Scale on map varies by more than 10%, scale bar may be inaccurate
```

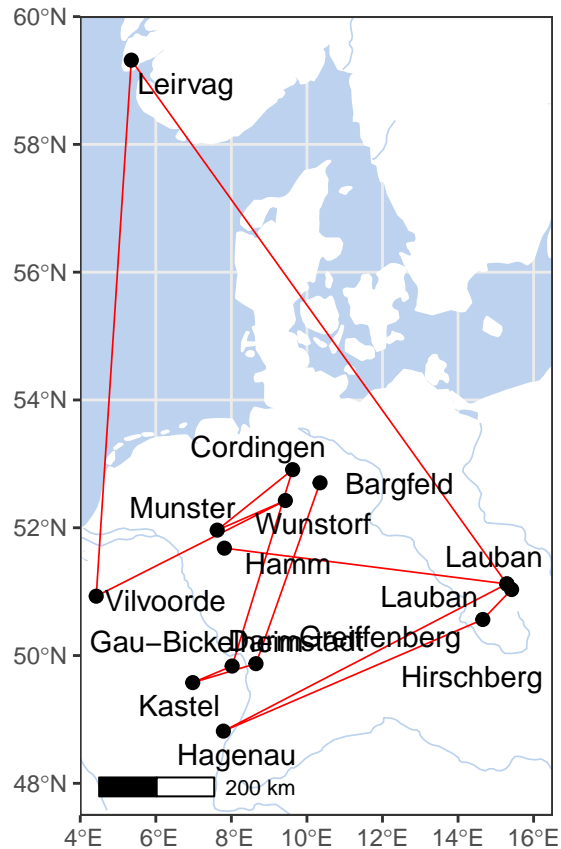


```
locations_lived_germ <- locations_lived %>%
  filter(country_current == "Germany")

xlim=c(6.25,11.5); ylim=c(48.5,54)
ggplot(data = world) +
  geom_sf(fill="white", color="white") +
  geom_path(data = rivers_f, aes(x = long, y = lat, group = group), color = waterColor, size = .3) +
  geom_path(data = bundesländer_f, aes(x = long, y = lat, group = group), color = "red", size = .05) +
  geom_polygon(data = lüneburg_f, aes(x = long, y = lat, group = group), color = "darkgreen", fill = "darkgreen") +
  geom_point(data = locations_lived_germ, aes(x=long, y=lat, color=category), size = 2) +
  scale_color_manual(name="Area", values = c("city"="red", "village"="green")) +
  geom_text_repel(data = locations_lived_germ, aes(x=long, y=lat, label = location_original), force = 1) +
  coord_sf(xlim = xlim, ylim = ylim, expand = FALSE) +
  theme(panel.background = element_rect(fill = waterColor)) +
  annotation_scale(location = "bl", width_hint = 0.25) +
  coord_sf(xlim = xlim, ylim = ylim, expand = FALSE) +
  theme(panel.background = element_rect(fill = waterColor),
        axis.title.y=element_blank(),
        axis.title.x=element_blank())
```

```
## Coordinate system already present. Adding new coordinate system, which will replace the existing one
## Scale on map varies by more than 10%, scale bar may be inaccurate
```




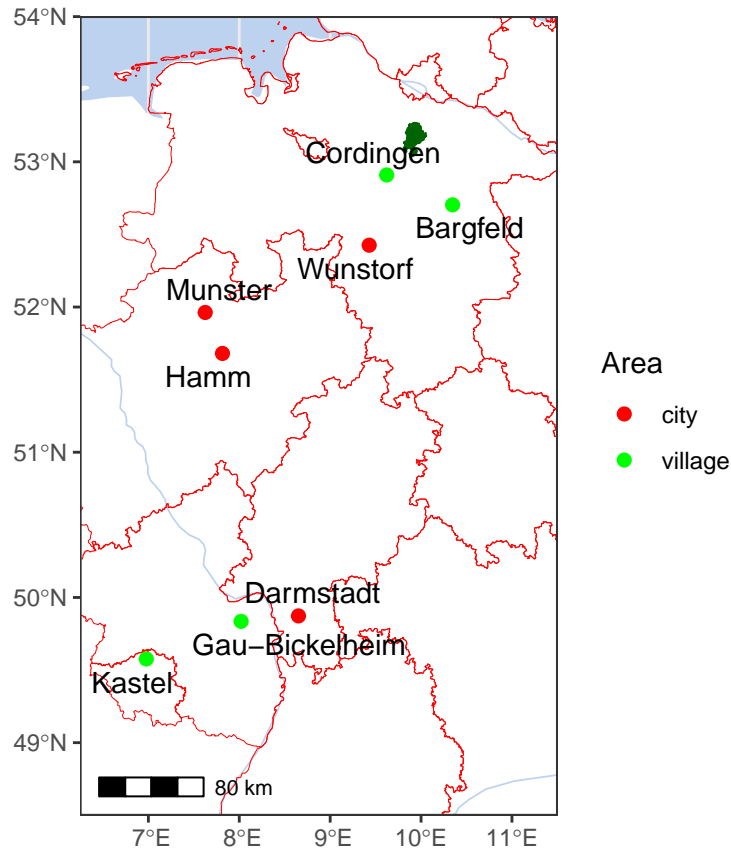

```
locations_lived_lüneburg <- locations_lived %>%
  filter(location_original == "Bargfeld" | location_original == "Cordingen")

xlim=c(8.5,11.5); ylim=c(52.25,54)
ggplot(data = world) +
  geom_sf(fill="white", color="white") +
  geom_path(data = rivers_f, aes(x = long, y = lat, group = group), color = waterColor, size = .3) +
  geom_path(data = bundesländer_f, aes(x = long, y = lat, group = group), color = "red", size = .05) +
  geom_polygon(data = lüneburg_f, aes(x = long, y = lat, group = group), color = "darkgreen", fill = "darkgreen") +
  geom_point(data = locations_lived_lüneburg, aes(x=long, y=lat, color=category), size = 2) +
  scale_color_manual(name="Area", values = c("city"="red", "village"="green")) +
  geom_text_repel(data = locations_lived_lüneburg, aes(x=long, y=lat, label = location_original), fontface = "bold", size = 10) +
  coord_sf(xlim = xlim, ylim = ylim, expand = FALSE) +
  theme(panel.background = element_rect(fill = waterColor)) +
  annotation_scale(location = "bl", width_hint = 0.25) +
  coord_sf(xlim = xlim, ylim = ylim, expand = FALSE) +
  theme(panel.background = element_rect(fill = waterColor),
        axis.title.y=element_blank(),
        axis.title.x=element_blank())
```

## Coordinate system already present. Adding new coordinate system, which will replace the existing one

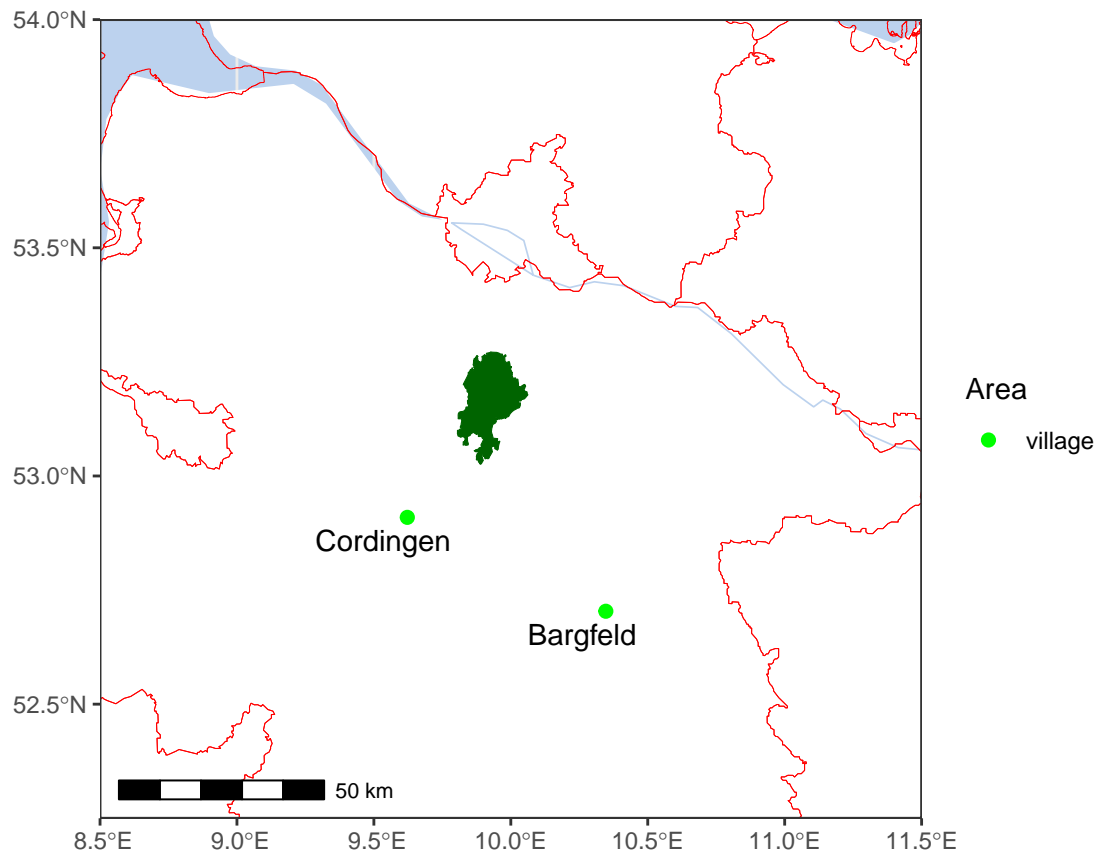

```
locations_lived_leaflet <- locations_lived %>%
  mutate(popup = paste0("Arno Schmidt lived here from ", moved_in, " to ", moved_out))

m <- leaflet(locations_lived_leaflet) %>%
  addProviderTiles(providers$Stamen.Toner) %>%
  setView(lng = 11, lat = 52, zoom = 7) %>%
  addMarkers(~long, ~lat, popup=~popup, label=~location_original)
#m
```

```
#saveWidget(m, 'map_locations_lived.html', selfcontained = FALSE)
```