

The Definitive Guide To OpenWebStart

Table of Contents

Introduction	2
What is OpenWebStart?	2
Installation	3
Interactive Installation	3
Windows	3
macOS	3
Linux	4
Release Contents	4
Unattended Installation	5
JNLP File Association	6
How to Uninstall	6
Running OWS from portable USB stick	7
Local vs. System-Wide Installation	7
Updates	7
Configuration	8
User level configuration	9
Enterprise wide configuration	9
Configuring location of <code>jvm_cache</code>	9
Configuring location of <code>deployment.properties</code>	10
JVM Management	11
JVM Download Server	11
Setup a Custom Download Server	12
Allowing JVM Server in JNLP and defining a JVM Server Whitelist	12
Whitelist for JVM arguments	13
Cache Management	13
Application Management	14
Proxy Settings	14
Security Settings	15
Suppressing security checks on manifest	15
Certificates	17
Server Whitelist	17
Logging	18
Log Console	19
Logging to Files	19

Remote Debugging	20
System Configuration	20
Defining the System Configuration	21
Content of the System Configuration	21
Locking a Property	21
Configuration Properties Overview	22

Introduction

Java Web Start (JWS) was deprecated in Java 9, and starting with Java 11, Oracle removed JWS from their JDK distributions. This means that clients that have the latest version of Java installed can no longer use JWS-based applications. And since public support of Java 8 has ended in Q2/2019, companies no longer get any updates and security fixes for Java Web Start.

This is why some enthusiasts at Karakun decided to create OpenWebStart, an open source reimplementation of the Java Web Start technology. This guide describes how you can use OpenWebStart as a replacement for JWS and continue using your JNLP-based applications with little or no change at all.

We appreciate your feedback. If you feel that there's a lack of documentation in a certain area or if you find inaccuracies in the documentation, please don't hesitate to contact us at openwebstart@karakun.com or the [support forum](#).

What is OpenWebStart?

OpenWebStart is an open source reimplementation of the Java Web Start technology, released under the GPL with Classpath Exception. It provides the most commonly used features of Java Web Start and the JNLP standard, so that your customers can continue using applications based on Java Web Start and JNLP without any change. OpenWebStart is based on Iced-Tea-Web and follows the JNLP-specification defined in JSR-56.

The main focus of OpenWebStart is the execution of JNLP-based applications. Additionally, the tool contains various modules that simplify your Web Start workflows and let you configure OpenWebStart to suit your needs:

App Manager

manages the versions of any JNLP-based application that is executed by OpenWebStart.

JVM Manager

manages Java versions and Java updates on the client.

Control Panel

provides a graphical user interface to configure OpenWebStart.

Updater

downloads and installs new versions of OpenWebStart.

Installation

OpenWebStart can be installed on Windows, MacOS and Linux operating systems and there are two different ways to install OpenWebStart:

- Using the **interactive installation** with auto-update functionality
- Using the **unattended installation** for automated roll-outs

If you use Web Start for several small customers or on your own, we recommend using the interactive installer. Our native installer will set up everything on your Windows, Mac, or Linux system so that OpenWebStart is immediately ready to use. OpenWebStart checks for updates automatically, and the Updater component keeps the tool current without the need for any user interaction.

If you or your customers are companies with IT departments of their own, we recommend an unattended installation to roll out OpenWebStart on multiple client machines. Instead of walking through the graphical installer of OWS on every machine your IT department can pre-define the responses for the installation options in a response varfile.

Interactive Installation

Windows

1. Open the ZIP-file.
2. Run the installer.
3. Choose a language and click **OK** to open the OpenWebStart Setup wizard.
4. Click **Next** to start the OpenWebStart installation.
5. Browse to the directory where to install OpenWebStart, and click **Next**.
Windows default: `C:\Program Files\OpenWebStart`
6. Enable the checkbox to associate the .JNLP suffix with OpenWebStart, and click **Next**.
7. Please wait for OpenWebStart to be installed on your computer.
8. Click **Finish** on the completion screen to close the wizard.

macOS

1. Open the OpenWebStart disk image (DMG file) to mount it.
2. Run the `Open Web Start Installer.app`.
3. Choose a language and click **OK** to open the OpenWebStart Setup wizard.
4. Click **Next** to start the OpenWebStart installation.
5. Browse to the directory where to install OpenWebStart, and click **Next**.
Default: `/Applications/Open Web Start`
6. Enable the checkbox to associate the .JNLP suffix with OpenWebStart, and click **Next**.

7. Please wait for OpenWebStart to be installed on your computer.
8. Click **Finish** on the completion screen to close the wizard.

Linux

1. Go to the directory where the installer (DEB file) is stored and run the file from the terminal
`sudo dpkg -i OpenWebStart_linux_1_1_8.deb`
2. Enter your root password.
3. Choose a language and click OK to open the OpenWebStart Setup wizard.
4. Click Next to start the OpenWebStart installation.
5. Browse to the directory where to install OpenWebStart, and click Next.
Default: `/opt/openwebstart`
6. Enable the checkbox to associate the .JNLP suffix with OpenWebStart, and click Next.
7. Please wait for OpenWebStart to be installed on your computer.
8. Click Finish on the completion screen to close the wizard.

If you need help installing OpenWebStart, also have a look at the public installation and configuration discussions at the [Support Forum](#).

Release Contents

<OpenWebStart Installation Dir>

.install4j : Contains Install4J installer files including *response.varfile* that is used for unattended installation.

jre : Contains the bundled JRE that starts OWS

***.png** : Icons used by OWS

itw-settings.exe : Application for configuring OWS

itw-settings.vmoptions : JVM args used by bundled JRE when starting itw-settings

javaws.exe : OWS executable that starts a JNLP file

javaws.vmoptions : JVM args used by bundled JRE when starting javaws

openwebstart.jar : OWS jar

readme.txt : Describes OWS release contents and useful links

uninstall.exe : Uninstaller

Unattended Installation

If you or your customers are companies with IT departments of their own, we recommend an unattended installation to roll out OpenWebStart on multiple client machines. In this scenario, the auto-update functionality is inactive; your IT department is free to plan and handle rollouts of new versions based on your internal workflows.

When installing OpenWebStart, several properties can be predefined in a so-called `response.varfile` file.

Some of the supported properties are lockable. If a property is lockable, you can define an additional property of type `PROPERTY_NAME.locked=true` to prevent users from editing the property in the user interface. For example, to define a value for the `ows.jvm.manager.server.default` property that cannot be changed in the user interface, specify the following two properties:

```
ows.jvm.manager.server.default=https://my.custom.server
ows.jvm.manager.server.default.locked=true
```

Have a look at the [Configuration Properties Overview](#) to get an overview of all properties that can be specified in the `response.varfile`.

To create a `response.varfile` file, run the installation of OpenWebStart at least once manually. By doing so a `response.varfile` file is created in OpenWebStart installation folder in your system. In the installation folder, you find a `.install4j` folder that contains the basic `response.varfile` file. The content of such a file looks like this:

```
sys.adminRights$Boolean=false
sys.fileAssociation.extensions$StringArray="jnlp","jnlp"
sys.fileAssociation.launchers$StringArray="313","313"
sys.installationDir=/Applications/OpenWebStart
sys.languageId=de
```

You can easily edit this file and add additional properties based on the table in this article. Do not change the initial content of the file, and add new properties always to the end of the file. After editing, a `response.varfile` file might look like this:

```
sys.adminRights$Boolean=false
sys.fileAssociation.extensions$StringArray="jnlp","jnlp"
sys.fileAssociation.launchers$StringArray="313","313"
sys.installationDir=/Applications/OpenWebStart
sys.languageId=de
ows.jvm.manager.server.default=https://my.custom.server
ows.jvm.manager.server.default.locked=true
```

You can now use your enhanced file to install OpenWebStart on multiple machines. Simply copy the enhanced `response.varfile` next to the installer and execute the following command:

```
<OpenWebStart_windows_Setup.exe> -q -varfile response.varfile
```

JNLP File Association

To ensure that your computer handles links, desktop shortcuts, or start menu entries to JNLP applications correctly, you should associate the JNLP file type (*.jnlp) on your computer with OpenWebStart. In case you used a Oracle JVM in the past, your JNLP file association might still be set to Oracle javaws.

Note that during the installation process, OpenWebStart will not change file associations of any existing Oracle javaws executable, so you can use both.

To associate .JNLP applications in Windows Explorer

1. Right-click the JNLP app and select **Open With > Choose Another App**
2. Click **More Apps** and scroll down
3. Click **Look for Another App on this PC**
4. Browse to OpenWebStart at
`C:\Program Files\OpenWebStart\javaws`
5. Click **Open** to associate this JNLP file with OpenWebStart

To associate .JNLP applications in macOS Finder:

1. Right-click the JNLP app and select **Open With > Other...**
2. Browse to OpenWebStart at `/Applications/Open Web Start/javaws`
3. Click **Open** to associate this JNLP file with OpenWebStart

How to Uninstall

In case you need to uninstall OpenWebStart follow the steps below:

For Windows and macOS

1. Go to your OpenWebStart directory
2. Run the Uninstaller
3. Click **Next** in the OpenWebstart Uninstaller Wizard
4. Wait for the Uninstaller to complete
5. Click **Finish** on the completion screen to close the wizard.

For Linux

Use your package manager and remove the package OpenWebStart

Running OWS from portable USB stick

It is possible to run OWS from a portable USB stick without actually installing OWS on your machine. Although this is a quick way of running OWS the downside of not using the installer is that you do not get the support of the underlying operating system in terms of file associations, registry entries and desktop integration. So if you can (and want to) do without the file associations, desktop icon and startup menu you can create a portable version yourself.

All files required for execution are located in the installation directory. It is therefore sufficient to copy this directory onto a USB stick and then to run *javaws.exe* and *itw-settins.exe* by mounting the USB stick on the target computer.

If you want the settings and the cache to remain on the USB stick, the path to your two directories can be set with the following environment variables:

```
XDG_CACHE_HOME (default value is %USER_HOME%\cache)
```

```
XDG_CONFIG_HOME (default: %USER_HOME%\config)
```

To run OWS from a USB stick it is recommended to create a small batch script that sets the two variables and then executes *javaws.exe* and *itw-settings.exe*

```
javaws.exe [url-to-jnlp | path-to-jnlp] [options]
```

It should also be mentioned that with every new release of OWS the two things that usually change are:

```
\openwebstart.jar (the application must be updated)
```

```
\jre\ (the bundled JRE which is used to run OpenWebStart)
```

So you might want to update these files in the USB stick to keep your OWS installation up-to-date.

Local vs. System-Wide Installation

You can install OWS for the current user or for all users of the computer.

Once OWS is installed on your machine it can be configured locally using the local *deployment.config* file or it can take its configuration from a centralized enterprise wide *deployment.config*. This is described in detail at [Configuration](#).

Updates

OpenWebStart can be configured to automatically check for new releases and perform automatic updates.

To do so go to the "Updates" Panel in the OWS Settings.

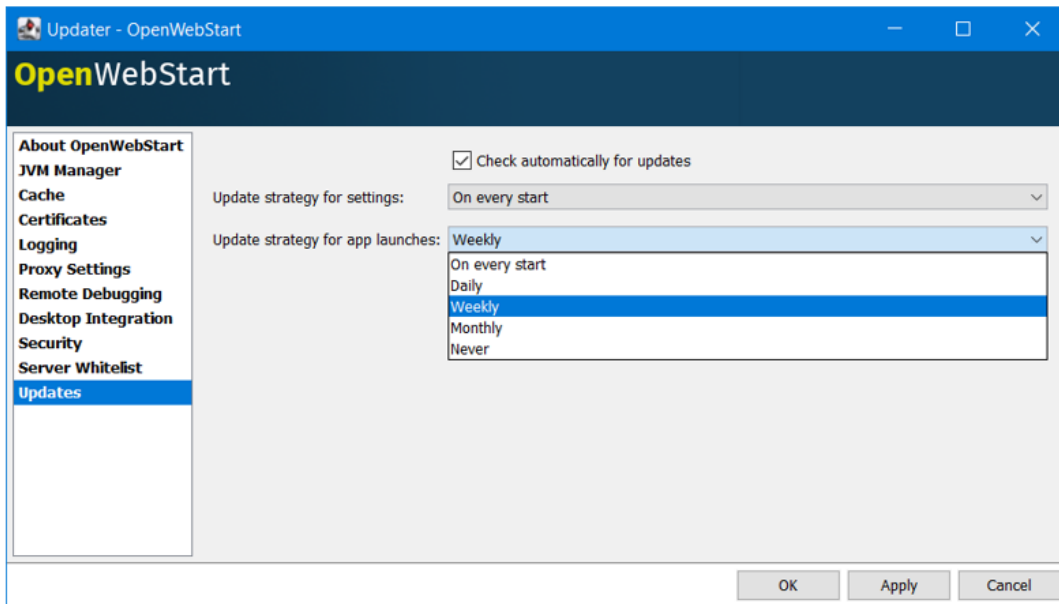


Figure 1. OWS Update options

It is possible to define an update strategy on every **start**, **daily**, **weekly**, **monthly**, or **never**.

Configuration

The standard way to configure OpenWebStart is to use the OWS Settings application. The executable is located in the installation directory and is named **itw-settings**.

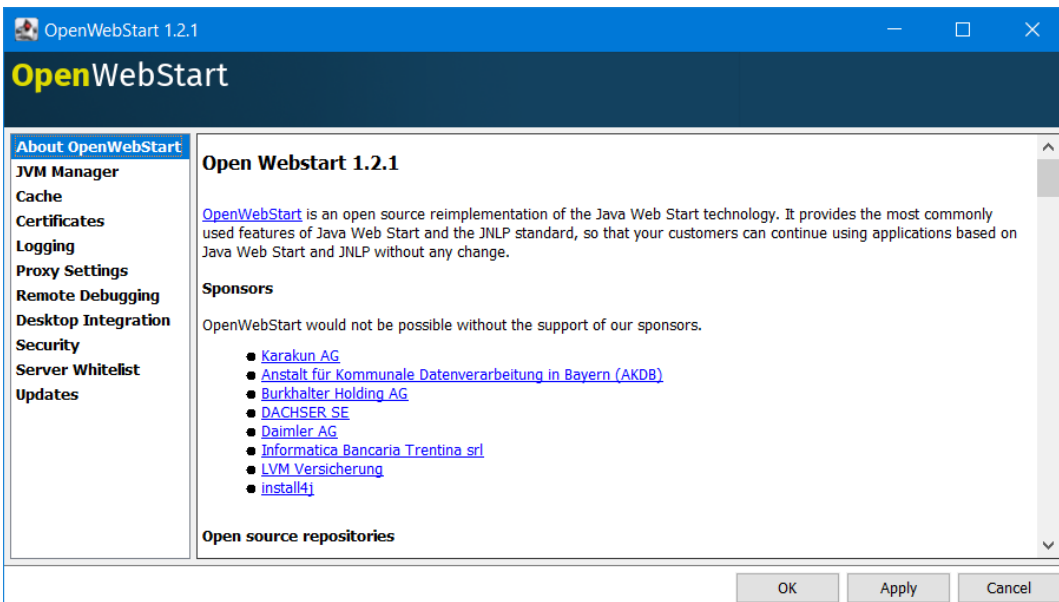


Figure 2. Configuring OWS Settings

All settings managed by this application are stored on the file system in a file called **deployment.properties**. For Windows the file is located at **\${USER_HOME}\.config\icedtea-web\deployment.properties**. For Mac and Linux the file is located at **\${USER_HOME}/.config/icedtea-web/deployment.properties**.

This file can be edited with a regular text editor. For some expert configurations this may be

necessary, but for most cases the graphical UI will be sufficient.

Various life-cycle aspects of your JNLP applications can be configured, such as download and update strategy or caching behavior. You can configure the JVM vendor and version that should be used to launch your JNLP application as well as proxy settings, security settings, certificates and server whitelists.

The following sections will describe these various configuration possibilities in detail.

User level configuration

OWS can be configured locally by specifying properties in `<User Home>\.config\icedtea-web\deployment.properties` file.

Enterprise wide configuration

In an enterprise environment, for uniformity of behavior, it is preferred that all users use the same configuration for OWS.

It is possible to configure OWS with a system-wide configuration. This allows setting up a common configuration for multiple users at a centralized location on a single computer. This helps in managing a corporate infrastructure where many computers need to be configured identically.

Centralized location for `configuration` and `cache` can be specified using `XDG_CONFIG_HOME` and `XDG_CACHE_HOME` environment variables.

The centralized `configuration` comprises:

- `deployment.properties` : all users must use the same `deployment.properties` for OWS
- user decisions (`.appletTrustSettings`)
- logs - logs for the app started by each user
- security (certificate stores)
- icons - for the app started by user

The centralized `cache` comprises

- `jvm_cache` : directory where common set of downloaded jvms are stored
- `cache` and `recently_used` file : directory for caching the jnlp and resources of the applications started by users
- `temp dir` : Directory created by OWS for temp files.

Configuring location of `jvm_cache`

`jvm_cache` location can be configured using the property `ows.jvm.manager.cache.dir` in the centralized `deployment.properties` file :

```
ows.jvm.manager.cache.dir=c:\\temp\\JVMCacheDir
```

NOTE

`ows.jvm.manager.cache.dir` specification in `deployment.properties` takes precedence over `XDG_CACHE_HOME`.

Configuring location of `deployment.properties`

It is possible to make OWS use `deployment.properties` from a customized location.

A user-level `deployment.properties` file always exists in the `<User Home>/.config/icedtea-web` directory. There can also be an optional system-level `deployment.properties` file. If it exists, its location is determined by a System Administrator through the `deployment.config` file. The `deployment.config` file is used for specifying the system-level `deployment.properties` in the infrastructure. By default no `deployment.config` file exists, so no system-wide `deployment.properties` file exists. If the `deployment.config` file exists, it is located in one of the directories shown in the following table:

Operating System	Location
Windows	<code><Windows Directory>\Sun\Java\Deployment\deployment.config</code>
Linux	<code>/etc/.java/deployment/deployment.config</code>
Mac	<code>/Library/Application Support/Oracle/Java/Deployment/deployment.config</code>

The `deployment.config` file contains two properties: `deployment.system.config` and `deployment.system.config.mandatory`.

The `deployment.system.config` property is the URL to the system (enterprise-wide) `deployment.properties` file. This property can be used by system administrators to centrally administer or "lock-down" user-specific configuration settings.

```
deployment.system.config=file:///c:/OpenWebStart/my.properties
```

The `deployment.system.config.mandatory` property is a boolean. If set to true, the `deployment.properties` file that is pointed to by the `deployment.system.config` property must be found and successfully loaded, otherwise, nothing is allowed to run. If the property is set to false, an attempt is made to find and load the `deployment.properties` file that is pointed to by the `deployment.system.config` property. If successful, the file is used, otherwise, the file is ignored. The default for the `deployment.system.config.mandatory` property is false.

OWS will then pick up `deployment.properties` from the specified file when `deployment.properties` is NOT present in `<User Home>\.config\icedtea-web` dir

When `deployment.properties` IS present in `<User Home>\.config\icedtea-web` dir then it seems to

have precedence for specified properties.

JVM Management

OWS provides facility to choose set of JVMs that can be used to run the applications specified in JNLP files

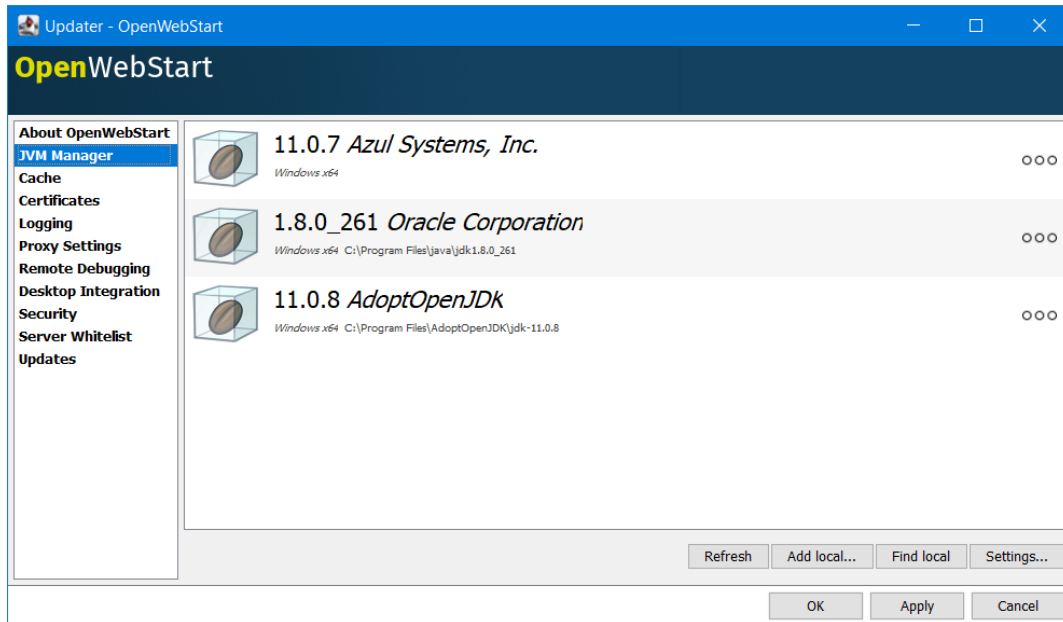


Figure 3. JVM Management

One can choose or automatically add locally available JVMs or one can specify the server from where JVMc can be downloaded.

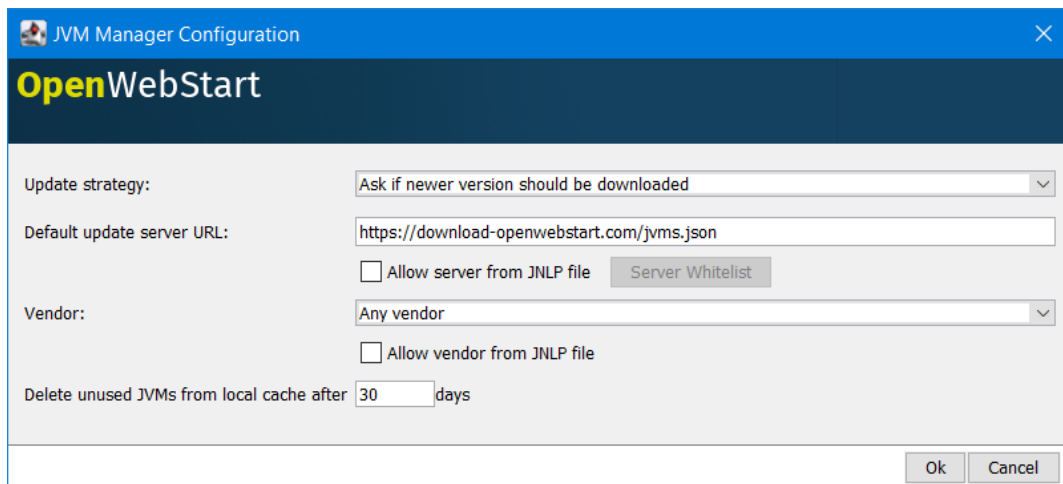


Figure 4. Configuring JVM Management

JVM Download Server

OpenWebStart can fetch JVMs and JVM updates from a download server that is specified in the JVM Manager Configuration of the OWS Settings application. The default points to <https://download-openwebstart.com/jvms.json>.

Setup a Custom Download Server

If you want to set up your own JVM download server you must provide a json file which lists all available JVMs.

This json file must contain the following data:

```
{
  "cacheTimeInMillis":<milliseconds>,
  "runtimes":[
    {
      "version":<JVM version>,
      "vendor":<vendor name>,
      "os":<OS identifier>,
      "href":<absolute url to the archive containing the JVM>
    },
    ... more runtime definitions
  ]
}
```

cacheTimeInMillis

The time which needs to elapse before a client is allowed to contact the server again. Usually the server is accessed once per application startup.

os

Possible values are: MAC64, MAC32, LINUX64, LINUX32, WIN64, WIN32

Allowing JVM Server in JNLP and defining a JVM Server Whitelist

You can allow specification of JVM server in the JNLP file by defining the property: *ows.jvm.manager.server.allowFromJnlp=true*. In this case the JVM will be downloaded from the URL specified in the JNLP file:

```
<java version="1.8*" href="http://myjvms.myserver.com/jvms.json"/>
```

When allowing JVM server download from the JNLP file, as a security measure it is advisable to define a whitelist for JVM server URLs that will be specified in JNLP files. JVMs will be allowed to be downloaded from only those server URLs that match a whitelist entry.

The JVM server whitelist can be defined in the *deployment properties* file *\${userHome}/.config/icedtea-web/deployment.properties*:

```
ows.jvm.manager.server.allowFromJnlp.whitelist=myjvms.myserver.com, *.jvms.com
```

It is possible to specify wildcards in the URLs specified in the whitelist. Please see the section on "Server Whitelist" for details.

Whitelist for JVM arguments

OWS starts the JNLP application with the JVM that best matches JVM in the JNLP file. While starting the JVM, OWS passes the JVM args specified in the JNLP file:

```
<java version="1.8+" java-vm-args=" -Xmx512m -Xms128m -XX:SurvivorRatio=6  
-XX:NewSize=96m -XX:MinHeapFreeRatio=20 -XX:MaxHeapFreeRatio=30"/>
```

OWS maintains a hardcoded list of secure JVM args as specified at:

- <https://docs.oracle.com/javase/8/docs/technotes/guides/javaws/developersguide/syntax.html#secure-property>
- <https://docs.oracle.com/javase/9/tools/java.htm#JSWOR624>
- <https://news.kynosarges.org/2019/03/24/swing-high-dpi-properties/>

OWS allows only those JVM args that are in the above lists. However, sometimes with new versions of JREs new JVM arguments are introduced. Also, some of the valid arguments are not documented in the above lists. In such cases it is possible for the user to specify new JVM arguments in the `deployment.properties` for OWS to allow them to be passed to the JVM:

```
deployment.jvm.arguments.whitelist=-Dnew_jvm_arg1, -Dnew_jvm_arg2
```

Subsequently the JNLP file can include the above JVM args:

```
<java version="x" java-vm-args="-Dnew_jvm_arg1=value1 -Dnew_jvm_arg2=value2"/>
```

Cache Management

OWS downloads the resources like jars and images specified in the JNLP file from the specified server(s). OWS stores application resources for faster execution by avoiding downloading the next time you run the application. By default application resources are stored in `<User Home>/.cache/icedtea-web/.cache` directory. However, OWS will download resources for the application if it finds that a resource has been updated on the server.

To find out whether a resource has been modified since the last download, OWS sends a *HTTP HEAD* request to the server and expects to receive the last modified timestamp of the resource on the server. In order to facilitate caching of resources by OWS it is necessary that the server from where the resources are downloaded is configured to respond to *HTTP HEAD* request. In case the server is not configured to respond to *HTTP HEAD* request, OWS will not be able to determine the last modified timestamp of the resource and will go ahead and download the resource.

The OWS cache can be configured and managed:

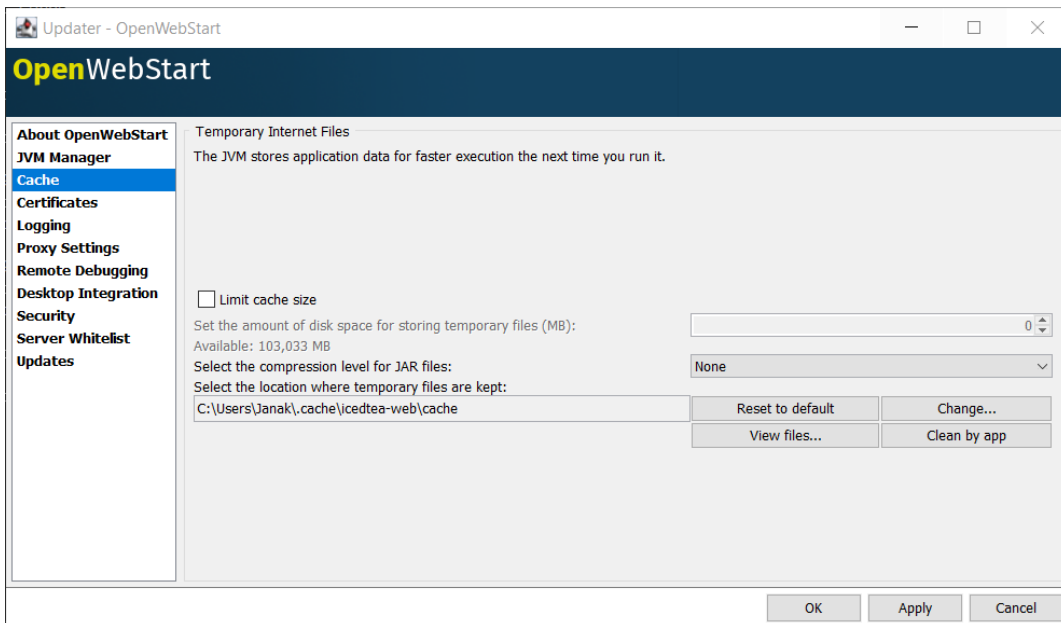


Figure 5. Configuring Cache Management

Application Management

An experimental feature has been provided to manage applications downloaded by OWS. This feature can be enabled by setting the following property in `deployment.properties`:

```
ows.experimental.applicationManager.active=true
```

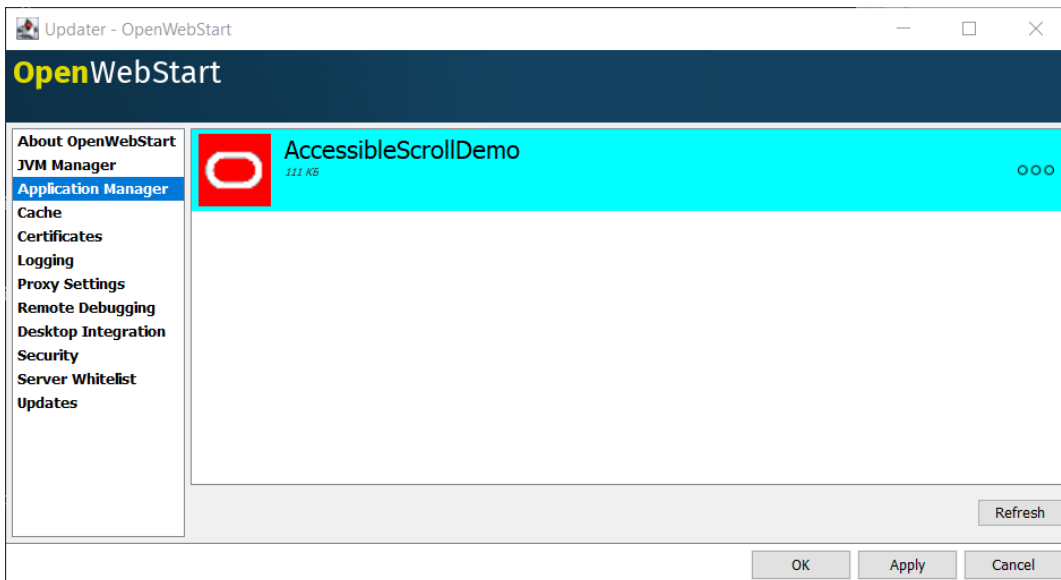


Figure 6. Application Management

The Application manager shows the list of downloaded applications. It allows to: * start the application * create shortcut * delete the application from cache.

Proxy Settings

It is possible to configure proxy to be used by OWS when it downloads jnlp files and resources:

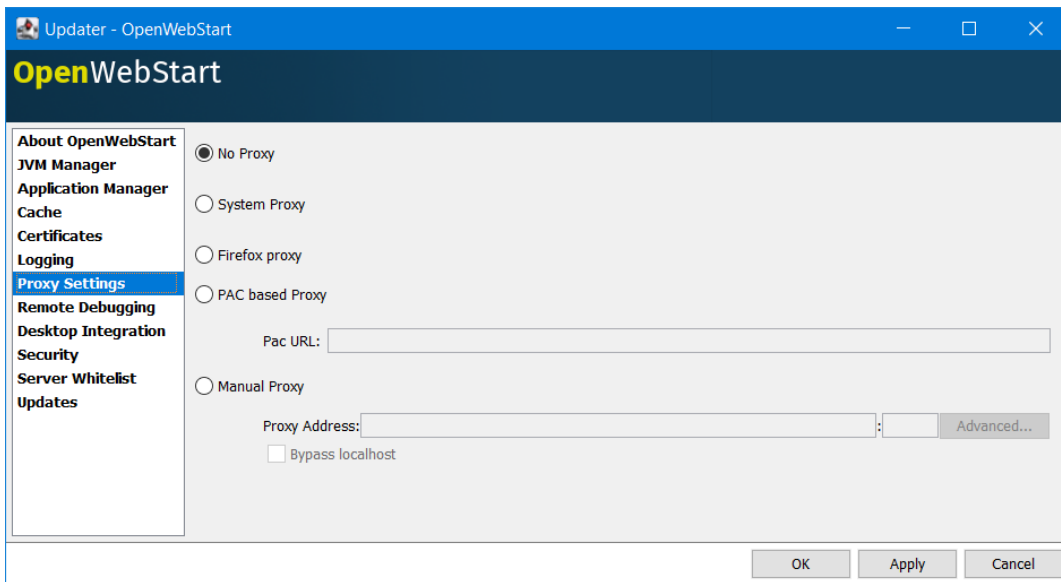


Figure 7. Proxy Settings

Security Settings

Security settings for OWS can be configured in the Security panel:

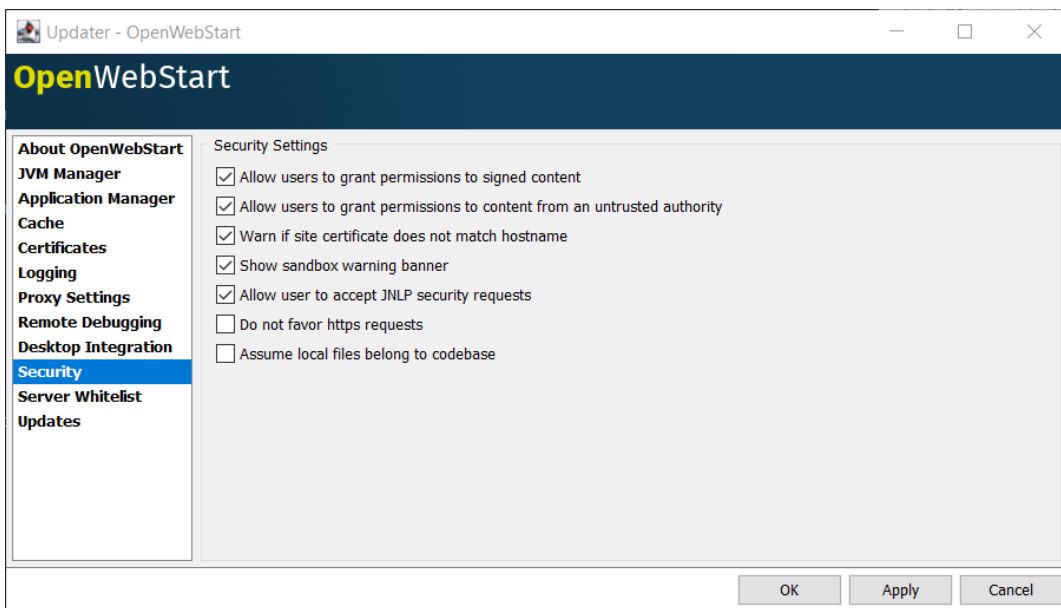


Figure 8. Security Settings

Suppressing security checks on manifest

If security related attributes (such as `Permissions` etc) are missing in the manifest of a signed jar, OWS displays a Security dialog:

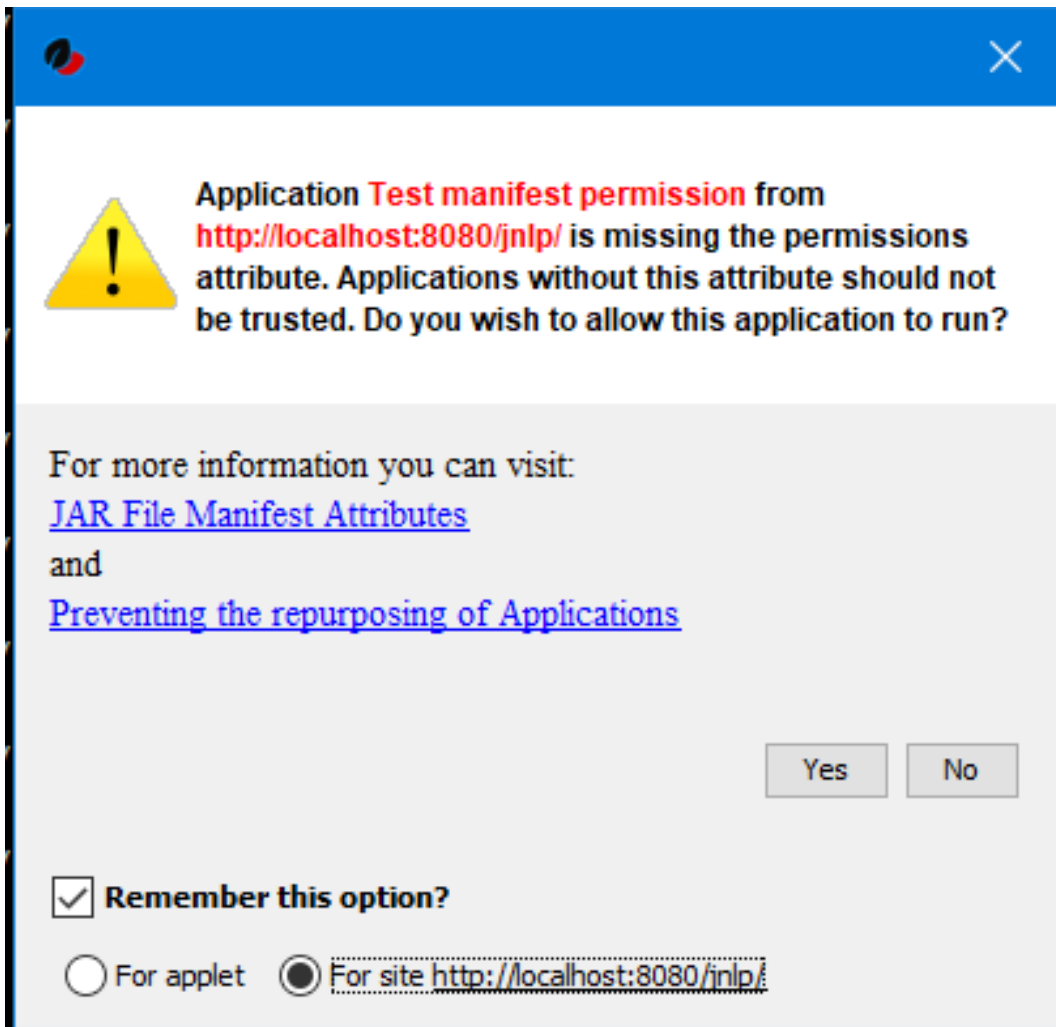


Figure 9. Security Dialog

You can choose to "Remember this option" for the site and Press the Yes button. Your decision will be stored in the file `<User_HOME>/.config/icedtea-web/appletTrustSettings`. Next time when you start the jnlp you will not be shown the above dialog.

Alternatively, you can suppress the checking of selected or all manifest attributes by specifying the following property in your `deployment.properties` file:

```
deployment.manifest.attributes.check=NONE
```

Default value of this property is `ALL`.

Other values for this property are `PERMISSIONS`, `CODEBASE`, `TRUSTED`, `ALAC`, `ENTRYPOINT`. You can specify a comma separated list these Manifest attributes to be checked by OWS. For example if you want all except `Permissions` attribute to be checked by OWS ManifestChecker then you could specify:

```
deployment.manifest.attributes.check= CODEBASE,TRUSTED,ALAC,ENTRYPOINT
```


Certificates

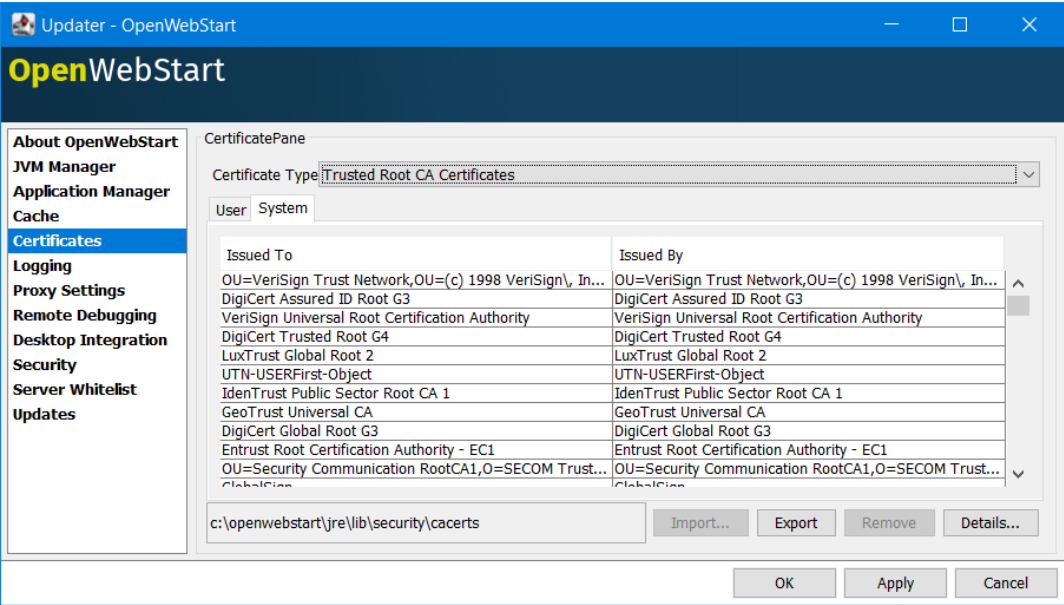


Figure 10. Managing Certificates

<documentation added in the near future>

Server Whitelist

The "Server Whitelist" panel in OWS settings displays the server whitelist. To define a server whitelist you have to edit the `deployment.properties` file in your config directory with a text editor by adding a new line similar to the following:

```
deployment.security.whitelist=10.10.10.10, google.com, some.server.net
```

The different servers are listed as a comma separated string. Localhost is implicitly always in the white list. If you delete the line again then no whitelisting is applied and all servers are reachable.

Note that whitelisting only applies while downloading resources (jars and jnlps) and not while an application is running. Thus an application can open a connection to a server which is not in the white list.

It is also possible to specify the content of the whitelist in the response file of an unattended OWS installation.

It is possible to specify a wildcard in the host and port part of the URL. The following table illustrates the rules for whitelist URLs with wildcard:

Whitelist entry	UI Displayed	Comment
http://subdomain.domain.com:8080	http://subdomain.domain.com:8080	only the specified protocol, host port combination is whitelisted
domain.com	https://domain.com:443	since HTTPS and 443 are defaults

Whitelist entry	UI Displayed	Comment
100.101.102.103	https://100.101.102.103:443	since HTTPS and 443 are defaults
http://subdomain.domain.com	http://subdomain.domain.com:80	since HTTP is used default port is 80
https://subdomain.domain.com	https://subdomain.domain.com:443	since HTTPS is used default port is 443
https://subdomain.domain.com:80	https://subdomain.domain.com	any port is whitelisted
https://*.domain.com:443	https://*.domain.com:443	any domain which ends in ".domain.com" is whitelisted
.domain.com:80	https://.domain.com	any domain which ends in ".domain.com" and any port is whitelisted
https://*:443	https://*:443	any host but with protocol https and port 443 is whitelisted (any part other than the first part of host cannot be a wildcard)
https://jvms.*:443	Error: invalid host	* is only allowed at position 0 of the host name
https://*jvms.domain.com:443	Error: invalid host	for host part use either * or text but not combination
https://jvms.*.domain.com:443	Error: invalid host	* is only allowed at position 0 of the host name
https://subdomain.domain.com:1	Error: Invalid port	only a number in the range 1-65535 or * is valid for the port
https://*.123.134.145	Error: Invalid IP Address	IP address cannot have a wildcard
https://100.1*.134.145	Error: Invalid IP Address	IP address cannot have a wildcard

Logging

OpenWebStart provides access to log message information to monitor application execution and analyse erroneous behavior by the Log Console GUI and log files. Both can be enabled in the "Logging" panel in OWS settings.

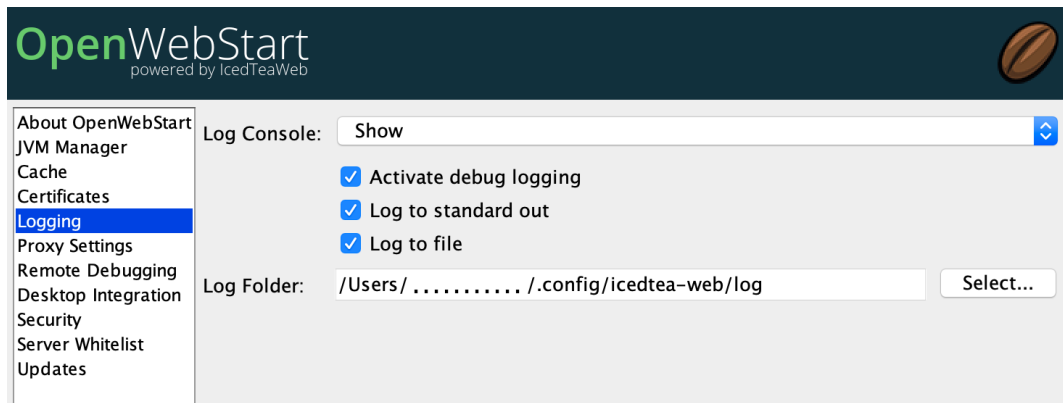


Figure 11. Logging options in OWS Settings

Log Console

OpenWebStart provides the possibility to show a log console window where all log messages of OpenWebStart itself and the launched JNLP application are displayed.

Various filter options can be selected to reduce the log output. To show the log console choose "Show" in "Log Console" selection.

Logging to Files

Logging to files can be activated for file-based log analysis or to send the logs files to the OpenWebStart support.

You have to select "Activate debug logging", "Log to file", and specify the log folder where OpenWebStart should write the log files.

By default this is `<user_home>/..config/icedtea-web/log`. Ensure that your folder has write access permissions when customize this path.

When launching a JNLP application, OpenWebStart produces three log files for different stages. They all following the naming convention:

```
<timestamp>-ows-stage<stage number>.log
```

The first file (according to creation timestamp) contains log events produced by the OpenWebStart launcher. It basically contains information on the launcher arguments and the location of the deployment.properties. It is created in stage 1.

The second file (still stage 1) contains log events on the start-up of OpenWebStart itself. It provides details on version and update status, embedded JVM version, JVM arguments, keystores loaded, validation and parsing results of the JNLP file, and details on the VM required by and used to finally launch the JNLP application. It ends with all the details about the command that OpenWebStart is about to execute to launch the JNLP application.

The third log file (stage 2) logs the events that happen when OpenWebStart launches the JNLP application. **This is probably the most relevant log file for OpenWebStart users.** It provides details on how the launch and execution of the JNLP application is going, such as the resources

downloaded for the application. **If your application cannot start properly, this log file is the best place to look for any error messages or stack traces.**

Note that log files of the OpenWebStart Settings application also goes to this log directory. They are named

```
<timestamp>-ows-settings.log
```

You will rarely need those.

Remote Debugging

OWS allows remote debugging of the application started by OWS. You can configure the settings as follows:

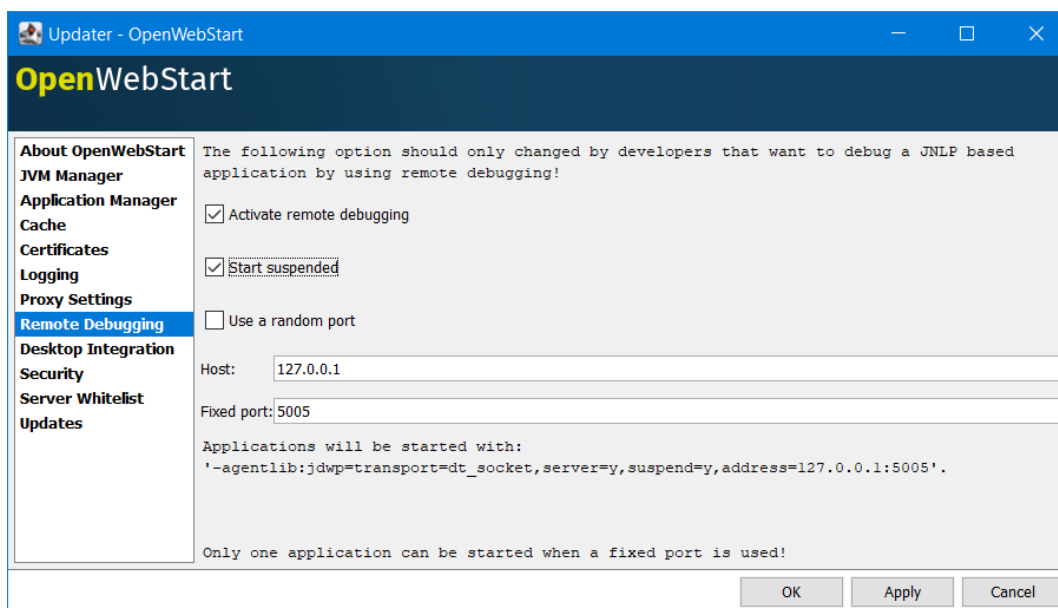


Figure 12. Remote Debugging

System Configuration

When loading the configuration during the start of OpenWebStart the following steps are executed:

1. Load the default values which are hardcoded in the source code.
2. Search for a system configuration.
3. Load the system configuration if one was found.
4. Load the user configuration.

Whenever a configuration is loaded the values which are already defined are updated. There is however the possibility to lock a property. If a property is locked then subsequent configurations may not modify the value. This allows enforcing certain values on a system level. Any changes the user makes in his personal configuration file will not have any effect on the locked property.

Defining the System Configuration

The system configuration needs to be defined in the following way.

Windows: create the file `%windir%\Sun\Java\deployment\deployment.config` and add the following properties:

MacOs and Linux: create the file `/etc/.java/deployment/deployment.config` and add the following properties:

deployment.system.config

The URL to the system configuration. The name of the file can be freely chosen. Special characters need escaping. See the following examples:

- `deployment.system.config=file\:/C:/Windows/Sun/Java/global.properties`
- `deployment.system.config=file\:/etc/.java/deployment/base.properties`
- `deployment.system.config=https\://192.168.1.1./javaws/system.properties`

deployment.system.config.mandatory

If set to `true` then OpenWebStart will fail if it is unable to load the system settings. This property is optional. The default value is `false`.

The final file should look something like this:

```
deployment.system.config=https\://192.168.1.1./javaws/system.properties
deployment.system.config.mandatory=true
```

Content of the System Configuration

The simplest way to create a system configuration is to start the `itw-settings`. After saving the configuration the modified properties are written to the user configuration file. For Windows the file is located at `${USER_HOME}\.config\icedtea-web\deployment.properties`. For Mac and Linux the file is located at `${USER_HOME}/.config/icedtea-web/deployment.properties`.

The customized user configuration can be used as a starting point for the system configuration. Simply copy the file and remove the properties which should not be defined on the system level.

OpenWebStart does not save properties which have the default value. Therefore the generated user configuration may not contain all the values you wish to enforce on the system level.

Please contact openwebstart@karakun.com if you need to know the key and valid values for a specific configuration.

Locking a Property

One of the use cases is to enforce some configurations to all users in your corporate environment. This can be achieved by locking configuration on a system level. To lock a property you need to define a second entry with a `.locked` postfix.

Here an example:

```
ows.jvm.manager.server.default=https\:\/\/192.168.1.1/jvms.json  
ows.jvm.manager.server.default.locked=true
```

TIP

the value of `ows.jvm.manager.server.default.locked` is ignored. The presence of the key is sufficient for locking the property.

Configuration Properties Overview

The following table provides an overview of the configuration properties of OpenWebStart.

NOTE

The properties marked in the column LK are lockable. The properties marked in the column RV can be specified in the response.varfile. See [Configuration](#) and [Unattended Installation](#) for further details.

Property	LK	RV	Description
ows.jvm.manager.cache.dir	X	X	Allows to specify the directory where the JVM cache is located. The follow example shows two examples for Windows: ows.jvm.manager.cache.dir=c:\\temp\\JVMCacheDir or ows.jvm.manager.cache.dir=c:/temp/JVMCacheDir
ows.jvm.manager.server.default	X	X	This property must contain a valid URL that defines the server that is used to download new JVMs.
ows.jvm.manager.server.allowFromJnlp	X	X	Defines if a custom URL can be used to download a JVM. Such URL can be part of a JNLP file.
ows.jvm.manager.server.allowFromJnlp.whitelist	X	X	A comma separated list of urls that are defined as whitelist. The whitelist is checked whenever OpenWebStart will download a JVM from an URL out of a JNLP file.
ows.jvm.manager.vendor	X	X	Defines a specifc JVM vendor. By doing so, only JVMs from that vendor will be downloaded. You can use “*” to allow any vendor.
ows.jvm.manager.vendor.allowFromJnlp	X	X	Defines if a vendor attribute in a java/j2se tag of the JNLP file should be respected. Default is false i.e. the vendor from the settings is taken.

Property	LK	RV	Description
ows.jvm.manager.updateStrategy	X	X	When starting a JNLP application, OpenWebStart can check if an updated JVM is available to run the application. This property defines how OpenWebstart behaves in the JVM check. Possible values are DO_NOTHING_ON_LOCAL_MATCH, ASK_FOR_UPDATE_ON_LOCAL_MATCH and AUTOMATICALLY_DOWNLOAD
ows.jvm.manager.versionRange	X	X	Allows to limit the possible JVM versions. Must be valid version-string according to JSR-56 Appendix A.
deployment.proxy.http.host	X	X	The HTTP proxy hostname.
deployment.proxy.https.host	X	X	The HTTPS proxy hostname.
deployment.proxy.http.port	X	X	The HTTP proxy port.
deployment.proxy.https.port	X	X	The HTTPS proxy port.
deployment.proxy.bypass.local	X	X	All local hosts should be bypassed. Default is false.
deployment.proxy.bypass.list	X	X	A comma separated list of host names that should bypass the proxy.
deployment.proxy.type	X	X	The proxy type that should be used. Possible values are 0 (no proxy), 1 (manual proxy, default), 2 (PAC based proxy), 3 (Firefox), 4 (system proxy)
deployment.proxy.auto.config.url	X	X	The URL for the proxy auto-config (PAC) file that will be used.
deployment.proxy.same	X	X	If true use the same web server and port for https and ftp as is configured for http. (This is only valid if deployment.proxy.type = 1 (manual proxy). Default is false.
deployment.cache.max.size	X	X	The cache maximum size. Default is -1
deployment.https.noenforce	X	X	If set to true http urls are not converted to https. Default is false.
deployment.assumeFileSystemInCodebase	X	X	Defines if files from the local filesystem are always handled as if they would be part of the codebase.
deployment.security.whitelist	-	X	A comma separated list of urls that are defined as whitelist. The whitelist is checked whenever OpenWebStart will download a resource (like a JAR file).

Property	LK	RV	Description
ows.jvm.manager.maxDaysUnusedInJvmCache	X	X	Max number of days an unused JVM stays in the JVM cache. The default is 30.
deployment.log	-	X	If set to true debug logging is enabled. Default is false
deployment.log.file	-	X	If set to true log is outputted to file. Default is false
ows.update.activated	X	X	Defines if OpenWebStart should automatically search for updates.
ows.checkUpdate	X	X	This property has no effect and is only used to lock functionality in the user interface. If this property is locked, a user cannot manually search for OpenWebStart updates.
ows.update.strategy.settings	X	X	Defines how often OpenWebStart should search for updates when opening the settings windows. Allowed values are ON_EVERY_START, DAILY, WEEKLY, MONTHLY, and NEVER.
ows.update.strategy.launch	X	X	Defines how often OpenWebStart should search for updates when starting an application. Allowed values are ON_EVERY_START, DAILY, WEEKLY, MONTHLY, and NEVER.