

# Technology-based aids for people affected by Autism Spectrum Disorder (ASD)

Cristina Gava, Peron Davide

Neurosensorial Engineering final project

A.A. 2017/2018

## **Abstract**

Individuals affected by Autism Spectrum Disorder(ASD), especially the not-verbal ones, are often unable to communicate in an appropriate way, they show strong difficulties in social interactions and in manifesting their affective states or their necessities. The conventional techniques, used to improve the performances of these people in the everyday tasks, are observation-based and can require a lot of effort in terms of time and money, with limited results. Technology-assisted therapies can result more powerful and fast.

Our aim is to analyze the current technology-based solutions that can help the therapist and the family of an autistic subject to interact with him. These solutions exploit the joint use of human intelligence and artificial intelligence to improve the powerfulness of therapies and to allow a better integration of these individuals in the society.

## **Index Terms**

Autism Spectrum Disorder, Avatar-robots, Wearable Technology, Health Monitoring

## CONTENTS

<b>I</b>	<b>Introduction</b>	<b>3</b>
<b>II</b>	<b>Therapeutical techniques</b>	<b>3</b>
II-A	General AVATAR idea . . . . .	4
II-B	A more complex system . . . . .	5
<b>III</b>	<b>Everydays tools techniques</b>	<b>5</b>
III-A	Jumping Ball . . . . .	5
III-B	Genetic Algorithm . . . . .	5
<b>IV</b>	<b>Conclusions</b>	<b>5</b>
	<b>References</b>	<b>5</b>

## I. INTRODUCTION

Autism Spectrum Disorder (ASD) is a term used to cover a very big set of disorders. In this field there are a lot of studies and experiments, but still is one of the most unknown **(DP says: forse unknown non il massimo come termine qui)** disease. The symptoms are well known, while the causes are mostly unknown. Nowadays, *screening tests* are used to classify a person as affected by ASD, but these tests have an high percentage of error (false positive or negative) and they can be administered on a patient at least 3 years old. For this reason, several techniques have been studied to wonder if a children has this disorder in the first 2 years of life.

In this respect, this work is divided in two main sections. In section II we present some innovative tool to improve social skills of a child affected by ASD faster than a classical face-to-face therapy will does **(DP says: Questa frase fa schifo)**. In section III we present a couple of wearable products that allow a faster and easier integration of the subject in the everyday tasks.

## II. THERAPEUTICAL TECHNIQUES

The classical way to conduct a therapy session, is a face-to-face meeting between the subject and the therapist. Usually, is conducted in four phases: the first one is called *Instruction*, in which the therapist explain what is the skill that the subject is going to learn; the second one is the *Modeling* phase, in which the therapist show the patient what he has to do; there is then the *Rehearsal* phase, in which the patient tries to imitate the therapist and finally a *Feedback* phase in which the therapist draw its own conclusions about the test. The problem of this kind of therapy are the completely subjective evaluation procedure carried out by the therapist and that the subject's attention is not immediate.

To improve the performances of the sessions, the use of Virtual Agents (VA) platforms has been introduced. A VA platform consist of an avatar, that can be a robot or a virtual character, a learning software that receive information from the Avatar, elaborate them and adjust the response of the Avatar, and an interface for the therapist to interpretate the results. In a VA session, the therapist, with the aids of the learning software, learns the Avatar in order to do an action that the child has to imitate, the child tries to imitate the Avatar learning new way to interact with the society. Different system has been proposed, we propose here two different solutions, one more general and one more complex and efficient.

### A. General AVATAR idea

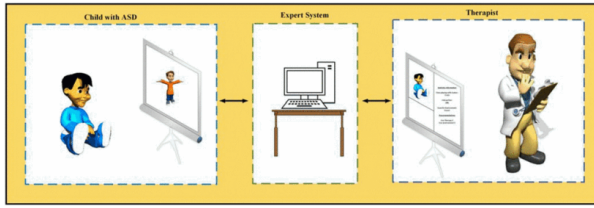


Fig. 1: Scheme of AVATAR system

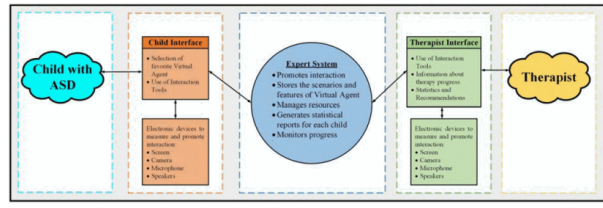


Fig. 2: Structure of AVATAR platform

The idea of an Avatar-based therapy session is proposed firstly in [1]. They propose a system composed by a VA and an *expert system* used by the therapist to instruct the VA. A general scheme of the proposed system is shown in Figure 1.

They chose to use a Virtual Agent instead of a robot since, according with the needs, it provides the possibility to customize the tool, while a robot is limited on its shape and its Degrees of Freedom (DoF).

As can be seen in Figure 2, the platform is organized as follow:

**Child Interface** It selects the child's favourite Virtual Agent and uses interaction tools as screen, camera, microphone and speakers to interact with the child;

**Expert System** Contains a learning algorithm that promotes interaction between the child and the Virtual Agent, it stores the scenario and features of the Virtual Agent and it monitors progress of the session in order to generate statistical reports that will be used by the therapist;

**Therapist Interface** Allow the therapist to access to the reports generated by the Expert System and gives information about the current therapy, in order to allow the therapist to draw conclusions.

The choices about the best VA to use during the sessions, or the characteristics that has to be changed in the current VA, are taken monitoring the reaction of the child when he's put in front of them. The character can be not strictly a human, since the highest degree of affinity can be towards an animal or an object.

The key point in their work is that the information received on the screen of the therapist interface shows a real time image of the child and monitored progress statistics. Since the VA that the child observes on his screen is a disguise of his therapist, combined with artificial intelligence, is actually the therapist who promotes the interaction in combination with the expert system.

### B. A more complex system

Another more complex and complete approach was performed in [2], using a robot instead of a VA, since it has been shown in [3] that patients show a more favorable response towards humanoid robots than to other non-humanoid virtual characters.

This approach has sensible advantages but also some intrinsic shortcomings:

- most of the robotic or virtualized therapy are preprogrammed, that make the session boring and repetitive;
- robots are limited and work in a controlled environment;
- usually robots don't have a quantitative behavioral analysis tool due to the absence of therapists during their development process.

## III. EVERYDAYS TOOLS TECHNIQUES

### A. Jumping Ball

### B. Genetic Algorithm

## IV. CONCLUSIONS

## REFERENCES

- [1] L. F. Guerrero-Vasquez, J. F. Bravo-Torres, and M. Lopez-Nores, "Avatar, autism: Virtual agents to augment relationships in children," in *2017 IEEE XXIV International Conference on Electronics, Electrical Engineering and Computing (INTERCON)*, Aug 2017, pp. 1–4.
- [2] M. Alahbabi, F. Almazroei, M. Almarzoqi, A. Almeheri, M. Alkabi, A. A. Nuaimi, M. Cappuccio, and F. Alnajjar, "Avatar based interaction therapy: A potential therapeutic approach for children with autism," in *2017 IEEE International Conference on Mechatronics and Automation (ICMA)*, Aug 2017, pp. 480–484.
- [3] G. Pioggia, R. Igliozi, M. L. Sica, M. Ferro, F. Muratori, A. Ahluwalia, and D. D. Rossi, "Exploring emotional and imitational android-based interactions in autistic spectrum disorders," in *Journal of CyberTherapy and Rehabilitation*, 2008, pp. 49–62.