

Universidad Nacional Autónoma de México.

Centro de Educación Continua

Actividad #6 (carga de datos en MYSQL)

Equipo: Sala 5

Profesora: Lulu Soto

Alumno: David Mendieta Lopez

13/02/2025

=====

- ❖ **Carga los datos en nuestro database de la tarea pasada de acuerdo con lo visto en la clase de hoy. Envía fotos de su ejecución correcta como evidencia de cada una de las tablas e cantidad de registros que tiene.**

Antes de empezar vamos a ver dónde se puede almacenar documentación para poderlo carga en nuestro MYSQL...

Para nuestro caso nuestra ruta es: **"C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\"**

Luego ver si esta nuestras tablas cargan los datos en nuestra database:

- Artículos

The screenshot shows the MySQL Workbench interface. The SQL editor contains the following query:

```
10  /** Antes de continuar; hay que verificar si nuestra database tiene (o no) las tablas en cuestion de este forma **/  
11  • Show Full Tables From base_inventario;  
12  
13  /** Verificamos que los atributos este ne orden a como lo creamos en cada tabla **/  
14  • Use Base_Inventario;
```

The Result Grid shows the output of the query:

Tables_in_base_inventario	Table_type
articulos	BASE TABLE
clientes	BASE TABLE
estados	BASE TABLE
inventarios	BASE TABLE
ordenes	BASE TABLE
proveedores	BASE TABLE

The Action Output pane shows the execution results:

#	Time	Action	Message
1	16:45:02	Show Variables Like 'secure_file_priv'	1 row(s) returned
2	16:45:14	Show Full Tables From base_inventario	6 row(s) returned

MySQL Workbench

Local instance MySQL80 x

File Edit View Query Database Server Tools Scripting Help

Navigator

Filter objects

SCHEMAS

- base_inventario
 - Tables
 - Views
 - Stored Procedures
 - Functions
 - Inventarios
 - sys

Carga_Base_2

Fields Terminated By '|'

Lines Terminated By '\n'

(NUM_articulo, NUM_orden, NUM_inventario, Codigo_proveedor, cantidad, precio_total);

Select Count(*) From Articulos; # Checamos el numero de registros #

Result Grid

Count(*)
68

Result 8 x

Output

Action Output

#	Time	Action	Message
1	16:45:02	Show Variables Like 'secure_file_priv'	1 row(s) returned
2	16:45:14	Show Full Tables From base_inventario	6 row(s) returned
3	17:01:41	Use Base_inventario	0 row(s) affected
4	17:03:16	Desc Articulos	6 row(s) returned
5	17:04:51	Load Data Infile 'C:\ProgramData\MySQL\MySQL Server 8.0\Uploads\articulos.txt' Into Table...	68 row(s) affected Records: 68 Deleted: 0 Skipped: 0 Warnings: 0
6	17:28:17	Select Count(*) From Articulos LIMIT 0, 1000	1 row(s) returned

No object selected

o Clientes

MySQL Workbench

Local instance MySQL80 x

File Edit View Query Database Server Tools Scripting Help

Navigator

Filter objects

SCHEMAS

- base_inventario
 - Tables
 - Views
 - Stored Procedures
 - Functions
 - Inventarios
 - sys

Carga_Base_2

Select Count(*) From Articulos; # Checamos el numero de registros #

Clientes

Load Data Infile 'C:\ProgramData\MySQL\MySQL Server 8.0\Uploads\clientes.txt'

Into Table Clientes

Fields Terminated By '|'

Lines Terminated By '\n'

(NUM_cliente, nombre, apellidos, compania, direccion1, direccion2, ciudad, estado, CP, telefono);

Select Count(*) From Clientes;

Estados

Output

Action Output

#	Time	Action	Message
1	16:45:02	Show Variables Like 'secure_file_priv'	1 row(s) returned
2	16:45:14	Show Full Tables From base_inventario	6 row(s) returned
3	17:01:41	Use Base_inventario	0 row(s) affected
4	17:03:16	Desc Articulos	6 row(s) returned
5	17:04:51	Load Data Infile 'C:\ProgramData\MySQL\MySQL Server 8.0\Uploads\articulos.txt' Into Table...	68 row(s) affected Records: 68 Deleted: 0 Skipped: 0 Warnings: 0
6	17:28:17	Select Count(*) From Articulos LIMIT 0, 1000	1 row(s) returned
7	17:33:13	Desc Clientes	10 row(s) returned
8	17:35:17	Load Data Infile 'C:\ProgramData\MySQL\MySQL Server 8.0\Uploads\clientes.txt' Into Table...	28 row(s) affected Records: 28 Deleted: 0 Skipped: 0 Warnings: 0

No object selected

MySQL Workbench

Local instance MySQL80 x

File Edit View Query Database Server Tools Scripting Help

Navigator

Filter objects

SCHEMAS

- base_inventario
 - Tables
 - Views
 - Stored Procedures
 - Functions
 - Inventarios
 - sys

Carga_Base_2

Fields Terminated By '|'

Lines Terminated By '\n'

(NUM_cliente, nombre, apellidos, compania, direccion1, direccion2, ciudad, estado, CP, telefono);

Select Count(*) From Clientes;

Result Grid

Count(*)
28

Result 10 x

Output

Action Output

#	Time	Action	Message
2	16:45:14	Show Full Tables From base_inventario	6 row(s) returned
3	17:01:41	Use Base_inventario	0 row(s) affected
4	17:03:16	Desc Articulos	6 row(s) returned
5	17:04:51	Load Data Infile 'C:\ProgramData\MySQL\MySQL Server 8.0\Uploads\articulos.txt' Into Ta...	68 row(s) affected Records: 68 Deleted: 0 Skipped: 0 Warnings: 0
6	17:28:17	Select Count(*) From Articulos LIMIT 0, 1000	1 row(s) returned
7	17:33:13	Desc Clientes	10 row(s) returned
8	17:35:17	Load Data Infile 'C:\ProgramData\MySQL\MySQL Server 8.0\Uploads\clientes.txt' Into Ta...	28 row(s) affected Records: 28 Deleted: 0 Skipped: 0 Warnings: 0
9	17:36:54	Select Count(*) From Clientes LIMIT 0, 1000	1 row(s) returned

No object selected

○ Estados

The screenshot shows MySQL Workbench with a query script for creating and loading the 'Estados' table. The script includes comments, file loading, table creation, field termination, line termination, and a count query. The output pane shows the execution results for each step.

```
51
52
53 # Estados #
54 Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\estados.txt'
55 Into Table Estados
56 Fields Terminated By '|'
57 Lines Terminated By '\\n'
58 (Estado, nombre_estado);
59
60 Select Count(*) From Estados;
61
62
63 # Inventarios #
64 Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\inventarios.txt'
```

Action Output

#	Time	Action	Message
4	17:03:16	Desc Articulos	6 row(s) returned
5	17:04:51	Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\articulos.txt' Into Ta...	68 row(s) affected Records: 68 Deleted: 0 Skipped: 0 Warnings: 0
6	17:28:17	Select Count(*) From Articulos LIMIT 0, 1000	1 row(s) returned
7	17:33:13	Desc Clientes	10 row(s) returned
8	17:35:17	Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\clientes.txt' Into Ta...	28 row(s) affected Records: 28 Deleted: 0 Skipped: 0 Warnings: 0
9	17:36:54	Select Count(*) From Clientes LIMIT 0, 1000	1 row(s) returned
10	17:42:07	Desc Estados	2 row(s) returned
11	17:44:17	Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\estados.txt' Into Ta...	52 row(s) affected Records: 52 Deleted: 0 Skipped: 0 Warnings: 0

Result Grid

Count(*)
52

Action Output

#	Time	Action	Message
5	17:04:51	Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\articulos.txt' Into Ta...	68 row(s) affected Records: 68 Deleted: 0 Skipped: 0 Warnings: 0
6	17:28:17	Select Count(*) From Articulos LIMIT 0, 1000	1 row(s) returned
7	17:33:13	Desc Clientes	10 row(s) returned
8	17:35:17	Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\clientes.txt' Into Ta...	28 row(s) affected Records: 28 Deleted: 0 Skipped: 0 Warnings: 0
9	17:36:54	Select Count(*) From Clientes LIMIT 0, 1000	1 row(s) returned
10	17:42:07	Desc Estados	2 row(s) returned
11	17:44:17	Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\estados.txt' Into Ta...	52 row(s) affected Records: 52 Deleted: 0 Skipped: 0 Warnings: 0
12	17:45:14	Select Count(*) From Estados LIMIT 0, 1000	1 row(s) returned


○ Inventarios

The screenshot shows MySQL Workbench with a query script for creating and loading the 'Inventarios' table. The script includes comments, file loading, table creation, field termination, line termination, and a count query. The output pane shows the execution results for each step.

```
61
62
63 # Inventarios #
64 Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\inventarios.txt'
65 Into Table Inventarios
66 Fields Terminated By '|'
67 Lines Terminated By '\\n'
68 (NUM_inventario, Codigo_proveedor, descripcion, precio_unitario, unidad, descripcion_unidad);
69
70 Select Count(*) From Inventarios;
71
72
```


Action Output

#	Time	Action	Message
66	18:51:19	Create Table Estados(Estado Char(2), nombre_estado Char(15))	0 row(s) affected
67	18:51:19	Create Table Clientes(NUM_cliente Int, nombre Char(15), apellidos Char(15), compania ...	0 row(s) affected
68	18:51:19	Create Table Inventarios(NUM_inventario Smallint, Codigo_proveedor Char(3), descrip...	0 row(s) affected
69	18:51:19	Create Table Proveedores(Codigo_proveedor Char(3), nombre_proveedor Char(20))	0 row(s) affected
70	18:51:19	Create Table Ordenes(NUM_orden Int, fecha_orden Date, NUM_cliente Int, instruccion...	0 row(s) affected
71	18:51:19	Create Table Articulos(NUM_articulo Smallint, NUM_orden Int, NUM_inventario Smallint...	0 row(s) affected
72	18:52:41	Use Base_inventario	0 row(s) affected
73	18:52:51	Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\articulos.tx...	68 row(s) affected Records: 68 Deleted: 0 Skipped: 0 Warnings: 0
74	18:53:00	Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\clientes.txt'...	28 row(s) affected Records: 28 Deleted: 0 Skipped: 0 Warnings: 0
75	18:53:04	Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\estados.txt...	52 row(s) affected Records: 52 Deleted: 0 Skipped: 0 Warnings: 0
76	18:55:22	Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\inventarios...	74 row(s) affected Records: 74 Deleted: 0 Skipped: 0 Warnings: 0

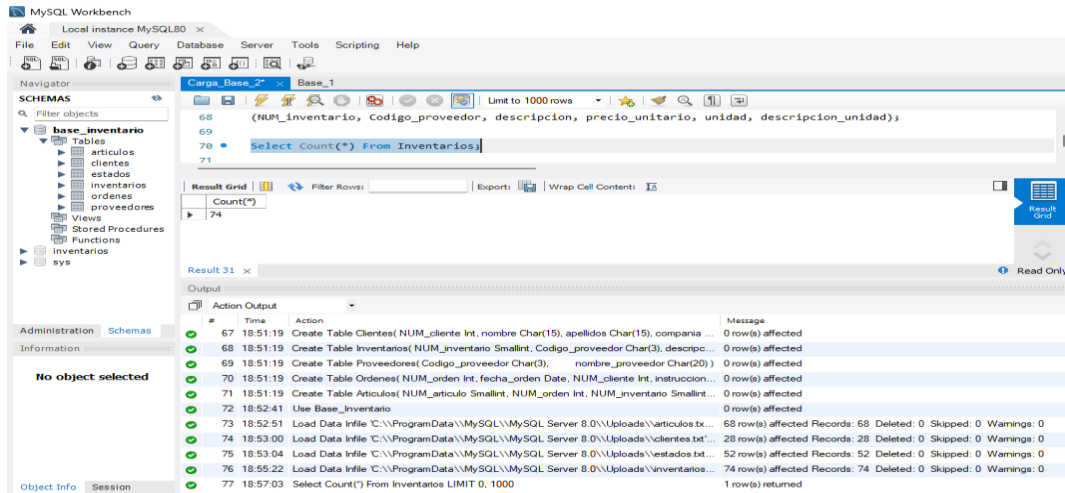


- Ordenes (tiene un tratamiento especial)

Pedimos que se acepte los datos vacíos o no correctos de formato de “DATE”

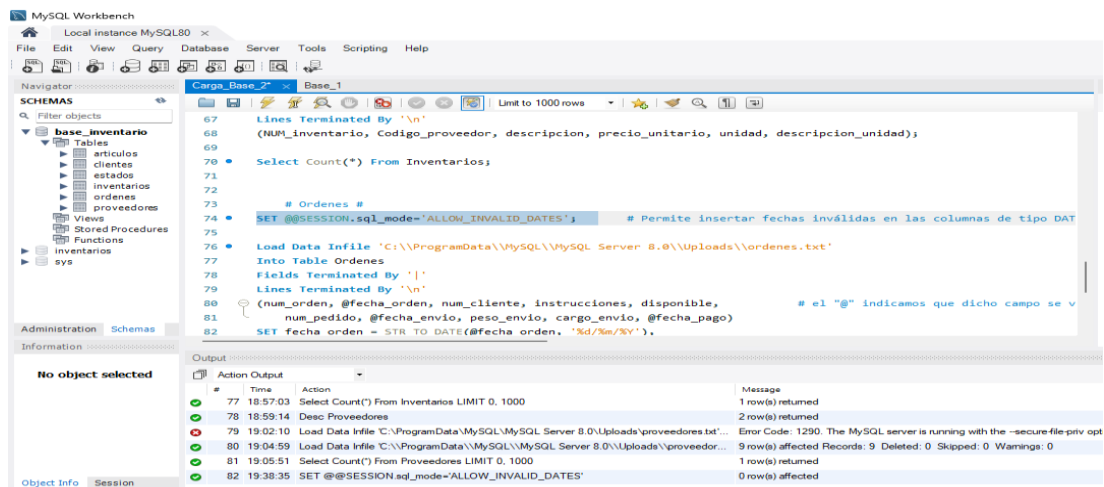

Pasamos ahora si a cargar los datos...

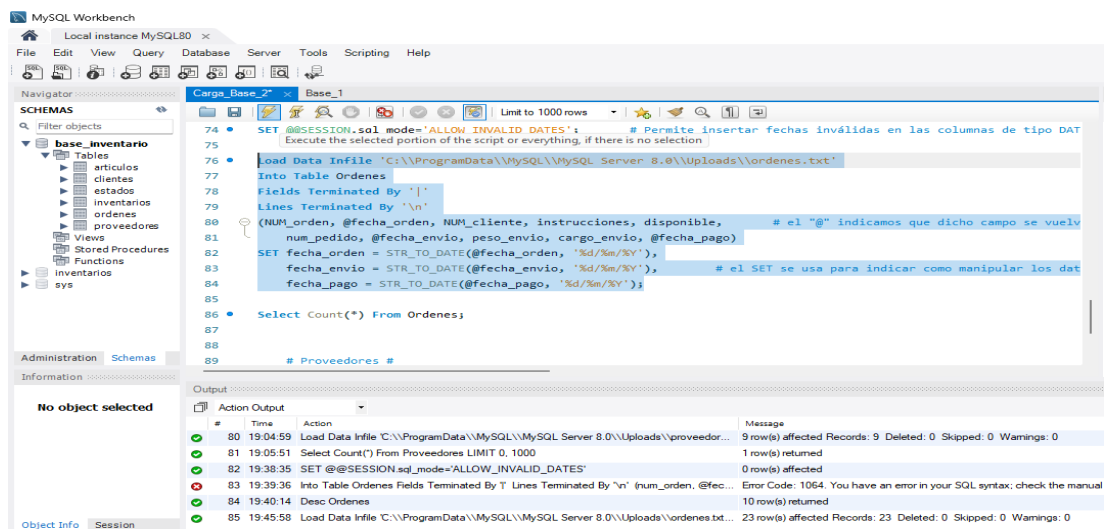

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator

Filter objects

base_inventario

articulos

clientes

estados

inventarios

ordenes

proveedores

Views

Stored Procedures

Functions

inventarios

sys

Administration Schemas

Information

No object selected

Object Info Session

Carga_Base_2 Base_1

Limit to 1000 rows

85

86 `Select Count(*) From Ordenes;`

87

88

89 `# Proveedores #`

Result Grid

Count(*)

23

Result 35

Output

Action Output

#	Time	Action	Message
81	19:05:51	Select Count(*) From Proveedores LIMIT 0, 1000	1 row(s) returned
82	19:38:35	SET @@SESSION.sql_mode='ALLOW_INVALID_DATES'	0 row(s) affected
83	19:39:36	Info Table Ordenes Fields Terminated By 'n' (num_orden, @fec...	Error Code: 1064. You have an error in your SQL syntax; check the manual
84	19:40:14	Desc Ordenes	10 row(s) returned
85	19:45:58	Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\ordenes.txt...	23 row(s) affected Records: 23 Deleted: 0 Skipped: 0 Warnings: 0
86	19:48:48	Select Count(*) From Ordenes LIMIT 0, 1000	1 row(s) returned

○ Proveedores

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator

Filter objects

base_inventario

articulos

clientes

estados

inventarios

ordenes

proveedores

Views

Stored Procedures

Functions

inventarios

sys

Administration Schemas

Information

No object selected

Object Info Session

Carga_Base_2 Base_1

Limit to 1000 rows

81

82

83

84 `# Proveedores #`

85 `Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\proveedores.txt'`

86 `Into Table Proveedores`

87 `Fields Terminated By ','`

88 `Lines Terminated By '\\n'`

89 `(Codigo_proveedor, nombre_proveedor);`

90 `Select Count(*) From Proveedores;`

Output

Action Output

#	Time	Action	Message
70	18:51:19	Create Table Ordenes(NUM_orden Int, fecha_orden Date, NUM_cliente Int, instruccion...	0 row(s) affected
71	18:51:19	Create Table Articulos(NUM_articulo Smallint, NUM_orden Int, NUM_inventario Smallint...	0 row(s) affected
72	18:52:41	Use Base_inventario	0 row(s) affected
73	18:52:51	Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\articulos.tx...	68 row(s) affected Records: 68 Deleted: 0 Skipped: 0 Warnings: 0
74	18:53:00	Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\clientes.txt'...	28 row(s) affected Records: 28 Deleted: 0 Skipped: 0 Warnings: 0
75	18:53:04	Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\estados.txt'...	52 row(s) affected Records: 52 Deleted: 0 Skipped: 0 Warnings: 0
76	18:55:22	Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\inventarios'...	74 row(s) affected Records: 74 Deleted: 0 Skipped: 0 Warnings: 0
77	18:57:03	Select Count(*) From Inventarios LIMIT 0, 1000	1 row(s) returned
78	18:59:14	Desc Proveedores	2 row(s) returned
79	19:02:10	Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\proveedores.tx...	Error Code: 1290. The MySQL server is running with the --secure-file-priv opt
80	19:04:59	Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\proveedor...	9 row(s) affected Records: 9 Deleted: 0 Skipped: 0 Warnings: 0

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator

Filter objects

base_inventario

articulos

clientes

estados

inventarios

ordenes

proveedores

Views

Stored Procedures

Functions

inventarios

sys

Administration Schemas

Information

No object selected

Object Info Session

Carga_Base_2 Base_1

Limit to 1000 rows

88 `(Codigo_proveedor, nombre_proveedor);`

89

90 `Select Count(*) From Proveedores;`

Result Grid

Count(*)

9

Result 33

Output

Action Output

#	Time	Action	Message
71	18:51:19	Create Table Articulos(NUM_articulo Smallint, NUM_orden Int, NUM_inventario Smallint...	0 row(s) affected
72	18:52:41	Use Base_inventario	0 row(s) affected
73	18:52:51	Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\articulos.tx...	68 row(s) affected Records: 68 Deleted: 0 Skipped: 0 Warnings: 0
74	18:53:00	Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\clientes.txt'...	28 row(s) affected Records: 28 Deleted: 0 Skipped: 0 Warnings: 0
75	18:53:04	Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\estados.txt'...	52 row(s) affected Records: 52 Deleted: 0 Skipped: 0 Warnings: 0
76	18:55:22	Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\inventarios'...	74 row(s) affected Records: 74 Deleted: 0 Skipped: 0 Warnings: 0
77	18:57:03	Select Count(*) From Inventarios LIMIT 0, 1000	1 row(s) returned
78	18:59:14	Desc Proveedores	2 row(s) returned
79	19:02:10	Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\proveedores.tx...	Error Code: 1290. The MySQL server is running with the --secure-file-priv opt
80	19:04:59	Load Data Infile 'C:\\ProgramData\\MySQL\\MySQL Server 8.0\\Uploads\\proveedor...	9 row(s) affected Records: 9 Deleted: 0 Skipped: 0 Warnings: 0
81	19:05:51	Select Count(*) From Proveedores LIMIT 0, 1000	1 row(s) returned