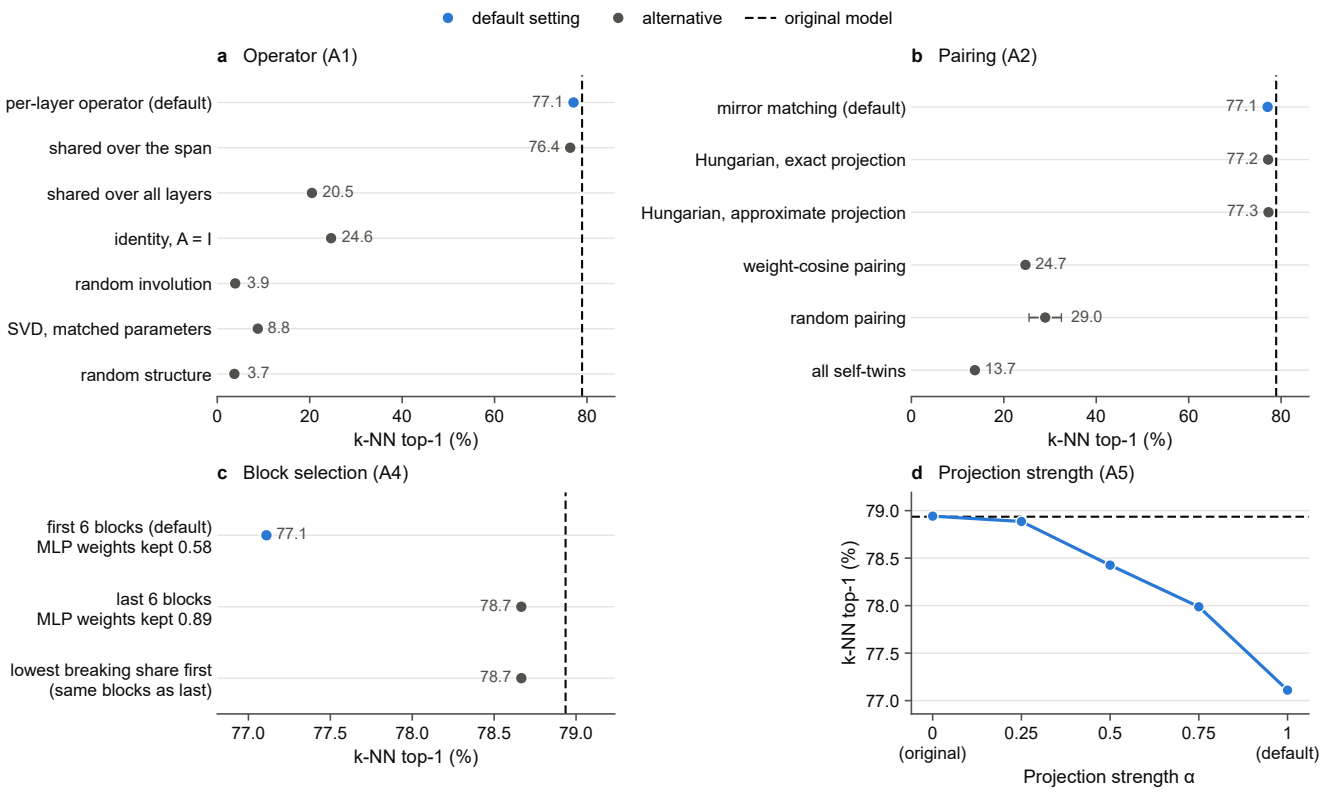
default setting
alternative
original model
a Operator (A1)
per-layer operator (default)
shared over the span
shared over all layers
identity, A = I
random involution
SVD, matched parameters
random structure
77.1
76.4
20.5
24.6
3.9
8.8
3.7
0
20
40
60
80
k-NN top-1 (%)
b Pairing (A2)
mirror matching (default)
Hungarian, exact projection
Hungarian, approximate projection
weight-cosine pairing
random pairing
all self-twins
77.1
77.2
77.3
24.7
29.0
13.7
0
20
40
60
80
k-NN top-1 (%)
c Block selection (A4)
first 6 blocks (default)
MLP weights kept 0.58
last 6 blocks
MLP weights kept 0.89
lowest breaking share first
(same blocks as last)
77.1
78.7
78.7
77.0
77.5
78.0
78.5
79.0
k-NN top-1 (%)
d Projection strength (A5)
k-NN top-1 (%)
79.0
78.5
78.0
77.5
77.0
0
(original)
0.25
0.5
0.75
1
(default)
Projection strength α