


Big picture flow of Google OAuth login

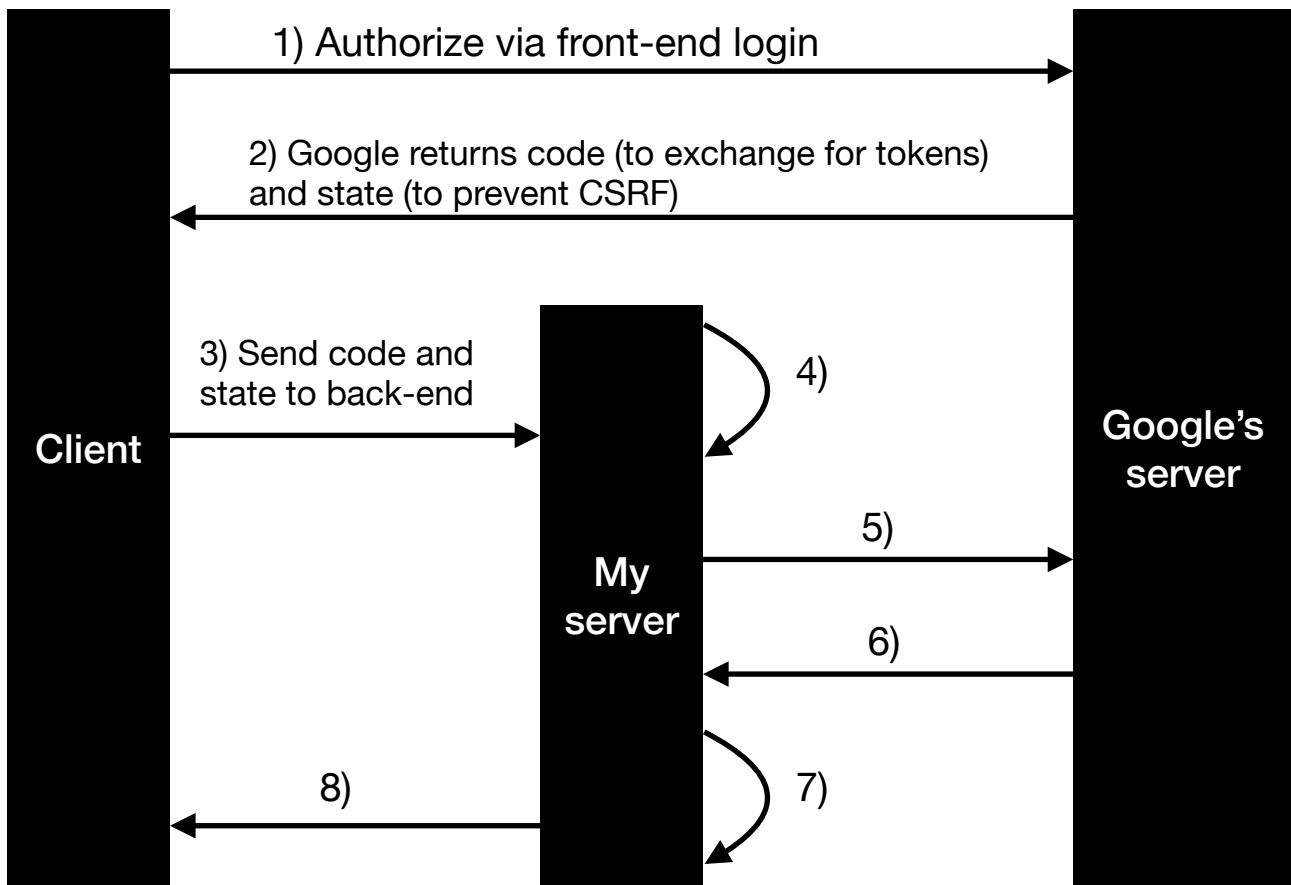

4) Back-end use client secret file and state to set up Google OAuth's flow, an object to be used along with the code to retrieve tokens

5) Use the flow object and code to fetch tokens


6) Google's server verify the flow and code, and returns credentials by setting the attribute 'credentials' onto the flow object (flow.credentials)

7) Do the followings:

- Use flow.credentials to retrieve tokens, refresh_tokens, and other things.
- Use tokens as authorization bearer to request for user's id, email, name, and picture from Google userinfo API
- Set user credentials in userCredsDB and set up a collection in MongoDB dedicated to this user (if this is their first time logging in)
- Store user's email and id in Flask session (cookies)

8) Send necessary credentials back to front-end

Google OAuth flow on front-end (client) side

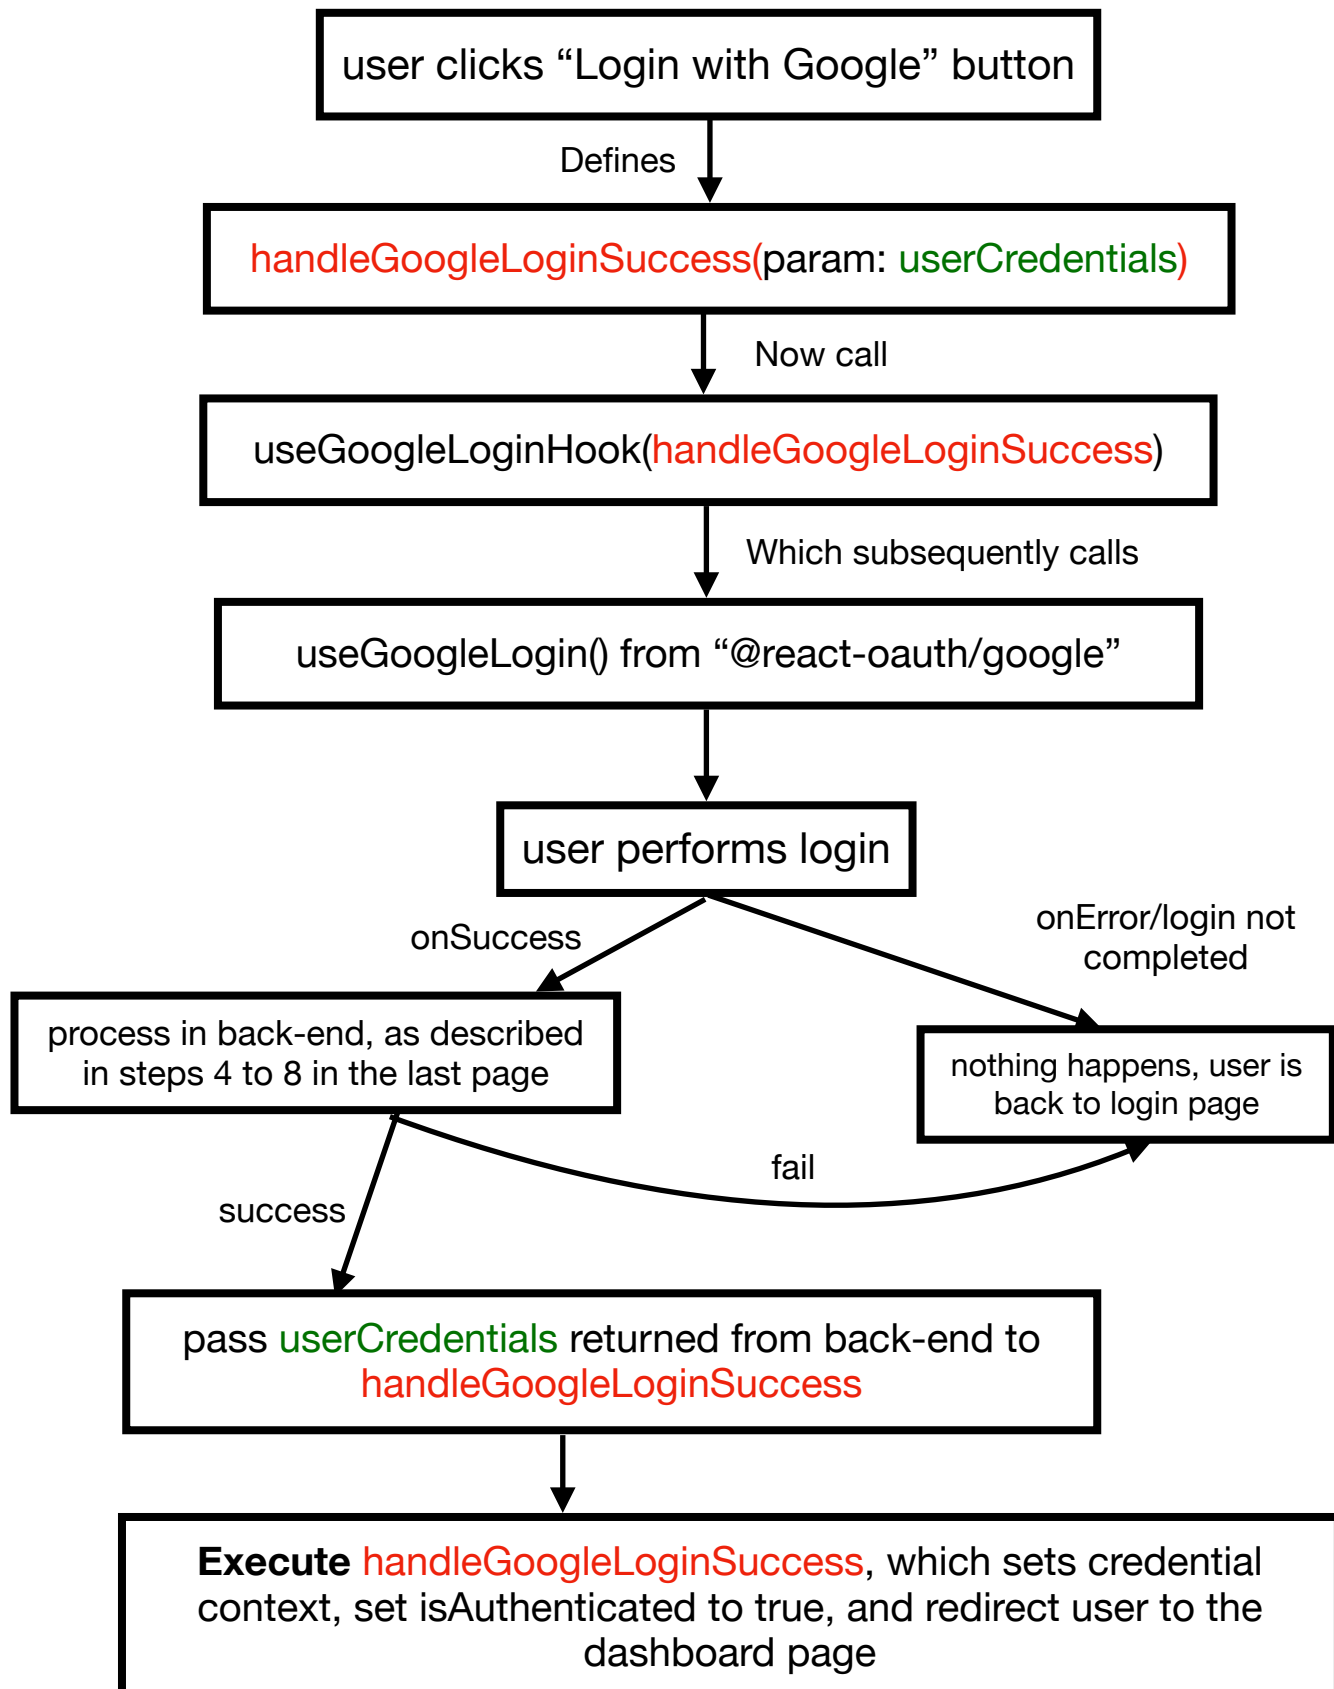

Writing `handleGoogleLoginSuccess()` inside `index.tsx` (the login page) doesn't execute it, just **DEFINING** it (what it should do once executed). What happens is `handleGoogleLoginSuccess()` is passed into `useGoogleLoginHook`, which **EXECUTES** `handleGoogleLoginSuccess()` when user successfully logged in by Google.