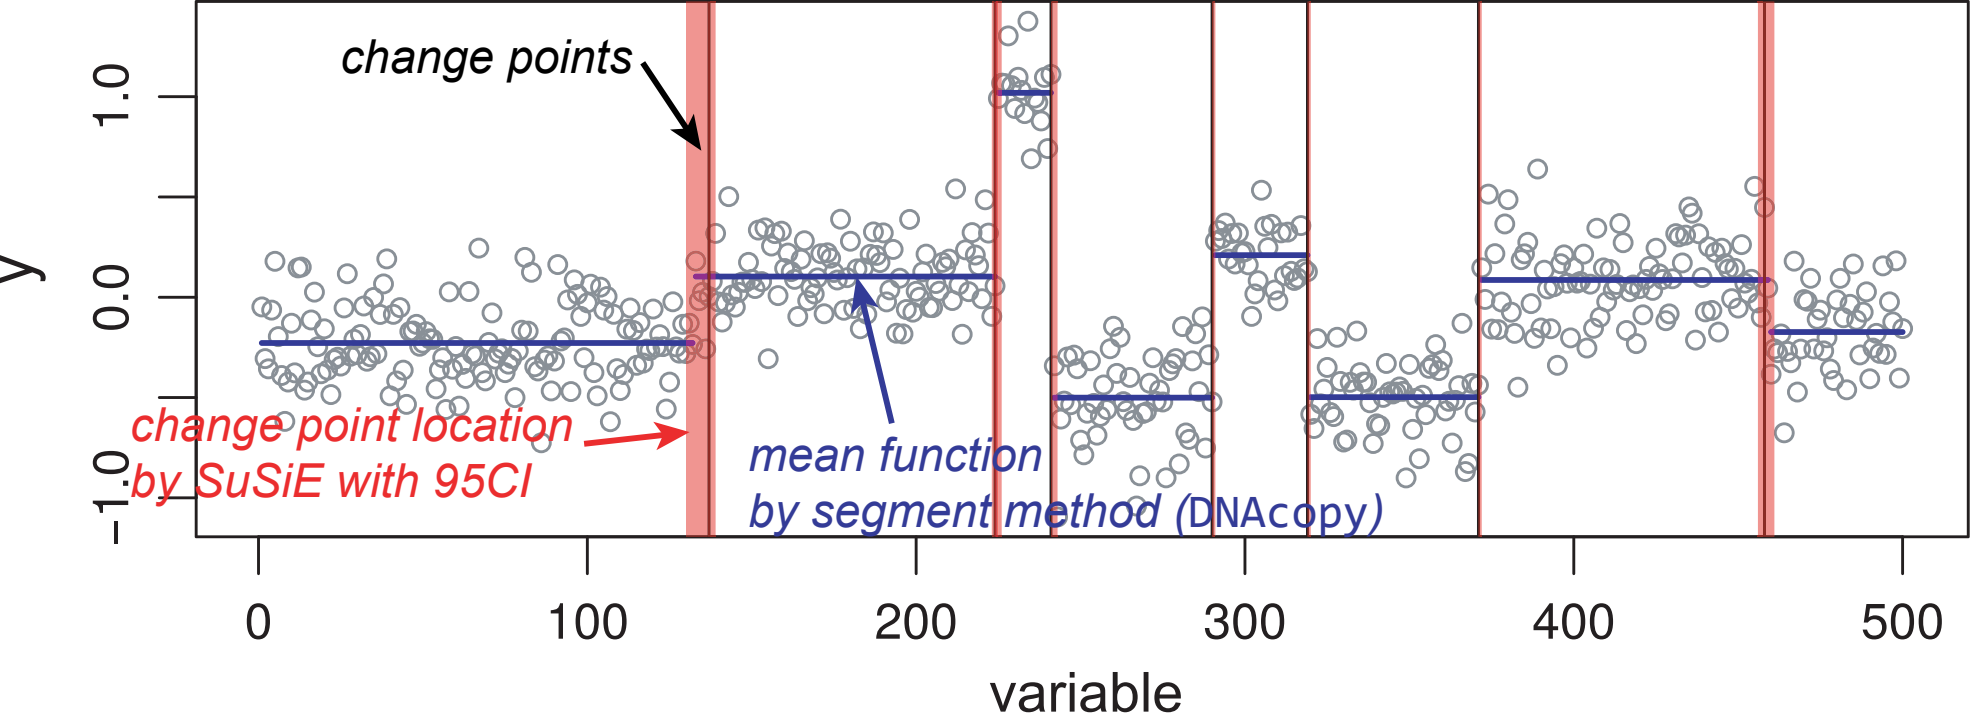
change points
change point location
by SuSiE with 95CI
mean function
by segment method (DNAcopy)
y
1.0
0.0
−1.0
0
100
200
300
400
500
variable

(a)

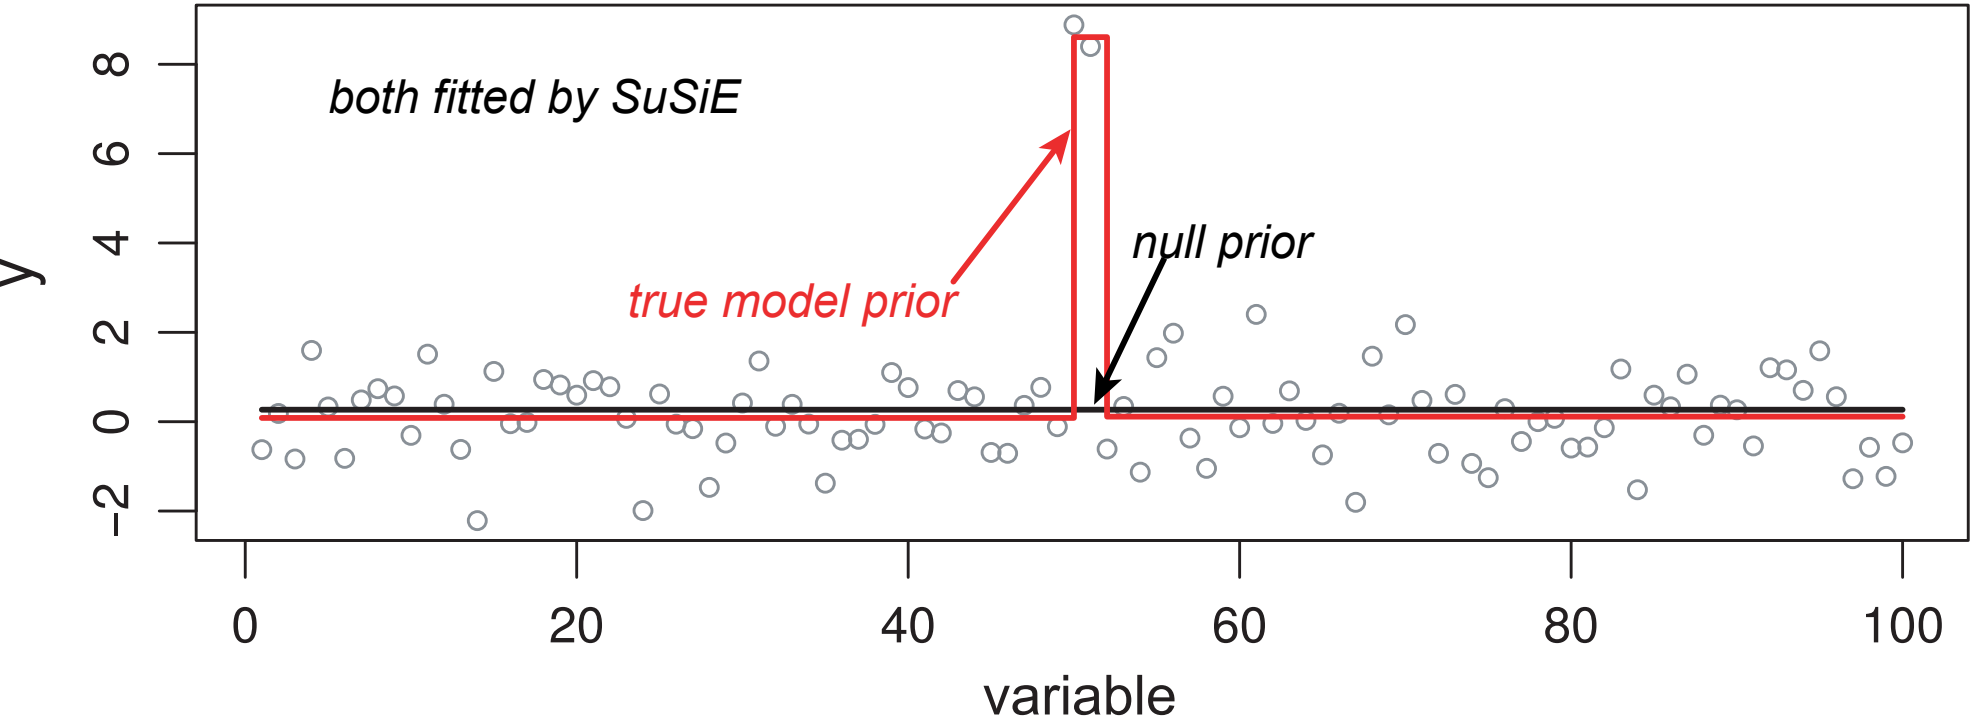
both fitted by SuSiE
true model prior
null prior
y
8
6
4
2
0
−2
0
20
40
60
80
100
variable

(b)