(a) Per-request admission (today)

✗ a → Y refused: Y is full; b → X refused: X is full

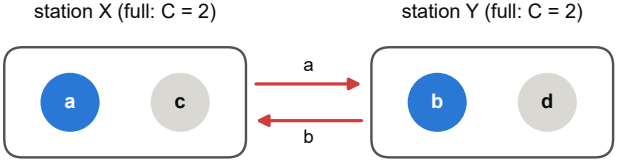

Each request is checked alone, so both stay.

Their links keep failing (cause B in Fig. 6).

(b) Coordinated admission (proposed for 6G)

✓ {a → Y, b → X} admitted together

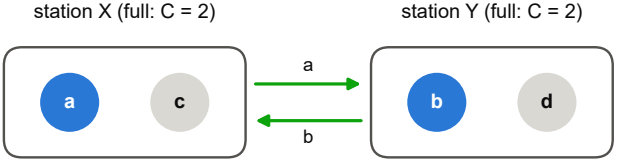

After both moves, X and Y still hold C = 2.

Assumes both land in the same slot (tested by the delay check).