JavaEE Deployment — Our Actual Flow

macOS • AWS EC2 • SSH • Tomcat • PostgreSQL • GitHub Actions

PHASE 1 — MANUAL EC2 DEPLOYMENT

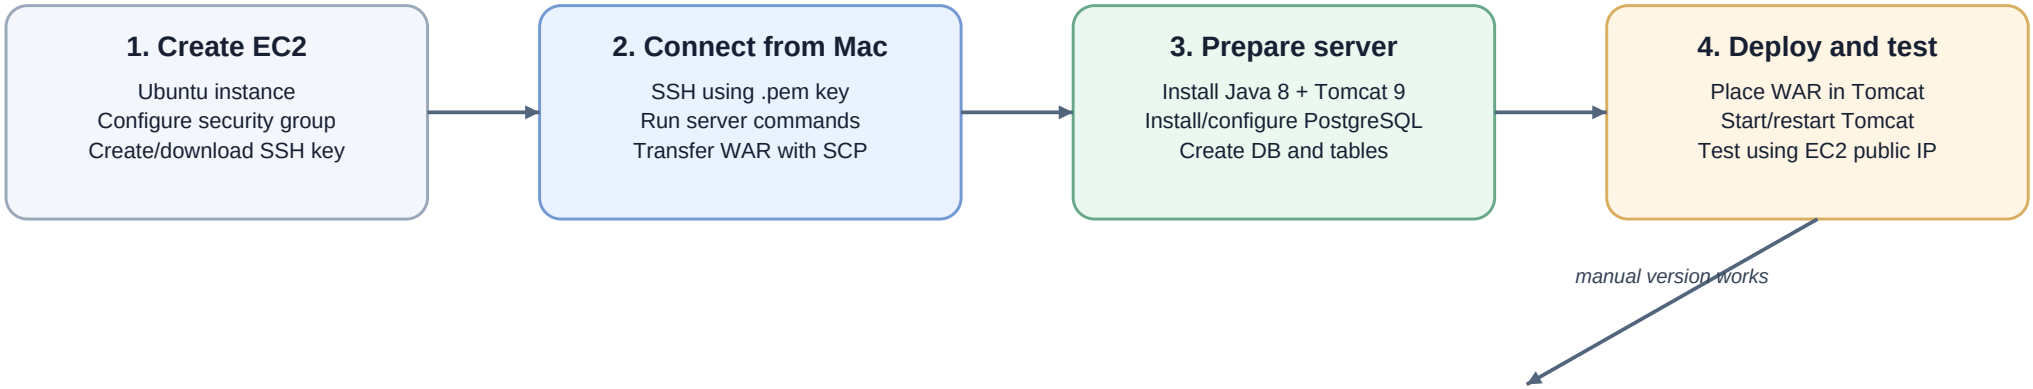

PHASE 2 — AUTOMATED DEPLOYMENT

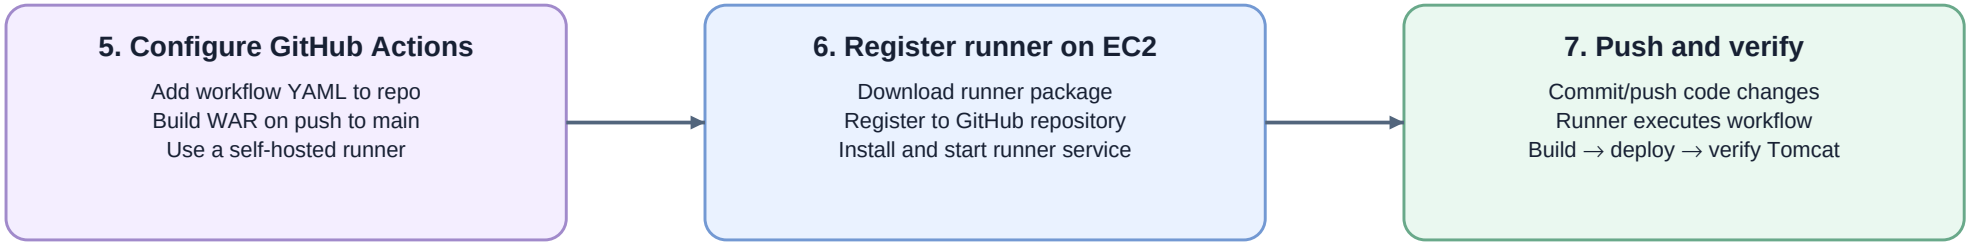

Connection / security notes: Mac → EC2: SSH private key | Runner → GitHub: repository registration token | IAM role: AWS permissions (e.g., SSM)

The earlier GitHub-hosted runner SSH secrets were removed; with a self-hosted runner on EC2, deployment can run locally on that instance.