

HEART: HiErarchical Abstraction for Real-Time Partial Order Causal Link Planning

Paper

Abstract

In recent years the ubiquity of artificial intelligence raised concerns among the uninitiated. The misunderstanding is further increased since most advances do not have explainable results. For automated planning, the research often targets speed, quality, or expressivity. Most existing solutions focus on one area while not addressing the others. However, human-related applications require a complex combination of all those criteria at different levels. We present a new method to compromise on these aspects while staying explainable. We aim to leave the range of potential applications as wide as possible but our main targets are human intent recognition and assistive robotics. The HEART planner is a real-time decomposition planner based on a hierarchical version of Partial Order Causal Link (POCL). It cyclically explores the plan space while making sure that intermediary high level plans are valid and will return them as approximate solutions when interrupted. These plans are proven to be a guaranteed of solvability. This paper aims to evaluate that process and its results related to classical approaches in terms of efficiency and quality.

Introduction

Since the early days of automated planning, a wide variety of approaches have been considered to solve diverse types of problems. They all range in expressivity, speed, and reliability but often aim to excel in one of these domains. This leads to a polarization of the solutions toward extremely specialized methods to tackle each problem. All of these approaches have been compared and discussed extensively in the books of Ghallab et al. [2004; 2016].

Partially ordered approaches are popular for their least commitment aspect, flexibility and ability to modify plans to use refinement operations [Weld 1994]. This approach is often used in applications in robotics and multi-agent planning [Lemai and Ingrand 2004; Dvorak et al. 2014]. One of the most flexible partially ordered approaches is called *Partial Order Causal Link planning (POCL)* [Young and Moore 1994]. It works by refining partial plans consisting of steps and causal links into a solution by solving all flaws compromising the validity of the plan.

Another approach is *Hierarchical Task Networks (HTN)* [Sacerdoti 1974] that are meant to tackle the problem using composite

actions in order to define hierarchical tasks within the plan. Hierarchical domains are often considered easier to conceive and maintain by experts mainly because they seem closer to the way we think about these problems [Sacerdoti 1975].

In our work we aim combining HTN planning and POCL planning in such a manner as to generate intermediary high level plans during the planning process. Combining these two approaches is not new [Young and Moore 1994; Kambhampati et al. 1998; Biundo and Schattenberg 2001]. Our work is based on *Hierarchical Partial Order Planning (HiPOP)* by Bechon et al. [2014]. The idea is to expand the classical POCL algorithm with new flaws in order to make it compatible with HTN problems and allowing the production of abstract plans. In order to do this we present an upgraded planning framework that aims to simplify and factorize all notions to their minimal forms. We also propose some domain compilation techniques to reduce the work of the expert conceiving the domain.

In all these works, only the final solution to the input problem is considered. That is a good approach to classical planning except when no solutions can be found (or when there none exists). Our work focuses on the case when the solution could not be found in time or when high level explanations are preferable to the complete implementation detail of the plan. This is done by focusing the planning effort toward finding intermediary abstract plans along the path to the complete solution.

In the rest of the paper, we detail how the HiErarchical Abstraction for Real-Time (HEART) planner creates abstract intermediary plans that can be used for various applications. First, we discuss the motivations and related works to explain the choices behind our design process. Then we present the way we modeled an updated planning framework fitting our needs and then we explain our method and prove its properties to finally discuss the experimental results.

1 Motivations and Potential Applications

Several reasons can cause a problem to be unsolvable. The most obvious case is that no solution exists that meets the requirements of the problem. This has already been addressed by Göbelbecker et al. [2010] where “excuses” are being investigated as potential explanations for when a problem has no solutions.

Our approach tries to handle the case of when the problem is too difficult to solve within tight time constraints. Since planning is at least EXPSPACE-hard for HTN using complex representation [Erol et al. 1994], computing only the first plan level of a

hierarchical domain is much easier in relation to the complete problem.

While abstract plans are not complete solutions, they still display a useful set of properties for various applications. The most immediate application is for explainable planning [Fox *et al.* 2017; Seegebarth *et al.* 2012]. Indeed a high-level plan is more concise and does not contain unnecessary implementation details that would confuse a non-expert.

Another potential application for such plans are relative to domains that works with approximative data. Our main example here is intent recognition which was the original motivation for this work. Planners are not meant to solve intent recognition problems. However, several works extended what is called in psychology the *theory of mind*. That theory is the equivalent of asking “*what would I do if I was them ?*” when observing the behavior of other agents. This leads to new ways to use *inverted planning* as an inference tool. One of the first to propose that idea was Baker *et al.* [2007] that use Bayesian planning to infer intentions. Ramirez and Geffner [2009] found an elegant way to transform a plan recognition problem into classical planning. This is done simply by encoding temporal constraints in the planning domain in a similar way as Baiocchi *et al.* [1998] describe it to match the observed action sequence. A cost comparison will then give a probability of the goal to be pursued given the observations. A new method, proposed by Sohrabi *et al.* [2016], makes the recognition fluent centric. It assigns costs to missing or noisy observed fluents, which allows finer details and less preprocessing work than action-based recognition. This method also uses a meta-goal that combines each possible goal and is realized when at least one of these goals is satisfied. Sohrabi *et al.* state that the quality of the recognition is directly linked to the quality and domain coverage of the generated plans. Thus guided diverse planning¹ was preferred along with the ability to infer several probable goals at once.

2 Related Works

HTN is often combined with classical approaches since it allows for a more natural expression of domains making expert knowledge easier to encode. These kinds of planners are called **decompositional planners** when no initial plan is provided [Fox 1997]. Most of the time the integration of HTN simply consists in calling another algorithm when introducing a composite operator during the planning process. In the case of the DUET planner by Gerevini *et al.* [2008], it is done by calling an instance of an HTN planner based on task insertion called SHOP2 [Nau *et al.* 2003] to deal with composite actions. Some planners take the integration further by integrating the decomposition of composite action as a special step in their refinement process. Such works include the discourse generation oriented DPOCL [Young and Moore 1994] and the paper by Kambhampati *et al.* [1998] generalizing the practice for decompositional planners.

In our case, we chose a class of hierarchical planners based on Plan Space Planning (PSP) algorithms [Bechon *et al.* 2014; Dvorak *et al.* 2014; Bercher *et al.* 2014] as our reference approach. The main difference here is that the decomposition is integrated into the classical POCL algorithm by only adding new types of

flaws. This allows to keep all the flexibility and properties of POCL while adding the expressivity and abstraction capabilities of HTN. We also made an improved planning framework based on the one used by HiPOP to reduce further the number of changes needed to handle composite actions and to increase the efficiency of the resulting implementation.

Another work has already been done on another aspect of those types of abstract plans. The Angelic algorithm by Marthi *et al.* [2007] exploited the usefulness of such plans in the planning process itself and used them as a heuristic guide. They also proved that, for a given fluent semantics, it is guaranteed that such abstract solutions can be refined into actual solutions. However, the Angelic planner does not address the inherent properties of such abstract plans as approximate solutions and uses a more restrictive totally ordered framework.

3 Definitions

3.1 Domain

The domain specifies the allowed operators that can be used to plan and all the fluents they use as preconditions and effects.

Definition 1 (Domain). A domain is a triplet $\mathcal{D} = \langle E_{\mathcal{D}}, R, A_{\mathcal{D}} \rangle$ where: $E_{\mathcal{D}}$ is the set of **domain entities**. R is the set of **relations** over $E_{\mathcal{D}}^n$. These relations are akin to n-ary predicates in first order logic. $A_{\mathcal{D}}$ is the set of **operators** which are fully lifted *actions*.

Fluents are signed first order logic n-ary predicates. Negative fluents are noted $\neg f$ and behave as a logical complement. We do not use the closed world hypothesis: fluents are only satisfied when another compatible fluent is provided.

Example: To describe an item not being held we use the fluent $\neg taken(item)$. If the cup contains water, $in(water, cup)$ is true.

3.2 Plan and hierarchical representation

Definition 2 (Partial Plan / Method). A partially ordered plan is an *acyclic* directed graph $\pi = (S, L)$, with:

- S the set of **steps** of the plan as vertices. A step is an action belonging in the plan. S must contain an initial step I_{π} and goal step G_{π} .
- L the set of **causal links** of the plan as edges. We note $l = a_s \xrightarrow{c} a_t$ the link between its source a_s and its target a_t caused by the set of fluents c . If $c = \emptyset$ then the link is used as an ordering constraint.

In our framework, *ordering constraints* are defined as the transitive cover of causal links over the set of steps. We note ordering constraints: $a_a > a_s$, with a_a being *anterior* to its *successor* a_s . Ordering constraints cannot form cycles, meaning that the steps must be different and that the successor cannot also be anterior to its anterior steps: $a_a \neq a_s \wedge a_s \not> a_a$. In all plans, the initial and goal steps have their order guaranteed: $I_{\pi} > G_{\pi} \wedge \nexists a_x \in S_{\pi} : a_x > I_{\pi} \vee G_{\pi} > a_x$. If we need to enforce order, we simply add a link without specifying a cause. The use of graphs and implicit order constraints help to simplify the model while maintaining its properties.

The central notion of planning is operators. Instantiated operators are usually called *actions*. In our framework, actions can be partially instantiated. We use the term action for both lifted and grounded operators.

¹Diverse planning is set to find a set of m plans that are distant of d from one another.

Definition 3 (Action). An action is a parametrized tuple $a(args) = \langle name, pre, eff, methods \rangle$ where:

- *name* is the **name** of the action.
- *pre* and *eff* are sets of fluents that are respectively the **preconditions** and the **effects** of the action.
- *methods* is a set of **methods** (*partial order plans*) that decompose the action into smaller ones. Methods, and the methods of their enclosed actions, cannot contain the parent action.

Example: The precondition of the operator $take(item)$ is simply a single negative fluent noted $\neg taken(item)$ ensuring the variable *item* is not already taken.

Composite actions are represented using methods. An action without methods is called *atomic*. It is of interest to note the divergence with classical HTN representation here since normally composite actions do not have preconditions nor effects. This is because in our case we will need to insert them into abstract plans.

In order to verify the input of the domain, the causes of the causal links in the methods are optional. If omitted, the causes are inferred by unifying the preconditions and effects with the same mechanism as in the subgoal resolution in our POCL algorithm. Since we want to guarantee the validity of abstract plans, we need to ensure that user provided plans are solvable. We use the following formula to compute the final preconditions and effects of any composite action a : $pre(a) = \bigcup_{a_s \in L^+(a)} causes(a_s)$ and $eff(a) = \bigcup_{a_s \in L^-(a)} causes(a_s)$. An instance of the classical POCL algorithm is then run on the problem $\mathcal{P}_a = \langle \mathcal{D}, C_p, a \rangle$ to ensure its coherence and the domain compilation fails if POCL cannot be completed. Since our decomposition hierarchy is acyclic ($a \notin A_a$, see definition 9) nested methods cannot contain their parent action as a step.

3.3 Problem

Problem instances are often most simply described by two components: the initial state and the goal.

Definition 4 (Problem). The planning problem is defined as a tuple $\mathcal{P} = \langle \mathcal{D}, C_p, a_0 \rangle$ where:

- \mathcal{D} is a planning domain.
- C_p is the set of **problem constants** disjoint from the domain constants.
- a_0 is the **root operator** of the problem which methods are potential solutions of the problem.

Example: We use a simple problem for our example domain. The initial state provides that nothing is ready, taken or hot and all containers are empty (all using quantifiers). The goal is to have tea made.

The root operator is initialized to $a_0 = \langle "", s_0, s^*, \{\pi_{lv(a_0)}\} \rangle$, with s_0 being the initial state and s^* the goal specification. The method $\pi_{lv(a_0)}$ is a partial order plan with the initial and goal steps linked together via a_0 . The initial partial order plan is $\pi_{lv(a_0)} = \langle \{I, G\}, \{I \xrightarrow{s_0} a_0 \xrightarrow{s^*} G\} \rangle$, with $I = \langle "init", \emptyset, s_0, \emptyset \rangle$ and $G = \langle "goal", s^*, \emptyset, \emptyset \rangle$.

3.4 Partial Order Causal Links

Our method is based on the classical POCL algorithm. It works by refining a partial plan into a solution by recursively removing all of its flaws.

Definition 5 (Flaws). Flaws have a *proper fluent* f and a causing step often called the *needer* a_n . Flaws in a partial plan are either:

- **Subgoals**, *open conditions* that are yet to be supported by another step a_n often called *provider*. We note subgoals $\dagger_f a_n$.
- **Threats**, caused by steps that can break a causal link with their effects. They are called *breakers* of the threatened link. A step a_b threatens a causal link $l_t = a_p \xrightarrow{f} a_n$ if and only if $\neg f \in eff(a_b) \wedge a_b \not\prec a_p \wedge a_n \not\prec a_b$. Said otherwise, the breaker can cancel an effect of a providing step a_p , before it gets used by its needer a_n . We note threats $a_b \boxtimes l_t$.

Example: Our initial plan contains two unsupported subgoals: one to make the tea ready and another to put sugar in it. In this case, the needer is the goal step and the proper fluents are each of its preconditions.

These flaws need to be fixed in order for the plan to be valid. In POCL it is done by finding their resolvers.

Definition 6 (Resolvers). Classical resolvers are additional causal links that aim to fix a flaw.

- *For subgoals*, the resolvers are a set of potential causal links containing the proper fluent f in their causes while taking the needer step a_n as their target and a **provider** step a_p as their source.
- *For threats*, we usually consider only two resolvers: **demonstration** ($a_b \succ a_p$) and **promotion** ($a_n \succ a_b$) of the breaker relative to the threatened link. We call the added causeless causal link a **guarding** link.

Example: The subgoal for $in(water, cup)$, in our example, can be solved by using the action $pour(water, cup)$ as the source of a causal link carrying the proper fluent as its only cause.

The application of a resolver does not necessarily mean progress. It can have consequences that may require reverting its application in order to respect the backtracking of the POCL algorithm.

Definition 7 (Side effects). Flaws that are caused by the application of a resolver are called *related flaws*. They are inserted into the *agenda*² with each application of a resolver:

- *Related subgoals* are all the new open conditions inserted by new steps.
- *Related threats* are the causal links threatened by the insertion of a new step or the deletion of a guarding link.

Flaws can also become irrelevant when a resolver is applied. Those *invalidated flaws* are removed from the agenda upon detection:

- *Invalidated subgoals* are subgoals satisfied by the new causal links or the removal of their needer.
- *Invalidated threats* happen when the breaker no longer threatens the causal link because the order guards the threatened causal link or either of them have been removed.

²An agenda is a flaw container used for the flaw selection of POCL.

Example: Adding the action $\text{pour}(\text{water}, \text{cup})$ causes a related subgoal for each of the preconditions of the action which are: the cup and the water must be taken and water must not already be in the cup.

In algorithm 1 we present a generic version of POCL inspired by Ghallab *et al.* [2004, sec. 5.4.2].

Algorithm 1 Partial Order Planner

```

1 function POCL(Agenda  $a$ , Problem  $\mathcal{P}$ )
2   if  $a = \emptyset$  then  $\triangleright$  Populated agenda of flaws needs to be
   provided
3     return Success  $\triangleright$  Stops all recursion
4   Flaw  $f \leftarrow \text{choose}(a)$   $\triangleright$  Heuristically chosen flaw removed
   from agenda
5   Resolvers  $R \leftarrow \text{solve}(f, \mathcal{P})$ 
6   for all  $r \in R$  do  $\triangleright$  Non-deterministic choice operator
7     apply( $r, \pi$ )  $\triangleright$  Apply resolver to partial plan
8     Agenda  $a' \leftarrow \text{update}(a)$ 
9     if POCL( $a', \mathcal{P}$ ) = Success then  $\triangleright$  Refining recursively
10      return Success
11     revert( $r, \pi$ )  $\triangleright$  Failure, undo resolver application
12    $a \leftarrow a \cup \{f\}$   $\triangleright$  Flaw was not resolved
13   return Failure  $\triangleright$  Revert to last non-deterministic choice

```

Resolvers are picked non-deterministically for applications (this can be heuristically driven). At line 7 the resolver is effectively applied to the current plan. All side effects and invalidations are handled during the update of the agenda at line 8. If a problem occurs, line 11 backtracks and tries other resolvers. If no resolver fits the flaw, the algorithm backtracks to previous resolver choices to explore all the possible plans and ensure completeness.

In definition 7, we mentioned effects that aren't present in classical POCL, namely *negative resolvers*. All classical resolvers only add steps and causal links to the partial plan. Our method needs to remove composite steps and their adjacent links when expanding them.

4 The Heart of the Method

In this section, we explain how our method combines POCL with HTN planning and how they are used to generate intermediary abstract plans.

4.1 Additional Notions

In order to properly introduce the changes made for using HTN domains in POCL, we need to define a few notions.

Transposition is needed to define decomposition.

Definition 8 (Transposition). In order to transpose the causal links of an action a' with the ones of an existing step a in a plan π , we use the following operation :

$$a \triangleright_{\pi}^{-} a' = \left\{ \phi^{-}(l) \xrightarrow{\text{causes}(l)} a' : l \in L_{\pi}^{-}(a) \right\}$$

It is the same with $a' \xrightarrow{\text{causes}(l)} \phi^{+}(l)$ and L^{+} for $a \triangleright_{\pi}^{+} a'$. This supposes that the respective preconditions and effects of a and a' are equivalent. When not signed, the transposition is generalized: $a \triangleright a' = a \triangleright_{\pi}^{-} a' \cup a \triangleright_{\pi}^{+} a'$.

Example: $a \triangleright^{-} a'$ gives all incoming links of a with the target set to a' instead.

Definition 9 (Proper Actions). Proper actions are actions that are “contained” within an entity. We note it $A_a = A_a^{lv(a)}$ for an action a . It can be applied to various concepts :

- For a *domain* or a *problem* $A_{\mathcal{D}} = A_{\mathcal{D}}$.
- For a *plan* it is $A_{\pi}^0 = S_{\pi}$. Recursively: $A_a^n = \bigcup_{b \in A_a^0} A_b^{n-1}$. For atomic actions $A_a = \emptyset$.
- For an *action* it is $A_a^0 = \bigcup_{m \in \text{methods}(a)} S_m$.

Example: The proper actions of $\text{make}(\text{drink})$ are the actions contained within its methods. The set of extended proper actions adds all proper actions of its single proper composite action $\text{infuse}(\text{drink}, \text{water}, \text{cup})$.

Definition 10 (Abstraction Level). This is a measure of the maximum amount of abstraction an entity can express:³

$$lv(x) = \left(\max_{a \in A_x} (lv(a)) + 1 \right) [A_x \neq \emptyset]$$

Example: The abstraction level of any atomic action is 0 while it is 2 for the composite action $\text{make}(\text{drink})$. The example domain has an abstraction level of 3.

4.2 Abstraction In POCL

The most straightforward way to handle abstraction in regular planners is illustrated by Duet [Gerevini *et al.* 2008] by managing hierarchical actions separately from a task insertion planner. We chose to add abstraction in POCL in a manner inspired by the work of Bechon *et al.* [2014] on a planner called HiPOP. The difference between the original HiPOP and our implementation of it is that we focus on the expressivity and the ways flaw selection can be exploited for partial resolution. Our version is lifted at runtime while the original is grounded for optimizations. All mechanisms we have implemented use POCL but with different management of flaws and resolvers. The original algorithm 1 is left untouched.

One of those changes is that resolver selection needs to be altered for subgoals. Indeed, as stated by the authors of HiPOP : the planner must ensure the selection of high-level operators in order to benefit from the hierarchical aspect of the domain, otherwise, adding operators only increases the branching factor. We also need to add a way to deal with composite actions once inserted in the plan to reduce them to their atomic steps.

Definition 11 (Decomposition Flaws). They occur when a partial plan contains a non-atomic step. This step is the needer a_n of the flaw. We note its decomposition $a_n \oplus$.

- **Resolvers:** An decomposition flaw is solved with an **decomposition resolver**. The resolver will replace the needer with one of its instantiated methods $m \in \text{methods}(a_n)$ in the plan π . This is done by using transposition such that: $a_n \oplus_{\pi}^m = \langle S_m \cup (S_{\pi} \setminus \{a\}), a_n \triangleright^{-} I_m \cup a_n \triangleright^{+} G_m \cup (L_{\pi} \setminus L_{\pi}(a_n)) \rangle$.
- **Side effects:** An decomposition flaw can be created by the introduction of a composite action in the plan by any resolver and invalidated by its removal :

$$\frac{\bigcup_{a_m \in S_m} \pi' \upharpoonright_f a_m \quad \bigcup_{a_b \in S_{\pi'}} a_b \boxtimes l \quad \bigcup_{a_c \in S_m} a_c \oplus}{\text{...}}$$

³We use Iverson brackets here.

Example: When adding the step $make(tea)$ in the plan to solve the subgoal that needs tea being made, we also introduce an decomposition flow that will need this composite step replaced by its method using a decomposition resolver. In order to the decomposition of a composite action into a plan, all existing links are reported to the initial and goal step of the selected method, while the composite action and its links are removed from the plan. The main differences between HiPOP and HEART in our implementations are the functions of flaw selection and the handling of the results (one plan for HiPOP and a plan per cycle for HEART). In HiPOP, the flaw selection is made by prioritizing the decomposition flaws. Bechon *et al.* [2014] state that it makes the full resolution faster. However, it also loses opportunities to obtain abstract plans in the process.

4.3 Cycles

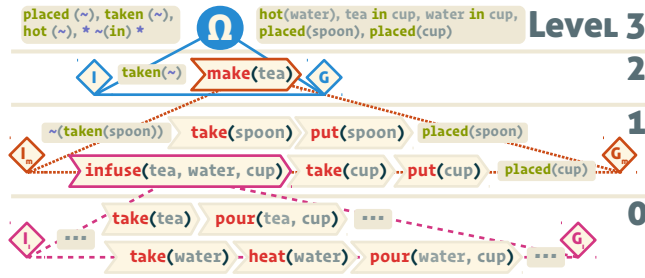


Figure 1: The cycle process on the example domain. Atomic actions that are copied from a cycle to the next are omitted.

The main focus of our work is toward obtaining **abstract plans** which are plans that are completed while still containing composite actions. In order to do that the flaw selection function will enforce cycles in the planning process.

Definition 12 (Cycle). A cycle is a planning phase defined as a triplet $c = \langle lv(c), agenda, \pi_{lv(c)} \rangle$ where : $lv(c)$ is the maximum abstraction level allowed for flaw selection in the *agenda* of remaining flaws in partial plan $\pi_{lv(c)}$. The resolvers of subgoals are therefore constrained by the following: $a_p \downarrow_f a_n : lv(a_p) \leq lv(c)$.

During a cycle all decomposition flaws are delayed. Once no more flaws other than decomposition flaws are present in the agenda, the current plan is saved and all remaining decomposition flaws are solved at once before the abstraction level is lowered for the next cycle: $lv(c') = lv(c) - 1$. Each cycle produces a more detailed abstract plan than the one before.

Abstract plans allow the planner to do an approximate form of anytime execution. At any given time the planner is able to return a fully supported plan. Before the first cycle, the plan returned is $\pi_{lv(a_0)}$.

Example: In our case using the method of intent recognition of Sohrabi *et al.* [2016], we can already use $\pi_{lv(a_0)}$ to find a likely goal explaining an observation (a set of temporally ordered fluents). That can make an early assessment of the probability of each goal of the recognition problem.

For each cycle c , a new plan $\pi_{lv(c)}$ is created as a new method of the root operator a_0 . These intermediary plans are not solutions of the problem, nor do they mean that the problem is solvable. In

order to find a solution, the HEART planner needs to reach the final cycle c_0 with an abstraction level $lv(c_0) = 0$. However, these plans can be used to derive meaning from the potential solution of the current problem and give a good approximation of the final result before its completion.

Example: In the figure 1, we illustrate the way our example problem is progressively solved. Before the first cycle c_2 all we have is the root operator and its plan π_3 . Then within the first cycle, we select the composite action $make(tea)$ instantiated from the operator $make(drink)$ along with its methods. All related flaws are fixed until all that is left in the agenda is the abstract flaws. We save the partial plan π_2 for this cycle and expand $make(tea)$ into a copy of the current plan π_1 for the next cycle. The solution of the problem will be stored in π_0 once found.

5 Results

5.1 Theoretical

In this section, we aim to prove several properties of our approach and resulting plans : HEART is complete, sound and its abstract plans can always be decomposed into a valid solution.

The completeness of POCL has been proven in the same paper as for its soundness [Penberthy *et al.* 1992]. An interesting property of the POCL algorithm is that flaw selection strategies do not impact these properties. Since the only modification of the algorithm is the extension of the classical flaws with a decomposition flaw, all we need to explore, to update the proofs, is the impact of the new resolver. By definition, the resolvers of decomposition flaws will take into account all flaws introduced by its resolution into the refined plan. It can also revert its application properly (even if it is not needed given the soon to be proven properties).

Lemma (Decomposing preserves acyclicity). *The decomposition of a composite action with a valid method in an acyclical plan will not cause cycles to appear. This can be written $\forall a_s \in S_\pi : a_s \not\prec_\pi a_s \implies \forall a'_s \in S_{a\Phi_\pi^m} : a'_s \not\prec_{a\Phi_\pi^m} a'_s$.*

Proof. When decomposing a composite action a with a method m in an existing plan π , we add all steps S_m in the refined plan. Both π and m are guaranteed to be cycle free by definition. We can note that $\forall a_s \in S_m : (\nexists a_t \in S_m : a_s \succ a_t \wedge \neg f \in \text{eff}(a_t)) \implies f \in \text{eff}(a)$. Said otherwise, if an action a_s can participate a fluent f to the goal step of the method m then it is necessarily present in the effects of a . Since higher level action are preferred during the resolver selection, no actions in the methods are already used in the plan when the decomposition happens. This can be noted $\exists a \in \pi \implies S_m \cup S_\pi$ meaning that in the graph formed both partial plans m and π cannot contain the same edges therefore their acyclicity is preserved when inserting one into the other. \square

Lemma (Solved decomposition flaws cannot reoccur). *The application of a decomposition resolver on a plan π , guarantees that $a \notin S_{\pi'}$ for any partial plan refined from π without reverting the application of the resolver.*

Proof. As stated in the definition of the methods (definition 3): $a \notin A_a$. This means that a cannot be introduced in the plan by its decomposition or the decomposition of its proper actions. Indeed, once a is expanded, the level of the following cycle $c_{lv(a)-1}$ prevents a to be selected by subgoal resolvers. It cannot either be

contained in the methods of another action that are selected afterward because otherwise following definition 10 its level would be at least $lv(a) + 1$.

□

Lemma (Decomposing to abstraction level 0 guarantees solvability). *Finding a partial plan that contains only decomposition flaws with actions of abstraction level 1, guarantees a solution to the problem.*

Proof. Any method m of a composite action $a : lv(a) = 1$ is by definition a solution of the problem $\mathcal{P}_a = \langle \mathcal{D}, C_p, a \rangle$. By definition, $a \notin A_a$, and $a \notin A_{a \oplus \pi}^m$ (meaning that a cannot reoccur after being decomposed). It is also given by definition that the instantiation of the action and its methods are coherent regarding variable constraints (everything is instantiated before selection by the resolvers). Since the plan π only has decomposition flaws and all flaws within m are guaranteed to be solvable, and both are guaranteed to be acyclical by the application of any decomposition $a \oplus \pi^m$, the plan is solvable.

□

Lemma (Abstract plans guarantee solvability). *Finding a partial plan π that contains only decomposition flaws, guarantees a solution to the problem.*

Proof. Recursively, if we apply the previous proof on higher level plans we note that decomposing at level 2 guarantees a solution since the method of the composite actions are guaranteed to be solvable.

□

From these proofs we can derive the property of soundness (from the guarantee that the composite action provides its effects from any methods) and completeness (since if a composite action cannot be used, the planner defaults to using any actions of the domain).

5.2 Experimental

In order to assess its capabilities, HEART was tested on two criteria: quality and complexity. All tests were executed on an Intel® Core™ i7-7700HQ CPU clocked at 2.80GHz. The Java process used only one core and was not limited by time or memory. Each experiment was repeated between 700 and 10 000 times to ensure that variations in speed were not impacting the results.

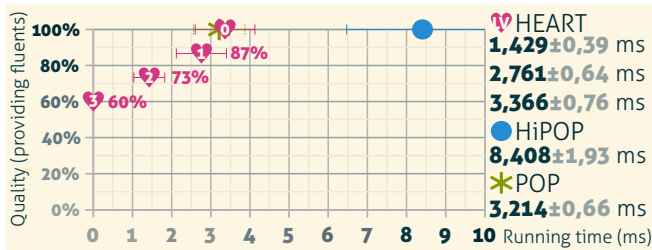


Figure 2: Evolution of the quality with computation time.

Figure 2 shows how the quality is affected by the abstraction in partial plans. The tests are made using our example domain. The quality is measured by counting the number of providing

fluents in the plan $|\bigcup_{a \in S_\pi} eff(a)|$. This metric is actually used to approximate the probability of a goal given observations in intent recognition. The percentages are relative to the total number of unique fluents of the complete solution. These results show that in some cases it may be more interesting to plan in a leveled fashion to solve HTN problems. For the first cycle of level 3, the quality of the abstract plan is already of 60%. This is the quality of the exploitation of the plan *before any planning*. With almost three quarters of the final quality and less than half of the complete computation time, the result of the first cycle is a good quality/time compromise.

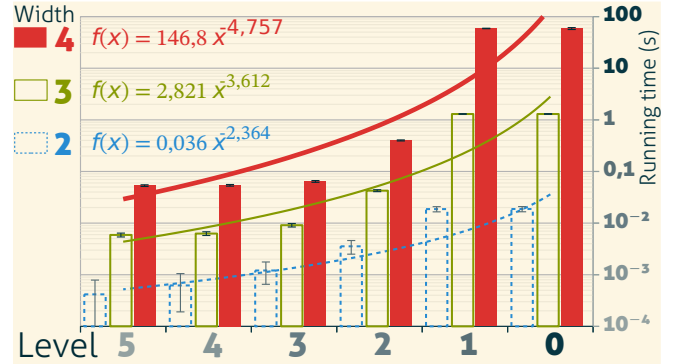


Figure 3: Impact of domain shape on the computation time by levels. The scale of the vertical axis is logarithmic. Equations are the definition of the trend curves.

In the second test, we used generated domains. These domains consist of an action of abstraction level 5. It has a single method containing a number of actions of level 4. We call this number the width of the domain. All needed actions are built recursively to form a tree shape. Atomic actions only have single fluent effects. The goal is the effect of the higher level action and the initial state is empty. These domains do not contain negative effects. Figure 3 shows the computational profile of HEART for various levels and widths. We note that the behavior of HEART seems to follow an exponential law with the negative exponent of the trend curves seemingly being correlated to the actual width. This means that computing the first cycles has a complexity that is close to being *linear* while computing the last cycles is of the same complexity as classical planning which is at least *P-SPACE* (depending on the details of the formalism) [Erol *et al.* 1995].

Conclusions

In this paper, we have presented a new planner called HEART based on POCL. An updated planning framework fitting the need for such a new approach was proposed. We showed how HEART performs compared to complete planners in terms of speed and quality. While the abstract plans generated during the planning process are not complete solutions, they are exponentially faster to generate while retaining significant quality over the final plans. They are also proof of solvability of the problem. By using these plans it is possible to find good approximations to intractable problems within tight time constraints.

References

- [Baiocchi *et al.* 1998] Baiocchi Marco, Stefano Marcugini, and Alfredo Milani Encoding planning constraints into partial order planning domains. *International Conference on Principles of Knowledge Representation and Reasoning*, 608–616 Morgan Kaufmann Publishers Inc., 1998.
- [Baker *et al.* 2007] Baker Chris L., Joshua B. Tenenbaum, and Rebecca R. Saxe Goal inference as inverse planning. *Proceedings of the Annual Meeting of the Cognitive Science Society*, Vol. 29, 2007.
- [Bechon *et al.* 2014] Bechon Patrick, Magali Barbier, Guillaume Infantes, Charles Lesire, and Vincent Vidal HiPOP: Hierarchical Partial-Order Planning. *European Starting AI Researcher Symposium*, 264,51–60 IOS Press, 2014.
- [Bercher *et al.* 2014] Bercher Pascal, Shawn Keen, and Susanne Biundo Hybrid planning heuristics based on task decomposition graphs. *Seventh Annual Symposium on Combinatorial Search*, 2014.
- [Biundo and Schattenberg 2001] Biundo S., and B. Schattenberg From abstract crisis to concrete relief preliminary report on flexible integration on nonlinear and hierarchical planning. *Proceedings of the European Conference on Planning*, 2001.
- [Dvorak *et al.* 2014] Dvorak Filip, Arthur Bit-Monnot, Félix Ingrand, and Malik Ghallab A flexible ANML actor and planner in robotics. *Planning and Robotics (PlanRob) Workshop (ICAPS)*, 2014.
- [Erol *et al.* 1994] Erol Kutluhan, James Hendler, and Dana S. Nau HTN planning: Complexity and expressivity. *AAAI*, 94,1123–1128 1994.
- [Erol *et al.* 1995] Erol Kutluhan, Dana S. Nau, and Venkatramana S. Subrahmanian Complexity, decidability and undecidability results for domain-independent planning. *Artificial intelligence*, 76 (1-2), 75–88, 1995.
- [Fox 1997] Fox Maria Natural hierarchical planning using operator decomposition. *European Conference on Planning*, 195–207 Springer, 1997.
- [Fox *et al.* 2017] Fox Maria, Derek Long, and Daniele Magazzeni Explainable Planning. *Proceedings of IJCAI Workshop on Explainable AI*, Melbourne, Australia, August 2017.
- [Gerevini *et al.* 2008] Gerevini Alfonso, Ugur Kuter, Dana S. Nau, Alessandro Saetti, and Nathaniel Waisbrot Combining Domain-Independent Planning and HTN Planning: The Duet Planner. *Proceedings of the European Conference on Artificial Intelligence*, 18,573–577 2008.
- [Ghallab *et al.* 2004] Ghallab Malik, Dana Nau, and Paolo Traverso *Automated planning: Theory & practice*, Elsevier, 2004.
- [Ghallab *et al.* 2016] Ghallab Malik, Dana Nau, and Paolo Traverso *Automated Planning and Acting*, Cambridge University Press, 2016.
- [Göbelbecker *et al.* 2010] Göbelbecker Moritz, Thomas Keller, Patrick Eyerich, Michael Brenner, and Bernhard Nebel Coming Up With Good Excuses: What to do When no Plan Can be Found. *Proceedings of the International Conference on Automated Planning and Scheduling*, 20,81–88 AAAI Press, May 2010.
- [Kambhampati *et al.* 1998] Kambhampati Subbarao, Amol Mali, and Biplav Srivastava Hybrid planning for partially hierarchical domains. *AAAI/IAAI*, 882–888 1998.
- [Lemai and Ingrand 2004] Lemai Solange, and Félix Ingrand Interleaving temporal planning and execution in robotics domains. *AAAI*, 4,617–622 2004.
- [Marthi *et al.* 2007] Marthi Bhaskara, Stuart J. Russell, and Jason Andrew Wolfe Angelic Semantics for High-Level Actions. *ICAPS*, 232–239 2007.
- [Nau *et al.* 2003] Nau Dana S., Tsz-Chiu Au, Oktay Ilghami, Ugur Kuter, J. William Murdock, et al. SHOP2: An HTN planning system. *J. Artif. Intell. Res. (JAIR)*, 20, 379–404, 2003.
- [Penberthy *et al.* 1992] Penberthy J Scott, Daniel S Weld, and others UCPOP: A Sound, Complete, Partial Order Planner for ADL. *Kr*, 92, 103–114, 1992.
- [Ramirez and Geffner 2009] Ramirez Miquel, and Hector Geffner Plan recognition as planning. *Proceedings of the International Conference on International Conference on Automated Planning and Scheduling*, 19,1778–1783 AAAI Press, 2009.
- [Sacerdoti 1974] Sacerdoti Earl D. Planning in a hierarchy of abstraction spaces. *Artificial intelligence*, 5 (2), 115–135, 1974.
- [Sacerdoti 1975] Sacerdoti Earl D. *The nonlinear nature of plans*, STANFORD RESEARCH INST MENLO PARK CA, 1975.
- [Seegebarth *et al.* 2012] Seegebarth Bastian, Felix Müller, Bernd Schattenberg, and Susanne Biundo Making hybrid plans more clear to human users a formal approach for generating sound explanations. *Proceedings of the Twenty-Second International Conference on International Conference on Automated Planning and Scheduling*, 225–233 AAAI Press, 2012.
- [Sohrabi *et al.* 2016] Sohrabi Shirin, Anton V. Riabov, and Octavian Udrea Plan Recognition as Planning Revisited. *Proceedings of the International Joint Conference on Artificial Intelligence*, Vol. 25, 2016.
- [Weld 1994] Weld Daniel S. An introduction to least commitment planning. *AI magazine*, 15 (4), 27, 1994.
- [Young and Moore 1994] Young R. Michael, and Johanna D. Moore DPOCL: A principled approach to discourse planning. *Proceedings of the Seventh International Workshop on Natural Language Generation*, 13–20 Association for Computational Linguistics, 1994.