Topic 1 | AI Agent Hands-On

Implementation Evidence Report

Workflow: Topic_01_Advanced_AI_Agent **Date:** 10 November 2026

Outcome: Successful test execution. Chat Trigger, AI Agent and model node each completed successfully.

Purpose

Document the completed n8n AI Agent setup, successful chat response, model configuration and execution token usage, using the actual screenshots supplied during the exercise.

Architecture and settings

Component	Observed configuration
Chat Trigger	When chat message received
AI Agent	Connected Chat Trigger Node; {{$json.chatInput}}
Model	qwen/qwen-2.5-7b-instruct
Credential	OpenAI account 20 (credential name only)
Inference	Responses API OFF; max tokens 500; temperature 0.0

Observed result

AI Agent JSON: {"output": "Hello! How can I assist you today?"}

Model usage: 203 prompt tokens, 10 completion tokens, 213 total tokens; finish reason: stop.


Execution timing: 2.043 s workflow; 1.734 s model node (as displayed in the supplied screenshot).

Assessment note

The guide specifies GPT-4o or Claude 3.5 Sonnet. The available company gateway list did not include GPT-4o; Qwen was used instead. The successful test validates the functional flow, but any strict model requirement needs assessor confirmation.

E1 | Successful workflow execution


All three nodes display green checks. The workflow reports successful execution and shows the chat reply and log timing.

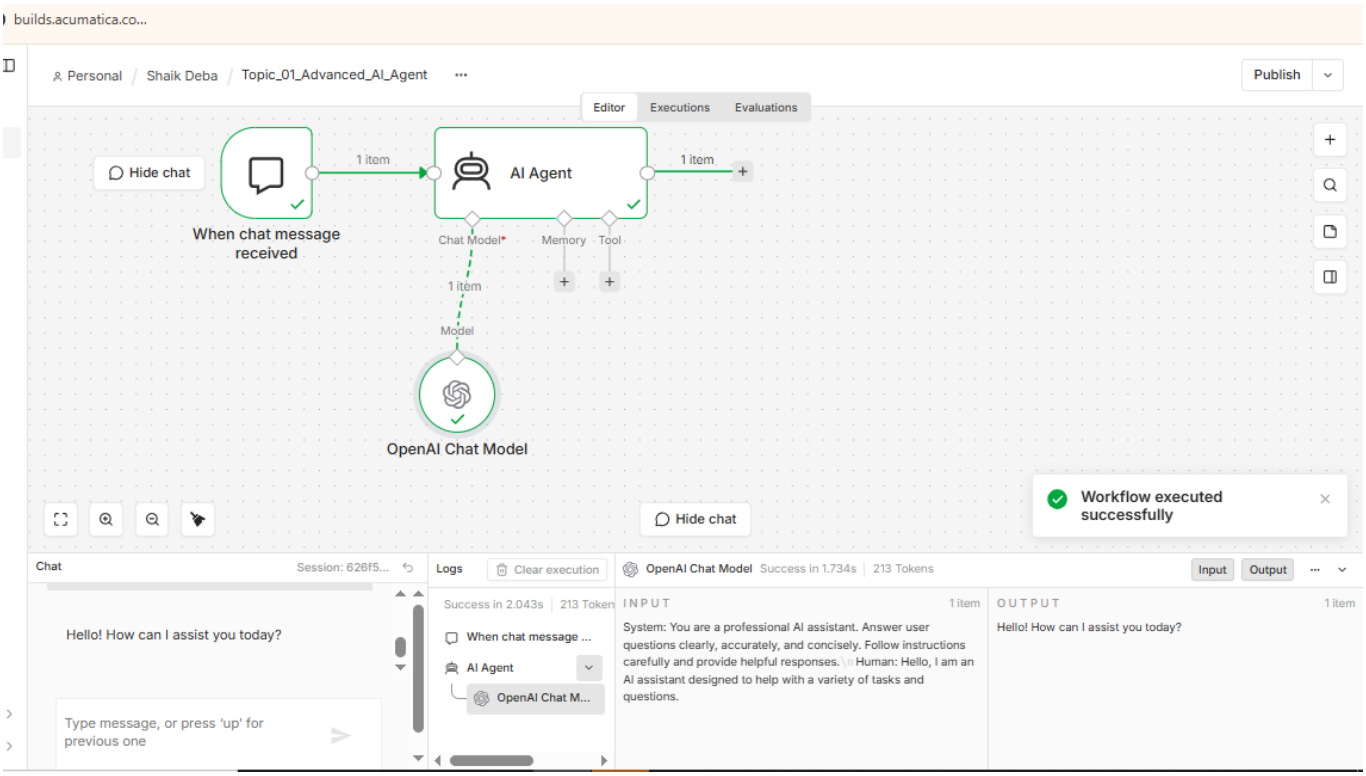

Evidence source: user-provided n8n screenshot.

E2 | AI Agent output JSON


The AI Agent receives the chatInput value and returns the generated response in its output JSON.

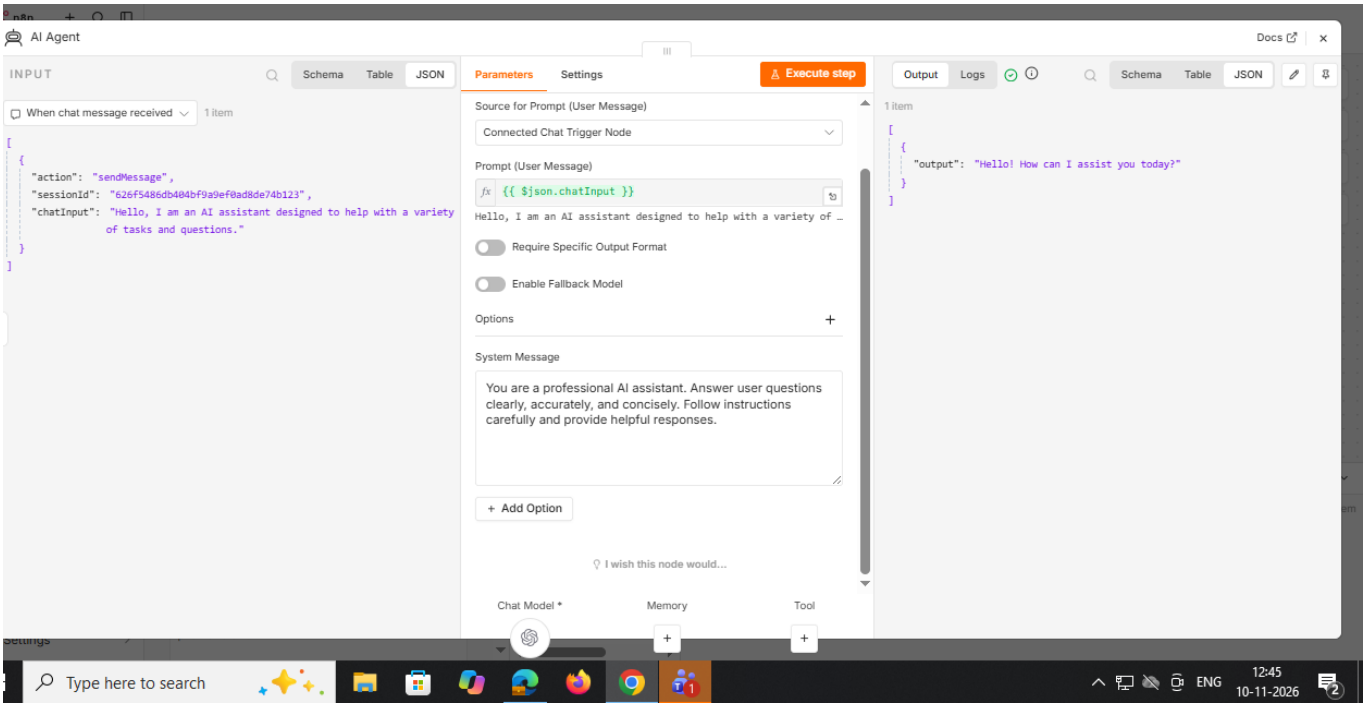

Evidence source: user-provided n8n screenshot.

E3 | Model configuration and token usage

The selected Qwen model uses 500 maximum tokens and temperature 0.0; the model response reports 213 total tokens.

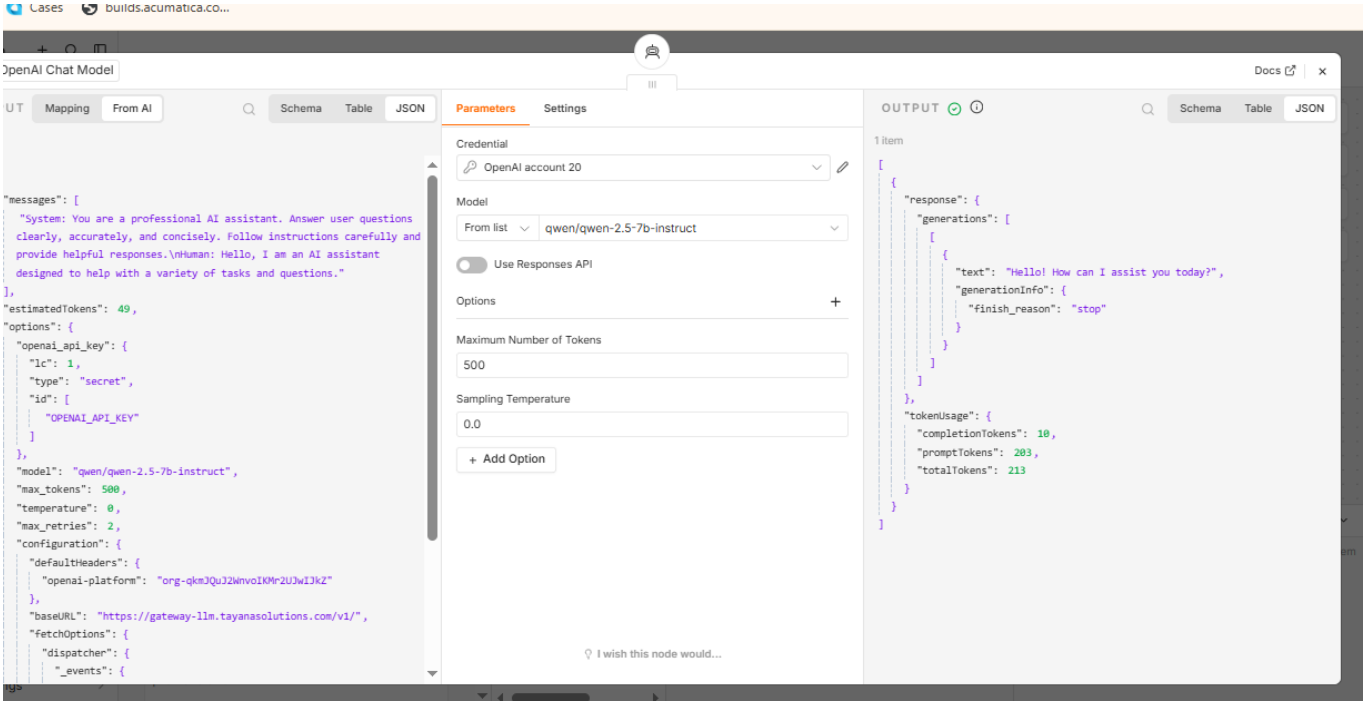

Evidence source: user-provided n8n screenshot.