
Topic 13 – IF Node & Conditional Logic

n8n Hands-On Beginner Course | Workflow Evidence


1. Workflow Execution

All five nodes executed successfully. Mock Orders generated two items; the IF node routed one item to each output.

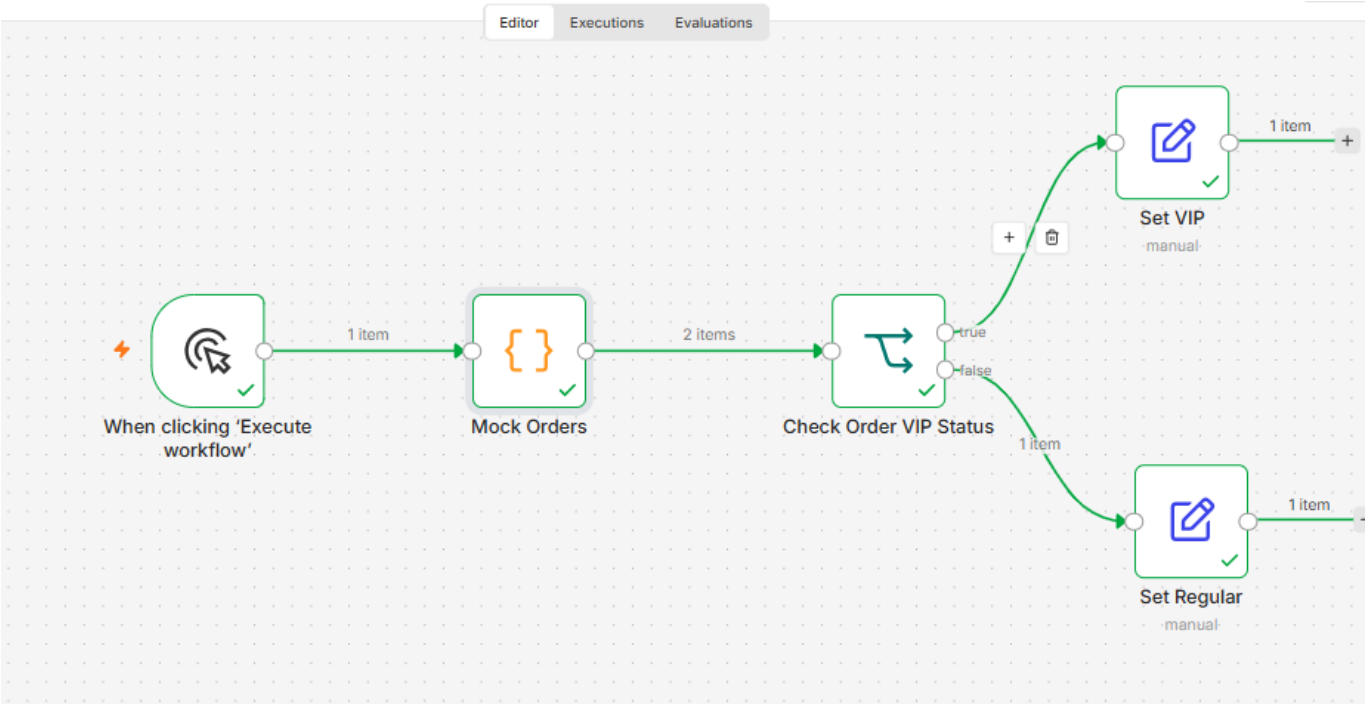


2. Mock Orders – Two Customer Items

The Code node generated Alice with an order value of 150 and Bob with an order value of 75.

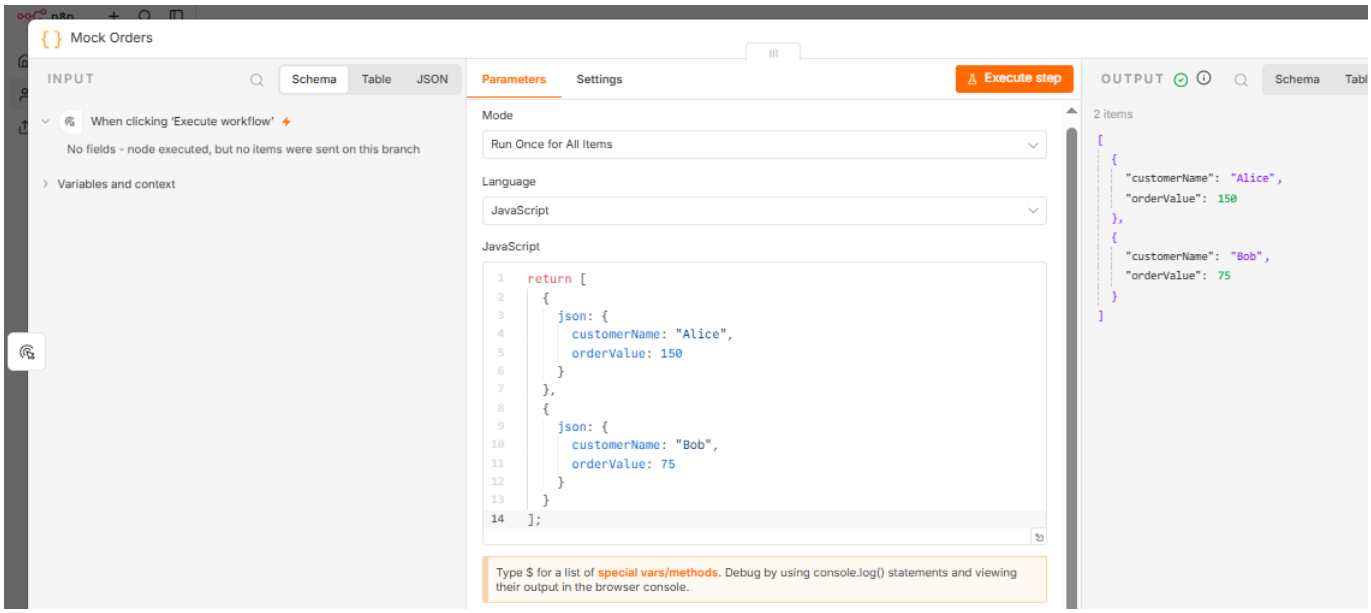


3. True Branch – Set VIP

Alice was routed to the True branch. The output retains customerName and orderValue and assigns VIP status.

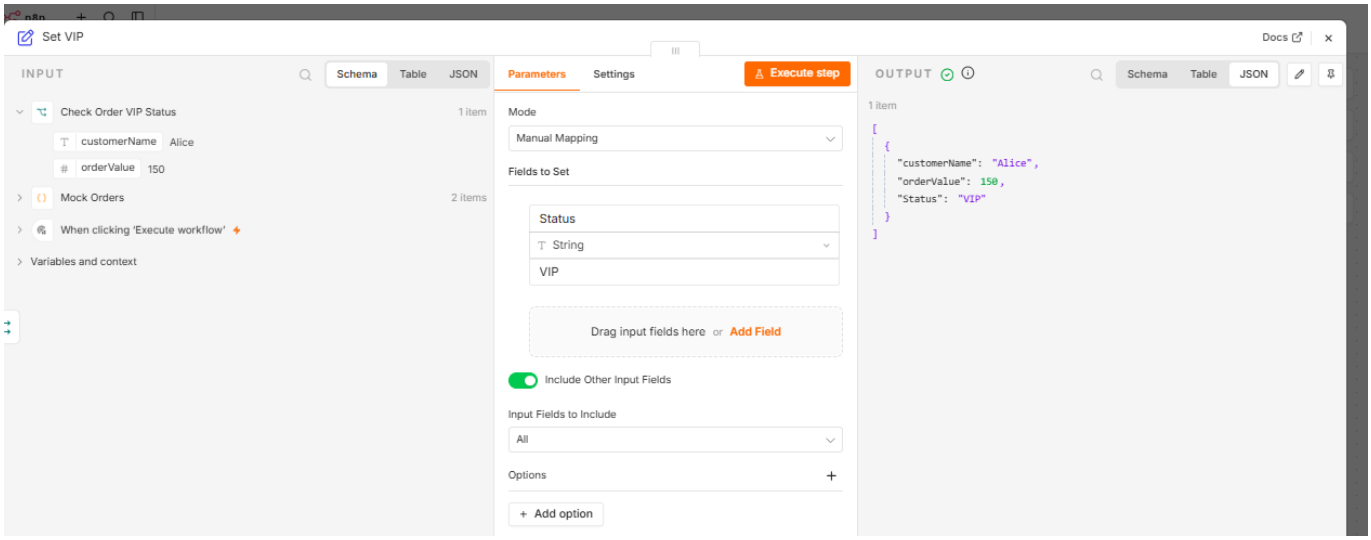

4. False Branch – Set Regular

Bob was routed to the False branch. The output retains customerName and orderValue and assigns Regular status.

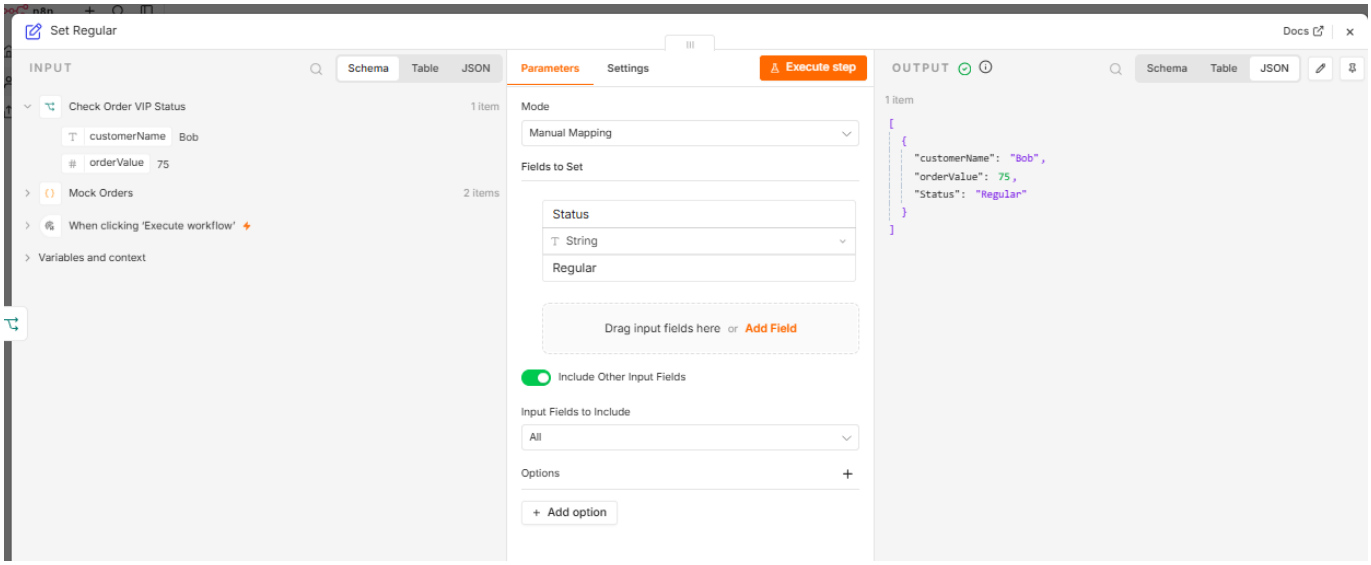

Note: The screenshots show the output field as “Status”; the implementation plan specifies “status” (lowercase).