



# Example - anti-virus software

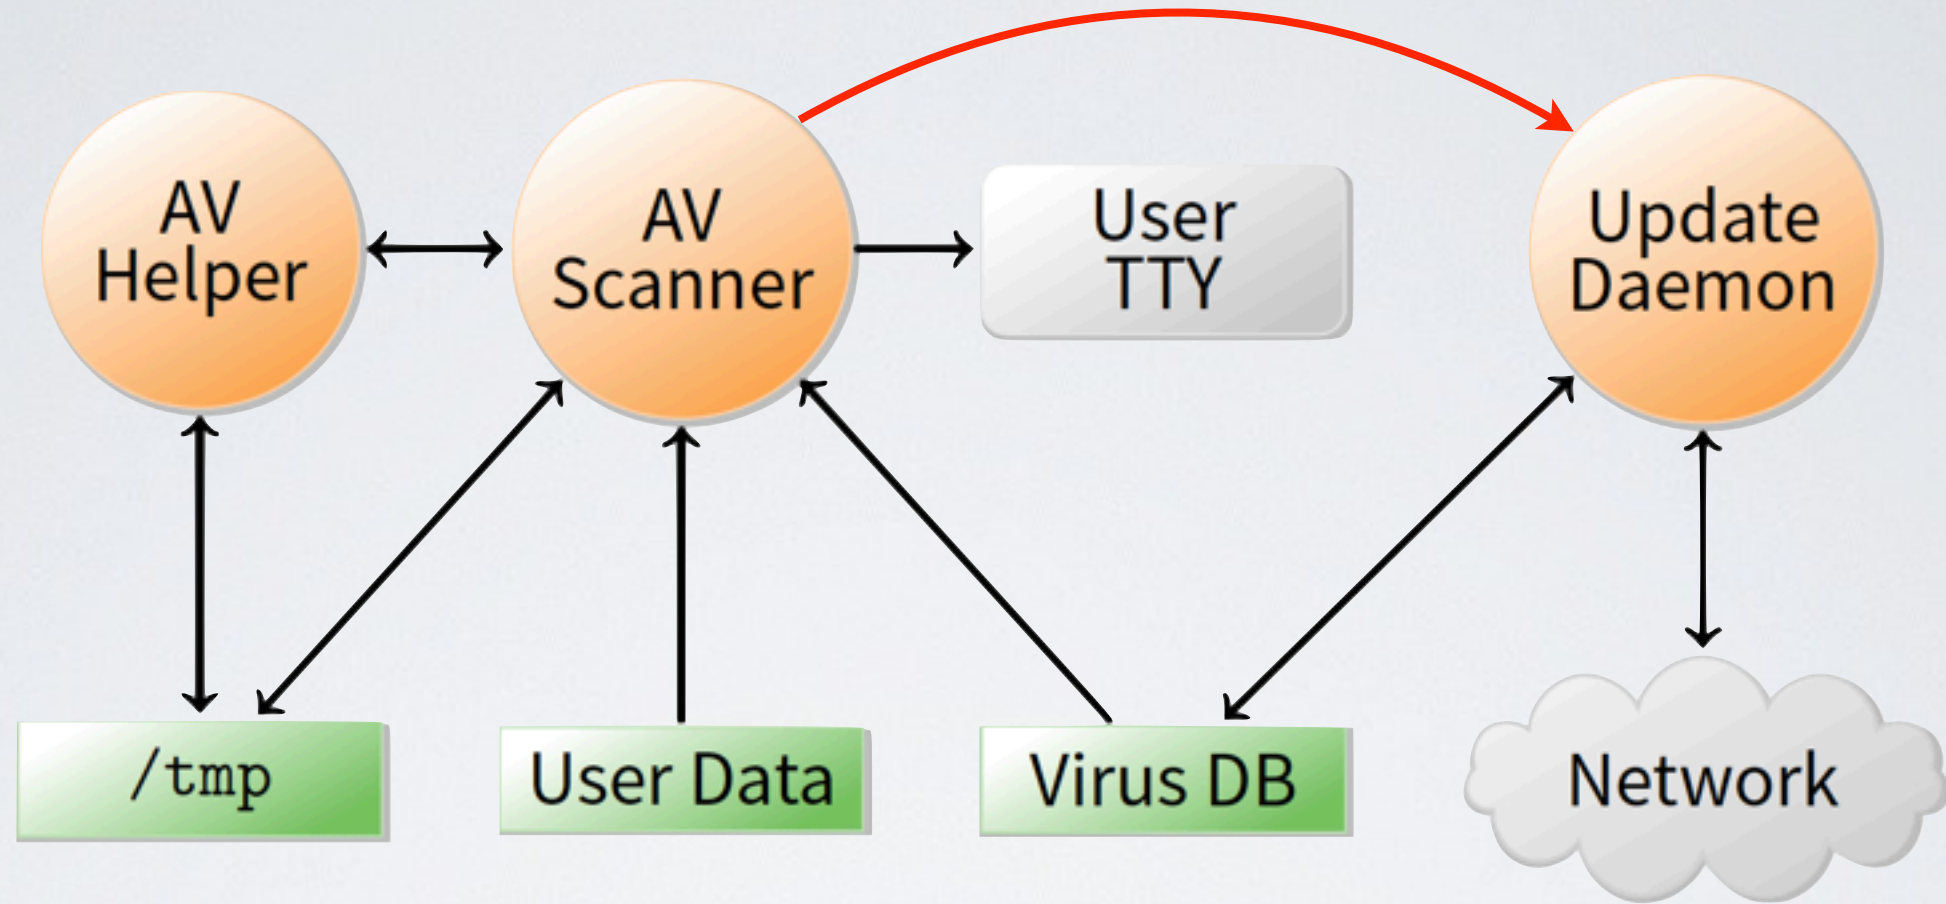

- Scanner can send private data to update daemon and update daemon sends data over network
- ➔ Block IPC & shared memory system calls in scanner?

## Example - anti-virus software

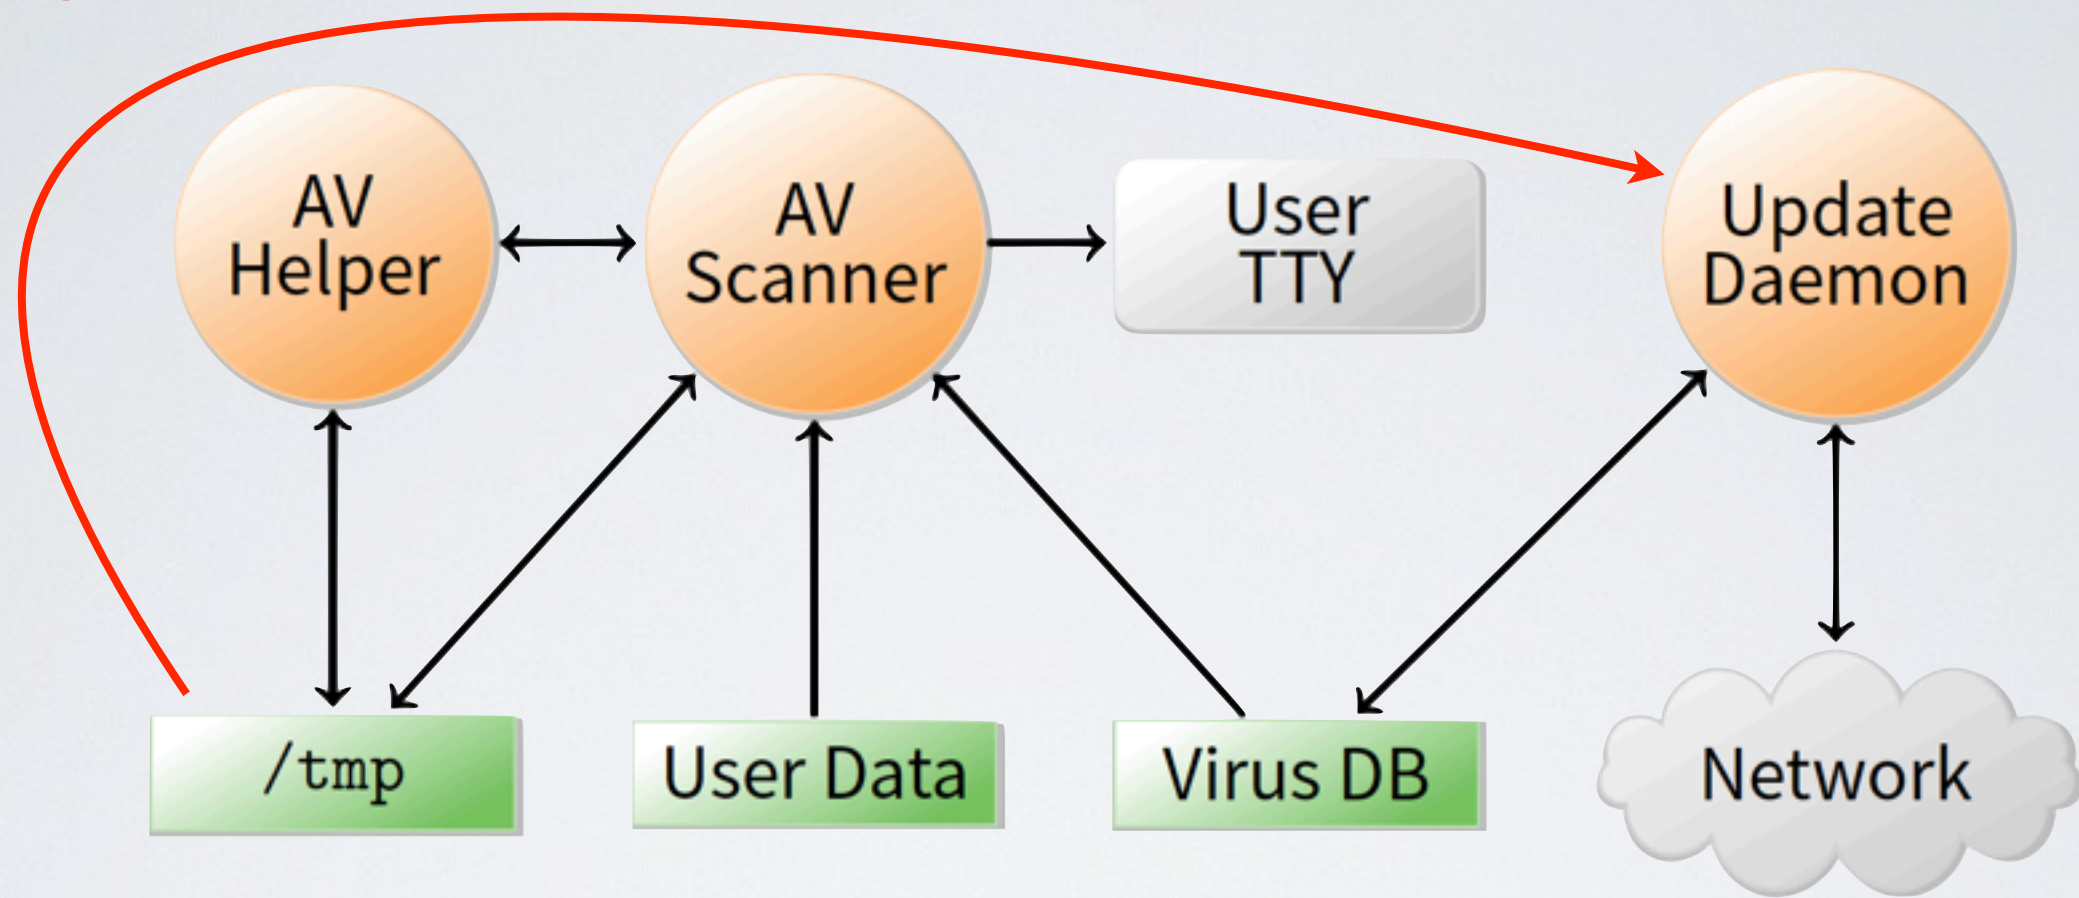

- Scanner can write data to world-readable file in `/tmp` and update daemon later reads and discloses file
- ➔ Prevent update daemon from using `/tmp`