


server generated

[Used]

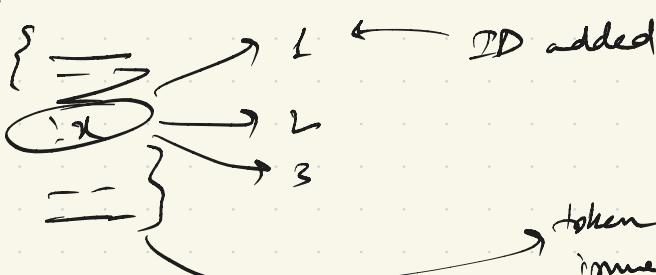

```
{
  "amount": 280,
  "embedded_receiver": "Naruto",
  "embedded_sender": "Ardhendu",
  "id": "ea3c1497-4d08-42a7-9d22-3d76460f593e",
  "expiry": "2025-07-19T10:53:06.648439",
  "receiver_id": "Naruto",
  "sender_id": "Ardhendu",
  "signature": "14b24888b29661fd74511324a246017089977ac0bdd29754cddf30901f54e4f",
  "timestamp": "2025-07-19T10:48:06.648439",
  "transaction_id": "a5b0905d-64f4-4614-bc5c-a9f62ad11201"
}
```

add money
 ↳ generates : empty()
 receiver JSON
 NOT

- 1st generate receiver empty token
- 2nd scan QR
get ID (public)
- 3rd in token add public ID
and embedded ID (protected)
- 4th send token

