

```
In [1]: import pandas as pd
```

```
In [2]: stats=pd.read_csv(r"D:\NIT\panda\Books\data.csv")
```

```
In [3]: stats
```

Out[3]:

	CountryName	CountryCode	BirthRate	InternetUsers	IncomeGroup
0	Aruba	ABW	10.244	78.9	High income
1	Afghanistan	AFG	35.253	5.9	Low income
2	Angola	AGO	45.985	19.1	Upper middle income
3	Albania	ALB	12.877	57.2	Upper middle income
4	United Arab Emirates	ARE	11.044	88.0	High income
...
190	Yemen, Rep.	YEM	32.947	20.0	Lower middle income
191	South Africa	ZAF	20.850	46.5	Upper middle income
192	Congo, Dem. Rep.	COD	42.394	2.2	Low income
193	Zambia	ZMB	40.471	15.4	Lower middle income
194	Zimbabwe	ZWE	35.715	18.5	Low income

195 rows × 5 columns

```
In [4]: len(stats)
```

```
Out[4]: 195
```

```
In [5]: stats.columns
```

```
Out[5]: Index(['CountryName', 'CountryCode', 'BirthRate', 'InternetUsers',  
          'IncomeGroup'],  
          dtype='object')
```

```
In [7]: len(stats.columns)
```

```
Out[7]: 5
```

```
In [8]: stats.head()
```

Out[8]:

	CountryName	CountryCode	BirthRate	InternetUsers	IncomeGroup
0	Aruba	ABW	10.244	78.9	High income
1	Afghanistan	AFG	35.253	5.9	Low income
2	Angola	AGO	45.985	19.1	Upper middle income
3	Albania	ALB	12.877	57.2	Upper middle income
4	United Arab Emirates	ARE	11.044	88.0	High income

```
In [9]: stats.tail()
```

Out[9]:

	CountryName	CountryCode	BirthRate	InternetUsers	IncomeGroup
190	Yemen, Rep.	YEM	32.947	20.0	Lower middle income
191	South Africa	ZAF	20.850	46.5	Upper middle income
192	Congo, Dem. Rep.	COD	42.394	2.2	Low income
193	Zambia	ZMB	40.471	15.4	Lower middle income
194	Zimbabwe	ZWE	35.715	18.5	Low income

```
In [10]: stats.info()
```

```
<class 'pandas.core.frame.DataFrame'>  
RangeIndex: 195 entries, 0 to 194  
Data columns (total 5 columns):  
#   Column          Non-Null Count  Dtype  
---  ---  
0   CountryName     195 non-null   object  
1   CountryCode     195 non-null   object  
2   BirthRate       195 non-null   float64  
3   InternetUsers   195 non-null   float64  
4   IncomeGroup     195 non-null   object  
dtypes: float64(2), object(3)  
memory usage: 7.7+ KB
```

```
In [11]: stats.describe()
```

Out[11]:

	BirthRate	InternetUsers
count	195.000000	195.000000
mean	21.469928	42.076471
std	10.605467	29.030788
min	7.900000	0.900000
25%	12.120500	14.520000
50%	19.680000	41.000000
75%	29.759500	66.225000
max	49.661000	96.546800

In [13]: stats.describe().transpose()

Out[13]:

	count	mean	std	min	25%	50%	75%	max
BirthRate	195.0	21.469928	10.605467	7.9	12.1205	19.68	29.7595	49.6610
InternetUsers	195.0	42.076471	29.030788	0.9	14.5200	41.00	66.2250	96.5468

In [14]: stats.head()

Out[14]:

	CountryName	CountryCode	BirthRate	InternetUsers	IncomeGroup
0	Aruba	ABW	10.244	78.9	High income
1	Afghanistan	AFG	35.253	5.9	Low income
2	Angola	AGO	45.985	19.1	Upper middle income
3	Albania	ALB	12.877	57.2	Upper middle income
4	United Arab Emirates	ARE	11.044	88.0	High income

In [16]: stats.columns

Out[16]: Index(['CountryName', 'CountryCode', 'BirthRate', 'InternetUsers', 'IncomeGroup'], dtype='object')

In [17]: stats.columns = ['a', 'b', 'c', 'd', 'e']

In [18]: stats

Out[18]:

	a	b	c	d	e
0	Aruba	ABW	10.244	78.9	High income
1	Afghanistan	AFG	35.253	5.9	Low income
2	Angola	AGO	45.985	19.1	Upper middle income
3	Albania	ALB	12.877	57.2	Upper middle income
4	United Arab Emirates	ARE	11.044	88.0	High income
...
190	Yemen, Rep.	YEM	32.947	20.0	Lower middle income
191	South Africa	ZAF	20.850	46.5	Upper middle income
192	Congo, Dem. Rep.	COD	42.394	2.2	Low income
193	Zambia	ZMB	40.471	15.4	Lower middle income
194	Zimbabwe	ZWE	35.715	18.5	Low income

195 rows × 5 columns

In [21]: stats.columns= ['CountryName', 'CountryCode', 'BirthRate', 'InternetUsers', 'IncomeGroup']

In [20]: stats

Out[20]:

	a	b	c	d	e
0	Aruba	ABW	10.244	78.9	High income
1	Afghanistan	AFG	35.253	5.9	Low income
2	Angola	AGO	45.985	19.1	Upper middle income
3	Albania	ALB	12.877	57.2	Upper middle income
4	United Arab Emirates	ARE	11.044	88.0	High income
...
190	Yemen, Rep.	YEM	32.947	20.0	Lower middle income
191	South Africa	ZAF	20.850	46.5	Upper middle income
192	Congo, Dem. Rep.	COD	42.394	2.2	Low income
193	Zambia	ZMB	40.471	15.4	Lower middle income
194	Zimbabwe	ZWE	35.715	18.5	Low income

195 rows × 5 columns

In [22]: stats[21:26]

Out[22]:

	CountryName	CountryCode	BirthRate	InternetUsers	IncomeGroup
21	Belize	BLZ	23.092	33.60	Upper middle income
22	Bermuda	BMU	10.400	95.30	High income
23	Bolivia	BOL	24.236	36.94	Lower middle income
24	Brazil	BRA	14.931	51.04	Upper middle income
25	Barbados	BRB	12.188	73.00	High income

In [23]: stats[:]

Out[23]:

	CountryName	CountryCode	BirthRate	InternetUsers	IncomeGroup
0	Aruba	ABW	10.244	78.9	High income
1	Afghanistan	AFG	35.253	5.9	Low income
2	Angola	AGO	45.985	19.1	Upper middle income
3	Albania	ALB	12.877	57.2	Upper middle income
4	United Arab Emirates	ARE	11.044	88.0	High income
...
190	Yemen, Rep.	YEM	32.947	20.0	Lower middle income
191	South Africa	ZAF	20.850	46.5	Upper middle income
192	Congo, Dem. Rep.	COD	42.394	2.2	Low income
193	Zambia	ZMB	40.471	15.4	Lower middle income
194	Zimbabwe	ZWE	35.715	18.5	Low income

195 rows × 5 columns

In [24]: stats['CountryName']

Out[24]:

0	Aruba
1	Afghanistan
2	Angola
3	Albania
4	United Arab Emirates
...	...
190	Yemen, Rep.
191	South Africa
192	Congo, Dem. Rep.
193	Zambia
194	Zimbabwe

Name: CountryName, Length: 195, dtype: object

In [25]: def1 = stats[['CountryName','BirthRate']]

In [26]: def1

Out[26]:

	CountryName	BirthRate
0	Aruba	10.244
1	Afghanistan	35.253
2	Angola	45.985
3	Albania	12.877
4	United Arab Emirates	11.044
...
190	Yemen, Rep.	32.947
191	South Africa	20.850
192	Congo, Dem. Rep.	42.394
193	Zambia	40.471
194	Zimbabwe	35.715

195 rows × 2 columns

In [27]: def2= stats[4:9]

In [29]: def2

Out[29]:

	CountryName	CountryCode	BirthRate	InternetUsers	IncomeGroup
4	United Arab Emirates	ARE	11.044	88.0	High income
5	Argentina	ARG	17.716	59.9	High income
6	Armenia	ARM	13.308	41.9	Lower middle income
7	Antigua and Barbuda	ATG	16.447	63.4	High income
8	Australia	AUS	13.200	83.0	High income

In [30]: stats.BirthRate* stats.InternetUsers

Out[30]:

```
0      808.2516
1      207.9927
2      878.3135
3      736.5644
4      971.8720
...
190    658.9400
191    969.5250
192     93.2668
193    623.2534
194    660.7275
Length: 195, dtype: float64
```

In [31]: stats['mycal']= stats.BirthRate* stats.InternetUsers

In [32]: stats['mycal']

Out[32]:

```
0      808.2516
1      207.9927
2      878.3135
3      736.5644
4      971.8720
...
190    658.9400
191    969.5250
192     93.2668
193    623.2534
194    660.7275
Name: mycal, Length: 195, dtype: float64
```

In [33]: stats.head()

Out[33]:

	CountryName	CountryCode	BirthRate	InternetUsers	IncomeGroup	mycal
0	Aruba	ABW	10.244	78.9	High income	808.2516
1	Afghanistan	AFG	35.253	5.9	Low income	207.9927
2	Angola	AGO	45.985	19.1	Upper middle income	878.3135
3	Albania	ALB	12.877	57.2	Upper middle income	736.5644
4	United Arab Emirates	ARE	11.044	88.0	High income	971.8720

In [34]: stats.drop('mycal',axis= 1)

Out[34]:

	CountryName	CountryCode	BirthRate	InternetUsers	IncomeGroup
0	Aruba	ABW	10.244	78.9	High income
1	Afghanistan	AFG	35.253	5.9	Low income
2	Angola	AGO	45.985	19.1	Upper middle income
3	Albania	ALB	12.877	57.2	Upper middle income
4	United Arab Emirates	ARE	11.044	88.0	High income
...
190	Yemen, Rep.	YEM	32.947	20.0	Lower middle income
191	South Africa	ZAF	20.850	46.5	Upper middle income
192	Congo, Dem. Rep.	COD	42.394	2.2	Low income
193	Zambia	ZMB	40.471	15.4	Lower middle income
194	Zimbabwe	ZWE	35.715	18.5	Low income

195 rows × 5 columns

In [35]:

stats[stats.IncomeGroup == 'Low income']

Out[35]:

	CountryName	CountryCode	BirthRate	InternetUsers	IncomeGroup	mycal
1	Afghanistan	AFG	35.253	5.90	Low income	207.99270
11	Burundi	BDI	44.151	1.30	Low income	57.39630
13	Benin	BEN	36.440	4.90	Low income	178.55600
14	Burkina Faso	BFA	40.551	9.10	Low income	369.01410
29	Central African Republic	CAF	34.076	3.50	Low income	119.26600
38	Comoros	COM	34.326	6.50	Low income	223.11900
52	Eritrea	ERI	34.800	0.90	Low income	31.32000
55	Ethiopia	ETH	32.925	1.90	Low income	62.55750
64	Guinea	GIN	37.337	1.60	Low income	59.73920
65	Gambia, The	GMB	42.525	14.00	Low income	595.35000
66	Guinea-Bissau	GNB	37.503	3.10	Low income	116.25930
77	Haiti	HTI	25.345	10.60	Low income	268.65700
93	Cambodia	KHM	24.462	6.80	Low income	166.34160
99	Liberia	LBR	35.521	3.20	Low income	113.66720
111	Madagascar	MDG	34.686	3.00	Low income	104.05800
115	Mali	MLI	44.138	3.50	Low income	154.48300
120	Mozambique	MOZ	39.705	5.40	Low income	214.40700
123	Malawi	MWI	39.459	5.05	Low income	199.26795
127	Niger	NER	49.661	1.70	Low income	84.42370
132	Nepal	NPL	20.923	13.30	Low income	278.27590
148	Rwanda	RWA	32.689	9.00	Low income	294.20100
154	Sierra Leone	SLE	36.729	1.70	Low income	62.43930
156	Somalia	SOM	43.891	1.50	Low income	65.83650
158	South Sudan	SSD	37.126	14.10	Low income	523.47660
167	Chad	TCD	45.745	2.30	Low income	105.21350
168	Togo	TGO	36.080	4.50	Low income	162.36000
177	Tanzania	TZA	39.518	4.40	Low income	173.87920
178	Uganda	UGA	43.474	16.20	Low income	704.27880
192	Congo, Dem. Rep.	COD	42.394	2.20	Low income	93.26680
194	Zimbabwe	ZWE	35.715	18.50	Low income	660.72750

In [37]:

import matplotlib.pyplot as plt
import seaborn as sns

In [44]:

%matplotlib inline
plt.rcParams['figure.figsize'] =8,4

In [45]:

vis1=sns.distplot(stats['InternetUsers'])


C:\Users\HP\AppData\Local\Temp\ipykernel_9008\1737118983.py:1: UserWarning:

`distplot` is a deprecated function and will be removed in seaborn v0.14.0.

Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

For a guide to updating your code to use the new functions, please see <https://gist.github.com/mwaskom/de44147ed2974457ad6372750bbe5751>

```
vis1=sns.distplot(stats['InternetUsers'])
```

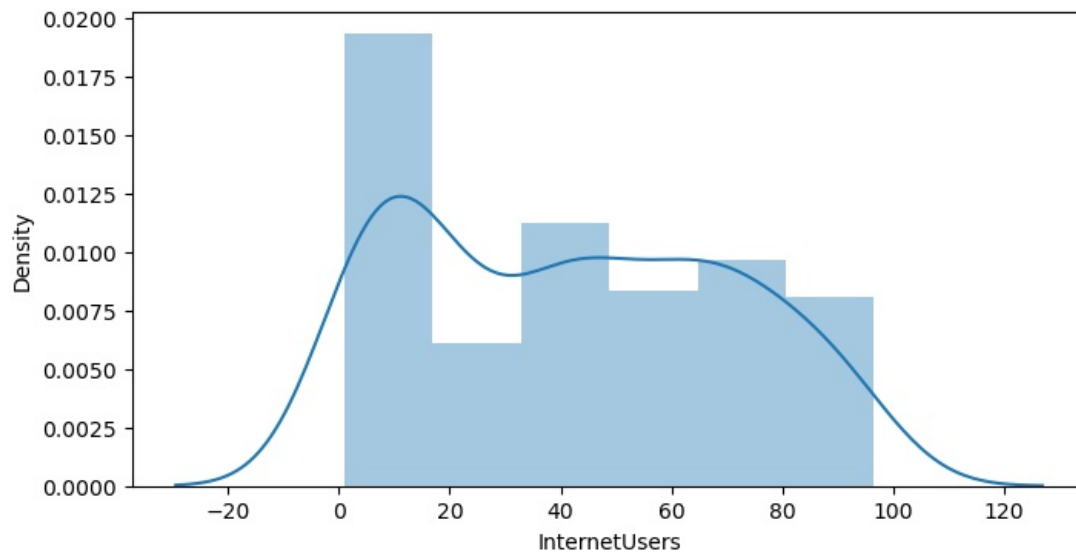

```
In [46]: vis1 = sns.distplot(stats['InternetUsers'], bins=20)
```


C:\Users\HP\AppData\Local\Temp\ipykernel_9008\3643627157.py:1: UserWarning:

`distplot` is a deprecated function and will be removed in seaborn v0.14.0.


Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

For a guide to updating your code to use the new functions, please see <https://gist.github.com/mwaskom/de44147ed2974457ad6372750bbe5751>

```
vis1 = sns.distplot(stats['InternetUsers'], bins=20)
```

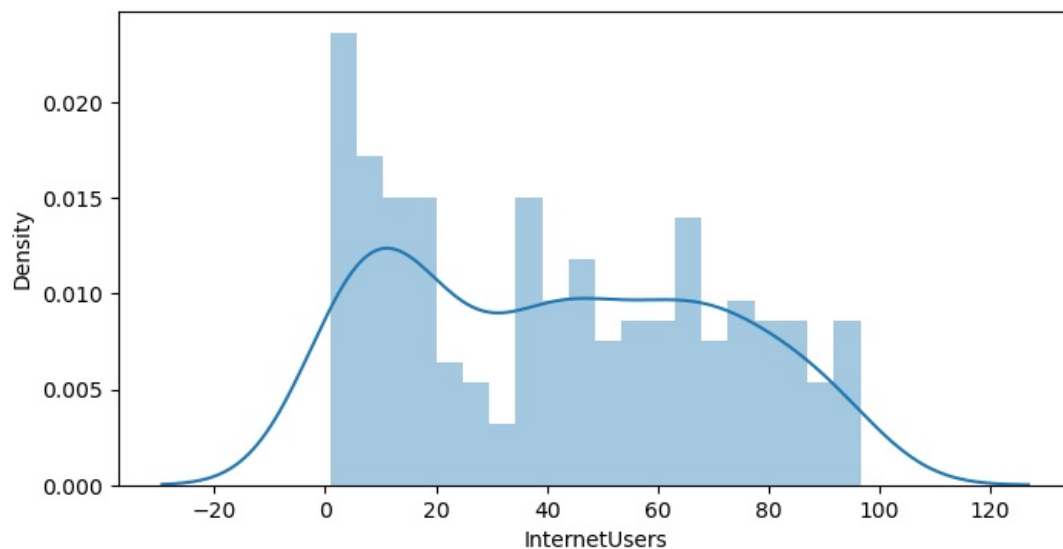


```
In [47]: vis2 = sns.boxplot(data = stats ,x='IncomeGroup',y='BirthRate')
```

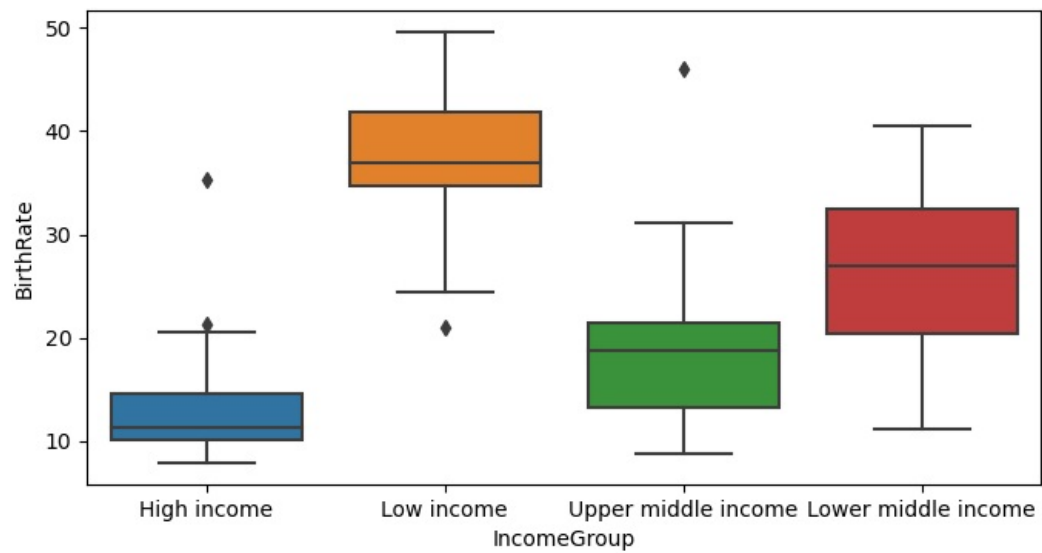


```
In [48]: vis3 = sns.lmplot(data = stats, x = 'InternetUsers', y = 'BirthRate', fit_reg = False)
```

C:\Users\HP\anaconda3\Lib\site-packages\seaborn\axisgrid.py:118: UserWarning: The figure layout has changed to tight
self._figure.tight_layout(*args, **kwargs)

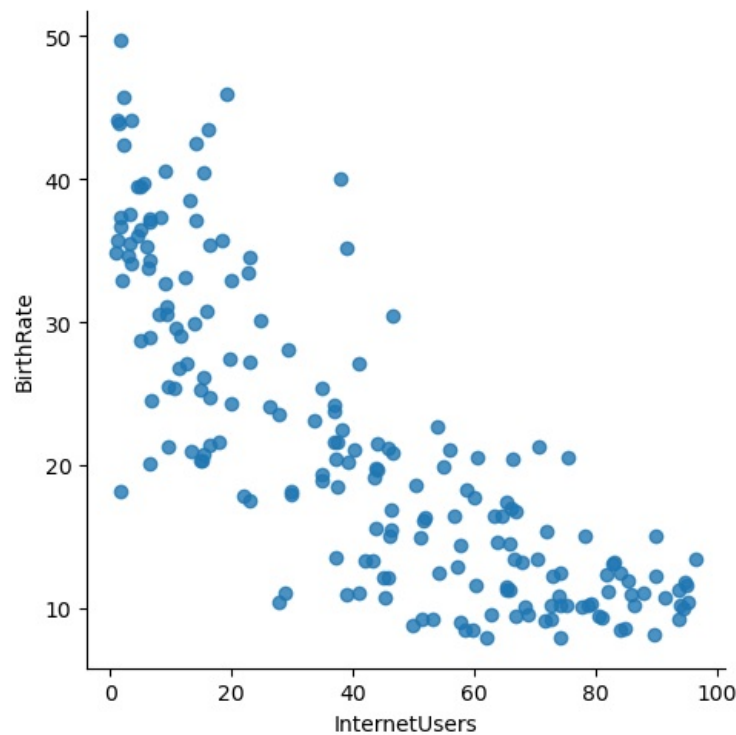


```
In [49]: vis5 = sns.lmplot(data = stats, x = 'InternetUsers', y = 'BirthRate',  
fit_reg = False, hue = 'IncomeGroup')
```

C:\Users\HP\anaconda3\Lib\site-packages\seaborn\axisgrid.py:118: UserWarning: The figure layout has changed to tight
self._figure.tight_layout(*args, **kwargs)

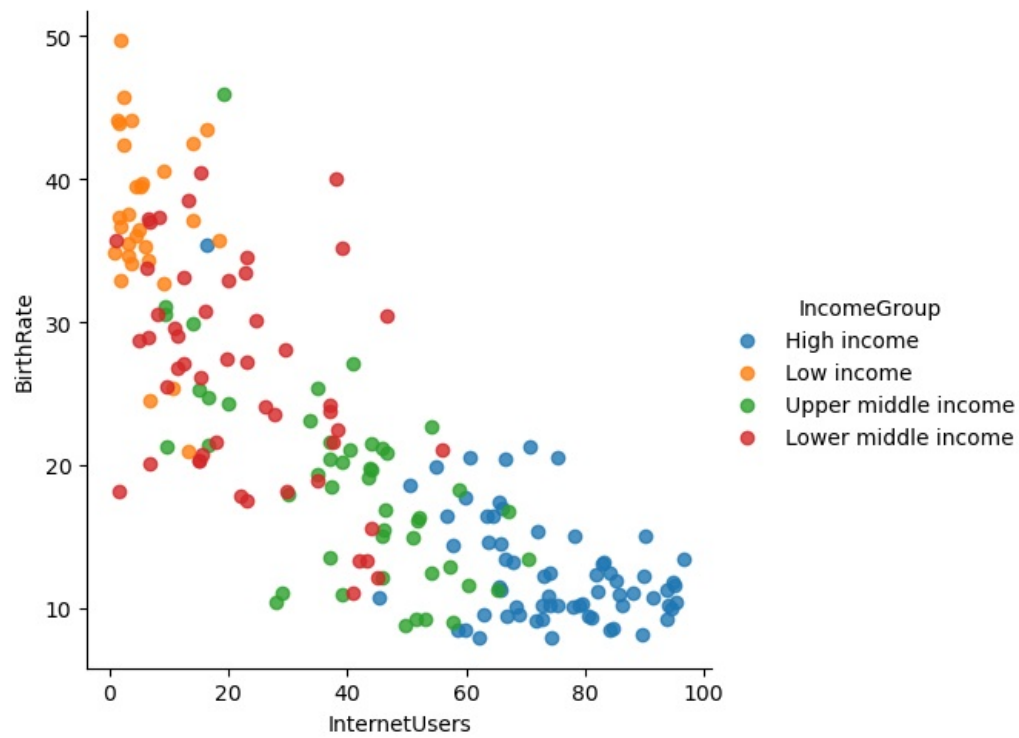

```
In [50]: vis6 = sns.barplot(stats['BirthRate'])
```

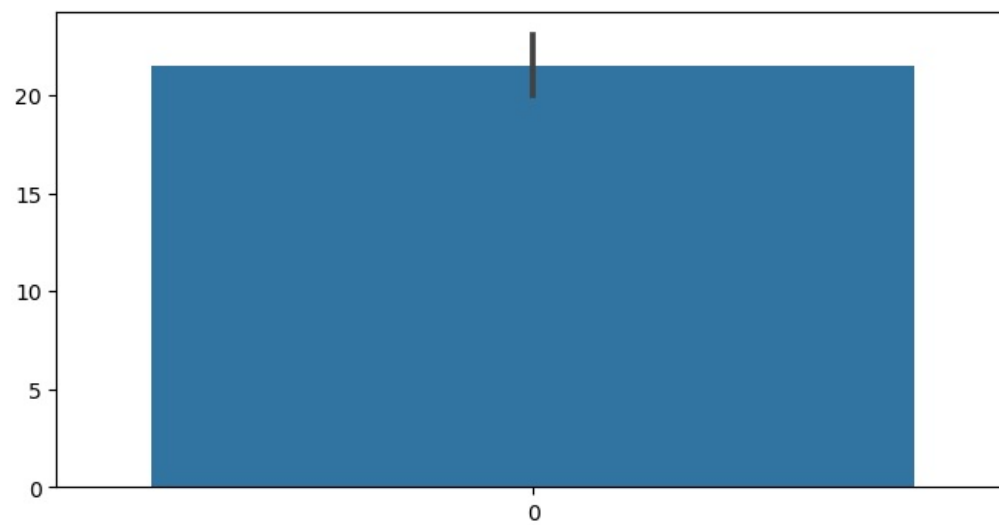

```
In [ ]:
```