

## RESEARCH ARTICLE

### Taylor & Francis L<sup>A</sup>T<sub>E</sub>X template for authors (**Interact** layout + Council of Science Editors name-year reference style)

C.J. Duan<sup>a</sup> and Anuj Gorav<sup>b</sup>

<sup>a</sup>Dulun Consulting Group, Riverside, California, U.S.A.; <sup>b</sup>Troy University, Alabama, U.S.A.

#### ARTICLE HISTORY

Compiled April 27, 2018

#### ABSTRACT

This template is for authors who are preparing a manuscript for a Taylor & Francis journal using the L<sup>A</sup>T<sub>E</sub>X document preparation system and the **interact** class file, which is available via selected journals' home pages on the Taylor & Francis website.

#### KEYWORDS

Sections; lists; figures; tables; mathematics; fonts; references; appendices

## 1. Introduction

In order to assist authors in the process of preparing a manuscript for a journal, the Taylor & Francis 'Interact' layout style has been implemented as a L<sup>A</sup>T<sub>E</sub>X 2<sub>ε</sub> class file based on the **article** document class. A BIB<sub>T</sub>E<sub>X</sub> bibliography style file and a sample bibliography are also provided in order to assist with the formatting of your references.

Commands that differ from or are provided in addition to standard L<sup>A</sup>T<sub>E</sub>X 2<sub>ε</sub> are described in this document, which is *not* a substitute for a L<sup>A</sup>T<sub>E</sub>X 2<sub>ε</sub> tutorial.

The **interactc**sample.tex file can be used as a template for a manuscript by cutting, pasting, inserting and deleting text as appropriate, using the preamble and the L<sup>A</sup>T<sub>E</sub>X environments provided (e.g. `\begin{abstract}`, `\begin{keywords}`).

### 1.1. The *Interact* class file

The **interact** class file preserves the standard L<sup>A</sup>T<sub>E</sub>X 2<sub>ε</sub> interface such that any document that can be produced using **article.cls** can also be produced with minimal alteration using the **interact** class file as described in this document.

If your article is accepted for publication it will be typeset as the journal requires in Minion Pro and/or Myriad Pro. Since most authors will not have these fonts installed, the page make-up is liable to alter slightly with the change of font. Also, the **interact** class file produces only single-column format, which is preferred for peer review and will be converted to two-column format by the typesetter if necessary during preparation of the proofs. Please therefore do not try to match the typeset format exactly, but use the standard L<sup>A</sup>T<sub>E</sub>X fonts instead and ignore details such as slightly long lines of text or figures/tables not appearing in exact synchronization with their citations in the text:

these details will be dealt with by the typesetter. Similarly, it is unnecessary to spend time addressing warnings in the log file – if your .tex file compiles to produce a PDF document that correctly shows how you wish your paper to appear, such warnings will not prevent your source files being imported into the typesetter’s program.

### ***1.2. Submission of manuscripts prepared using L<sup>A</sup>T<sub>E</sub>X***

Manuscripts for possible publication should be submitted to the Editors for review as directed in the journal’s Instructions for Authors, and in accordance with any technical instructions provided in the journal’s ScholarOne Manuscripts or Editorial Manager site. Your L<sup>A</sup>T<sub>E</sub>X source file(s), the class file and any graphics files will be required in addition to the final PDF version when final, revised versions of accepted manuscripts are submitted.

Please ensure that any author-defined macros used in your article are gathered together in the preamble of your .tex file, i.e. before the `\begin{document}` command. Note that if serious problems are encountered in the coding of a document (missing author-defined macros, for example), the typesetter may resort to rekeying it.

## **2. Using the interact class file**

For convenience, simply copy the `interact.cls` file into the same directory as your manuscript files (you do not need to install it in your T<sub>E</sub>X distribution). In order to use the `interact` document class, replace the command `\documentclass{article}` at the beginning of your document with the command `\documentclass{interact}`.

The following document-class options should *not* be used with the `interact` class file:

- `10pt`, `11pt`, `12pt` – unavailable;
- `oneside`, `twoside` – not necessary, `oneside` is the default;
- `leqno`, `titlepage` – should not be used;
- `twocolumn` – should not be used (see Subsection 1.1);
- `onecolumn` – not necessary as it is the default style.

To prepare a manuscript for a journal that is printed in A4 (two column) format, use the `largeformat` document-class option provided by `interact.cls`; otherwise the class file produces pages sized for B5 (single column) format by default. The `geometry` package should not be used to make any further adjustments to the page dimensions.

## **3. Additional features of the interact class file**

### ***3.1. Title, authors’ names and affiliations, abstracts and article types***

The title should be generated at the beginning of your article using the `\maketitle` command. In the final version the author name(s) and affiliation(s) must be followed immediately by `\maketitle` as shown below in order for them to be displayed in your PDF document. To prepare an anonymous version for double-blind peer review, you can put the `\maketitle` between the `\title` and the `\author` in order to hide the author name(s) and affiliation(s) temporarily. Next you should include the abstract if your article has one, enclosed within an `abstract` environment. The `\articletype`

command is also provided as an *optional* element which should *only* be included if your article actually needs it. For example, the titles for this document begin as follows:

```
\articletype{ARTICLE TEMPLATE}
```

```
\title{Taylor \& Francis \LaTeX\ template for authors (\textsf{Interact}
layout + Council of Science Editors name-year reference style)}
```

```
\author{
\name{A.~N. Author\textsuperscript{a}\thanks{CONTACT A.~N. Author.
Email: latex.helpdesk@tandf.co.uk} and John Smith\textsuperscript{b}}
\affil{\textsuperscript{a}Taylor \& Francis, 4 Park Square, Milton
Park, Abingdon, UK; \textsuperscript{b}Institut f\"{u}r Informatik,
Albert-Ludwigs-Universit\"{a}t, Freiburg, Germany} }
```

```
\maketitle
```

```
\begin{abstract}
```

This template is for authors who are preparing a manuscript for a Taylor \& Francis journal using the \LaTeX\ document preparation system and the \texttt{interact} class file, which is available via selected journals' home pages on the Taylor \& Francis website.

```
\end{abstract}
```

An additional abstract in another language (preceded by a translation of the article title) may be included within the `abstract` environment if required.

A graphical abstract may also be included if required. Within the `abstract` environment you can include the code

```
\\resizebox{25pc}{!}{\includegraphics{abstract.eps}}
```

where the graphical abstract is to appear, where `abstract.eps` is the name of the file containing the graphic (note that 25pc is the recommended maximum width, expressed in pica, for the graphical abstract in your manuscript).

### 3.2. Abbreviations

A list of abbreviations may be included if required, enclosed within an `abbreviations` environment, i.e. `\begin{abbreviations}...\end{abbreviations}`, immediately following the `abstract` environment.

### 3.3. Keywords

A list of keywords may be included if required, enclosed within a `keywords` environment, i.e. `\begin{keywords}...\end{keywords}`. Additional keywords in other languages (preceded by a translation of the word 'keywords') may also be included within the `keywords` environment if required.

### 3.4. Subject classification codes

AMS, JEL or PACS classification codes may be included if required. The `interact` class file provides an `amscode` environment, i.e. `\begin{amscode}...\end{amscode}`, a `jelcode` environment, i.e. `\begin{jelcode}...\end{jelcode}`, and a `pacscode` environment, i.e. `\begin{pacscode}...\end{pacscode}` to assist with this.

### 3.5. Additional footnotes to the title or authors' names

The `\thanks` command may be used to create additional footnotes to the title or authors' names if required. Footnote symbols for this purpose should be used in the order \* (coded as `$^{\ast}`), † (`$\dagger`), ‡ (`$\ddagger`), § (`$\S`), ¶ (`$\P`), || (`$\lvert`), †† (`$\dagger\dagger`), ‡‡ (`$\ddagger\ddagger`), §§ (`$\S\S`), ¶¶ (`$\P\P`).

Note that any footnotes to the main text will automatically be assigned the superscript symbols 1, 2, 3, etc. by the class file.<sup>1</sup>

## 4. Some guidelines for using the standard features of L<sup>A</sup>T<sub>E</sub>X

### 4.1. Sections

The `Interact` layout style allows for five levels of section heading, all of which are provided in the `interact` class file using the standard L<sup>A</sup>T<sub>E</sub>X commands `\section`, `\subsection`, `\subsubsection`, `\paragraph` and `\subparagraph`. Numbering will be automatically generated for all these headings by default.

### 4.2. Lists

Numbered lists are produced using the `enumerate` environment, which will number each list item with arabic numerals by default. For example,

- (1) first item
- (2) second item
- (3) third item

was produced by

```
\begin{enumerate}
  \item first item
  \item second item
  \item third item
\end{enumerate}
```


Alternative numbering styles can be achieved by inserting an optional argument in square brackets to each `item`, e.g. `\item[(i)] first item` to create a list numbered with roman numerals at level one.

Bulleted lists are produced using the `itemize` environment. For example,

- First bulleted item
- Second bulleted item
- Third bulleted item

---

<sup>1</sup>If preferred, the `endnotes` package may be used to set the notes at the end of your text, before the bibliography. The symbols will be changed to match the style of the journal if necessary by the typesetter.

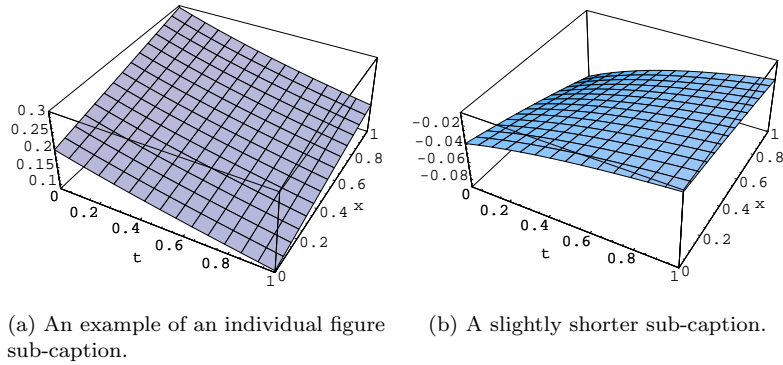

**Figure 1.** Example of a two-part figure with individual sub-captions showing that captions are flush left and justified if greater than one line of text.

was produced by

```
\begin{itemize}
  \item First bulleted item
  \item Second bulleted item
  \item Third bulleted item
\end{itemize}
```

### 4.3. Figures

The `interact` class file will deal with positioning your figures in the same way as standard  $\text{\LaTeX}$ . It should not normally be necessary to use the optional `[htb]` location specifiers of the `figure` environment in your manuscript; you may, however, find the `[p]` placement option or the `endfloat` package useful if a journal insists on the need to separate figures from the text.

Figure captions appear below the figures themselves, therefore the `\caption` command should appear after the body of the figure. For example, Figure 1 with caption and sub-captions is produced using the following commands:

```
\begin{figure}
\centering
\subfloat[An example of an individual figure sub-caption.]{%
\resizebox*{5cm}{!}{\includegraphics{graph1.eps}}}\hspace{5pt}
\subfloat[A slightly shorter sub-caption.]{%
\resizebox*{5cm}{!}{\includegraphics{graph2.eps}}}
\caption{Example of a two-part figure with individual sub-captions
showing that captions are flush left and justified if greater
than one line of text.} \label{sample-figure}
\end{figure}
```

To ensure that figures are correctly numbered automatically, the `\label` command should be included just after the `\caption` command, or in its argument.

The `\subfloat` command requires `subfig.sty`, which is called in the preamble of the `interactcsesample.tex` file (to allow your choice of an alternative package if preferred) and included in the `Interact  $\text{\LaTeX}$`  bundle for convenience. Please supply any additional figure macros used with your article in the preamble of your `.tex` file.

**Table 1.** Example of a table showing that its caption is as wide as the table itself and justified.

Class	Type					
	One	Two	Three	Four	Five	Six
Alpha <sup>a</sup>	A1	A2	A3	A4	A5	A6
Beta	B2	B2	B3	B4	B5	B6
Gamma	C2	C2	C3	C4	C5	C6

<sup>a</sup>This footnote shows how to include footnotes to a table if required.

The source files of any figures will be required when the final, revised version of a manuscript is submitted. Authors should ensure that these are suitable (in terms of lettering size, etc.) for the reductions they envisage.

The `epstopdf` package can be used to incorporate encapsulated PostScript (.eps) illustrations when using PDF $\LaTeX$ , etc. Please provide the original .eps source files rather than the generated PDF images of those illustrations for production purposes.

#### 4.4. Tables

The `interact` class file will deal with positioning your tables in the same way as standard  $\LaTeX$ . It should not normally be necessary to use the optional `[htb]` location specifiers of the `table` environment in your manuscript; you may, however, find the `[p]` placement option or the `endfloat` package useful if a journal insists on the need to separate tables from the text.

The `tabular` environment can be used as shown to create tables with single horizontal rules at the head, foot and elsewhere as appropriate. The captions appear above the tables in the `Interact` style, therefore the `\tbl` command should be used before the body of the table. For example, Table 1 is produced using the following commands:

```
\begin{table}
\tbl{Example of a table showing that its caption is as wide as
the table itself and justified.}
{\begin{tabular}{lcccccc} \toprule
& \multicolumn{2}{l}{Type} \\ \cmidrule{2-7}
Class & One & Two & Three & Four & Five & Six \\ \midrule
Alpha\textsuperscript{a} & A1 & A2 & A3 & A4 & A5 & A6 \\
Beta & B2 & B2 & B3 & B4 & B5 & B6 \\
Gamma & C2 & C2 & C3 & C4 & C5 & C6 \\ \bottomrule
\end{tabular}}
\tabnote{\textsuperscript{a}This footnote shows how to include
footnotes to a table if required.}
\label{sample-table}
\end{table}
```

To ensure that tables are correctly numbered automatically, the `\label` command should be included just before `\end{table}`.

The `\toprule`, `\midrule`, `\bottomrule` and `\cmidrule` commands are those used by `booktabs.sty`, which is called by the `interact` class file and included in the `Interact`  $\LaTeX$  bundle for convenience. Tables produced using the standard commands of the `tabular` environment are also compatible with the `interact` class file.

#### 4.5. Landscape pages

If a figure or table is too wide to fit the page it will need to be rotated, along with its caption, through  $90^\circ$  anticlockwise. Landscape figures and tables can be produced using the `rotating` package, which is called by the `interact` class file. The following commands (for example) can be used to produce such pages.

```
\setcounter{figure}{1}
\begin{sidewaysfigure}
\centerline{\epsfbox{figname.eps}}
\caption{Example landscape figure caption.}
\label{landfig}
\end{sidewaysfigure}

\setcounter{table}{1}
\begin{sidewaystable}
\tbl{Example landscape table caption.}
{\begin{tabular}{@{}l l l l c l l}
.
.
.
\end{tabular}}\label{landtab}
\end{sidewaystable}
```

Before any such float environment, use the `\setcounter` command as above to fix the numbering of the caption (the value of the counter being the number given to the preceding figure or table). Subsequent captions will then be automatically renumbered accordingly. The `\epsfbox` command requires `epsfig.sty`, which is called by the `interact` class file and is also included in the `Interact LATEX` bundle for convenience.

Please note that if the `endfloat` package is used, one or both of the commands

```
\DeclareDelayedFloatFlavor{sidewaysfigure}{figure}
\DeclareDelayedFloatFlavor{sidewaystable}{table}
```

will need to be included in the preamble of your `.tex` file, after the `endfloat` package is loaded, in order to process any landscape figures and/or tables correctly.

#### 4.6. Theorem-like structures

A predefined proof environment is provided by the `amsthm` package (which is called by the `interact` class file), as follows:

**Proof.** More recent algorithms for solving the semidefinite programming relaxation are particularly efficient, because they explore the structure of the MAX-CUT problem. □

This was produced by simply typing:

```
\begin{proof}
More recent algorithms for solving the semidefinite programming
relaxation are particularly efficient, because they explore the
structure of the MAX-CUT problem.
\end{proof}
```

Other theorem-like environments (theorem, definition, remark, etc.) need to be defined as required, e.g. using `\newtheorem{theorem}{Theorem}` in the preamble of your .tex file (see the preamble of `interactcscsample.tex` for more examples). You can define the numbering scheme for these structures however suits your article best. Please note that the format of the text in these environments may be changed if necessary to match the style of individual journals by the typesetter during preparation of the proofs.

## 4.7. Mathematics

### 4.7.1. Displayed mathematics

The `interact` class file will set displayed mathematical formulas centred on the page without equation numbers if you use the `displaymath` environment or the equivalent `\[...\]` construction. For example, the equation

$$\hat{\theta}_{w_i} = \hat{\theta}(s(t, \mathcal{U}_{w_i}))$$

was typeset using the commands

```
\[
\hat{\theta}_{w_i} = \hat{\theta}(s(t, \mathcal{U}_{w_i}))
\]
```

For those of your equations that you wish to be automatically numbered sequentially throughout the text for future reference, use the `equation` environment, e.g.

$$\hat{\theta}_{w_i} = \hat{\theta}(s(t, \mathcal{U}_{w_i})) \tag{1}$$

was typeset using the commands

```
\begin{equation}
\hat{\theta}_{w_i} = \hat{\theta}(s(t, \mathcal{U}_{w_i}))
\end{equation}
```

Part numbers for sets of equations may be generated using the `subequations` environment, e.g.

$$\varepsilon \rho w_{tt}(s, t) = N[w_s(s, t), w_{st}(s, t)]_s, \tag{2a}$$

$$w_{tt}(1, t) + N[w_s(1, t), w_{st}(1, t)] = 0, \tag{2b}$$

which was typeset using the commands

```
\begin{subequations} \label{subeqnexample}
\begin{equation}
\varepsilon \rho w_{tt}(s, t) = N[w_s(s, t), w_{st}(s, t)]_s,
\label{subeqnparta}
\end{equation}
\begin{equation}
w_{tt}(1, t) + N[w_s(1, t), w_{st}(1, t)] = 0, \quad \label{subeqnpartb}
\end{equation}
\end{subequations}
```



This is made possible by the `amsmath` package, which is called by the class file. If you put a `\label` just after the `\begin{subequations}` command, references can be made to the collection of equations, i.e. ‘(2)’ in the example above. Or, as the example also shows, you can label and refer to each equation individually – i.e. ‘(2a)’ and ‘(2b)’.

Displayed mathematics should be given end-of-line punctuation appropriate to the running text sentence of which it forms a part, if required.

#### 4.7.2. Math fonts

**4.7.2.1. Superscripts and subscripts.** Superscripts and subscripts will automatically come out in the correct size in a math environment (i.e. enclosed within `\(...\)` or `$. . . $` commands in running text, or within `\[...\]` or the `equation` environment for displayed equations). Sub/superscripts that are physical variables should be italic, whereas those that are labels should be roman (e.g.  $C_p$ ,  $T_{\text{eff}}$ ). If the subscripts or superscripts need to be other than italic, they must be coded individually.

#### 4.7.2.2. Upright Greek characters and the upright partial derivative sign.

Upright lowercase Greek characters can be obtained by inserting the letter ‘u’ in the control code for the character, e.g. `\umu` and `\upi` produce  $\mu$  (used, for example, in the symbol for the unit microns –  $\mu\text{m}$ ) and  $\pi$  (the ratio of the circumference of a circle to its diameter). Similarly, the control code for the upright partial derivative  $\partial$  is `\upartial`. Bold lowercase as well as uppercase Greek characters can be obtained by `\bm \gamma`, for example, which gives  $\boldsymbol{\gamma}$ , and `\bm \Gamma`, which gives  $\boldsymbol{\Gamma}$ .

### Acknowledgement(s)

An unnumbered section, e.g. `\section*{Acknowledgements}`, may be used for thanks, etc. if required and included *in the non-anonymous version* before any Notes or References.

### Disclosure statement

An unnumbered section, e.g. `\section*{Disclosure statement}`, may be used to declare any potential conflict of interest and included *in the non-anonymous version* before any Notes or References, after any Acknowledgements and before any Funding information.

### Funding

An unnumbered section, e.g. `\section*{Funding}`, may be used for grant details, etc. if required and included *in the non-anonymous version* before any Notes or References.

### Notes on contributor(s)

An unnumbered section, e.g. `\section*{Notes on contributors}`, may be included *in the non-anonymous version* if required. A photograph may be added if requested.

## Nomenclature/Notation

An unnumbered section, e.g. `\section*{Nomenclature}` (or `\section*{Notation}`), may be included if required, before any Notes or References.

## Notes

An unnumbered ‘Notes’ section may be included before the References (if using the `endnotes` package, use the command `\theendnotes` where the notes are to appear, instead of creating a `\section*`).

## 5. References

### 5.1. *References cited in the text*

### 5.2. *The list of references*

## References

- Ambudkar SV, Gottesman MM, editors. 1998. ABC transporters: Biomedical, cellular, and molecular aspects. (Methods in Enzymology; vol. 292). San Diego (CA): Academic Press.
- Andrews JE. 1960a. Cold hardening and cold hardiness of young winter rye seedlings as affected by stage of development and temperature. *Can J Bot.* 38(3):353–363.
- Andrews JE. 1960b. Cold hardiness of sprouting wheat as affected by duration of hardening and hardening temperature. *Can J Plant Sci.* 40(1):93–102.
- Antani S, Long LR, Thoma GR, Lee DJ. 2003. Anatomical shape representation in spine x-ray images. Paper presented at: VIIP 2003. Proceedings of the 3rd IASTED International Conference on Visualization, Imaging and Image Processing; Sep 8–10; Benalmadena, Spain.
- Antonoli GE, editor. 1997. Pacemaker leads 1997. Proceedings of the 3rd International Symposium on Pacemaker Leads; Sep 11–13; Ferrara, Italy. Bologna: Monducci Editore.
- Berrino F, Gatta G, Crosignani P. 2004. [Case-control evaluation of screening efficacy]. *Epidemiol Prev.* 28:354–359. Italian.
- Dawson J. 1986a. Animal experiments: Conference report. *BMJ.* 292(6536):1654–1655.
- Dawson M. 1986b. Some examples of necessary continuation and possible discontinuation of animal experiments. *Acta Physiol Scand Suppl.* 554:194–197.
- Fauci AS. 2002. Smallpox vaccination policy – the need for dialogue. *N Engl J Med.* 346(17):1319–1320.
- Feller BA. 1981. Health characteristics of persons with chronic activity limitation, United States, 1979. Hyattsville (MD): National Center for Health Statistics (US). Report No: VHS-SER-10/137. Available from: NTIS, Springfield, VA; PB88-228622.
- Institute of Medicine (US). 1975. Legalized abortion and the public health: Report of a study by a committee of the Institute of Medicine. Washington (DC): National Academy of Sciences.
- Lee DJ, Bates D, Dromey C, Xu X, Antani S. 2003. An imaging system correlating lip shapes with tongue contact patterns for speech pathology research. In: Krol M, Mitra S, Lee DJ, editors. CMBS 2003. Proceedings of the 16th IEEE Symposium on Computer-Based Medical Systems; Jun 26–27; New York. Los Alamitos (CA): IEEE Computer Society. p. 307–313.
- Ochi K, Sugiura N, Komatsuzaki Y, Nishino H, Ohashi T. 2003. Patency of inferior meatal antrostomy. *Auris Nasus Larynx.* 30 Suppl:S57–S60.
- Oviedo S. 1995. Adolescent pregnancy: Voices heard in the everyday lives of pregnant teenagers [master’s thesis]. Denton (TX): University of North Texas.

- Piaget J, Inhelder B. 1951. La genèse de l'idée de hasard chez l'enfant [The origin of the idea of chance in the child]. Paris: Presses Universitaires de France.
- Ritzmann RE. 1974. The snapping mechanism of *Alpheid* shrimp [dissertation]. Charlottesville (VA): University of Virginia.
- Savage E, Ramsay M, White J, Beard S, Lawson H, Hunjan R, Brown D. 2005. Mumps outbreaks across England and Wales in 2004: Observational study. *BMJ*. 330(7500):1119–1120. [accessed 2005 May 31]. Available from: <http://bmj.bmjournals.com/cgi/reprint/330/7500/1119>.
- Schott J, Priest J. 2002. Leading antenatal classes: A practical guide. 2nd ed. Boston (MA): Books for Midwives.
- Shakelford RT. 1978. Surgery of the alimentary tract. Philadelphia (PA): W.B. Saunders. chap. 2, Esophagoscopy; p. 29–40.
- Smith CE. 1970. Studies on arbovirus epidemiology associated with established and developing rice culture. Introduction. *Trans R Soc Trop Med Hyg*. 64(4):481–482.
- Smith CE. 1975. The significance of mosquito longevity and blood-feeding behaviour in the dynamics of arbovirus infections. *Med Biol*. 53(5):288–294.
- Smith KL. 1991. New dangers in our field [editorial]. *Am J Nucl Eng*. 13(1):15–16.
- Stearns AA. 1864. Armory Square Hospital nursing diary. 70 leaves. Located at: History of Medicine Division, National Library of Medicine, Bethesda, MD; MS B 372.
- Weinstein L, Swartz MN. 1974. Pathologic properties of invading organisms. In: Sodeman WA, editor. *Pathologic physiology: Mechanisms of disease*. 5th ed. Philadelphia (PA): Saunders; p. 135–140.
- Weiss R. 2003 Apr 11. Study shows problems in cloning people: Researchers find replicating primates will be harder than other mammals. *Washington Post* (Home Ed). Sect. A:12 (col. 1).

## 6. Appendices

Any appendices should be placed after the list of references, beginning with the command `\appendix` followed by the command `\section` for each appendix title, e.g.

```
\appendix
\section{This is the title of the first appendix}
\section{This is the title of the second appendix}
```

produces:

**Appendix A. This is the title of the first appendix**

**Appendix B. This is the title of the second appendix**

Subsections, equations, figures, tables, etc. within appendices will then be automatically numbered as appropriate. Some theorem-like environments may need to have their counters reset manually (e.g. if they are not numbered within sections in the main text). You can achieve this by using `\numberwithin{remark}{section}` (for example) just after the `\appendix` command.

Note that if the `endfloat` package is used on a document containing any appendices, the `\processdelayedfloats` command must be included immediately before the `\appendix` command in order to ensure that the floats belonging to the main body of the text are numbered as such.

## Appendix A. Troubleshooting

Authors may occasionally encounter problems with the preparation of a manuscript using L<sup>A</sup>T<sub>E</sub>X. The appropriate action to take will depend on the nature of the problem:

- (i) If the problem is with L<sup>A</sup>T<sub>E</sub>X itself, rather than with the actual macros, please consult an appropriate L<sup>A</sup>T<sub>E</sub>X 2<sub>ε</sub> manual for initial advice. If the solution cannot be found, or if you suspect that the problem does lie with the macros, then please contact Taylor & Francis for assistance ([latex.helpdesk@tandf.co.uk](mailto:latex.helpdesk@tandf.co.uk)), clearly stating the title of the journal to which you are submitting.
- (ii) Problems with page make-up (e.g. occasional overlong lines of text; figures or tables appearing out of order): please do not try to fix these using ‘hard’ page make-up commands – the typesetter will deal with such problems. (You may, if you wish, draw attention to particular problems when submitting the final version of your manuscript.)
- (iii) If a required font is not available on your system, allow T<sub>E</sub>X to substitute the font and specify which font is required in a covering letter accompanying your files.

## Appendix B. Obtaining the template and class file

### *B.1. Via the Taylor & Francis website*

This article template and the `interact` class file may be obtained via the ‘Instructions for Authors’ pages of selected Taylor & Francis journals.

Please note that the class file calls up the open-source L<sup>A</sup>T<sub>E</sub>X packages `booktabs.sty`, `epsfig.sty` and `rotating.sty`, which will, for convenience, unpack with the downloaded template and class file. The template calls for `natbib.sty` and `subfig.sty`, which are also supplied for convenience.

### *B.2. Via e-mail*

This article template, the `interact` class file and the associated open-source L<sup>A</sup>T<sub>E</sub>X packages are also available via e-mail. Requests should be addressed to [latex.helpdesk@tandf.co.uk](mailto:latex.helpdesk@tandf.co.uk), clearly stating for which journal you require the template and class file.