



Fully Automated Integration Guide AIS “e-Factura”

Chişinău 2025

CONTENTS

1	Introduction	3
2	Operational processes and workflows	3
3	Creating the API User.....	9
4	Setting up the API of the AIS “e-Factura”	10
5	Services Operations, request_respons structures.....	11
5.1	“CheckInvoicesStatus” method.....	12
5.1.1	Example of the code for the dialing method	13
5.2	“GetAcceptedInvoices” method.....	14
5.2.1	Call method code example	15
5.3	“GetInvoicesBySerialNumber” method	15
5.3.1	Call method code example	17
5.4	“GetInvoicesContentForPrint” method	17
5.4.1	Call method code example	19
5.5	“GetInvoicesForSigning” method	19
5.5.1	Example of the code for the calling method	21
5.6	“GetInvoicesQRcodes” method	21
5.6.1	Call method code example	23
5.7	“GetLogs” method.....	23
5.7.1	Call method code example	25
5.8	“GetRejectedInvoices” method	25
5.8.1	Call method code example	26
5.9	“GetSerialNumbers” method.....	26
5.9.1	Call method code example	27
5.10	“GetTaxpayersInfo” method	28
5.10.1	Call method code example	29
5.11	“PostAcceptedInvoices” method.....	30
5.11.1	Call method code example	31
5.12	“PostCanceledInvoices” method	31
5.12.1	Call method code example	32
5.13	“PostInvoices” method.....	33
5.13.1	Call method code example	34
5.14	“PostInvoicesWithAttachment” method	35
5.14.1	Call method code example	36
5.15	“PostRejectedInvoices” method.....	37
5.15.1	Call method code example	39
5.16	“SearchInvoices” method.....	39
5.16.1	Call method code example	41
6	Electronic Signature Application Model	42

1 Introduction

This document is elaborated to describe the process of integration by API with the Automated Information System “e-Factura”. The guide details the technical interfaces offered by the AIS “e-Factura” designated for accounting information systems (ERP) that will interact with the platform.

The document includes the necessary specifications for a full understanding of the architecture and functionalities of the AIS “e-Factura” from an integration perspective, covering data structures, call methods, authentication/authorization mechanisms and procedures for validating data transmitted and received via API.

The API provides an extensive set of methods, grouped by functionalities, such as: checking the status of invoices, obtaining accepted or rejected invoices, sending invoices (with or without attachments), obtaining information about taxpayers and bank accounts, generating QR codes, as well as managing logs.

The guide is mainly addressed to teams developing and implementing accounting solutions (e.g. platforms such as 1C), providing the necessary information for the design, development and configuration of API connections with the AIS “e-Factura” used by economic operators – Suppliers, Buyers and Carriers – who are also users of the platform.

2 Operational processes and workflows

The authentication and authorization module of the e-Factura API ensures identification and validation of the company’s accounting system prior to the initiation of the data exchange with the AIS “e-Factura”.

The process uses a proxy client that transmits the username and password through a secure SSL connection (https), and the digital certificate is verified by the certification authority.

Figure 1 shows the sequence of steps required to connect the accounting application to the e-Factura API, including the submission of authentication data, the validation of the digital certificate and the authentication confirmation response (successful or failed).

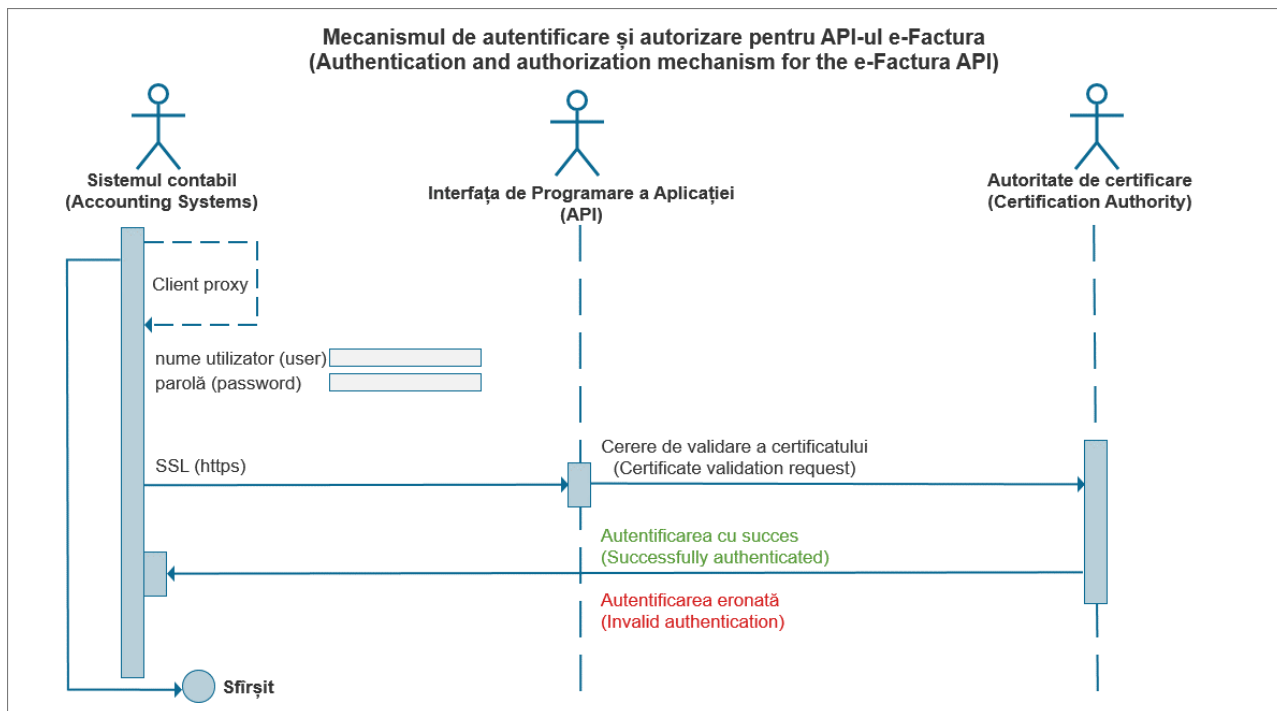


Figure 1 Authentication and authorization mechanism for the e-Factura API

The process of authentication and authorization of applications using the e-Factura API is carried out as follows:

1. Initiation of the secure connection

The user's accounting system (Supplier or Buyer) establishes the connection with the e-Factura API through a secure **SSL channel (HTTPS)**;

2. Transmission of credentials

The customer (application proxy) submits the authentication details – username and password – to the e-Factura API;

3. Validation of the digital certificate

The API shall submit to the **Certifying Authority** a request for validation of the digital certificate used for authentication.

4. Authentication result

- If the certificate is valid, the authentication is considered successful and the application receives access to the API;
- If the certificate is invalid or the credentials are incorrect, the process is rejected and access is not granted.

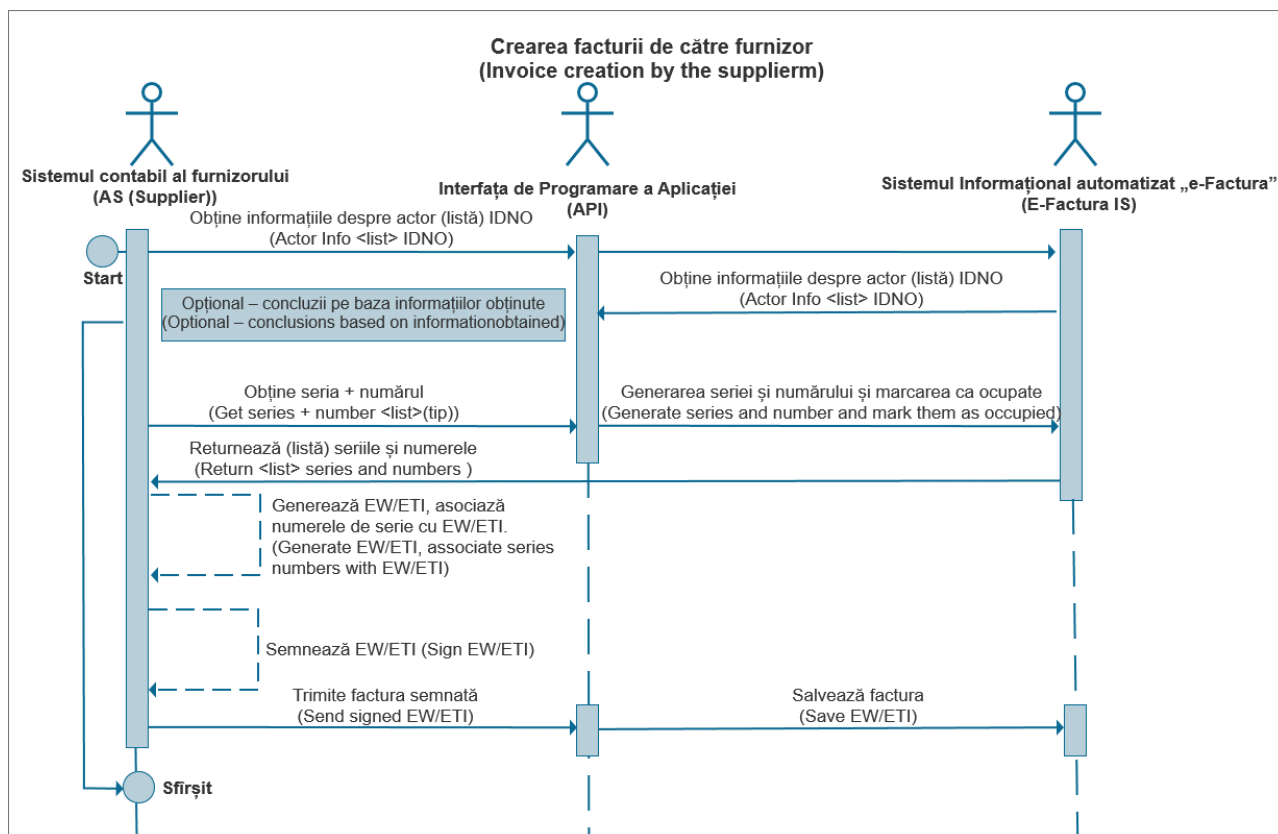


Figure 2 Creating and signing the tax invoice by the Supplier

The process of creating the electronic tax invoice by the Supplier within the accounting system and sending it to AIS “e-Factura” involves the following steps:

1. Obtaining information about participants

The Supplier’s accounting system queries the AIS “e-Factura” using the **GetTaxpayersInfo** method in order to collect data about the Buyer and, where applicable, the Carrier. The information returned includes name, address, VAT number, taxpayer type and confirmation of use of the platform;

2. Requesting series and numbers

The accounting system requests from AIS “e-Factura” the series and numbers available for electronic tax invoices using the **GetSeriaAndNumbers** method. The “e-Factura” system generates and marks these series/numbers as used and returns them to the Supplier’s application;

3. Creation of the electronic tax invoice

Based on the allocated series and numbers, the Supplier’s accounting system generates the electronic tax invoice and prepares it for signature;

4. Digital Signature

The invoice is electronically signed by the Supplier, using a qualified digital certificate, ensuring the authenticity and integrity of the document;

5. Transmission to AIS “e-Factura”

The signed tax invoice is sent via the **PostInvoices** method to the AIS “e-Factura”, where it is officially validated and saved in the system.

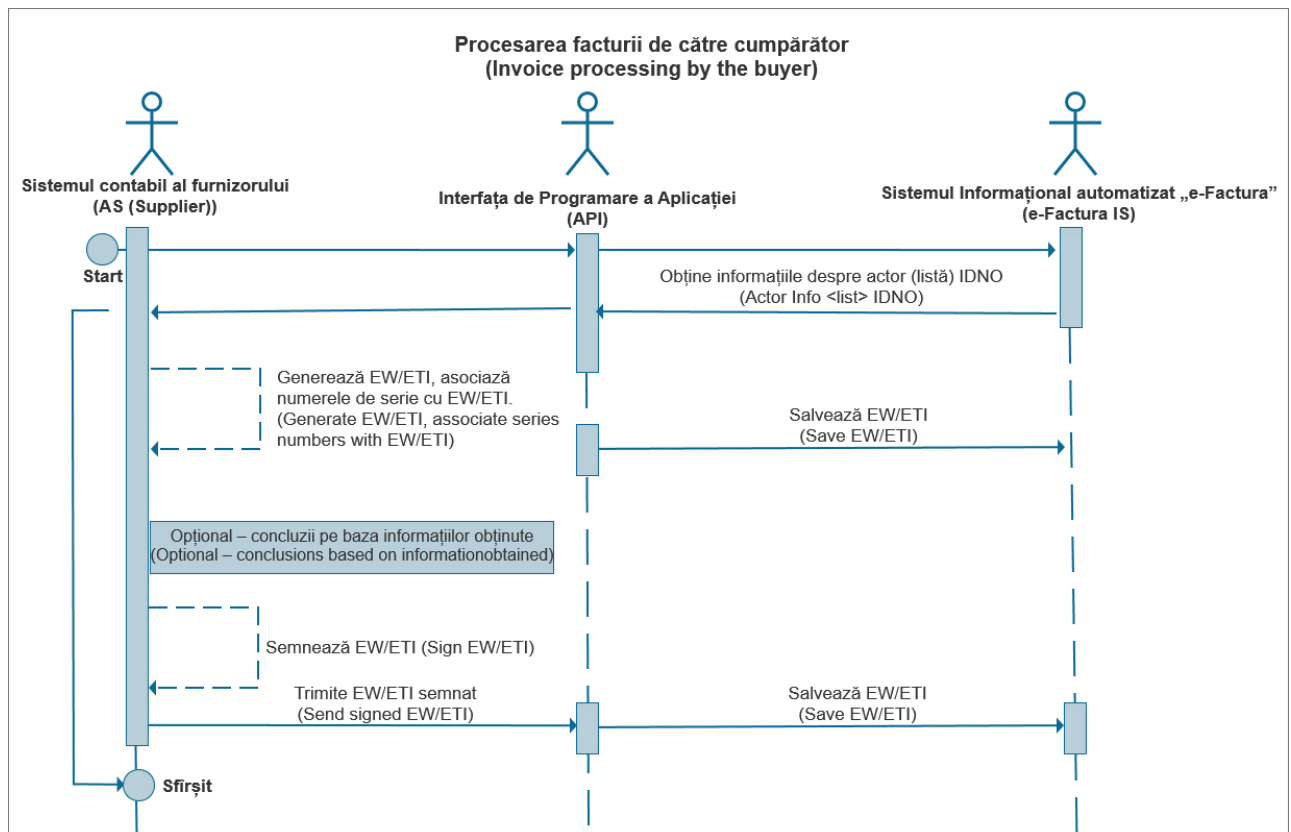


Figure 3 Processing of the invoice by the Buyer

The processing of the electronic tax invoice by the Buyer in its accounting system and its registration in the AIS “e-Factura” involves the following steps:

1. Obtaining information about participants

The Buyer’s accounting system queries AIS “e-Factura” in order to obtain the necessary data about the Supplier and other actors involved, using the **GetTaxpayersInfo** method;

2. Receipt of the electronic invoice

The electronic tax invoice previously generated and transmitted by the Supplier is available in the AIS “e-Factura” and can be accessed by the Buyer through the API interface;

3. Internal analysis and processing (optional)

Based on the information obtained, the Buyer's accounting system may perform internal checks and may decide to accept or reject the invoice;

4. Signature of the invoice by the Buyer

If the internal process provides for this step, the Buyer applies the electronic signature on the invoice, providing confirmation of its receipt and acceptance;

5. Transmission of the signed invoice to the AIS “e-Factura”

The invoice signed by the Buyer is retransmitted via API and saved in the AIS “e-Factura”, where it is kept together with the updated status.

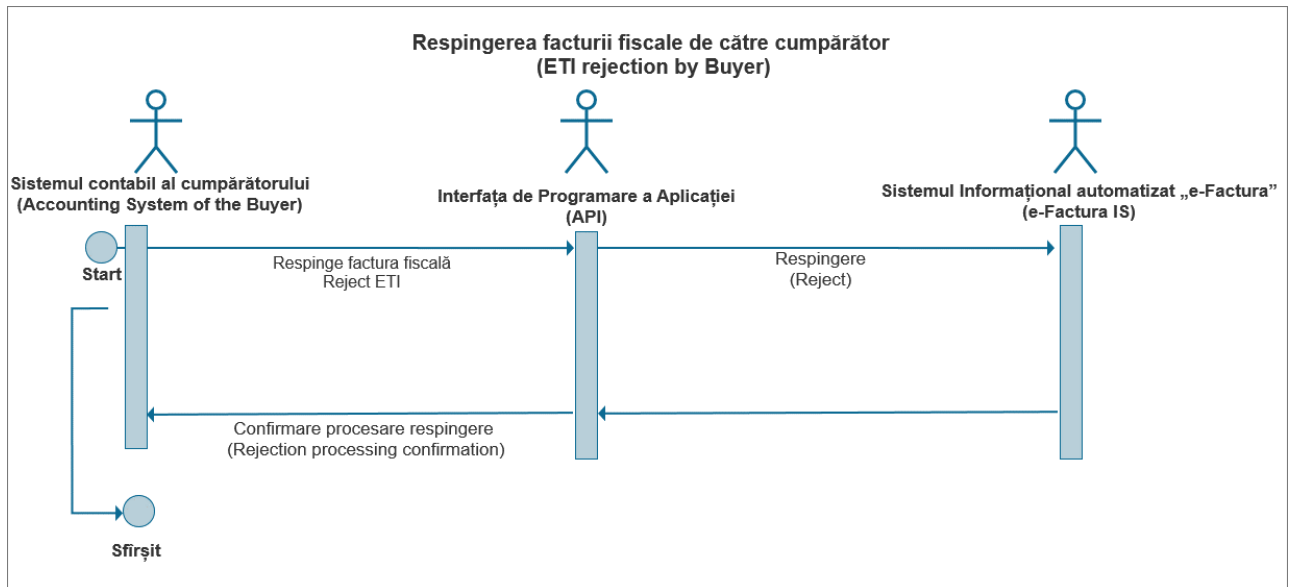


Figure 4 Rejection of the tax invoice by the Buyer

The process of rejecting an electronic tax invoice by the Buyer involves the following steps:

1. Initiation of rejection

The Buyer's accounting system decides to reject an electronic tax invoice and sends this action to AIS "e-Factura" via the API (**PostRejectedInvoices** method);

2. Registration of rejection in the AIS "e-Factura"

The "e-Factura" information system processes the request and marks the invoice as rejected;

3. Confirmation of processing

After registration of the rejection, the AIS "e-Factura" returns a confirmation to the Buyer's accounting system, ensuring the traceability and validation of the transaction.

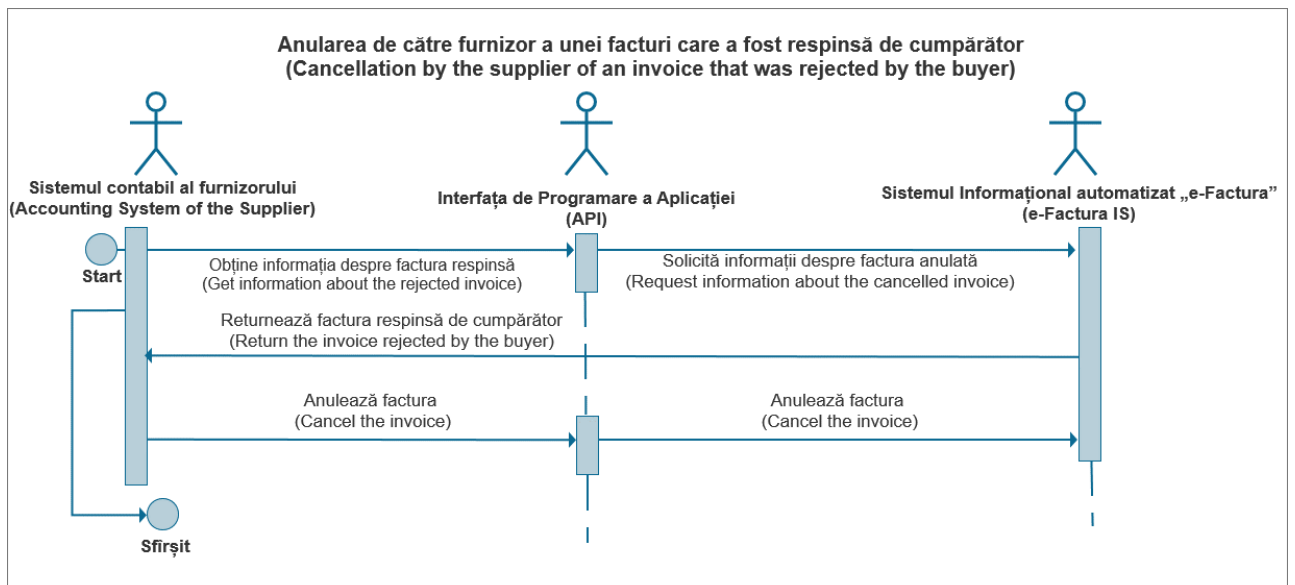


Figure 5 Cancellation by the Supplier of a tax invoice rejected by the Buyer

The process of cancelling an electronic tax invoice rejected by the Buyer involves the following steps:

1. Obtaining information about the rejected invoice

The Supplier's accounting system queries details of the invoice rejected by the Buyer through the API using the **GetRejectedInvoices** method;

2. Return of information

The AIS "e-Factura" shall provide the accounting system with the data related to the rejected invoice, including the identifiers necessary to process the cancellation;

3. Initiation of cancellation

The Supplier's accounting system sends to AIS "e-Factura" the request for cancellation of the invoice using the **PostCanceledInvoices** method;

4. Cancellation confirmation in the AIS "e-Factura"

The "e-Factura" information system processes the request, marks the invoice as cancelled and confirms the transaction to the Supplier's accounting system.

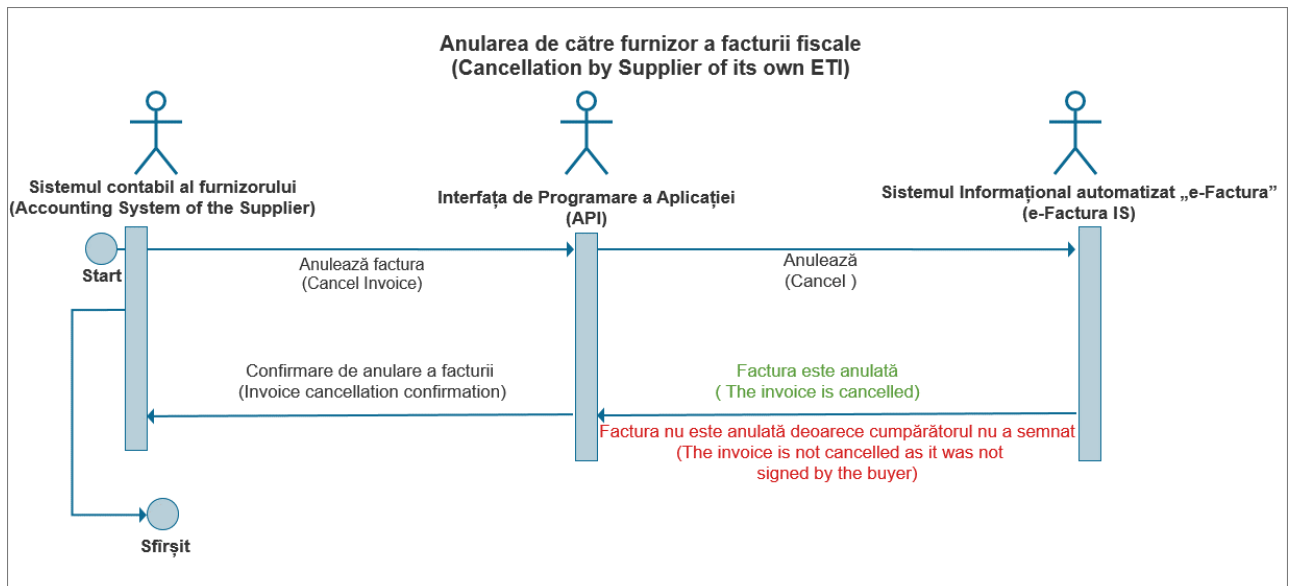


Figure 6 Tax invoice cancellation process by Supplier

The cancellation process of an electronic tax invoice created by the Supplier is carried out as follows:

1. Initiation of cancellation

The Supplier's accounting system sends an invoice cancellation request to AIS "e-Factura" using the **PostCanceledInvoices** method;

2. Processing of the request in the AIS "e-Factura"

The "e-Factura" system checks the status of the invoice and decides whether it can be cancelled:

- If the invoice has not been signed by the Buyer, it may be cancelled;
- If the invoice has already been signed by the Buyer, cancellation is not possible.

3. Confirmation of operation

The AIS "e-Factura" returns to the Supplier's accounting system the result of the process: confirmation of the cancellation of the invoice or the reason why the cancellation was not accepted.

3 Creating the API User

The first step in using the AIS “e-Factura” API is to create a dedicated user for the application. This functionality is only available to users with a **Manager (Director)** role within the system. The API user has a special role, which gives him access to all the functionalities provided by the platform. The steps for creating a new API user are as follows:

1. Go to the “**Settings**” section;
2. Select the “**Users of the company**” sub-menu in the profile;
3. Select the “**CREATE AN API USER**” button (*Register API user*);

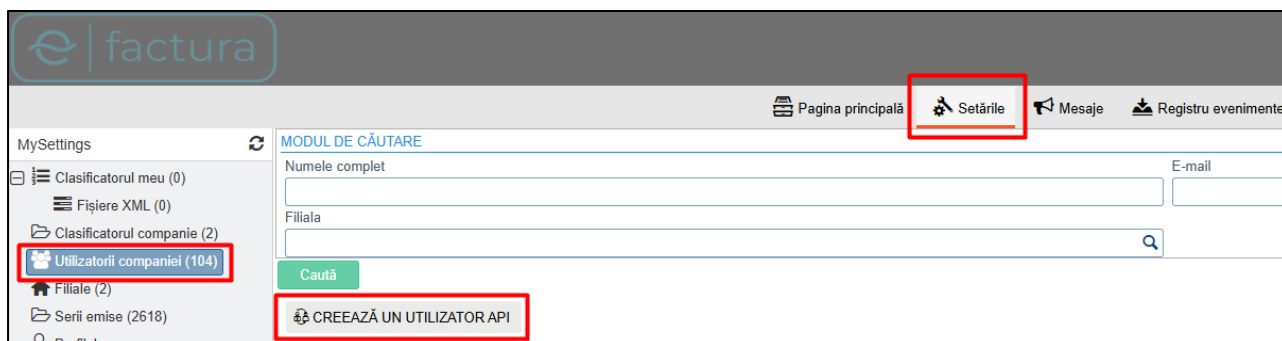


Figure 7 Creating the API user

Figure 8 Filling in the fields for API user registration

4. Select the “**Register**” button to save the entered information and create the user.

4 Setting up the API of the AIS “e-Factura”

```
<bindings>
  <basicHttpBinding>
    <binding name="BasicHttpBinding_IService">
      <security mode="TransportWithMessageCredential" />
    </binding>
  </basicHttpBinding>
</bindings>
<client>
  <endpoint address="https://api-test.fisc.md/Service.svc"
    binding="basicHttpBinding"
    bindingConfiguration="BasicHttpBinding_IService"
    contract="E_FacturaService.IService"
    name="BasicHttpBinding_IService" />
</client>
```

Figure 9 web.config configuration

This section defines the configuration required to connect the application to the e-Factura API service. BasicHttpBinding is used with TransportWithMessageCredential security, which ensures data transmission over HTTPS connections and authentication based on a username and password. Within the <client> node, the API endpoint (service address), the binding type, the associated configuration and the contract through which the application will interact with the service are specified.

```
private EFacturaApiRef.ServiceClient _client;

_client = new EFacturaApiRef.ServiceClient();

_client.ClientCredentials.UserName.UserName = "supplier";
_client.ClientCredentials.UserName.Password = "supplier";
```

Figure 10 Customer initiation and authentication code

This code snippet exemplifies how the application initializes the ServiceClient object to communicate with the e-Factura API. After creating the client, the authentication data (username and password) is set through the ClientCredentials property. These credentials are transmitted at each call, allowing the identification and authorization of the application within the e-Factura system.

5 Services Operations, request_respons structures

General list of methods:

1. **CheckInvoicesStatus;**
(method that checks the status of invoices already submitted in the e-Factura system and returns information about their processing (accepted, rejected, pending))
2. **GetAcceptedInvoices;**
(method for obtaining the list of invoices that have been accepted by the e-Factura system)
3. **GetInvoicesBySerialNumber;**
(method for searching and obtaining electronic invoices based on the series assigned to the invoice)
4. **GetInvoicesContentForPrint;**
(method that generates the content of the e-Factura in a format ready for printing or offline viewing)
5. **GetInvoicesForSigning;**
(method that returns electronic invoices prepared for digital signature in the e-Factura system)
6. **GetInvoicesQRcodes;**
(method that provides the generated QR codes for electronic invoices, useful for their quick identification and verification)
7. **GetLogs;**
(method that gives access to the logs of events and actions carried out under the e-Factura system, useful for monitoring and auditing)
8. **GetRejectedInvoices;**
(method that returns the list of rejected electronic invoices by the e-Factura system, together with information about the reasons for the rejection)
9. **GetSerialAndNumbers;**
(method providing the series and numbers of invoices available or already used in the e-Factura system)
10. **GetTaxpayersInfo;**
(method that provides identification information and general data about taxpayers registered in the e-Factura system)
11. **PostAcceptedInvoices;**
(method that allows the transmission in the system of the already accepted electronic invoices, in order to be officially registered and archived in the e-Factura)

12. PostCanceledInvoices;

(method that allows the transmission of cancelled electronic invoices to be properly recorded and marked in the e-Factura system)

13. PostInvoices;

(method that allows the transmission of new electronic invoices to the e-Factura system for validation and processing)

14. PostInvoicesWithAttachment;

(method that enables electronic invoices accompanied by attached PDF documents (e.g. contracts, notices) to be sent to the e-Factura system for validation and processing)

15. PostRejectedInvoices;

(method that allows the transmission of rejected electronic invoices to be properly recorded and managed in the e-Factura system)

16. SearchInvoices.

(method that allows searching electronic invoices in the e-Factura system based on general criteria (e.g. number, series, date, status))

5.1 “CheckInvoicesStatus” method

The “CheckInvoicesStatus” method makes it possible to obtain the status of one or more tax invoices issued by the Supplier. The request is made through an InvoicesRequest object and the answer is returned in the InvoicesResponse format.

Table 1 Service operations

Signature	CheckInvoicesStatus (InvoicesRequest request): StatusResponse.	
Description	Returns the status of the tax invoice issued by the Supplier.	
Returns	A StatusResponse structure containing the results list (Results), the processing time stamp (TimeStamp) and the request identifier (RequestId).	
Input parameters		
Name	Type	Description
Request	InvoicesStatusRequest	The structure containing the parameters necessary to obtain the status of a tax invoice issued by the Supplier.
Errors		
Code	Reason	
AuthenticationFailedException	The authentication of the service consumer has failed.	
AuthorizationFailedException	The authorization of the service consumer has failed.	
InternalErrorException	An internal error occurred while processing the request.	

Table 2 Structure of request_respons

Member	Type	Mandatory/ Optional	Description
InvoicesStatusRequest (Request for the status of tax invoices)			
RequestId	string	Mandatory	Unique external identifier of the request.
Seria	string	Mandatory	Tax invoice series.
Number	string	Mandatory	Tax invoice number
InvoicesStatusResponse (Response to the request for the status of tax invoices)			
Results	Array of Invoice	Mandatory	List of returned tax invoices.
TimeStamp	DateTime	Mandatory	Date and time of processing of the request.
Status	Int	Mandatory	Status of the processing of the request: 1 – accepted for execution; 2 – successfully executed; 3 – error in execution.
RequestId	String	Mandatory	External identifier of the associated request.
Number	String	Mandatory	Tax invoice number.
Seria	String	Mandatory	Tax invoice series.
InvoiceStatus	Int	Mandatory	Current status of the tax invoice: 0 – Draft; 1 – Signed by the Supplier; 2 – Refused by the Buyer; 3 – Accepted by the Buyer; 5 – Cancelled by the Supplier; 6 – Archived; 7 – Sent to the Buyer; 8 – Signed by the Buyer; 10 – Transported (confirmation of receipt of goods/services).

5.1.1 Example of the code for the dialing method

```

var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new InvoicesStatusRequest
{
    RequestId = Guid.NewGuid().ToString(),
    Seria = "EA7A",
    Number = "000004664"
};

var response = client.GetInvoicesStatus(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status},
Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<Invoice>();
foreach (var inv in results)
    Console.WriteLine($"Seria: {inv.Seria}, Număr: {inv.Number}, Status:
{inv.Status}, InvoiceStatus: {inv.InvoiceStatus}, Mesaj: {inv.Message}, Time:
{inv.TimeStamp}");

```

5.2 “GetAcceptedInvoices” method

The “GetAcceptedInvoices” method allows the list of tax invoices issued by the Supplier and accepted by the Buyer to be obtained on the basis of the criteria submitted. The request is made through an InvoicesRequest object (or method-specific type according to WSDL) and the answer is returned as an InvoicesResponse structure.

Table 3 Service operations

Signature	GetAcceptedInvoices (ActorBaseRequest request): InvoicesResponse.	
Description	Get the list of tax invoices issued by the Supplier and accepted by the Buyer.	
Returns	An InvoicesResponse structure containing: • Results – a set of returned tax invoices; • TimeStamp – time stamp of the processing; • RequestId – request identifier.	
Input parameters		
Name	Type	Description
Request	ActorBaseRequest	Structure containing the RequestId and the roles of the actors in the process.
Errors		
Code	Reason	
AuthenticationFailedException	The authentication of the service consumer has failed.	
AuthorizationFailedException	The authorization of the service consumer has failed.	
InternalErrorException	An internal error occurred while processing the request.	

Table 4 Structure of request_respons

Member	Type	Mandatory / Optional	Description
ActorBaseRequest (Request based on the type of actor)			
RequestId	String	Optional	Unique external request identifier.
ActorRole	Int	Mandatory, > 0	Roles of the actors in the e-Factura system: 1 – Supplier; 2 – Buyer; 3 – Carrier.
InvoicesResponse (Response to request of tax invoices)			
Results	Array of Invoice	Mandatory	List of processed/accepted invoices corresponding to the query.
TimeStamp	DateTime	Mandatory	Time stamp of the action.
Status	Int	Mandatory	Response status: 1 – accepted for execution; 2 – successfully executed; 3 – error in execution;
RequestId	String	Mandatory	External request ID.
Invoice (tax invoice)			
Number	String	Mandatory	Tax invoice number.
Seria	String	Mandatory	Tax invoice series.

Message	String	Optional	Info/diagnosis message at invoice level. Error message (only if Status = 3).
Status	String	Mandatory	Transaction status code for this invoice: 2 – Ok; 3 – Error.
TimeStamp	DateTime	Mandatory	Time stamp of the action.
InvoiceStatus	Int	Mandatory	Status of the tax invoice in the system: 0 – Draft; 1 – Signed by the Supplier; 2 – Refused by the Buyer; 3 – Accepted by the Buyer; 5 – Cancelled by the Supplier; 7 – Sent to the Buyer; 8 – Signed by the Buyer; 10 – Transported (signed as goods/services received).

5.2.1 Call method code example

```

var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new ActorBaseRequest
{
    RequestId = Guid.NewGuid().ToString(),
    ActorRole = 1 // 1 = Furnizor
};

var response = client.GetAcceptedInvoices(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status},
Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<Invoice>();
foreach (var inv in results)
    Console.WriteLine($"Seria: {inv.Seria}, Număr: {inv.Number}, Status:
{inv.Status}, InvoiceStatus: {inv.InvoiceStatus}, Mesaj: {inv.Message}, Time:
{inv.TimeStamp}");

```

5.3 “GetInvoicesBySerialNumber” method

The “GetInvoicesBySerialNumber” method makes it possible to obtain a list of tax invoices on the basis of their number and series. The request is made through an InvoicesRequest object and the answer is returned in the form of an InvoicesResponse, which contains the list of invoices found, the time stamp of the processing and the unique identifier of the request.

Table 5 Service operations

Signature	GetInvoicesBySerialNumber (InvoicesRequest request): InvoicesResponse.
Description	Get a list of tax invoices based on identifiers (number and series).

Returns	InvoicesResponse object containing the following fields: • Results – list of tax invoices; • TimeStamp – time stamp of the processing; • RequestId – request identifier.	
Input parameters		
Name	Type	Description
Request	InvoicesRequest	Object containing the list of InvoiceIdentifiers and a unique RequestId linked to the request.
Errors		
Code	Reason	
AuthenticationFailedException	The authentication of the service consumer has failed.	
AuthorizationFailedException	The authorization of the service consumer has failed.	
InternalErrorException	An internal error occurred while processing the request.	

Table 6 Structure of request_respons

Member	Type	Mandatory / Optional	Description
InvoicesXmlRequest (Request of tax invoices)			
RequestId	string	Optional	External identifier.
AndNumbers series	Array of InvoiceIdentifier	Mandatory, at least one element	Current package of tax invoice identifiers.
InvoicesXmlResponse (Response of tax invoices in XML format)			
Results	Array of Invoice	Mandatory	List of tax invoices.
TimeStamp	DateTime	Mandatory	Time stamp of the action.
Status	Int	Mandatory	Status of the processing of the request: 1 – Accepted for execution; 2 – Successfully executed; 3 – Error in execution.
RequestId	string	Mandatory	External request identifier.
XmlInvoice (Tax invoice in XML format)			
XML	string	Mandatory	The content of the invoice in XML format, valid according to the XSD scheme.
Number	string	Mandatory	Tax invoice number.
Series	string	Mandatory	Tax invoice series.
Message	string	Optional	Error message, present only if Status = 3.
Status	string	Optional	2 – Ok; 3 – Error.
TimeStamp	DateTime	Mandatory	Time stamp of the action.

InvoiceStatus	Int	Mandatory	Status of the tax invoice: 0 – Draft; 1 – Signed by the Supplier; 2 – Refused by the Buyer; 3 – Accepted by the Buyer; 5 – Cancelled by the Supplier; 7 – Sent to the Buyer; 8 – Signed by the Buyer; 10 – Transported (signed as goods/services received).
---------------	-----	-----------	---

5.3.1 Call method code example

```
var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new InvoicesRequest
{
    RequestId = Guid.NewGuid().ToString(),
    SerialNumbers = new[]
    {
        new InvoiceIdentifier { Number = "000004664", Serial = "EA7A" },
        new InvoiceIdentifier { Number = "000004664", Serial = "EAA" }
    }
};

var response = client.GetInvoicesBySerialNumber(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status},
Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<XmlInvoice>();
foreach (var inv in results)
{
    Console.WriteLine($"Serial: {inv.Serial}, Number: {inv.Number}, Status:
{inv.Status}, InvoiceStatus: {inv.InvoiceStatus}, Mesaj: {inv.Message}, Time:
{inv.TimeStamp}");
    Console.WriteLine("XML content:");
    Console.WriteLine(inv.XML);
}
```

5.4 “GetInvoicesContentForPrint” method

Table 7 Service operations

Signature	GetInvoicesContentForPrint (PrintRequest request): PrintContentResponse.
Description	Returns the content of the tax invoices for printing (depending on the roles of the actors and the orientation of the page).
Returns	PrintContentResponse object containing: • Results – list of tax invoices for printing; • TimeStamp – time stamp of the processing; • RequestId – unique request identifier.
Input parameters	

Name	Type	Description
Request	PrintRequest	Structure including RequestId, SerialNumbers list (InvoiceIdentifier elements with Serial and Number), ActorRole and Orientation.
Errors		
Code	Reason	
AuthenticationFailedException	The authentication process of the service consumer has failed.	
AuthorizationFailedException	The authorization process of the service consumer has failed.	
InternalErrorException	An internal error occurred while processing the request.	

Table 8 Structure of request_respons

Member	Type	Mandatory / Optional	Description
InvoicesRequest (Request of tax invoices)			
RequestId	string	Optional	Unique request identifier.
AndNumbers series	Array of InvoiceIdentifier	Mandatory, at least one element	Collection of 0..n invoice identifiers for which print content is required.
ActorRole	string	Mandatory	Roles of the actors requesting the content (e.g. Supplier/Buyer).
Orientation	string	Mandatory	Page orientation for printing.
GetInvoiceContentForPrintResponse (Output Structure)			
Results	Array of Invoice	Mandatory	List of tax invoices.
TimeStamp	DateTime	Mandatory	Time stamp of the action.
Status	Int	Mandatory	Status of the processing of the request: 1 – accepted for execution; 2 – successfully executed; 3 – error in execution.
RequestId	string	Mandatory	External request identifier.
InvoicePrintResult (item from Results)			
Number	string	Mandatory	Tax invoice number.
Series	string	Mandatory	Tax invoice series.
Message	string	Optional	Error message, present only if Status = 3.
Status	Int	Mandatory	Status of the tax invoice: 2 – Success; 3 – Error.
TimeStamp	DateTime	Mandatory	Time stamp of the action.
Content	string(Base64)	Mandatory	Invoice content in PDF format (Base64 encoded). It must be decoded and saved as a .pdf file.
Format	string	Mandatory	Returned format – in this case “PDF”.

5.4.1 Call method code example

```
var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new InvoicesRequest
{
    RequestId = Guid.NewGuid().ToString(),
    SerialNumbers = new[]
    {
        new InvoiceIndentifier { Serial = "EA7A", Number = "000004664" },
        new InvoiceIndentifier { Serial = "EAA", Number = "000004665" }
    },
    ActorRole = 1, // 1 = Furnizor
    Orientation = "Portrait" // sau "Landscape"
};

var response = client.GetInvoicesBySerialNumber(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status},
Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<XmlInvoice>();
foreach (var info in results)
{
    Console.WriteLine($"Serial: {info.Serial}, Număr: {info.Number}, Status:
{info.Status}, Mesaj: {info.Message}, InvoiceStatus: {info.InvoiceStatus}, Time:
{info.TimeStamp}");
    Console.WriteLine("XML:");
    Console.WriteLine(info.XML);
}
```

5.5 “GetInvoicesForSigning” method

The “GetInvoicesForSigning” method makes it possible to obtain the content of tax invoices intended for signature, depending on the roles of the actors and the order of signature. The request is sent through a SignRequest object and the response is returned in the form of an InvoicesResponse, which contains the list of invoices in XML format, the time stamp of the processing and the unique identifier of the request.

Table 9 Service operations

Signature	GetInvoicesForSigning (SignRequest request): InvoicesResponse.	
Description	Returns the contents of the tax invoice for signature.	
Returns	InvoicesResponse type object, containing: • Results – list returned of tax invoices; • TimeStamp – time stamp of the processing; • RequestId – unique request identifier.	
Input parameters		
Name	Type	Description
Request	SignRequest	The structure representing the signing sequence, the roles of the actors and RequestId.

Errors	
Code	Reason
AuthenticationFailedException	The authentication process of the service consumer has failed.
AuthorizationFailedException	The authorization process of the service consumer has failed.
InternalErrorException	An internal error occurred while processing the request.

Table 10 Structure of request_respons

Member	Type	Mandatory/ Optional	Description
SignRequest (Request for signing)			
RequestId	string	Mandatory	Unique external identifier.
Order	Int	Mandatory only for the supplier	1 - Status of the tax invoice without signature; 2 - Signed with the first signature.
ActorRole	Int	Mandatory, > 0	Actor roles in the AIS “e-Factura”: 1 – Supplier; 2 – Buyer; 3 – Carrier.
InvoicesXmlResponse (Response of tax invoices in XML format)			
Results	Array of Invoice	Mandatory	List of invoices returned for signature. It may contain one or more records.
TimeStamp	DateTime	Mandatory	Time stamp of the action.
Status	Int	Mandatory	Represents the status of the response: 1 - accepted for execution; 2 - successfully executed; 3 - error in execution.
RequestId	string	Mandatory	External request of the identifier.
XmlInvoice (Tax invoice in XML format)			
Xml	string	Mandatory	The full content of the invoice in XML format, which includes all the necessary data for signing.
Number	string	Optional	Tax invoice number.
Series	string	Mandatory	Tax invoice series.
Message	string	Optional	Info/diagnosis message associated with the invoice. Error message, only if Status = 3.
Status	string	Mandatory	Status code for this invoice as part of the signing operation: 2 – Ok; 3 – Error.
TimeStamp	DateTime	Mandatory	Time stamp of the action.

InvoiceStatus	Int	Mandatory	Status of the tax invoice: 0 – Draft; 1 – Signed by the Supplier; 2 – Refused by the Buyer; 3 – Accepted by the Buyer; 5 – Cancelled by the Supplier; 7 – Sent to the Buyer; 8 – Signed by the Buyer; 10 – Transported (signed as goods/services received).
---------------	-----	-----------	---

5.5.1 Example of the code for the calling method

```
var client = new ServiceClient();
var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new SignRequest
{
    RequestId = Guid.NewGuid().ToString(),
    ActorRole = 1, // 1 = Furnizor
    Order = 1      // 1 = Statut fără semnătură
};

var response = client.GetInvoicesForSigning(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status},
Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<XmlInvoice>();
foreach (var inv in results)
{
    Console.WriteLine($"Seria: {inv.Seria}, Număr: {inv.Number}, Status:
{inv.Status}, InvoiceStatus: {inv.InvoiceStatus}, Mesaj: {inv.Message}, Time:
{inv.TimeStamp}");
    Console.WriteLine("XML content:");
    Console.WriteLine(inv.Xml);
}
```

5.6 “GetInvoicesQRcodes” method

The “GetInvoicesQRcodes” method makes it possible to obtain the information associated with the QR codes of one or more tax invoices, identified by series and number.

The request is submitted through an InvoicesRequest object, which contains the list of InvoiceIdentifiers and a unique RequestId. The response is returned in the form of a QRCodesResponse structure containing the list of QR codes, the processing time stamp and the unique request identifier.

Table 11 Service operations

Signature	GetInvoicesQRcodes (InvoicesRequest request): QRCodesResponse.
------------------	---

Description	Returns QR code-related information: - Graphical image of the QR code; - QR code text.	
Returns	Structure containing (List of images/texts of QR codes), Timestamp and RequestId.	
Input parameters		
Name	Type	Description
Request	InvoicesRequest	The structure representing a list of InvoiceIdentifiers; and RequestId.
Errors		
Code	Reason	
AuthenticationFailedException	The authentication process of the service consumer has failed.	
AuthorizationFailedException	The authorization process of the service consumer has failed.	
InternalErrorException	An internal error occurred while processing the request.	

Table 12 Structure of request_respons

Member	Type	Mandatory/ Optional	Description
InvoicesRequest (Request of tax invoices)			
RequestId	string	Optional	Unique external identifier.
AndNumbers series	Array of InvoiceInden	Mandatory, at least one element	Current package of tax invoice identifiers.
QRCodesResponse (QRCode response)			
RequestId	string	Optional	External Demand Identifier.
Result	Array of InvoiceQRCode	Mandatory	List of QR codes corresponding to the requested tax invoices (Series and Number).
TimeStamp	DateTime	Mandatory	Time stamp of the action.
Status	Int	Mandatory	Response status: 1 – accepted for execution; 2 – successfully executed; 3 – error in execution.
InvoiceIdentifier (Tax invoice identifier)			
Number	string	Mandatory	Tax invoice number.
Series	string	Mandatory	Tax invoice series.
InvoiceQRCode			
QRCode	Array of byte	Mandatory	The QR image of the code in Base64 format (can be decoded into a PNG image).

QRCodeText	string	Mandatory	Decoded text of the QR code (invoice data and access link). Example: EAA 000003300 Furn-9999999999999999 Cump- 9999999999999999 Total amount- 24014.70lei VAT amount- 0.00lei https://efactura- test.sfs.md:443/EFactura.aspx? id=39290140-8a58-4c7d-9470- 8d08ea5693b7.
Series	string	Mandatory	Tax invoice series.
Number	string	Mandatory	Tax invoice number.
TimeStamp	DateTime	Mandatory	Timestamp of QR code generation Action.

5.6.1 Call method code example

```
var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new InvoicesRequest
{
    RequestId = Guid.NewGuid().ToString(),
    SerialNumbers = new[]
    {
        new InvoiceIndentifier { Number = "000004664", Serial = "EA7A" },
        new InvoiceIndentifier { Number = "000004664", Serial = "EAA" }
    }
};

var response = client.GetInvoicesQRcodes(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status},
Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<InvoiceQRCode>();
foreach (var info in results)
{
    Console.WriteLine($"Serial: {info.Serial}, Număr: {info.Number}, Status:
{info.Status}, Mesaj: {info.Message}, Time: {info.TimeStamp}");
    Console.WriteLine($"QR Text: {info.QRCodeText}");
    Console.WriteLine($"QR Bytes length: {info.QRCode?.Length ?? 0}");
}
```

5.7 “GetLogs” method

The “GetLogs” method allows the recovery of logs recorded in the AIS “e-Factura” for a specified period of time. The request is submitted through a LogsRequest object, which contains the time interval (FromDate and optionally ToDate) and the unique request identifier (RequestId). The response is returned in the form of a LogsResponse structure, which includes the list of logs (Results), the processing time stamp and the unique request identifier. Each item in the Results is a RequestLog and contains details about the method called, the start and end time of the execution, the status of the execution, the possible error message and the response returned in JSON format.

Table 13 Service operations

Signature	GetLogs (LogsRequest request): LogsResponse.	
Description	Recovers logs recorded in the AIS “e-Factura” for a certain period of time.	
Returns	LogsResponse object containing: • Results – list of returned logs; • TimeStamp – time stamp of the request processing; • RequestId – unique request identifier.	
Input parameters		
Name	Type	Description
request	LogsRequest	Structure containing: • the time period for which logs are requested (e.g.: FromDate, ToDate). • RequestId – unique request identifier.

Table 14 Structure of request_respons

Member	Type	Mandatory/ Optional	Description
LogsRequest (request for logs)			
RequestId	String	Optional	External unique identifier.
From	DateTime	Optional	Start date and time of the interval for which logs are requested.
To	DateTime	Optional	Date and time of end of interval.
LogsResponse (logs' response)			
Results	Array of RequestLog	Mandatory	RequestLog list.
RequestLog (request log)			
Username	String	Mandatory	Username that invoked the method.
Method	String	Mandatory	Name of the method called.
StartDateTime	DateTime	Mandatory	The start time of the method's execution.
EndDateTime	DateTime	Mandatory	End time of method execution.
Status	Int	Mandatory	Status of enforcement.
Error	String	Optional	Error message, if execution failed.
Response	string	Mandatory	Answer returned in JSON format, for example: <pre>{ "Results": [{ "Status": 2, "Series": "EAA", "Number": "000005949" }, { "Status": 2, "Series": "EAA", "Number": "000005950" }, { "Status": 2, "Series": "EAA", "Number": "000005951" }], "TimeStamp": "\VDate(1408460536810)\V", "Status": 2, "RequestId": "4a1d38e8-7377-4748-" }</pre>

			97e4-0ed41c1fc189"}.
--	--	--	----------------------

5.7.1 Call method code example

```
var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new LogsRequest
{
    RequestId = Guid.NewGuid().ToString(),
    From = DateTime.Now.AddDays(-1), // cu 1 zi în urmă
    To = DateTime.Now                // până acum
};

var response = client.GetLogs(request);
var results = response?.Results ?? Array.Empty<RequestLog>();
foreach (var log in results)
{
    Console.WriteLine($"Method: {log.Method}, User: {log.Username}");
    Console.WriteLine($"Start: {log.StartDateTime}, End: {log.EndDateTime}");
    Console.WriteLine($"Status: {log.Status}, Error: {log.Error}");
    Console.WriteLine($"Response: {log.Response}");
}
```

5.8 “GetRejectedInvoices” method

The “GetRejectedInvoices” method returns the list of rejected tax invoices, taken from the AIS “e-Facturas”, depending on the role of the specified actor.

The request is made through an ActorBaseRequest object, which contains the roles of the actors (ActorRole) and the unique request identifier (RequestId). The response is returned in the form of an InvoicesResponse, which includes the list of rejected invoices (Results), the time stamp of the processing (TimeStamp) and the request identifier (RequestId).

Table 15 Service operations

Signature	GetRejectedInvoices (ActorBaseRequest request): InvoicesResponse.	
Description	Returns the list of rejected tax invoices taken from the AIS “e-Factura”.	
Returns	Structure containing invoice list, TimeStamp and RequestId.	
Input parameters		
Name	Type	Description
request	ActorBaseRequest	Structure containing parameters for searching rejected tax invoices and request identifier (RequestId).

Table 16 Structure of request_respons

Member	Type	Mandatory/ Optional	Description
ActorBaseRequest (Request based of the type of actor)			

RequestId	string	Optional	Unique external identifier.
ActorRole	Int	Mandatory, > 0	Roles of actors in the AIS “e-Factura”: 1 – Supplier; 2 – Buyer; 3 – Carrier.
InvoicesResponse (Response of tax invoices)			
RequestId	string	Mandatory	External demand identifier.
Status	Int	Mandatory	Represents the status of the response: 1 – accepted for execution; 2 – successfully executed; 3 – error in execution.
Results	Array of Invoice	Mandatory	List of rejected invoices returned by the method.
TimeStamp	DateTime	Mandatory	Time stamp of the action.

5.8.1 Call method code example

```
var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new ActorBaseRequest
{
    RequestId = Guid.NewGuid().ToString(),
    ActorRole = 1 // 1 = Furnizor
};

var response = client.GetRejectedInvoices(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status},
Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<Invoice>();
foreach (var inv in results)
    Console.WriteLine($"Seria: {inv.Seria}, Număr: {inv.Number}, InvoiceStatus:
{inv.InvoiceStatus}, Time: {inv.TimeStamp}");
```

5.9 “GetSeriaAndNumbers” method

The “GetSeriaAndNumbers” method returns the series and numbers of tax invoices available in the AIS “e-Factura”, generated according to the parameters specified in the application.

The request is made through a SerienumberRequest object, which contains the number of pairs requested (Count), optionally the start number (StartNumber), the series (Series) and the invoice type (InvoiceType), as well as the unique request identifier (RequestId).

The response is returned in the form of a SerienumberResponse structure, which contains the list of series and number pairs generated (Results), the processing time stamp (TimeStamp) and the request identifier (RequestId).

Table 17 Service operations

Signature	GetSeriaAndNumbers (SerienumberRequest request):
------------------	--

	SerialNumberResponse.	
Description	Returns the series and numbers of tax invoices from the AIS “e-Factura”.	
Returns	Stucture containing results, TimeStamp and RequestId.	
Input parameters		
Name	Type	Description
request	SeriesNumberRequest	Structure containing the parameters for generating series and number pairs, together with the RequestId.

Table 18 Structure of request_respons

Member	Type	Mandatory / Optional	Description
SerialNumberRequest (Series and Number Request)			
RequestId	string	Optional	Unique external identifier associated with this request. Links the request to the related reply.
Count	Int	Mandatory, > 0	Number of invoices (series and numbers) requested.
StartNumber	Int	Optional, > 0	The starting number from which the numbering sequence will continue.
Series	string	Optional	The series of the invoice for which the generation or acquisition of numbers is requested.
InvoiceType	Int	Mandatory, (default 0)	Type of tax invoice: 0 = ETI (Electronic Tax Invoice).
SerialNumberResponse (Series and Number Response)			
RequestId	string	Mandatory	External request identifier. This identification ID is associated with the request ID (RequestId) corresponding to the calling method that associates requests and returns.
Results	Array of AndNumber series	Mandatory	Collection of returned results (SerialNumber type as specified).
TimeStamp	DateTime	Mandatory	Time stamp of the action.
Status	Int	Mandatory	Represents the status of the response: 1 – accepted for execution; 2 – successfully executed; 3 – error in execution.

5.9.1 Call method code example

```
var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new SerialNumberRequest
{
    RequestId = Guid.NewGuid().ToString(),
```

```

    Count = 10,
    InvoiceType = 0,    // 0 = ETI
    Serial = "EA7A",
    StartNumber = 1000
};

var response = client.GetSerialAndNumbers(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status},
Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<SerialAndNumber>();
foreach (var info in results)
    Console.WriteLine($"Serial: {info.Serial}, Număr: {info.Number}, Status:
{info.Status}");

```

5.10 “GetTaxpayersInfo” method

The “GetTaxpayersInfo” method returns information about companies and their status in the AIS “e-Factura”, based on the tax codes provided.

The request is made through a TaxpayersRequest object, which contains the list of taxpayers’ tax codes (taxpayer identification numbers) and the unique request identifier (RequestId).

The response is returned in the form of a TaxpayersResponse structure, which includes the results list (Results), the processing time stamp (TimeStamp) and the unique request identifier (RequestId).

Table 19 Service operations

Signature	GetTaxpayersInfo (TaxpayersRequest request): TaxpayersResponse.	
Description	Returns information about companies and their status in the AIS “e-Factura”.	
Returns	Structure containing the list of results, TimeStamp and RequestId.	
Input parameters		
Name	Type	Description
Request	TaxpayersRequest	Structure containing the list of taxpayers’ tax codes (identification numbers) and the RequestId.
Errors		
Code	Reasons	
AuthenticationFailedException	The authentication process of the service consumer has failed.	
AuthorizationFailedException	The authorization process of the service consumer has failed.	
InternalErrorException	An internal error occurred while processing the request.	

Table 20 Structure of request_respons

Member	Type	Mandatory / Optional	Description
TaxpayersRequest (request of the taxpayer)			
RequestId	string	Optional	External identifier (it is unique for each request, but can be reused for the result that was returned in advance). This ID is associated with the corresponding RequestID with the call method that associates requests and returns.
String	string	Optional	List of tax codes (IDNP or IDNO / TIN) for which information is requested.
TaxpayersResponse (taxpayer response)			
Result	Array of Taxpayer	Mandatory	The collection of taxpayers found corresponding to the requested tax codes.
TimeStamp	DateTime	Mandatory	Time stamp of the action.
Status	Int	Mandatory	Statutes: 1 - accepted for execution; 2 - successfully executed; 3 - error in execution.
RequestId	string	Mandatory	External request identifier. This ID is associated with the corresponding method call request and associates requests and returns.
Taxpayer (taxpayer)			
IDNO	string	Mandatory	Tax ID number (IDNO/IDNP/TIN) of the taxpayer for whom the data has been returned.
Name	string	Mandatory	Name of the legal person or name of the natural person.
Address	string	Mandatory	The address of the taxpayer may be null if the information is not available.
TaxpayerType	Int	Mandatory	Type of taxpayer: 1 – Legal; 2 – Natural person; 3 – Non-resident.
IsEFacturaActor	bool	Mandatory	Indicator whether the entity is an actor in the AIS “e-Factura” (has active roles in the system).
ExistInTaxRegistry	bool	Mandatory	Indicator whether the entity exists in the tax register.

5.10.1 Call method code example

```
var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";
```

```

var request = new TaxpayersRequest
{
    RequestId = Guid.NewGuid().ToString(),
    FiscalCodes = new[] { "1002600004030", "1002600023736" }
};

var response = client.GetTaxpayersInfo(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status},
Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<Taxpayer>();
foreach (var info in results)
    Console.WriteLine($"Nume: {info.Name}, IDNO: {info.IDNO}, Tip:
{info.TaxpayerType}, Actor e-Factura: {info.IsEFacturaActor}, În registru fiscal:
{info.ExistInTaxRegistry}, Adresă: {info.Address}");

```

5.11 “PostAcceptedInvoices” method

The “PostAcceptedInvoices” method sends accepted tax invoices to the AIS “e-Factura” for registration.

The request is made through an AcceptedRequest object, which contains the unique request identifier (RequestId) and the list of accepted invoices (AndNumbers Series).

The response is returned in the form of an AcceptedResponse structure, which includes the results of processing each invoice (Results), the processing time stamp (TimeStamp), the execution status (Status) and the request identifier (RequestId).

Each item in the Results is InvoiceResult type and contains the invoice number and series, the processing status and, optionally, a detailed error message.

Table 21 Service operations

Signature	PostAcceptedInvoices (AcceptedRequest request): AcceptedResponse	
Description	Sends tax invoices accepted in AIS “e-Factura”.	
Returns	Structure containing the results of invoice processing, TimeStamp and RequestId.	
Input parameters		
Name	Type	Description
request	AcceptedRequest	Structure containing accepted tax invoices and request identifier (RequestId).

Table 22 Structure of request_respons

Member	Type	Mandatory/ Optional	Description
AcceptedRequest (request for acceptance)			
RequestId	string	Optional	External identifier.
AndNumbers series	Array of InvoiceIdentifier	Mandatory	Identifier of accepted invoices.

AcceptedResponse (response for acceptance)			
RequestId	string	Optional	External request of the identifier.
Results	Array of InvoiceResult	Mandatory	List of results for each invoice processed.
TimeStamp	DateTime	Mandatory	Time stamp of the action.
Status	Int	Mandatory	Represents the status: 1 – accepted for execution; 2 – successfully executed; 3 – error in execution.
InvoiceResult (result of the tax invoice)			
Number	string	Mandatory	Tax invoice number.
Series	string	Mandatory	Tax invoice series.
Message	string	Optional	Optional message containing details in case of error.
Status	string	Mandatory	Invoice processing status: 2 – Success; 3 – Error.
TimeStamp	DateTime	Mandatory	Time stamp of the action.

5.11.1 Call method code example

```

var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new AcceptedRequest
{
    RequestId = Guid.NewGuid().ToString(),
    SerialNumbers = new[]
    {
        new InvoiceIdentifier { Number = "000004664", Serial = "EAA" },
        new InvoiceIdentifier { Number = "000004665", Serial = "EAA" }
    }
};

var response = client.PostAcceptedInvoices(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status}, Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<InvoiceResult>();
foreach (var info in results)
    Console.WriteLine($"Serial: {info.Serial}, Number: {info.Number}, Status: {info.Status}, Message: {info.Message}, Time: {info.TimeStamp}");

```

5.12 “PostCanceledInvoices” method

The “PostCanceledInvoices” method sends cancelled tax invoices to the AIS “e-Factura”. The request is made through a CanceledRequest object, which contains the unique request identifier (RequestId) and the list of cancelled tax invoices, each with the associated comment (InvoicesComments).

The response is returned in the form of a CanceledResponse structure, which includes processing results (Results), time stamp (TimeStamp), execution status (Status) and request identifier (RequestId). Each item in the Results is InvoiceResult type and contains the invoice number and series, the processing status and, optionally, an information message in case of error or inability to cancel.

Table 23 Service operations

Signature	PostCanceledInvoices (CanceledRequest request): CanceledResponse.	
Description	Returns the cancelled invoices to the AIS “e-Factura”.	
Returns	Structure containing results, TimeStamp and RequestId.	
Input parameters		
Name	Type	Description
request	CanceledRequest	Structure containing the request identifier (RequestId) and the list of cancelled tax invoices (SeriaAndNumbers).

Table 24 Structure of request_respons

Member	Type	Mandatory/ Optional	Description
CanceledRequest (cancellation request)			
RequestId	string	Optional	External identifier.
InvoiceComment	Array of InvoiceComment	Mandatory	List of invoices to be cancelled with related comments.
Series	string	Optional	Tax invoice series.
Number	string	Optional	Tax invoice number.
PostCanceledInvoicesResult			
RequestId	string	Optional	External request identifier.
Results	Array of InvoiceResult	Mandatory	List of processing results for each invoice in the application.
TimeStamp	DateTime	Mandatory	Time stamp of the action.
Status	Int	Mandatory	Represents the status: 1 – accepted for execution; 2 – successfully executed; 3 – error in execution.
InvoiceResult			
Number	string	Mandatory	Tax invoice number.
Series	string	Mandatory	Tax invoice series.
Message	string	Optional	Information message in case of error or inability to cancel.
Status	string	Optional	Result status: 2 – Success; 3 – Error.
TimeStamp	DateTime	Mandatory	Time stamp of the action.

5.12.1 Call method code example

```
var client = new ServiceClient();
```

```

client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new CanceledRequest
{
    RequestId = Guid.NewGuid().ToString(),
    InvoiceComment = new[]
    {
        new InvoiceComment { Seria = "EA7A", Number = "0000046766", Comment =
"Anulare - eroare de emitere" },
        new InvoiceComment { Seria = "EAA", Number = "000004663", Comment =
"Anulare - dublură" }
    }
};

var response = client.PostCanceledInvoices(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status},
Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<InvoiceResult>();
foreach (var info in results)
    Console.WriteLine($"Seria: {info.Seria}, Număr: {info.Number}, Status:
{info.Status}, Mesaj: {info.Message}, Time: {info.TimeStamp}");

```

5.13 “PostInvoices” method

The “PostInvoices” method sends the tax invoices to the AIS “e-Factura” for registration. The request is made through a PostInvoicesRequest object, which contains the unique request identifier (RequestId), the content of invoices in XML format (InvoicesXml), the roles of the actors in the system (ActorRole) and the XML status (InvoicesXmlStatus).

The response is returned in the form of a PostInvoicesResponse structure, which includes the total number of invoices submitted (TotalInvoices), the number of invoices successfully processed (TotalInvoicesPosted), the time stamp (TimeStamp), the execution status (Status), the request identifier (RequestId) and, optionally, an error message (ErrorMessage) in case of failure.

Table 25 Service operations

Signature	PostInvoices (PostInvoicesRequest request): PostInvoicesResponse.	
Description	Returns the tax invoices to the AIS “e-Factura”.	
Returns	A structure containing the results of the invoices submitted, TimeStamp and RequestId.	
Input parameters		
Name	Type	Description
Request	PostInvoicesRequest	Structure containing one or more tax invoices and an associated RequestId.

Table 26 Structure of request_respons

Member	Type	Mandatory/ Optional	Description
PostInvoicesRequest (request to post tax invoices)			
RequestId	string	Optional	External identifier.
InvoicesXml	string	Mandatory	Content of tax invoices in XML format.
ActorRole	Int	Optional, > 0	Roles of the actors in the system: 1 – Supplier; 2 – Buyer; 3 – Carrier.
InvoicesXmlStatus	string	Optional	XML status: 0 – not signed; 1 – signed.
PostInvoicesResponse (response to posting tax invoices)			
RequestId	string	Mandatory	The external identifier associated with the request.
TotalInvoices	Int	Mandatory	Total number of invoices submitted.
TotalInvoicesPosted	Int	Mandatory	Number of successfully submitted tax invoices.
TimeStamp	DateTime	Mandatory	Time stamp of the action.
Status	Int	Mandatory	Represents the status: 1 – accepted for execution; 2 – successfully executed; 3 – error in execution.
ErrorMessage	string	Optional	Error message, if applicable. Examples: 1 – incorrect XML; 2 – processing error.

5.13.1 Call method code example

```

var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

const string xml =
@"<Documents>
  <Document>
    <SupplierInfo>
      <DeliveryDate>2014-04-22T00:00:00.804Z</DeliveryDate>
      <Supplier IDNO=""1002600001257""><BankAccount Account=""22241410046""
    /></Supplier>
      <Buyer IDNO=""1002600003354""><BankAccount Account=""2224710SV12365037100""
    /></Buyer>
      <Merchandises>
        <Row Code=""1"" Name=""Abon. Contactell"" UnitOfMeasure=""buc""
Quantity=""-1""
          UnitPriceWithoutTVA=""15.00"" TotalPriceWithoutTVA=""-15.00""
          TVA=""20"" TotalTVA=""3.00"" TotalPrice=""-18.00"" />
        <Row Code=""1"" Name=""Abon. Contactell 111"" UnitOfMeasure=""buc""
Quantity=""-1""
          UnitPriceWithoutTVA=""-15.00"" TotalPriceWithoutTVA=""-15.00""
          TVA=""20"" TotalTVA=""3.00"" TotalPrice=""-18.00"" />
      </Merchandises>
    </Document>
  </Documents>
"
```

```

        </Merchandises>
    </SupplierInfo>
    <AdditionalInformation><id>IdentificatorInter</id></AdditionalInformation>
</Document>
</Documents>";

var request = new PostInvoicesRequest
{
    RequestId = Guid.NewGuid().ToString(),
    ActorRole = 1,           // 1 = Furnizor
    InvoicesXmlStatus = "0", // "0" = Neseemnata
    InvoicesXml = xml
};

var response = client.PostInvoices(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status},
Time: {response?.TimeStamp}, TotalInvoices: {response?.TotalInvoices},
TotalInvoicesPosted: {response?.TotalInvoicesPosted}, ErrorMessage:
{response?.ErrorMessage}");

```

5.14 “PostInvoicesWithAttachment” method

The “PostInvoicesWithAttachment” method sends the tax invoices together with their attachments to the AIS “e-Factura”.

The request is made through a PostInvoicesWithAttachmentRequest object, which contains the unique request identifier (RequestId), the content of invoices in XML format (InvoicesXml), the associated attachments (Base 64 format), the roles of the actors in the system (ActorRole) and the XML status (InvoicesXmlStatus).

The response is returned in the form of a PostInvoicesWithAttachmentResponse structure, which includes the total number of invoices sent (TotalInvoices), the number of invoices successfully processed (TotalInvoicesPosted), the timestamp (TimeStamp), the execution status (Status), the request identifier (RequestId) and, optionally, an error message (ErrorMessage) in case of failure.

Table 27 Service operations

Signature	PostInvoicesWithAttachment	
Description	Posts tax invoices with attachments in the “e-Factura” AIS.	
Returns	A structure containing the results of the invoices submitted, TimeStamp and RequestId.	
Input parameters		
Name	Type	Description
Request	PostInvoicesWithAttachmentRequest	Structure containing one or more tax invoices with attachments and an associated RequestId.

Table 28 Structure of request_respons

Member	Type	Mandatory/ Optional	Description
PostInvoicesRequest (request to post tax invoices)			
RequestId	string	Mandatory	External identifier.
InvoicesXml	string	Mandatory	Content of tax invoices in XML format.
ActorRole	Int	Mandatory,>0	Roles of the actors in the AIS “e-Factura” 1 – Supplier; 2 – Buyer; 3 – Carrier.
FileName	string	Mandatory	The name of the document attached to the tax invoice is entered. Mandatory: .PDF
FileContent (ConvertedFileBase64)	string	Mandatory	The PDF file will be converted individually by the user into Base64 format and the content will be added. Max.: 10 MB
InvoicesXmlStatus	string	Mandatory	XML status: 0 – not signed; 1 – signed.
PostInvoicesResponse (response to posting tax invoices)			
TotalInvoices	Int	Mandatory	Total number of invoices submitted.
TotalInvoicesPosted	Int	Mandatory	Number of successfully submitted tax invoices.
TimeStamp	DateTime	Mandatory	Time stamp of the action.
Status	Int	Mandatory	Represents the status: 1 – accepted for execution; 2 – successfully executed; 3 – Error in execution.
RequestId	string	Mandatory	The external identifier associated with the request.
ErrorMessage	string	Optional	Error message, if applicable. Examples: 1 – incorrect XML; 2 – processing error.

5.14.1 Call method code example

```

var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

const string xml =
@"<Documents>
  <Document>
    <SupplierInfo>
      <DeliveryDate>2014-04-22T00:00:00.804Z</DeliveryDate>
      <Supplier IDNO=""1002600001257""><BankAccount Account=""22241410046""
    /></Supplier>
      <Buyer IDNO=""1002600003354""><BankAccount Account=""2224710SV12365037100""
    /></Buyer>
  </Document>
</Documents>";

```

```

        <Merchandises>
            <Row Code=""1"" Name=""Abon. Contactell"" UnitOfMeasure=""buc""
Quantity=""-1""
                UnitPriceWithoutTVA=""15.00"" TotalPriceWithoutTVA=""-15.00""
                TVA=""20"" TotalTVA=""3.00"" TotalPrice=""-18.00"" />
            <Row Code=""1"" Name=""Abon. Contactell 111"" UnitOfMeasure=""buc""
Quantity=""-1""
                UnitPriceWithoutTVA=""-15.00"" TotalPriceWithoutTVA=""-15.00""
                TVA=""20"" TotalTVA=""3.00"" TotalPrice=""-18.00"" />
        </Merchandises>
    </SupplierInfo>
    <AdditionalInformation><id>IdentificatorInter</id></AdditionalInformation>
</Document>
</Documents>";

var pdfPath = @"C:\path\to\invoice.pdf";
var base64Pdf = Convert.ToBase64String(File.ReadAllBytes(pdfPath));

var request = new PostInvoicesRequest
{
    RequestId = Guid.NewGuid().ToString(),
    ActorRole = 1, // 1 = Furnizor
    InvoicesXmlStatus = "0", // "0" = Nesemnat
    InvoicesXml = xml,
    FileName = "invoice.pdf",
    FileContent = base64Pdf
};

var response = client.PostInvoices(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status},
Time: {response?.TimeStamp}, TotalInvoices: {response?.TotalInvoices},
TotalInvoicesPosted: {response?.TotalInvoicesPosted}, ErrorMessage:
{response?.ErrorMessage}");

```

5.15 “PostRejectedInvoices” method

The “PostRejectedInvoices” method sends the tax invoices rejected by the Buyer to the AIS “e-Factura”.

The request is made through a RejectRequest object, which contains the unique request identifier (RequestId) and the list of rejected tax invoices with comments (InvoicesComments).

The response is returned in the form of a RejectedResponse structure, which includes the results of processing each invoice (Results), time stamp (TimeStamp), execution status (Status) and request identifier (RequestId).

Each item in the Results is InvoiceResult type and contains the invoice number and series, the processing status and, optionally, a message with details about the reason for rejecting the invoice.

Table 29 Service operations

Signature	PostRejectedInvoices (RejectRequest request): RejectedResponse.
Description	Remits refused tax invoices in the “e-Factura” AIS.
Returns	The structure containing the results of the invoices submitted, TimeStamp and RequestId.

Input parameters		
Name	Type	Description
request	RejectRequest	Structure containing the list of refused tax invoices and RequestId.

Table 30 Structure of request_respons

Member	Type	Mandatory / Optional	Description
RejectRequest (rejection request)			
RequestId	string	Optional	External identifier.
InvoicesComments	Array of InvoiceComment	Optional	List of invoices to be rejected, together with related comments.
InvoiceComment.Number	string	Optional	The number of the invoice to be rejected.
InvoiceComment.Series	string	Optional	The series of the invoice to be rejected.
InvoiceComment.Comment	string	Optional	Reason for rejecting the invoice.
RejectedResponse (rejection response)			
RequestId	string	Optional	External identifier.
Results	Array of InvoiceResult	Optional	List of results for each invoice processed. It can be empty if there are no results.
TimeStamp	DateTime	Mandatory	Time stamp of the action.
Status	Int	Mandatory	General status of the reply: 1 – accepted for execution; 2 – successfully executed; 3 – error.
InvoiceResult.Number	string	Mandatory (if listed)	Processed invoice number.
InvoiceResult.Series	string	Mandatory (if listed)	Processed invoice series.
InvoiceResult.Message	string	Optional	Explanatory message (e.g.: the reason why the invoice could not be rejected).
InvoiceResult.Status	Int	Mandatory	Status of refusal: 2 – Success; 3 – Error.
InvoiceResult.TimeStamp	dateTime	Mandatory	Date and time of processing of the tax invoice.
InvoiceComment (commentary on the tax invoice)			
Comment	string	Mandatory	Comment on the refusal of the tax invoice.
Number	string	Mandatory	Tax invoice number.
Series	string	Mandatory	Tax invoice series.
InvoiceResult (result of the tax invoice)			
Number	string	Mandatory	Tax invoice number.
Series	string	Mandatory	Tax invoice series.
Message	string	Optional	Error message (if applicable), or internal errors.
Status	string	Optional	Status of refusal:

			2 – Success; 3 – Error.
TimeStamp	DateTime	Mandatory	Time stamp of the action.

5.15.1 Call method code example

```
var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new RejectRequest
{
    RequestId = Guid.NewGuid().ToString(),
    InvoicesComments = new[]
    {
        new InvoiceComment { Number = "0000046766", Serial = "EA7A", Comment =
"reject" },
        new InvoiceComment { Number = "000004663", Serial = "EAA", Comment =
"reject" }
    }
};
var response = client.PostRejectedInvoices(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status},
Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<InvoiceResult>();
foreach (var info in results)
    Console.WriteLine($"Serial: {info.Serial}, Număr: {info.Number}, Status:
{info.Status}, Mesaj: {info.Message}, Time: {info.TimeStamp}");
```

5.16 “SearchInvoices” method

The “SearchInvoices” method makes it possible to obtain tax invoices from the “e-Factura” AIS on the basis of specific search criteria.

The request is made through a SearchRequest object, which contains the unique request identifier (RequestId), the actor role (ActorRole) and the search parameters (SearchParameters). Parameters may include invoice status (InvoiceStatus), identification data (IDNO/TIN, series, number), invoice type, time intervals and the internal identifier of the accounting system (APIeInvoiceId).

The response is returned in the form of an InvoicesResponse structure, which contains the list of invoices matching the criteria (Results), the time stamp of the processing (TimeStamp), the execution status (Status) and the request identifier (RequestId).

Each invoice in the list is Invoice type and includes the number, series, time stamp and current status of the tax invoice.

Table 31 Service operations

Signature	SearchInvoices (SearchRequest request): InvoicesResponse.
Description	Get the content of the tax invoice by search criteria.
Returns	A structure containing results (invoice list), TimeStamp and RequestId.
Input parameters	

Name	Type	Description
request	SearchRequest	Parameters for searching for tax invoices.
Errors		
Code	Reason	
AuthenticationFailedException	The authentication process of the service consumer has failed.	
AuthorizationFailedException	The authorization process of the service consumer has failed.	
InternalErrorException	An internal error occurred while processing the request.	

Table 32 Structure of request_respons

Member	Type	Mandatory/ Optional	Description
SearchRequest (search request)			
RequestId	string	Optional	Unique external identifier of the request.
ActorRole	Int	Optional, >0	Roles of actors in the AIS “e-Factura” 1 – Supplier; 2 – Buyer; 3 – Carrier.
Parameters	SearchParameters	Optional	Search parameters of tax invoices.
SearchParameters (search parameters)			
InvoiceStatus	int	Optional	Current status of the tax invoice: 0 – Draft; 1 – Signed by the Supplier; 2 – Refused by the Buyer; 3 – Accepted by the Buyer; 5 – Cancelled by the Supplier; 6 – Archived; 7 – Sent to the Buyer; 8 – Signed by the Buyer; 10 – Transported (acknowledgement of receipt of goods/services).
SupplierIDNO	string	Optional	Supplier TIN.
BuyerIDNO	string	Optional	Tax code (TIN) of the Buyer.
TransporterIDNO	string	Optional	Carrier TIN.
Seria	string	Optional	Tax invoice series.
Number	string	Optional	Tax invoice number.
InvoiceType	Int	Optional	Type of Tax Invoice (Tax Invoice=0).
IssuedOn	DateSearch	Optional	Data range for issuing the invoice.
IssuedOn.StartDate	dateTime	Optional	Start date of issuance.
IssuedOn.EndDate	dateTime	Optional	End date of issuance.
DeliveredOn	dateInterval	Optional	Date of delivery of the tax invoice.

RegisteredOn	DateSearch	Optional	Data range for registering the invoice in the system.
APIeInvoiceId	string	Optional	Internal identifier of the accounting system, as indicated in AdditionalInformation.
DeliveredOn.Start Date	dateTime	Optional	Delivery start date.
DeliveredOn.EndDate	dateTime	Optional	Delivery end date.
RegisteredOn.Start Date	dateTime	Optional	Start date of registration.
RegisteredOn.End Date	dateTime	Optional	End date of registration.

5.16.1 Call method code example

```

var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new SearchRequest
{
    RequestId = Guid.NewGuid().ToString(),
    ActorRole = 1, // 1 = Furnizor
    Parameters = new SearchParameters
    {
        InvoiceStatus = 7, // 7 Trimis
        SupplierIDNO = "1002600004030",
        BuyerIDNO = "1002600023736",
        TransporterIDNO = "1007600029836",
        Seria = "EA7A",
        Number = "000001234",
        InvoiceType = 0, // 0 = ETI
        APIeInvoiceId = "IdentificatorInter",
        IssuedOn = new DateSearch { StartDate = DateTime.Now.AddDays(-100),
        EndDate = DateTime.Now },
        DeliveredOn = new DateSearch { StartDate = DateTime.Now.AddDays(-100),
        EndDate = DateTime.Now },
        RegisteredOn = new DateSearch { StartDate = DateTime.Now.AddDays(-100),
        EndDate = DateTime.Now }
    }
};

var response = client.SearchInvoices(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status},
Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<Invoice>();
foreach (var inv in results)
    Console.WriteLine($"Seria: {inv.Seria}, Număr: {inv.Number}, InvoiceStatus:
{inv.InvoiceStatus}, Time: {inv.TimeStamp}");

```

6 Electronic Signature Application Model

Structure of the Invoice (with highlighting and technical comments)

This document presents the XML structure of an invoice for integration with the e-Factura API, highlighting the main areas:

- Green zone: Invoice structure (dates to be signed);
- Blue zone: XAdES-BES electronic signature (certificate + signature value).

```
<!-- ===== STRUCTURA FACTURII ===== -->
<!-- Această secțiune conține datele care trebuie semnate electronic -->
<SupplierInfo>
  <!-- Seria și numărul facturii -->
  <Seria>***</Seria>
  <Number>*****</Number>

  <!-- Datele de emitere și livrare -->
  <IssuedDate>2025-05-29T15:32:08+03:00</IssuedDate>
  <DeliveryDate>2025-05-29T15:32:02+03:00</DeliveryDate>

  <!-- Date furnizor -->
  <Supplier IDNO="*****" Title="[REDACTED_SUPPLIER_TITLE]"
Address="[REDACTED_SUPPLIER_ADDRESS]" NResident="false" IsSupplierOnly="false" TaxpayerType="1">
  <BankAccount BranchTitle="[REDACTED]" BranchCode="[REDACTED]" Account="[REDACTED]"/>
</Supplier>

  <!-- Date cumpărător -->
  <Buyer IDNO="*****" Title="[REDACTED_BUYER_TITLE]"
Address="[REDACTED_BUYER_ADDRESS]" NResident="false" IsSupplierOnly="false" TaxpayerType="1">
  <BankAccount BranchTitle="[REDACTED]" BranchCode="[REDACTED]" Account="[REDACTED]"/>
</Buyer>

  <!-- Date delegate și vehicul (opțional) -->
  <DelegateDate xmlns:p2="http://www.w3.org/2001/XMLSchema-instance" p2:nil="true"/>
  <VehicleLogbook>
    <IssuedDate xmlns:p3="http://www.w3.org/2001/XMLSchema-instance" p3:nil="true"/>
    <Seria/>
    <Number/>
  </VehicleLogbook>

  <!-- Totaluri factură -->
  <Redirections/>
  <Total>0.00</Total>
  <TotalTVA>0.00</TotalTVA>

  <!-- Lista mărfurilor/serviciilor -->
  <Merchandises>
    <Row Name="[REDACTED_ITEM]" Quantity="1" UnitPriceWithoutTVA="0.00"
TotalPriceWithoutTVA="0.00" TVA="20" TotalTVA="0.00" TotalPrice="0.00" OtherInfo="[REDACTED]"/>
  </Merchandises>
  <!-- Motivul creării facturii -->
  <CreationMotiv>4</CreationMotiv>
</SupplierInfo>

<!-- ===== SEMNĂTURA ELECTRONICĂ ===== -->
<!-- Conține semnătura XAdES-BES și certificatul utilizat pentru semnare -->
<Signatures>
  <SignatureContent>
```

```

<SignedDoc>
  <!-- Hash-ul documentului semnat -->
  <hash Id="_[REDACTED]">[HASH_IN_SIGNATURE]</hash>

  <!-- Semnătura XML Digital Signature -->
  <ds:Signature xmlns:ds="http://www.w3.org/2000/09/xmldsig#" Id="Signature-[REDACTED]">

    <!-- Informații despre semnătură (algoritmi, referințe) -->
    <ds:SignedInfo Id="SignedInfo-[REDACTED]">
      <ds:CanonicalizationMethod Algorithm="http://www.w3.org/TR/2001/REC-xml-c14n-
20010315#WithComments"/>
      <ds:SignatureMethod Algorithm="http://www.w3.org/2000/09/xmldsig#rsa-sha1"/>
      <ds:Reference Id="SignedProperties-Reference-[REDACTED]"
Type="http://uri.etsi.org/01903#SignedProperties" URI="#SignedProperties-[REDACTED]"/>
    </ds:SignedInfo>

    <!-- Valoarea semnăturii -->
    <ds:SignatureValue Id="SignatureValue-[REDACTED]">[REDACTED_BASE64]</ds:SignatureValue>

    <!-- Certificatul public utilizat -->
    <ds:KeyInfo Id="KeyInfo-[REDACTED]">
      <ds:X509Data>
        <ds:X509Certificate>[TRUNCATED_CERTIFICATE_BASE64]</ds:X509Certificate>
      </ds:X509Data>
    </ds:KeyInfo>
  </ds:Signature>
</SignedDoc>
</SignatureContent>
</Signatures>

```