



Semi-automated integration guide AIS "e-Factura"

Chişinău 2025

CONTENTS

1	Introduction.....	3
2	Operational processes and workflows.....	3
3	Creating the API User.....	3
4	API configuration of the AIS "e-Factura".....	5
5	Services Operations, request_respons structures	6
5.1	The “CheckInvoicesStatus” method	7
5.1.1	Example of the code for the dialing method	8
5.2	The “GetAcceptedInvoices” method	8
5.2.1	Example of the code for the dialing method	10
5.3	The “GetInvoicesBySerialNumber” method.....	10
5.3.1	Example of the code for the dialing method	12
5.4	The “GetInvoicesContentForPrint” method.....	12
5.4.1	Example of the code for the dialing method	13
5.5	The “GetInvoicesForSigning” method.....	14
5.5.1	Example of the code for the dialing method	15
5.6	The “GetInvoicesQRcodes” method.....	16
5.6.1	Example of the code for the dialing method	17
5.7	The “GetLogs” method	18
5.7.1	Example of the code for the dialing method	19
5.8	The “GetRejectedInvoices” method.....	19
5.8.1	Example of the code for the dialing method	20
5.9	The “GetTaxpayersInfo” method.....	21
5.9.1	Example of the code for the dialing method	22
5.10	The "PostAcceptedInvoices" method.....	23
5.10.1	Example of the code for the dialing method	24
5.11	The "PostCanceledInvoices" method.....	24
5.11.1	Example of the code for the dialing method	25
5.12	The "PostInvoices" method.....	26
5.12.1	Example of the code for the dialing method	27
5.13	The "PostInvoicesWithAttachment" method	27
5.13.1	Example of the code for the dialing method	29
5.14	The "PostRejectedInvoices" method.....	29
5.14.1	Example of the code for the dialing method	31
5.15	The "SearchInvoices" method.....	31
5.15.1	Example of the code for the dialing method	33

1 Introduction

This document describes the process of integration via API with the semi-automated version of the "e-Factura" Automated Information System.

The guide presents the semi-automated integration of the AIS "e-Factura" with accounting information systems (ERP) without the use of a digital certificate when transmitting invoices. Final operations, such as signing, canceling, or rejecting, are performed manually, directly in the web interface by authorized persons.

The document includes the specifications necessary for a complete understanding of the architecture and functionalities of the AIS "e-Factura" from an integration perspective, covering data structures and call methods.

The API provides an extensive set of methods, grouped by functionality, such as: checking invoice status, obtaining accepted or rejected invoices, transmitting invoices (with or without attachments), obtaining taxpayer information and generating QR codes, as well as managing logs.

In the semi-automated method, invoices are transmitted via the API, but the electronic signing of documents takes place later, manually, from the web interface of the AIS "e-Factura" by the authorized user.

The guide is primarily intended for accounting solution development and implementation teams (e.g., platforms such as 1C), providing the information necessary for the design, development, and configuration of API connections with the AIS "e-Factura" used by economic agents—Suppliers, Buyers, and Carriers — who are also users of the platform.

2 Operational processes and workflows

The "e-Factura" API authentication and authorization module ensures the identification and validation of the company's accounting system before initiating data exchange with the AIS "e-Factura".

In the case of the semi-automated method, the process uses a proxy client that transmits the authentication data (username and password) via a secure SSL connection (https). The system returns a session token that will be used for all subsequent calls to the API.

3 Creating the API User

The first step in using the AIS "e-Factura" API is to create a dedicated user for the application. This functionality is only available to users with the role of Manager (Director) within the system. The API user has a special role, which gives them access to all the functionalities provided by the platform.

The steps for creating a new API user are as follows:

1. Go to the "**Settings**" section;
2. Select the "**Company users**" submenu in your profile;

3. Select the "**CREATE AN API USER**" button (*Register API user*);

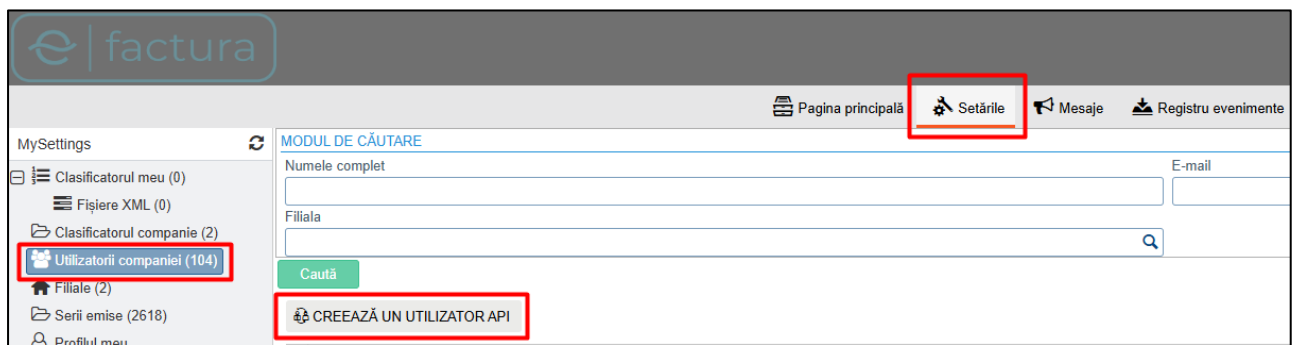


Figure 1 Creating the API User

The screenshot shows the 'Creează un Utilizator nou API' (Create new API User) form. The form is titled 'Creează un Utilizator nou API' and includes a subtitle 'Vă rugăm să completați toate câmpurile obligatorii (bold) pentru a crea'. The form is divided into two sections: 'Informații generale' (General information) and 'Proprietățile contului' (Account properties). The 'Informații generale' section contains fields for 'Numele Utilizatorului (login)' (API user), 'Prenumele' (api), 'Numele' (userTest), 'E-mail' (userapi@test.md), and 'Parola' (password). The 'Parola' field has a note: 'Parola nu trebuie să fie mai mică decât 5 caractere și trebuie să conțină caractere speciale @ sau #.' The 'Proprietățile contului' section contains a 'Rolul:' (Role) dropdown menu with 'API User' selected. The 'Register' and 'Close' buttons are at the bottom right.

Figure 2 Filling in the fields for API user registration

1. Select the "**Register**" button to save the information you entered and create the user.

4 API configuration of the AIS "e-Factura"

```
<bindings>
  <basicHttpBinding>
    <binding name="BasicHttpBinding_IService">
      <security mode="TransportWithMessageCredential" />
    </binding>
  </basicHttpBinding>
</bindings>
<client>
  <endpoint address="https://api-test.fisc.md/Service.svc"
    binding="basicHttpBinding"
    bindingConfiguration="BasicHttpBinding_IService"
    contract="E_FacturaService.IService"
    name="BasicHttpBinding_IService" />
</client>
```

Figure 3 Configuration web.config

This section defines the configuration required to connect the application to the e-Factura API service. BasicHttpBinding with TransportWithMessageCredential security is used, which ensures data transmission via HTTPS connections and authentication based on a username and password. Within the <client> node, the API endpoint (service address), binding type, associated configuration, and contract through which the application will interact with the service are specified.

```
private EFacturaApiRef.ServiceClient _client;

_client = new EFacturaApiRef.ServiceClient();

_client.ClientCredentials.UserName.UserName = "supplier";
_client.ClientCredentials.UserName.Password = "supplier";
```

Figure 4 Initialization and authentication code in Client

This code snippet shows how the app starts up the ServiceClient object to chat with the e-Factura API. After the client is created, the authentication data (username and password) is set through the ClientCredentials property. These credentials are sent with every call, letting the app be identified and authorized within the e-Factura system.

5 Services Operations, request_respons structures

General list of methods:

1. **CheckInvoicesStatus;**

(the method that checks the status of invoices already submitted to the e-Factura system and returns information about their processing (accepted, rejected, pending))

2. **GetAcceptedInvoices;**

(the method that allows obtaining the list of invoices that have been accepted by the e-Factura system)

3. **GetInvoicesBySerialNumber;**

(the method that allows searching and obtaining electronic invoices based on the series and number assigned to the invoice)

4. **GetInvoicesContentForPrint;**

(the method that generates the content of the electronic invoice in a format ready for printing or offline viewing)

5. **GetInvoicesForSigning;**

(the method that returns electronic invoices ready for digital signature in the e-Factura system)

6. **GetInvoicesQRcodes;**

(the method that provides QR codes generated for electronic invoices, useful for quick identification and verification)

7. **GetLogs;**

(the method that provides access to event logs and actions performed within the e-Factura system, useful for monitoring and auditing)

8. **GetRejectedInvoices;**

(the method that returns the list of electronic invoices rejected by the e-Factura system, along with information about the reasons for rejection)

9. **GetTaxpayersInfo;**

(the method that provides identification information and general data about taxpayers registered in the e-Factura system)

10. **PostAcceptedInvoices;**

(the method that allows the transmission of already accepted electronic invoices to the system, to be officially registered and archived in e-Factura)

11. **PostCanceledInvoices;**

(the method that allows canceled electronic invoices to be sent for registration and marking in the e-Factura system)

12. **PostInvoices;**

(the method that allows new electronic invoices to be sent to the e-Factura system for validation and processing)

13. **PostInvoicesWithAttachment;**

(the method that allows the transmission of electronic invoices accompanied by attached PDF documents (e.g., contracts, notices) to the e-Factura system for validation and processing)

14. **PostRejectedInvoices;**

(the method that allows the transmission of rejected electronic invoices to be recorded and managed appropriately in the e-Factura system)

15. **SearchInvoices.**

(the method that allows searching for electronic invoices in the e-Factura system based on general criteria (e.g., number, series, date, status))

5.1 The “CheckInvoicesStatus” method

The “CheckInvoicesStatus” method allows obtaining the status of one or more tax invoices issued by the supplier. The request is made using an InvoicesRequest object, and the response is returned in InvoicesResponse format.

Table 1 Service operations

Signature	CheckInvoicesStatus (InvoicesRequest request): StatusResponse.	
Description	Returns the status of the tax invoice issued by the supplier.	
Returns	A StatusResponse structure containing the list of results (Results), the processing timestamp (TimeStamp), and the request identifier (RequestId).	
Input parameters		
Name	Type	Description
Request	InvoicesStatusRequest	The structure containing the parameters required to obtain the status of a tax invoice issued by the supplier.
Errors		
Code	Reason	
AuthenticationFailedException	The service consumer authentication failed.	
AuthorizationFailedException	Authorization of the service consumer failed.	
InternalErrorException	An internal error occurred while processing the request.	

Table 2 Structure of request_respons

Member	Type	Mandatory/ Optional	Description
InvoicesStatusRequest (Request for tax invoice status)			
RequestId	string	Mandatory	The unique external identifier of the request.
Series	string	Mandatory	Tax Invoice Series.
Number	string	Mandatory	Tax Invoice Number
InvoicesStatusResponse (Response to the request for tax invoice status)			

Results	Array of Invoice	Mandatory	List of returned tax invoices.
TimeStamp	DateTime	Mandatory	Date and time of application processing.
Status	Int	Mandatory	Request processing status: 1 – accepted for execution; 2 – successfully executed; 3 – execution error.
RequestId	string	Mandatory	External identifier of the associated request.
Number	string	Mandatory	Tax Invoice Number.
Series	string	Mandatory	Tax Invoice Series.
InvoiceStatus	Int	Mandatory	Current status of the tax invoice: 0 – Draft; 1 – Signed by Supplier; 2 – Rejected by Buyer; 3 – Accepted by Buyer; 5 – Cancelled by Supplier; 6 – Archived; 7 – Sent to Buyer; 8 – Signed by Buyer; 10 – Shipped (confirmation of receipt of goods/services).

5.1.1 Example of the code for the dialing method

```

var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new InvoicesStatusRequest
{
    RequestId = Guid.NewGuid().ToString(),
    Serial = "EA7A",
    Number = "000004664"
};

var response = client.GetInvoicesStatus(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status}, Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<Invoice>();
foreach (var inv in results)
    Console.WriteLine($"Serial: {inv.Serial}, Număr: {inv.Number}, Status: {inv.Status}, InvoiceStatus: {inv.InvoiceStatus}, Mesaj: {inv.Message}, Time: {inv.TimeStamp}");

```

5.2 The “GetAcceptedInvoices” method

The "GetAcceptedInvoices" method allows to obtain a list of tax invoices issued by the supplier and accepted by the buyer, based on the criteria provided. The request is made using an InvoicesRequest object (or the method-specific type, according to WSDL), and the response is returned in the form of an InvoicesResponse structure.

Table 3 Service operations

Signature	GetAcceptedInvoices (ActorBaseRequest request): InvoicesResponse.
------------------	--

Description	Obtain a list of tax invoices issued by the supplier and accepted by the buyer.	
Returns	An InvoicesResponse structure containing: • Results – a set of returned tax invoices; • TimeStamp – the processing timestamp; • RequestId – the request identifier.	
Input parameters		
Name	Type	Description
request	ActorBaseRequest	Structure containing the request identifier (RequestId) and the role of the actor in the process.
Errors		
Code	Reason	
AuthenticationFailedException	The service consumer authentication process failed.	
AuthorizationFailedException	The service consumer authorization process failed.	
InternalErrorException	An internal error occurred while processing the request..	

Table 4 Structure of request_respons

Member	Type	Mandatory / Optional	Description
ActorBaseRequest (Request based on actor type)			
RequestId	string	Optional	Unique external identifier of the request.
ActorRole	int	Mandatory, > 0	The role of the actor in the e-Invoice system: 1 – Supplier; 2 – Buyer; 3 – Carrier.
InvoicesResponse (Response to request for tax invoices)			
Results	Array of Invoice	Mandatory	List of invoices processed/accepted corresponding to the query.
TimeStamp	DateTime	Mandatory	The time stamp of the action.
Status	Int	Mandatory	Time stamp of the action. Response status: 1 – Accepted for execution; 2 – Successfully executed; 3 – Execution error;
RequestId	string	Mandatory	The ID of the external request.
Invoice (tax invoice)			
Number	string	Mandatory	Tax invoice number.
Series	string	Mandatory	Tax invoice series.
Message	string	Optional	Informative/diagnostic message at invoice level. Error message (only if Status = 3).
Status	string	Mandatory	Operation status code for this invoice: 2 – OK; 3 – Error.
TimeStamp	DateTime	Mandatory	The time stamp of the action.

InvoiceStatus	Int	Mandatory	Tax invoice status in the system: 0 – Draft; 1 – Signed by Supplier; 2 – Rejected by Buyer; 3 – Accepted by Buyer; 5 – Cancelled by Supplier; 7 – Sent to Buyer; 8 – Signed by Buyer; 10 – Transported (signed that goods/services have been received).
---------------	-----	-----------	---

5.2.1 Example of the code for the dialing method

```
var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new ActorBaseRequest
{
    RequestId = Guid.NewGuid().ToString(),
    ActorRole = 1 // 1 = Furnizor
};

var response = client.GetAcceptedInvoices(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status}, Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<Invoice>();
foreach (var inv in results)
    Console.WriteLine($"Seria: {inv.Seria}, Număr: {inv.Number}, Status: {inv.Status}, InvoiceStatus: {inv.InvoiceStatus}, Mesaj: {inv.Message}, Time: {inv.TimeStamp}");
```

5.3 The “GetInvoicesBySerialNumber” method

The "GetInvoicesBySerialNumber" method allows to obtain a list of the actor's tax invoices based on their number and series. The request is made through an InvoicesRequest object, and the response is returned in the form of an InvoicesResponse, which contains the list of invoices found, the processing timestamp, and the unique identifier of the request.

Table 5 Service operations

Signature	GetInvoicesBySerialNumber (InvoicesRequest request): InvoicesResponse.	
Description	Get a list of tax invoices based on identifiers (number and series).	
Returns	An InvoicesResponse object containing the following fields: • Results – list of tax invoices; • TimeStamp – processing timestamp; • RequestId – request identifier.	
Input parameters		
Name	Type	Description
Request	InvoicesRequest	Object containing the list of tax invoice identifiers (InvoiceIdentifiers) and a unique RequestId associated with the

		request.
Errors		
Code	Reason	
AuthenticationFailedException	The service consumer authentication process has failed.	
AuthorizationFailedException	The service consumer authorization process has failed.	
InternalErrorException	An internal error occurred while processing the request.	

Table 6 Structure of request_respons

Member	Type	Mandatory/ Optional	Description
InvoicesXmlRequest (Request of tax invoices)			
RequestId	string	Optional	External identifier.
SeriaAndNumbers	Array of InvoiceIndentificator	Mandatory, at least one element	Current package of tax invoice identifiers.
InvoicesXmlResponse (Response of tax invoices in XML format)			
Results	Array of Invoice	Mandatory	List of tax invoices.
TimeStamp	DateTime	Mandatory	Time stamp of the action.
Status	Int	Mandatory	Status of the processing of the request: 1 – Accepted for execution; 2 – Successfully executed; 3 – Error in execution.
RequestId	string	Mandatory	External request identifier.
XmlInvoice (Tax invoice in XML format)			
XML	string	Mandatory	The content of the invoice in XML format, valid according to the XSD scheme.
Number	string	Mandatory	Tax invoice number.
Series	string	Mandatory	Tax invoice series.
Message	string	Optional	Error message, present only if Status = 3.
Status	string	Optional	2 – Ok; 3 – Error.
TimeStamp	DateTime	Mandatory	Time stamp of the action.
InvoiceStatus	Int	Mandatory	Status of the tax invoice: 0 – Draft; 1 – Signed by the Supplier; 2 – Refused by the Buyer; 3 – Accepted by the Buyer; 5 – Cancelled by the Supplier; 7 – Sent to the Buyer; 8 – Signed by the Buyer; 10 – Transported (signed as goods/services received).

5.3.1 Example of the code for the dialing method

```
var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new InvoicesRequest
{
    RequestId = Guid.NewGuid().ToString(),
    SerialNumbers = new[]
    {
        new InvoiceIdentifier { Number = "000004664", Serial = "EA7A" },
        new InvoiceIdentifier { Number = "000004664", Serial = "EAA" }
    }
};

var response = client.GetInvoicesBySerialNumber(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status}, Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<XmlInvoice>();
foreach (var inv in results)
{
    Console.WriteLine($"Serial: {inv.Serial}, Number: {inv.Number}, Status: {inv.Status}, InvoiceStatus: {inv.InvoiceStatus}, Message: {inv.Message}, Time: {inv.TimeStamp}");
    Console.WriteLine("XML content:");
    Console.WriteLine(inv.XML);
}
```

5.4 The “GetInvoicesContentForPrint” method

Table 7 Service operations

Signature	GetInvoicesContentForPrint (PrintRequest request): PrintContentResponse.	
Description	Returns the content of the tax invoices for printing (depending on the roles of the actors and the orientation of the page).	
Returns	PrintContentResponse object containing: • Results – list of tax invoices for printing; • TimeStamp – time stamp of the processing; • RequestId – unique request identifier.	
Input parameters		
Name	Type	Description
request	PrintRequest	Structure including RequestId, SeriaAndNumbers list (InvoiceIdentifier elements with Seria and Number), ActorRole and Orientation.
Errors		
Code	Reason	
AuthenticationFailedException	The authentication of the service consumer has failed.	
AuthorizationFailedException	The authorization of the service consumer has failed.	
InternalErrorException	An internal error occurred while processing the request.	

Table 8 Structure of request_respons

Member	Type	Mandatory/ Optional	Description
InvoicesRequest (Request of tax invoices)			
RequestId	string	Optional	Unique request identifier.
SeriaAndNumbers	Array of InvoiceIndentificator	Mandatory, at least one element	Collection of 0..n invoice identifiers for which print content is required.
ActorRole	string	Mandatory	Roles of the actors requesting the content (e.g. Supplier/Buyer).
Orientation	string	Mandatory	Page orientation for printing.
GetInvoiceContentForPrintResponse (Output Structure)			
Results	Array of Invoice	Mandatory	List of tax invoices.
TimeStamp	DateTime	Mandatory	Time stamp of the action.
Status	Int	Mandatory	Status of the processing of the request: 1 – accepted for execution; 2 – successfully executed; 3 – error in execution.
RequestId	string	Mandatory	External request identifier.
InvoicePrintResult (item from Results)			
Number	string	Mandatory	Tax invoice number.
Series	string	Mandatory	Tax invoice series.
Message	string	Optional	Error message, present only if Status = 3.
Status	Int	Mandatory	Status of the tax invoice: 2 – Success; 3 – Error.
TimeStamp	DateTime	Mandatory	Time stamp of the action.
Content	string(Base64)	Mandatory	Invoice content in PDF format (Base64 encoded). It must be decoded and saved as a .pdf file.
Format	string	Mandatory	Returned format – in this case “PDF”.

5.4.1 Example of the code for the dialing method

```

var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new InvoicesRequest
{
    RequestId = Guid.NewGuid().ToString(),
    SeriaAndNumbers = new[]
    {
        new InvoiceIndentificator { Seria = "EA7A", Number = "000004664" },
        new InvoiceIndentificator { Seria = "EAA", Number = "000004665" }
    },
    ActorRole = 1, // 1 = Furnizor

```

```

Orientation = "Portrait" // sau "Landscape"
};

var response = client.GetInvoicesBySerialNumber(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status}, Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<XmlInvoice>();
foreach (var info in results)
{
    Console.WriteLine($"Seria: {info.Seria}, Număr: {info.Number}, Status: {info.Status}, Mesaj: {info.Message}, InvoiceStatus: {info.InvoiceStatus}, Time: {info.TimeStamp}");
    Console.WriteLine("XML:");
    Console.WriteLine(info.XML);
}

```

5.5 The “GetInvoicesForSigning” method

The “GetInvoicesForSigning” method makes it possible to obtain the content of tax invoices intended for signature, depending on the roles of the actors and the order of signature. The request is sent through a SignRequest object and the response is returned in the form of an InvoicesResponse, which contains the list of invoices in XML format, the time stamp of the processing and the unique identifier of the request.

Table 9 Service operations

Signature	GetInvoicesForSigning (SignRequest request): InvoicesResponse.	
Description	Returns the contents of the tax invoice for signature.	
Returns	InvoicesResponse type object, containing: • Results – list returned of tax invoices; • TimeStamp – time stamp of the processing; • RequestId – unique request identifier.	
Input parameters		
Name	Type	Description
Request	SignRequest	The structure representing the signing sequence, the roles of the actors and RequestId.
Errors		
Code	Reason	
AuthenticationFailedException	The authentication of the service consumer has failed.	
AuthorizationFailedException	The authorization of the service consumer has failed.	
InternalErrorException	An internal error occurred while processing the request.	

Table 10 Structure of request_respons

Member	Type	Mandatory/ Optional	Description
SignRequest (Request for signing)			
RequestId	String	Mandatory	Unique external identifier.
Order	Int	Mandatory only for the supplier	1 - Status of the tax invoice without signature;

			2 - Signed with the first signature.
ActorRole	Int	Mandatory, > 0	Actor roles in the AIS “e-Factura”: 1 – Supplier; 2 – Buyer; 3 – Carrier.
InvoicesXmlResponse (Response of tax invoices in XML format)			
Results	Array of Invoice	Mandatory	List of invoices returned for signature. It may contain one or more records.
TimeStamp	DateTime	Mandatory	Time stamp of the action.
Status	Int	Mandatory	Represents the status of the response: 1 - accepted for execution; 2 - successfully executed; 3 - error in execution.
RequestId	String	Mandatory	External request of the identifier.
XmlInvoice (Tax invoice in XML format)			
Xml	String	Mandatory	The full content of the invoice in XML format, which includes all the necessary data for signing.
Number	String	Optional	Tax invoice number.
Series	String	Mandatory	Tax invoice series.
Message	String	Optional	Info/diagnosis message associated with the invoice. Error message, only if Status = 3.
Status	String	Mandatory	Status code for this invoice as part of the signing operation: 2 – Ok; 3 – Error.
TimeStamp	DateTime	Mandatory	Time stamp of the action.
InvoiceStatus	Int	Mandatory	Status of the tax invoice: 0 – Draft; 1 – Signed by the Supplier; 2 – Refused by the Buyer; 3 – Accepted by the Buyer; 5 – Cancelled by the Supplier; 7 – Sent to the Buyer; 8 – Signed by the Buyer; 10 – Transported (signed as goods/services received).

5.5.1 Example of the code for the dialing method

```

var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new SignRequest
{
    RequestId = Guid.NewGuid().ToString(),
    ActorRole = 1, // 1 = Furnizor
    Order = 1     // 1 = Statut fără semnătură
};

```

```

var response = client.GetInvoicesForSigning(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status}, Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<XmlInvoice>();
foreach (var inv in results)
{
    Console.WriteLine($"Seria: {inv.Seria}, Număr: {inv.Number}, Status: {inv.Status}, InvoiceStatus: {inv.InvoiceStatus}, Mesaj: {inv.Message}, Time: {inv.TimeStamp}");
    Console.WriteLine("XML content:");
    Console.WriteLine(inv.Xml);
}

```

5.6 The “GetInvoicesQRcodes” method

The “GetInvoicesQRcodes” method makes it possible to obtain the information associated with the QR codes of one or more tax invoices, identified by series and number.

The request is submitted through an InvoicesRequest object, which contains the list of InvoiceIdentifiers and a unique RequestId. The response is returned in the form of a QRcodesResponse structure containing the list of QR codes, the processing time stamp and the unique request identifier.

Table 11 Service operations

Signature	GetInvoicesQRcodes (InvoicesRequest request): QRCodesResponse.	
Description	Returns QR code-related information: - Graphical image of the QR code; - QR code text.	
Returns	Structure containing (List of images/texts of QR codes), TimeStamp and RequestId.	
Input parameters		
Name	Type	Description
Request	InvoicesRequest	The structure representing a list of InvoiceIdentifiers (tax invoice identifiers) and RequestId.
Errors		
Code	Reason	
AuthenticationFailedException	The authentication of the service consumer has failed.	
AuthorizationFailedException	The authorization of the service consumer has failed.	
InternalErrorException	An internal error occurred while processing the request.	

Table 12 Structure of request_respons

Member	Type	Mandatory/Optional	Description
InvoicesRequest (Request of tax invoices)			
RequestId	string	Optional	Unique external identifier.
SeriaAndNumbers	Array of InvoiceIdentifier	Mandatory, at least one	Current package of tax invoice identifiers.

		element	
QRCodesResponse (QRCode response)			
RequestId	string	Optional	External demand identifier.
Result	Array of InvoiceQRCode	Mandatory	List of QR codes corresponding to the requested tax invoices (Series and Number).
TimeStamp	DateTime	Mandatory	Time stamp of the action.
Status	Int	Mandatory	Response status: 1 – accepted for execution; 2 – successfully executed; 3 – error in execution.
InvoiceIndentificator (Tax Invoice Identifier)			
Number	string	Mandatory	Tax invoice number.
Series	string	Mandatory	Tax invoice series.
InvoiceQRCode			
QRCode	Array of byte	Mandatory	The QR image of the code in Base64 format (can be decoded into a PNG image).
QRCodeText	string	Mandatory	Decoded text of the QR code (invoice data and access link). Example: EAA 000003300 Furn-9999999999999999 Cump-9999999999999999 Total amount-24014.70lei VAT amount-0.00lei https://efactura-test.sfs.md:443/EFactura.aspx?id=39290140-8a58-4c7d-9470-8d08ea5693b7.
Series	string	Mandatory	Tax invoice series.
Number	string	Mandatory	Tax invoice number.
TimeStamp	DateTime	Mandatory	Timestamp of QR code generation Action.

5.6.1 Example of the code for the dialing method

```

var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new InvoicesRequest
{
    RequestId = Guid.NewGuid().ToString(),
    SerialNumbers = new[]
    {
        new InvoiceIndentificator { Number = "000004664", Serial = "EA7A" },
        new InvoiceIndentificator { Number = "000004664", Serial = "EAA" }
    }
};

var response = client.GetInvoicesQRcodes(request);

```

```

Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status}, Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<InvoiceQRCode>();
foreach (var info in results)
{
    Console.WriteLine($"Seria: {info.Seria}, Număr: {info.Number}, Status: {info.Status}, Mesaj: {info.Message}, Time: {info.TimeStamp}");
    Console.WriteLine($"QR Text: {info.QRCodeText}");
    Console.WriteLine($"QR Bytes length: {info.QRCode?.Length ?? 0}");
}

```

5.7 The “GetLogs” method

The “GetLogs” method allows the recovery of logs recorded in the AIS “e-Factura” for a specified period of time. The request is submitted through a LogsRequest object, which contains the time interval (FromDate and optionally ToDate) and the unique request identifier (RequestId). The response is returned in the form of a LogsResponse structure, which includes the list of logs (Results), the processing time stamp and the unique request identifier. Each item in the Results is a RequestLog and contains details about the method called, the start and end time of the execution, the status of the execution, the possible error message and the response returned in JSON format.

Table 13 Service operations

Signature	GetLogs (LogsRequest request): LogsResponse.	
Description	Recovers logs recorded in the AIS “e-Factura” for a certain period of time.	
Returns	LogsResponse object containing: • Results – list of returned logs; • TimeStamp – time stamp of the request processing; • RequestId – unique request identifier.	
Input parameters		
Name	Type	Description
request	LogsRequest	Structure containing: • the time period for which logs are requested (e.g.: FromDate, ToDate). • RequestId – unique request identifier.

Table 14 Structure of request_respons

Member	Type	Mandatory/ Optional	Description
LogsRequest (request for logs)			
RequestId	string	Optional	External unique identifier.
From	DateTime	Optional	Start date and time of the interval for which logs are requested.
To	DateTime	Optional	Date and time of end of interval.
LogsResponse (logs’ response)			
Results	Array of RequestLog	Mandatory	RequestLog list (login requests).
RequestLog (request’s log)			
Username	string	Mandatory	Username that invoked the method.

Method	string	Mandatory	Name of the method called.
StartDateTime	DateTime	Mandatory	The start time of the method's execution.
EndDateTime	DateTime	Mandatory	End time of method execution.
Status	Int	Mandatory	Status of enforcement.
Error	string	Optional	Error message, if execution failed.
Response	string	Mandatory	Answer returned in JSON format, for example: {"Results":[{"Status":2,"Series":"EAA","Number":"000005949"}, {"Status":2,"Series":"EAA","Number":"000005950"}, {"Status":2,"Series":"EAA","Number":"000005951"}], "TimeStamp":"\Date(1408460536810)\","Status":2,"RequestId":"4a1d38e8-7377-4748-97e4-0ed41c1fc189"}.

5.7.1 Example of the code for the dialing method

```

var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new LogsRequest
{
    RequestId = Guid.NewGuid().ToString(),
    From = DateTime.Now.AddDays(-1), // cu 1 zi în urmă
    To = DateTime.Now // până acum
};

var response = client.GetLogs(request);
var results = response?.Results ?? Array.Empty<RequestLog>();
foreach (var log in results)
{
    Console.WriteLine($"Method: {log.Method}, User: {log.Username}");
    Console.WriteLine($"Start: {log.StartDateTime}, End: {log.EndDateTime}");
    Console.WriteLine($"Status: {log.Status}, Error: {log.Error}");
    Console.WriteLine($"Response: {log.Response}");
}

```

5.8 The “GetRejectedInvoices” method

The “GetRejectedInvoices” method returns the list of rejected tax invoices, taken from the AIS “e-Facturas”, depending on the role of the specified actor.

The request is made through an ActorBaseRequest object, which contains the roles of the actors (ActorRole) and the unique request identifier (RequestId). The response is returned in the form of an InvoicesResponse, which includes the list of rejected invoices (Results), the time stamp of the processing (TimeStamp) and the request identifier (RequestId).

Table 15 Service operations

Signature	GetRejectedInvoices (ActorBaseRequest request): InvoicesResponse.	
Description	Returns the list of rejected tax invoices taken from the AIS “e-Factura”.	
Returns	Structure containing invoice list, TimeStamp and RequestId.	
Input parameters		
Name	Type	Description
request	ActorBaseRequest	Structure containing parameters for searching rejected tax invoices and request identifier (RequestId).

Table 16 Structure of request_respons

Member	Type	Mandatory/ Optional	Description
ActorBaseRequest (Request based of the type of actor)			
RequestId	String	Optional	Unique external identifier.
ActorRole	Int	Mandatory, > 0	Roles of actors in the AIS “e-Factura”: 1 – Supplier; 2 – Buyer; 3 – Carrier.
InvoicesResponse (Response of tax invoices)			
RequestId	String	Mandatory	External demand identifier.
Status	Int	Mandatory	Represents the status of the response: 1 – accepted for execution; 2 – successfully executed; 3 – error in execution.
Results	Array of Invoice	Mandatory	List of rejected invoices returned by the method.
TimeStamp	DateTime	Mandatory	Time stamp of the action.

5.8.1 Example of the code for the dialing method

```

var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new ActorBaseRequest
{
    RequestId = Guid.NewGuid().ToString(),
    ActorRole = 1 // 1 = Furnizor
};

var response = client.GetRejectedInvoices(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status}, Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<Invoice>();
foreach (var inv in results)
    Console.WriteLine($"Seria: {inv.Seria}, Număr: {inv.Number}, InvoiceStatus: {inv.InvoiceStatus}, Time: {inv.TimeStamp}");

```

5.9 The “GetTaxpayersInfo” method

The “GetTaxpayersInfo” method returns information about companies and their status in the AIS “e-Factura”, based on the tax codes provided.

The request is made through a TaxpayersRequest object, which contains the list of taxpayers’ tax codes (taxpayer identification numbers) and the unique request identifier (RequestId).

The response is returned in the form of a TaxpayersResponse structure, which includes the results list (Results), the processing time stamp (TimeStamp) and the unique request identifier (RequestId).

Table 17 Service operations

Signature	GetTaxpayersInfo (TaxpayersRequest request): TaxpayersResponse.	
Description	Returns information about companies and their status in the AIS “e-Factura”.	
Returns	Structure containing the list of results, TimeStamp and RequestId.	
Input parameters		
Name	Type	Description
Request	TaxpayersRequest	Structure containing the list of taxpayers' tax codes and the request identifier (RequestId).
Errors		
Code	Reasons	
AuthenticationFailedException	The authentication process of the service consumer has failed.	
AuthorizationFailedException	The authorization process of the service consumer has failed.	
InternalErrorException	An internal error occurred while processing the request.	

Table 18 Structure of request_respons

Member	Type	Mandatory/ Optional	Description
TaxpayersRequest (Taxpayer request)			
RequestId	String	Optional	External identifier (is unique for each request, but can be reused for a result that was returned in advance). This ID is associated with the corresponding RequestID of the calling method, which links requests and returns.
String	String	Optional	List of tax codes (IDNP or IDNO) for which information is requested.
TaxpayersResponse (The taxpayer's response)			
Result	Array of Taxpayer	Mandatory	The collection of taxpayers found corresponding to the requested tax codes.

TimeStamp	DateTime	Mandatory	The timestamp of the action.
Status	Int	Mandatory	Status: 1 - accepted for execution; 2 - executed successfully; 3 - error during execution.
RequestId	String	Mandatory	External identifier of the request. This ID is associated with the corresponding method call request and links requests and returns.
Taxpayer (Taxpayer)			
IDNO (state identification number for legal entities in the Republic of Moldova)	String	Mandatory	The taxpayer's tax identifier (IDNO/IDNP) for which the data was returned.
Name	String	Mandatory	The name of the legal entity or the name of the natural person.
Address	String	Mandatory	The taxpayer's address; can be null if the information is not available.
TaxpayerType	Int	Mandatory	Taxpayer type: 1 - Legal entity; 2 - Natural person; 3 - Non-resident.
IsEFacturaActor	Bool	Mandatory	Indicator of whether the entity is an actor in the AIS "e-Factura" (has active roles in the system).
ExistInTaxRegistry	Bool	Mandatory	Indicator of whether the entity exists in the tax registry.

5.9.1 Example of the code for the dialing method

```

var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new TaxpayersRequest
{
    RequestId = Guid.NewGuid().ToString(),
    FiscalCodes = new[] { "1002600004030", "1002600023736" }
};

var response = client.GetTaxpayersInfo(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status}, Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<Taxpayer>();
foreach (var info in results)
    Console.WriteLine($"Nume: {info.Name}, IDNO: {info.IDNO}, Tip: {info.TaxpayerType}, Actor e-Factura: {info.IsEFacturaActor}, În registru fiscal: {info.ExistInTaxRegistry}, Adresă: {info.Address}");

```

5.10 The "PostAcceptedInvoices" method

The "PostAcceptedInvoices" method sends accepted tax invoices to the AIS "e-Factura" for registration.

The request is made through an AcceptedRequest object, which contains the unique request identifier (RequestId) and the list of accepted invoices (SeriaAndNumbers).

The response is returned as an AcceptedResponse structure, which includes the processing results for each invoice (Results), the processing timestamp (TimeStamp), the execution status (Status), and the request identifier (RequestId).

Each element in the Results array is of type InvoiceResult and contains the invoice number and series, the processing status, and, optionally, a detailed error message in case of failure.

Table 19 Service operations

Signature	PostAcceptedInvoices (AcceptedRequest request): AcceptedResponse	
Description	Sends accepted tax invoices to the AIS "e-Factura".	
Returns	A structure that contains the invoice processing results, Timestamp, and RequestId.	
Input parameters		
Name	Type	Description
request	AcceptedRequest	The structure that contains the accepted tax invoices and the request identifier (RequestId).

Table 20 Structure of request_respons

Member	Type	Mandatory /Optional	Description
AcceptedRequest (acceptance request)			
RequestId	string	Optional	External identifier.
SeriaAndNumbers	Array of InvoiceIndenticator	Mandatory	The identifier of the accepted invoices.
AcceptedResponse (request for response)			
RequestId	string	Optional	External request identifier.
Results	Array of InvoiceResult	Mandatory	The list of results for each processed invoice.
TimeStamp	DateTime	Mandatory	The timestamp of the action.
Status	Int	Mandatory	Represents the status: 1 - accepted for execution; 2 - executed successfully; 3 - error during execution.
InvoiceResult (Tax Invoice Result)			
Number	string	Mandatory	The tax invoice number.
Series	string	Mandatory	The tax invoice series.
Message	string	Optional	An optional message containing details in case of an error.
Status	string	Mandatory	The invoice processing status: 2 - Success; 3 - Error.

TimeStamp	DateTime	Mandatory	The timestamp of the action.
-----------	----------	-----------	------------------------------

5.10.1 Example of the code for the dialing method

```

var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new AcceptedRequest
{
    RequestId = Guid.NewGuid().ToString(),
    SerialNumbers = new[]
    {
        new InvoiceIdentifier { Number = "000004664", Serial = "EAA" },
        new InvoiceIdentifier { Number = "000004665", Serial = "EAA" }
    }
};

var response = client.PostAcceptedInvoices(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status}, Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<InvoiceResult>();
foreach (var info in results)
    Console.WriteLine($"Serial: {info.Serial}, Number: {info.Number}, Status: {info.Status}, Mesaj: {info.Message}, Time: {info.TimeStamp}");

```

5.11 The "PostCanceledInvoices" method

The "PostCanceledInvoices" method sends canceled tax invoices to the AIS "e-Factura". The request is made through a CanceledRequest object, which contains the unique request identifier (RequestId) and the list of canceled tax invoices, each with an associated comment (InvoicesComments).

The response is returned as a CanceledResponse structure, which includes the processing results (Results), the timestamp (TimeStamp), the execution status (Status), and the request identifier (RequestId). Each element in the Results array is of type InvoiceResult and contains the invoice number and series, the processing status, and, optionally, an informational message in case of an error or inability to cancel.

Table 21 Service operations

Signature	PostCanceledInvoices (CanceledRequest request): CanceledResponse.	
Description	Submits canceled invoices to the AIS "e-Factura."	
Returns	A structure that contains the results, Timestamp, and RequestId.	
Input Parameters		
Name	Type	Description
request	CanceledRequest	A structure containing the request identifier (RequestId) and the list of canceled tax invoices (SeriaAndNumbers).

Table 22 Structure of request_respons

Member	Type	Mandatory /Optional	Description
CanceledRequest (cancellation request)			
RequestId	string	Optional	The external identifier.
InvoiceComment	Array of InvoiceComment	Mandatory	The list of invoices to be canceled, along with their associated comments.
Series	string	Optional	The tax invoice series.
Number	string	Optional	The tax invoice number.
PostCanceledInvoicesResult			
RequestId	string	Optional	The external request identifier.
Results	Array of InvoiceResult	Mandatory	A list of processing results for each invoice in the request.
TimeStamp	DateTime	Mandatory	The timestamp of the action.
Status	Int	Mandatory	Represents the status: 1 - accepted for execution; 2 - executed successfully; 3 - error during execution.
InvoiceResult			
Number	string	Mandatory	The tax invoice number.
Series	string	Mandatory	The tax invoice series.
Message	string	Optional	An informational message in case of an error or inability to cancel.
Status	string	Optional	The result status: 2 - Success; 3 - Error.
TimeStamp	DateTime	Mandatory	The timestamp of the action.

5.11.1 Example of the code for the dialing method

```

var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new CanceledRequest
{
    RequestId = Guid.NewGuid().ToString(),
    InvoiceComment = new[]
    {
        new InvoiceComment { Seria = "EA7A", Number = "0000046766", Comment = "Anulare – eroare de emitere" },
        new InvoiceComment { Seria = "EAA", Number = "000004663", Comment = "Anulare – dublură" }
    }
};

var response = client.PostCanceledInvoices(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status}, Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<InvoiceResult>();
foreach (var info in results)

```

```
Console.WriteLine($"Seria: {info.Seria}, Număr: {info.Number}, Status: {info.Status}, Mesaj: {info.Message}, Time: {info.TimeStamp}");
```

5.12 The "PostInvoices" method

The "PostInvoices" method sends tax invoices to the AIS "e-Factura" for registration. The request is made through a PostInvoicesRequest object, which contains the unique request identifier (RequestId), the content of the invoices in XML format (InvoicesXml), the actor's role in the system (ActorRole), and the XML status (InvoicesXmlStatus).

The response is returned as a PostInvoicesResponse structure, which includes the total number of invoices submitted (TotalInvoices), the number of invoices processed successfully (TotalInvoicesPosted), the timestamp (TimeStamp), the execution status (Status), the request identifier (RequestId), and, optionally, an error message (ErrorMessage) in case of failure.

Table 23 Service operations

Signature	PostInvoices (PostInvoicesRequest request): PostInvoicesResponse.	
Description	Submits tax invoices to the AIS "e-Factura".	
Returns	A structure that contains the results of the submitted invoices, Timestamp, and RequestId.	
Input Parameters		
Name	Type	Description
Request	PostInvoicesRequest	A structure that contains one or more tax invoices and an associated RequestId.

Table 24 Structure of request_respons

Member	Type	Mandatory/Optional	Description
PostInvoicesRequest (request for posting tax invoices)			
RequestId	string	Optional	The external identifier.
InvoicesXml	string	Mandatory	The content of the tax invoices in XML format.
ActorRole	Int	Optional, > 0	The actor's role in the system: 1 - supplier; 2 - buyer; 3 - transporter.
InvoicesXmlStatus	string	Optional	The XML status: 0 - unsigned; 1 - signed.
PostInvoicesResponse (response to posting tax invoices)			
RequestId	string	Mandatory	The external identifier associated with the request.
TotalInvoices	Int	Mandatory	The total number of invoices submitted.
TotalInvoicesPosted	Int	Mandatory	The number of tax invoices submitted successfully.
TimeStamp	DateTime	Mandatory	The timestamp of the action.
Status	Int	Mandatory	Represents the status:

			1 - accepted for execution; 2 - executed successfully; 3 - error during execution.
ErrorMessage	string	Optional	The error message, if applicable. Examples: 1 - Incorrect XML; 2 - Processing error.

5.12.1 Example of the code for the dialing method

```

var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

const string xml =
@"<Documents>
  <Document>
    <SupplierInfo>
      <DeliveryDate>2014-04-22T00:00:00.804Z</DeliveryDate>
      <Supplier IDNO=""1002600001257""><BankAccount Account=""22241410046"" /></Supplier>
      <Buyer IDNO=""1002600003354""><BankAccount Account=""2224710SV12365037100"" /></Buyer>
      <Merchandises>
        <Row Code=""1"" Name=""Abon. Contactell"" UnitOfMeasure=""buc"" Quantity=""-1""
          UnitPriceWithoutTVA=""15.00"" TotalPriceWithoutTVA=""-15.00""
          TVA=""20"" TotalTVA=""3.00"" TotalPrice=""-18.00"" />
        <Row Code=""1"" Name=""Abon. Contactell 111"" UnitOfMeasure=""buc"" Quantity=""-1""
          UnitPriceWithoutTVA=""-15.00"" TotalPriceWithoutTVA=""-15.00""
          TVA=""20"" TotalTVA=""3.00"" TotalPrice=""-18.00"" />
      </Merchandises>
    </SupplierInfo>
    <AdditionalInformation><id>IdentificatorInter</id></AdditionalInformation>
  </Document>
</Documents>";

var request = new PostInvoicesRequest
{
    RequestId = Guid.NewGuid().ToString(),
    ActorRole = 1, // 1 = Furnizor
    InvoicesXmlStatus = "0", // "0" = Nesemnata
    InvoicesXml = xml
};

var response = client.PostInvoices(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status}, Time:
{response?.TimeStamp}, TotalInvoices: {response?.TotalInvoices}, TotalInvoicesPosted:
{response?.TotalInvoicesPosted}, ErrorMessage: {response?.ErrorMessage}");

```

5.13 The "PostInvoicesWithAttachment" method

The "PostInvoicesWithAttachment" method sends tax invoices along with their attached files to the AIS "e-Factura".

The request is made using a PostInvoicesWithAttachmentRequest object, which contains the unique request identifier (RequestId), the invoices' content in XML format (InvoicesXml), the associated attachments (in Base64 format), the actor's role in the system (ActorRole), and the XML status (InvoicesXmlStatus).

The response is returned as a `PostInvoicesWithAttachmentResponse` structure. This includes the total number of invoices submitted (`TotalInvoices`), the number of invoices successfully processed (`TotalInvoicesPosted`), the action's timestamp (`TimeStamp`), the execution status (`Status`), the request's identifier (`RequestId`), and an optional error message (`ErrorMessage`) in case of a failure.

Table 25 Service operations

Signature	PostInvoicesWithAttachment	
Description	Posts tax invoices with attachments to the AIS "e-Factura".	
Returns	A structure that contains the results of the submitted invoices, Timestamp, and RequestId.	
Input Parameters		
Name	Type	Description
Request	PostInvoicesWithAttachmentRequest	A structure that contains one or more tax invoices with attachments and an associated RequestId.

Table 26 Structure of request_respons

Member	Type	Mandatory/ Optional	Description
PostInvoicesRequest (request for posting tax invoices)			
RequestId	string	Mandatory	External Identifier.
InvoicesXml	string	Mandatory	The content of the tax invoices in XML format.
ActorRole	Int	Mandatory, >0	The role of the actor in the AIS "e-Factura": 1 - supplier; 2 - buyer; 3 - transporter.
FileName	string	Mandatory	The name of the document attached to the tax invoice is entered. Required: .PDF
FileContent (ConvertedFileBase64)	string	Mandatory	The PDF file will be individually converted by the user to Base64 format and its content will be added. Max.: 10 MB
InvoicesXmlStatus	string	Mandatory	The status of the XML: 0 - unsigned; 1 - signed.
PostInvoicesResponse (response to posting tax invoices)			
TotalInvoices	Int	Mandatory	The total number of invoices submitted.
TotalInvoicesPosted	Int	Mandatory	The number of tax invoices successfully submitted.
TimeStamp	DateTime	Mandatory	The timestamp of the action.
Status	Int	Mandatory	Represents the status: 1 - accepted for execution; 2 - executed successfully;

			3 - execution error.
RequestId	string	Mandatory	The external identifier associated with the request.
ErrorMessage	string	Optional	The error message, if any. Examples: 1 - Incorrect XML; 2 - processing error.

5.13.1 Example of the code for the dialing method

```

var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

const string xml =
@"<Documents>
  <Document>
    <SupplierInfo>
      <DeliveryDate>2014-04-22T00:00:00.804Z</DeliveryDate>
      <Supplier IDNO=""1002600001257""><BankAccount Account=""22241410046"" /></Supplier>
      <Buyer IDNO=""1002600003354""><BankAccount Account=""2224710SV12365037100"" /></Buyer>
      <Merchandises>
        <Row Code=""1"" Name=""Abon. Contactell"" UnitOfMeasure=""buc"" Quantity=""-1""
          UnitPriceWithoutTVA=""15.00"" TotalPriceWithoutTVA=""-15.00""
          TVA=""20"" TotalTVA=""3.00"" TotalPrice=""-18.00"" />
        <Row Code=""1"" Name=""Abon. Contactell 111"" UnitOfMeasure=""buc"" Quantity=""-1""
          UnitPriceWithoutTVA=""-15.00"" TotalPriceWithoutTVA=""-15.00""
          TVA=""20"" TotalTVA=""3.00"" TotalPrice=""-18.00"" />
      </Merchandises>
    </SupplierInfo>
    <AdditionalInformation><id>IdentificatorInter</id></AdditionalInformation>
  </Document>
</Documents>";

var pdfPath = @"C:\path\to\invoice.pdf";
var base64Pdf = Convert.ToBase64String(File.ReadAllBytes(pdfPath));

var request = new PostInvoicesRequest
{
    RequestId = Guid.NewGuid().ToString(),
    ActorRole = 1, // 1 = Furnizor
    InvoicesXmlStatus = "0", // "0" = Nesemnata
    InvoicesXml = xml,
    FileName = "invoice.pdf",
    FileContent = base64Pdf
};

var response = client.PostInvoices(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status}, Time:
{response?.TimeStamp}, TotalInvoices: {response?.TotalInvoices}, TotalInvoicesPosted:
{response?.TotalInvoicesPosted}, ErrorMessage: {response?.ErrorMessage}");

```

5.14 The "PostRejectedInvoices" method

The "PostRejectedInvoices" method sends tax invoices rejected by the buyer to the AIS "e-Factura".

The request is made via a RejectRequest object, which contains the unique request identifier (RequestId) and the list of rejected tax invoices with comments (InvoicesComments).

The response is returned as a RejectedResponse structure, which includes the processing results for each invoice (Results), the timestamp (TimeStamp), the execution status (Status), and the request identifier (RequestId).

Each element within the Results array is an InvoiceResult type and contains the invoice number and series, the processing status, and, optionally, a message detailing the reason for the invoice's rejection.

Table 27 Service operations

Signature	PostRejectedInvoices (RejectRequest request): RejectedResponse.	
Description	Submit rejected tax invoices to the AIS "e-Factura".	
Returns	The structure containing the results of the submitted invoices, TimeStamp, and RequestId.	
Input Parameters		
Name	Type	Description
request	RejectRequest	Structure containing the list of rejected tax invoices and RequestId.

Table 28 Structure of request_respons

Member	Type	Mandator/ Optional	Description
RejectRequest (Request for refusal)			
RequestId	string	Optional	External Identifier.
InvoicesComments	Array of InvoiceComment	Optional	List of invoices to be rejected, along with corresponding comments.
InvoiceComment.Number	string	Optional	The number of the invoice to be rejected.
InvoiceComment.Seria	string	Optional	The series of the invoice to be rejected.
InvoiceComment.Comment	string	Optional	The reason for rejecting the invoice.
RejectedResponse (refusal response)			
RequestId	string	Optional	External Identifier.
Results	Array of InvoiceResult	Optional	List of results for each processed invoice. It can be empty if there are no results.
TimeStamp	DateTime	Mandatory	The timestamp of the action.
Status	Int	Mandatory	The general status of the response: 1 – Accepted for execution; 2 – Executed successfully; 3 – Error.
InvoiceResult.Number	string	Mandatory (if it's on the list)	The number of the processed invoice.
InvoiceResult.Seria	string	Mandatory (if it's on the list)	The series of the processed invoice.

InvoiceResult.Message	string	Optional	Explanatory message (e.g., the reason the invoice could not be rejected).
InvoiceResult.Status	Int	Mandatory	The rejection status: 2 – Success; 3 – Error.
InvoiceResult.Timestamp	dateTime	Mandatory	The date and time of processing for the respective invoice.
InvoiceComment (comment on the tax invoice)			
Comment	string	Mandatory	Rejection comment for the tax invoice.
Number	string	Mandatory	The number of the tax invoice.
Series	string	Mandatory	The series of the tax invoice.
InvoiceResult (tax invoice result)			
Number	string	Mandatory	The number of the tax invoice.
Series	string	Mandatory	The series of the tax invoice.
Message	string	Optional	Error message (if applicable), or internal errors.
Status	string	Optional	Rejection Status: 2 - Success; 3 - Error.
TimeStamp	DateTime	Mandatory	The timestamp of the action.

5.14.1 Example of the code for the dialing method

```

var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new RejectRequest
{
    RequestId = Guid.NewGuid().ToString(),
    InvoicesComments = new[]
    {
        new InvoiceComment { Number = "0000046766", Serial = "EA7A", Comment = "reject" },
        new InvoiceComment { Number = "000004663", Serial = "EAA", Comment = "reject" }
    }
};

var response = client.PostRejectedInvoices(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status}, Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<InvoiceResult>();
foreach (var info in results)
    Console.WriteLine($"Serial: {info.Serial}, Număr: {info.Number}, Status: {info.Status}, Mesaj: {info.Message}, Time: {info.TimeStamp}");

```

5.15 The "SearchInvoices" method

The "SearchInvoices" method allows you to retrieve tax invoices from the AIS "e-Factura" based on specific search criteria.

The request is made through a SearchRequest object, which contains the unique request identifier (RequestId), the actor's role (ActorRole), and a set of search parameters (SearchParameters). The

parameters can include the invoice status (InvoiceStatus), identification data (IDNO, series, number), invoice type, time ranges, and the internal identifier of the accounting system (APIeInvoiceId).

The response is returned as an InvoicesResponse structure, which contains the list of invoices matching the criteria (Results), the processing timestamp (TimeStamp), the execution status (Status), and the request identifier (RequestId).

Each invoice in the list is of type Invoice and includes the number, series, timestamp, and the current status of the tax invoice.

Table 29 Service operations

Signature	SearchInvoices (SearchRequest request): InvoicesResponse.	
Description	Get the content of the tax invoice based on the search criteria.	
Returns	A structure containing results (list of invoices), TimeStamp, and RequestId.	
Input Parameters		
Name	Type	Description
request	SearchRequest	Parameters for searching tax invoices.
Errors		
Code	Reason	
AuthenticationFailedException	User authentication failed.	
AuthorizationFailedException	User authorization failed.	
InternalErrorException	Internal service error.	

Table 30 Structure of request_respons

Member	Type	Mandatory/ Optional	Description
SearchRequest (search request)			
RequestId	string	Optional	The unique external identifier of the request.
ActorRole	Int	Optional, >0	The role of the actor in the AIS "e-Factura": 1 - supplier; 2 - buyer; 3 - transporter.
Parameters	SearchParameters	Optional	The search parameters for the tax invoices.
SearchParameters (search parameters)			

InvoiceStatus	int	Optional	The current status of the tax invoice: 0 - Draft; 1 - Signed by Supplier; 2 - Rejected by Buyer; 3 - Accepted by Buyer; 5 - Canceled by Supplier; 6 - Archived; 7 - Sent to Buyer; 8 - Signed by Buyer; 10 - Transported (acknowledgment of receipt of goods/services).
SupplierIDNO	string	Optional	The supplier's IDNO.
BuyerIDNO	string	Optional	The tax code (IDNO) of the buyer.
TransporterIDNO	string	Optional	The transporter's IDNO.
Series	string	Optional	The tax invoice series.
Number	string	Optional	The tax invoice number.
InvoiceType	Int	Optional	The type of tax invoice (Tax Invoice=0).
IssuedOn	DateSearch	Optional	The date range for the invoice's issuance.
IssuedOn.StartDate	dateTime	Optional	The start date of issuance.
IssuedOn.EndDate	dateTime	Optional	The end date of issuance.
DeliveredOn	dateInterval	Optional	The delivery date of the tax invoice.
RegisteredOn	DateSearch	Optional	The date range for the invoice's registration in the system.
APIeInvoiceId	string	Optional	The internal identifier of the accounting system, indicated in AdditionalInformation.
DeliveredOn.Start Date	dateTime	Optional	The start date of delivery.
DeliveredOn.EndDate	dateTime	Optional	The end date of delivery.
RegisteredOn.Start Date	dateTime	Optional	The start date of registration.
RegisteredOn.End Date	dateTime	Optional	The end date of registration.

5.15.1 Example of the code for the dialing method

```

var client = new ServiceClient();
client.ClientCredentials.UserName.UserName = "supplier";
client.ClientCredentials.UserName.Password = "supplier";

var request = new SearchRequest
{
    RequestId = Guid.NewGuid().ToString(),
    ActorRole = 1, // 1 = Furnizor

```

```

Parameters = new SearchParameters
{
    InvoiceStatus = 7, // 7 Trimis
    SupplierIDNO   = "1002600004030",
    BuyerIDNO      = "1002600023736",
    TransporterIDNO = "1007600029836",
    Serial         = "EA7A",
    Number         = "000001234",
    InvoiceType     = 0, // 0 = ETI
    APIeInvoiceId  = "IdentificatorInter",
    IssuedOn       = new DateSearch { StartDate = DateTime.Now.AddDays(-100), EndDate = DateTime.Now },
    DeliveredOn    = new DateSearch { StartDate = DateTime.Now.AddDays(-100), EndDate = DateTime.Now },
    RegisteredOn   = new DateSearch { StartDate = DateTime.Now.AddDays(-100), EndDate = DateTime.Now }
}
};

var response = client.SearchInvoices(request);
Console.WriteLine($"RequestId: {response?.RequestId}, Status: {response?.Status}, Time: {response?.TimeStamp}");

var results = response?.Results ?? Array.Empty<Invoice>();
foreach (var inv in results)
    Console.WriteLine($"Seria: {inv.Serial}, Număr: {inv.Number}, InvoiceStatus: {inv.InvoiceStatus}, Time: {inv.TimeStamp}");

```