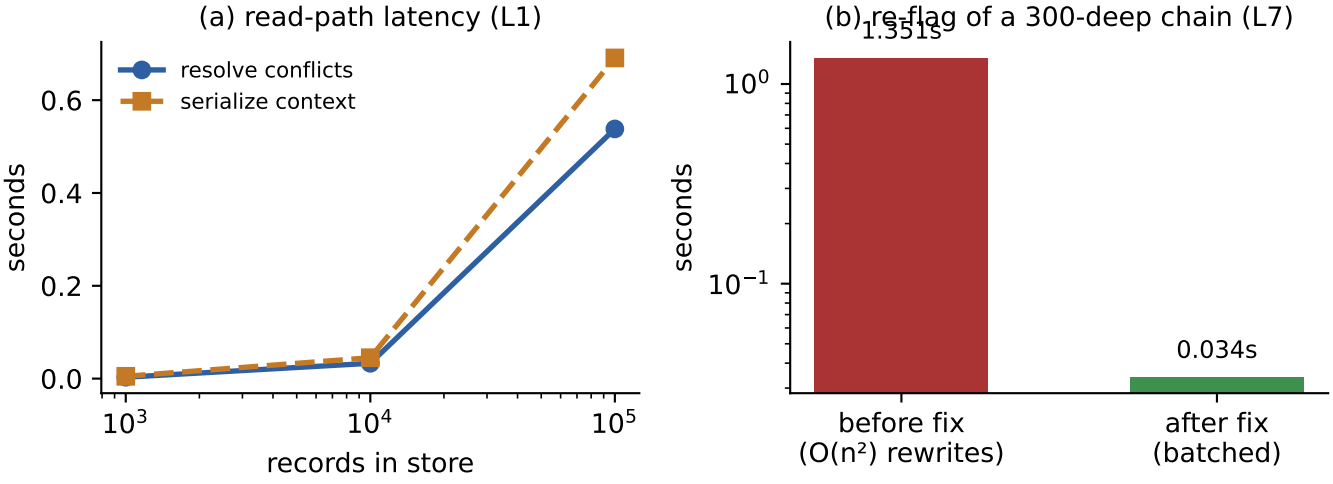
(a) read-path latency (L1)
resolve conflicts
serialize context
seconds
0.0
0.2
0.4
0.6
10^3
10^4
10^5
records in store
(b) re-flag of a 300-deep chain (L7)
seconds
10^0
10^{-1}
1.351s
0.034s
before fix
(O(n²) rewrites)
after fix
(batched)