

20104016

DEENA

Importing Libraries

```
In [1]: import numpy as np
import pandas as pd
import seaborn as sns
import matplotlib.pyplot as plt
```

Importing Datasets

```
In [2]: df=pd.read_csv("rainfall_east rajasthan.csv")
```

Out[2]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT
0	1932	EAST RAJASTHAN	1901	21.6	8.9	2.9	0.7	5.0	15.0	164.8	175.6	7.5	9.8
1	1933	EAST RAJASTHAN	1902	4.1	0.7	0.0	1.8	9.9	34.6	247.6	116.7	145.6	14.4
2	1934	EAST RAJASTHAN	1903	1.9	0.7	1.3	0.1	12.9	15.6	238.2	229.1	168.5	17.8
3	1935	EAST RAJASTHAN	1904	4.3	5.5	21.7	0.2	27.5	49.9	289.7	223.5	50.2	1.5
4	1936	EAST RAJASTHAN	1905	4.1	8.8	3.2	1.6	2.0	14.4	130.5	30.9	83.8	0.0
...
110	2042	EAST RAJASTHAN	2011	0.0	11.2	0.2	0.5	5.1	140.9	193.6	284.1	166.4	0.0
111	2043	EAST RAJASTHAN	2012	1.9	0.0	0.0	3.6	9.5	11.2	170.5	365.0	131.3	0.5
112	2044	EAST RAJASTHAN	2013	1.4	21.7	0.4	3.2	1.0	90.6	319.0	278.5	88.0	30.6
113	2045	EAST RAJASTHAN	2014	28.4	10.0	6.4	7.3	8.4	23.5	197.1	261.0	136.9	3.2
114	2046	EAST RAJASTHAN	2015	12.1	0.1	55.9	15.9	3.5	96.4	297.6	142.8	20.1	5.0

115 rows × 20 columns

Data Cleaning and Data Preprocessing

```
In [3]: df = df.dropna()
```

```
In [4]: df.columns
```

```
Out[4]: Index(['index', 'SUBDIVISION', 'YEAR', 'JAN', 'FEB', 'MAR', 'APR', 'MAY',  
              'JUN', 'JUL', 'AUG', 'SEP', 'OCT', 'NOV', 'DEC', 'ANNUAL', 'Jan-Feb',  
              'Mar-May', 'Jun-Sep', 'Oct-Dec'],  
             dtype='object')
```

```
In [5]: df.info()
```

```
<class 'pandas.core.frame.DataFrame'>  
Int64Index: 115 entries, 0 to 114  
Data columns (total 20 columns):  
#   Column                Non-Null Count  Dtype  
---  -  
0   index                 115 non-null   int64  
1   SUBDIVISION           115 non-null   object  
2   YEAR                  115 non-null   int64  
3   JAN                   115 non-null   float64  
4   FEB                   115 non-null   float64  
5   MAR                   115 non-null   float64  
6   APR                   115 non-null   float64  
7   MAY                   115 non-null   float64  
8   JUN                   115 non-null   float64  
9   JUL                   115 non-null   float64  
10  AUG                   115 non-null   float64  
11  SEP                   115 non-null   float64  
12  OCT                   115 non-null   float64  
13  NOV                   115 non-null   float64  
14  DEC                   115 non-null   float64  
15  ANNUAL                115 non-null   float64  
16  Jan-Feb               115 non-null   float64  
17  Mar-May               115 non-null   float64  
18  Jun-Sep               115 non-null   float64  
19  Oct-Dec               115 non-null   float64  
dtypes: float64(17), int64(2), object(1)  
memory usage: 18.9+ KB
```

Line chart

In [6]: `df.plot.line(subplots=True)`


Out[6]: array([<AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>], dtype=object)



Line chart

In [7]: `df.plot.line()`


Out[7]: <AxesSubplot:~>

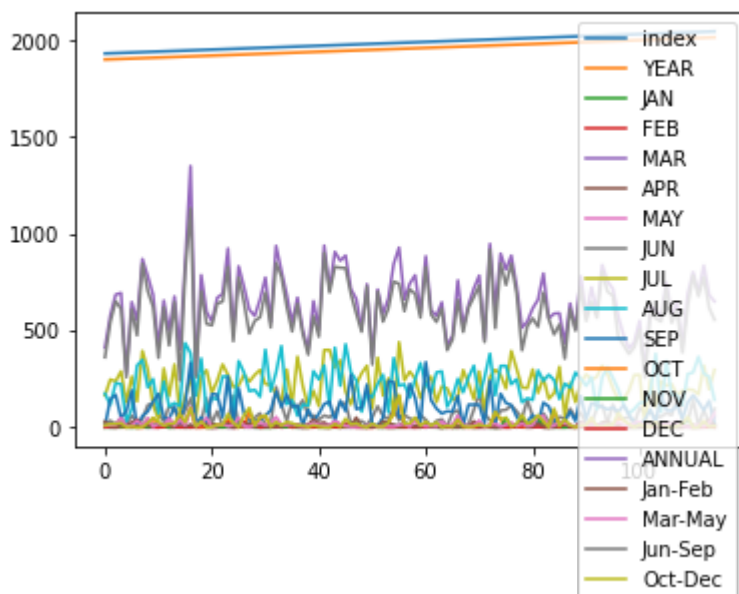

Bar chart

In [8]: `df.plot.bar()`


Out[8]: `<AxesSubplot:>`

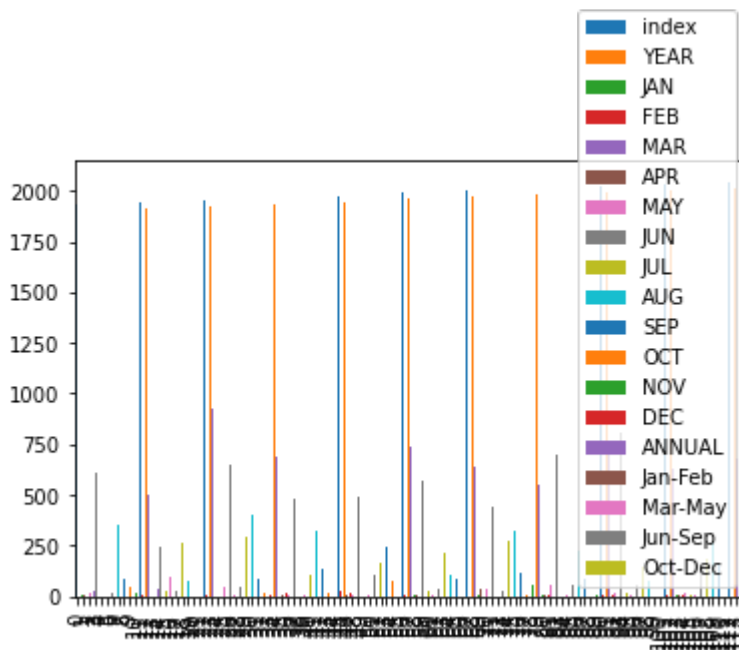

Histogram

In [9]: `df.plot.hist()`


Out[9]: `<AxesSubplot:ylabel='Frequency'>`

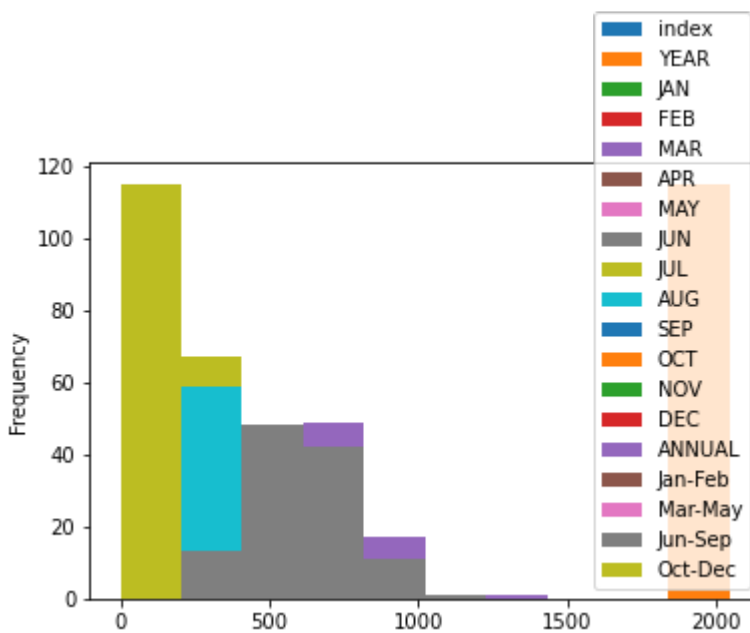

Area chart

In [10]: `df.plot.area()`


Out[10]: <AxesSubplot:>

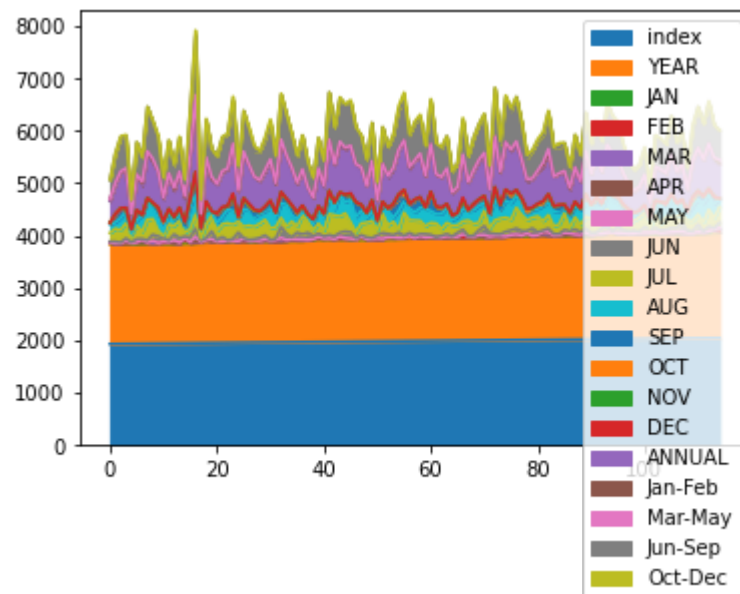

Box chart

In [11]: `df.plot.box()`

Out[11]: <AxesSubplot:>

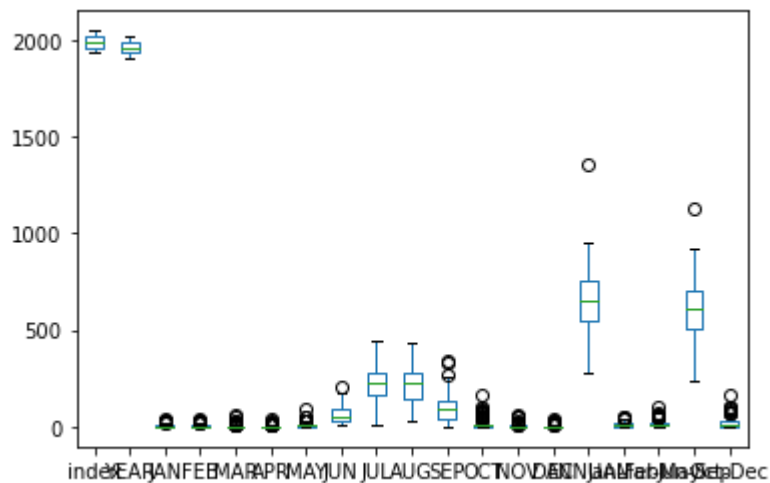

Pie chart


In [12]: `df.plot(figsize=(10, 5), title='ANNUAL')`

Out[12]: `<AxesSubplot:ylabel='ANNUAL'>`



In [13]: `df.plot.scatter(x='SUBDIVISION', y='ANNUAL')`

Out[13]: `<AxesSubplot:xlabel='SUBDIVISION', ylabel='ANNUAL'>`

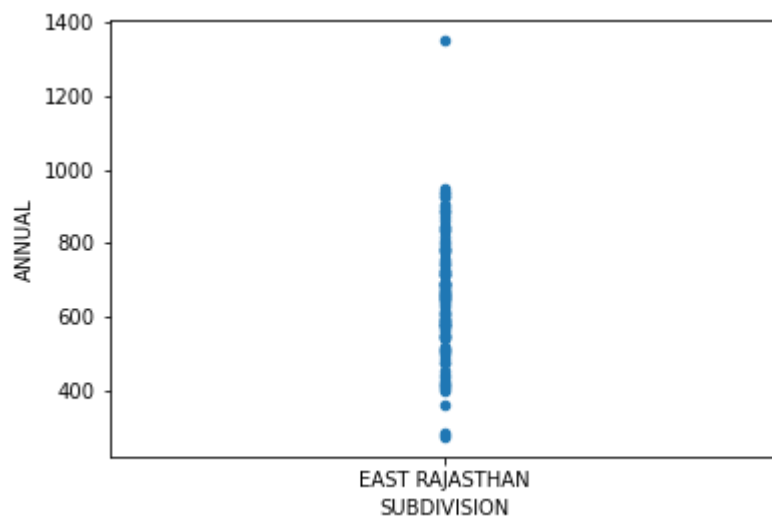

In [14]: `df.info()`

```
<class 'pandas.core.frame.DataFrame'>
Int64Index: 115 entries, 0 to 114
Data columns (total 20 columns):
#   Column          Non-Null Count  Dtype
---  -
0   index           115 non-null   int64
1   SUBDIVISION     115 non-null   object
2   YEAR            115 non-null   int64
3   JAN             115 non-null   float64
4   FEB             115 non-null   float64
5   MAR             115 non-null   float64
6   APR             115 non-null   float64
7   MAY             115 non-null   float64
8   JUN             115 non-null   float64
9   JUL             115 non-null   float64
10  AUG             115 non-null   float64
11  SEP             115 non-null   float64
12  OCT             115 non-null   float64
13  NOV             115 non-null   float64
14  DEC             115 non-null   float64
```


In [15]: `df.describe()`


Out[15]:

	index	YEAR	JAN	FEB	MAR	APR	MAY	
count	115.000000	115.000000	115.000000	115.000000	115.000000	115.000000	115.000000	11
mean	1989.000000	1958.000000	6.422609	5.417391	4.516522	3.144348	9.820000	6
std	33.341666	33.341666	8.223832	7.470142	9.145835	5.938592	12.256507	4
min	1932.000000	1901.000000	0.000000	0.000000	0.000000	0.000000	0.000000	
25%	1960.500000	1929.500000	0.700000	0.450000	0.150000	0.200000	2.450000	3
50%	1989.000000	1958.000000	3.600000	2.300000	1.300000	1.100000	5.700000	5
75%	2017.500000	1986.500000	8.600000	8.650000	4.100000	3.150000	12.700000	8
max	2046.000000	2015.000000	39.200000	35.700000	57.400000	43.200000	90.900000	20

EDA AND VISUALIZATION

In [16]: `sns.pairplot(df)`

Out[16]: `<seaborn.axisgrid.PairGrid at 0x1cbb0035e20>`

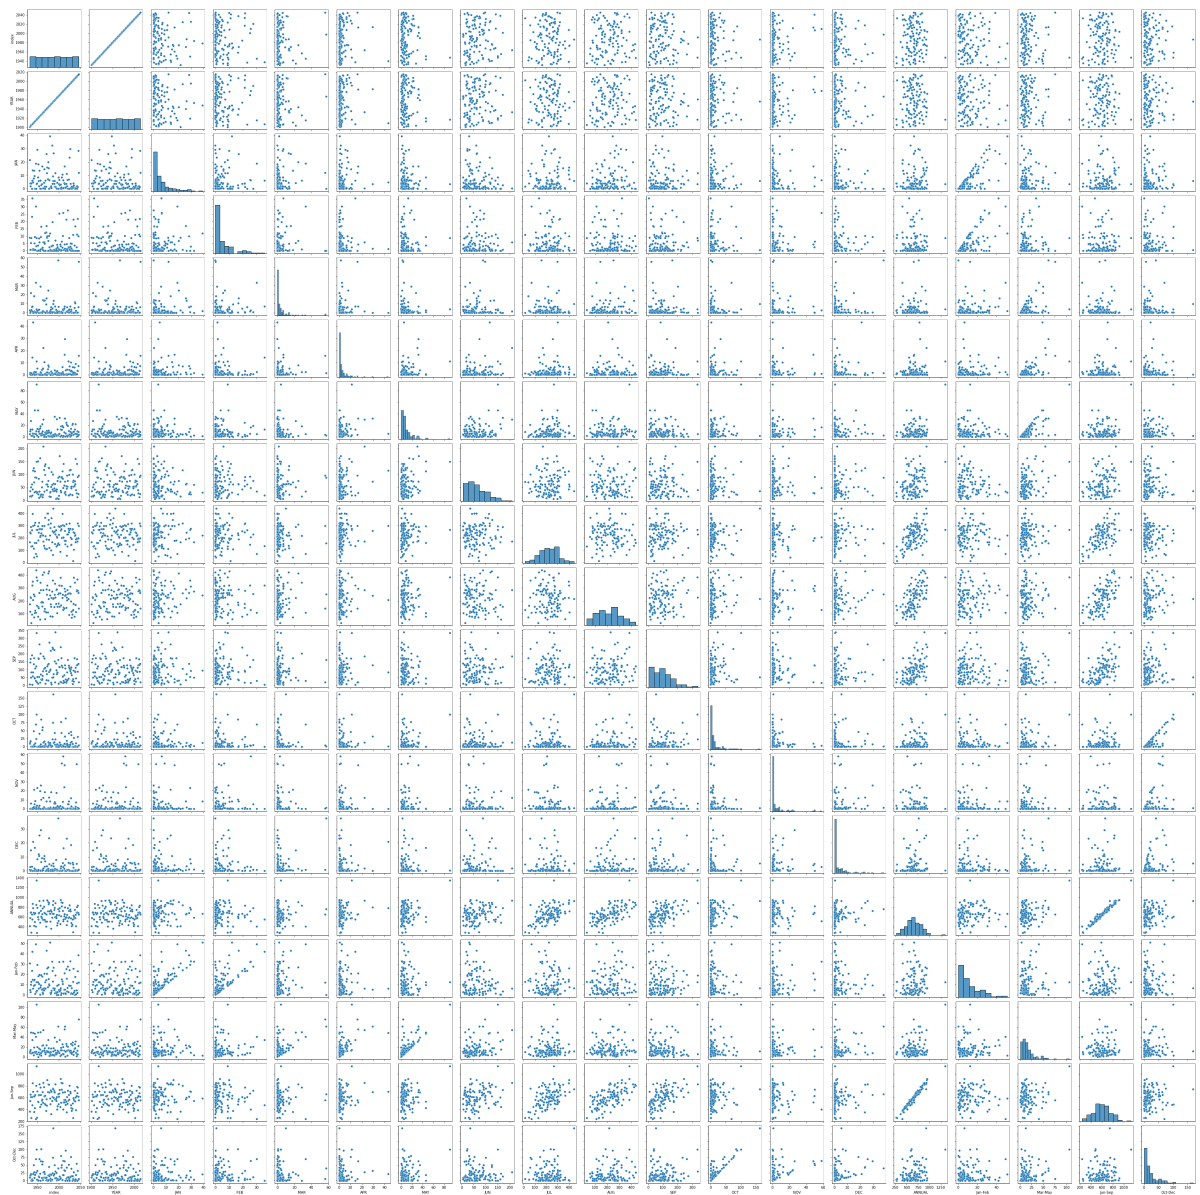


In [17]: `sns.distplot(df['ANNUAL'])`

C:\ProgramData\Anaconda3\lib\site-packages\seaborn\distributions.py:2557: FutureWarning: `distplot` is a deprecated function and will be removed in a future version. Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

warnings.warn(msg, FutureWarning)

Out[17]: `<AxesSubplot:xlabel='ANNUAL', ylabel='Density'>`

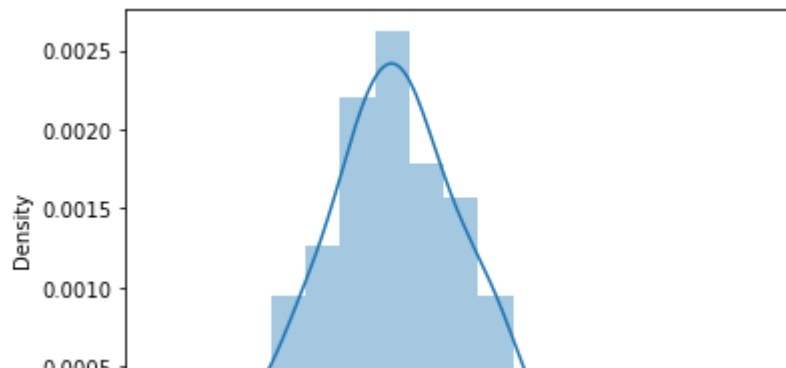

In [18]: `sns.heatmap(df.corr())`

Out[18]: `<AxesSubplot:>`

