

20104016

DEENA

Importing Libraries

```
In [1]: import numpy as np  
import pandas as pd  
import seaborn as sns  
import matplotlib.pyplot as plt
```

Importing Datasets

```
In [2]: df=pd.read_csv("rainfall_west madhya pradesh.csv")
```

```
Out[2]:
```

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT
0	2047	WEST MADHYA PRADESH	1901	25.8	5.8	5.8	2.8	2.1	41.2	228.9	349.9	47.9	5.6
1	2048	WEST MADHYA PRADESH	1902	22.1	8.4	0.0	2.0	5.9	35.9	401.9	179.4	194.1	37.9
2	2049	WEST MADHYA PRADESH	1903	5.3	0.0	0.0	0.0	22.3	50.6	304.9	261.1	250.2	55.1
3	2050	WEST MADHYA PRADESH	1904	3.2	15.5	14.8	0.0	12.0	96.6	273.0	218.6	125.9	3.3
4	2051	WEST MADHYA PRADESH	1905	3.5	4.4	1.1	0.8	3.0	36.1	326.3	137.6	183.5	0.3
...
110	2157	WEST MADHYA PRADESH	2011	0.0	1.7	0.1	1.8	3.6	241.5	306.7	343.3	165.0	0.2
111	2158	WEST MADHYA PRADESH	2012	6.2	0.0	0.0	0.9	3.1	48.2	439.2	341.2	194.3	2.1
112	2159	WEST MADHYA PRADESH	2013	1.7	31.1	8.5	2.8	0.4	263.7	485.1	432.6	98.9	68.7
113	2160	WEST MADHYA PRADESH	2014	25.6	34.4	4.6	1.4	1.4	30.6	337.4	211.0	192.6	7.0
114	2161	WEST MADHYA PRADESH	2015	40.2	6.4	53.5	13.3	2.0	154.1	428.2	276.6	55.6	11.0

115 rows × 20 columns

Data Cleaning and Data Preprocessing

```
In [3]: df=df.dropna()
```

```
In [4]: df.columns
```

```
Out[4]: Index(['index', 'SUBDIVISION', 'YEAR', 'JAN', 'FEB', 'MAR', 'APR', 'MAY',  
              'JUN', 'JUL', 'AUG', 'SEP', 'OCT', 'NOV', 'DEC', 'ANNUAL', 'Jan-Feb',  
              'Mar-May', 'Jun-Sep', 'Oct-Dec'],  
              dtype='object')
```

In [5]: `df.info()`

```

<class 'pandas.core.frame.DataFrame'>
Int64Index: 114 entries, 0 to 114
Data columns (total 20 columns):
#   Column                Non-Null Count  Dtype
---  ---
0   index                 114 non-null   int64
1   SUBDIVISION           114 non-null   object
2   YEAR                  114 non-null   int64
3   JAN                   114 non-null   float64
4   FEB                   114 non-null   float64
5   MAR                   114 non-null   float64
6   APR                   114 non-null   float64
7   MAY                   114 non-null   float64
8   JUN                   114 non-null   float64
9   JUL                   114 non-null   float64
10  AUG                   114 non-null   float64
11  SEP                   114 non-null   float64
12  OCT                   114 non-null   float64
13  NOV                   114 non-null   float64
14  DEC                   114 non-null   float64
15  ANNUAL                114 non-null   float64
16  Jan-Feb               114 non-null   float64
17  Mar-May               114 non-null   float64
18  Jun-Sep               114 non-null   float64
19  Oct-Dec               114 non-null   float64
dtypes: float64(17), int64(2), object(1)
memory usage: 18.7+ KB

```

Line chart

In [6]: `df.plot.line(subplots=True)`

```

Out[6]: array([<AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>,
<AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>,
<AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>,
<AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>,
<AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>], dtype=object)


```



Line chart

In [7]: `df.plot.line()`


Out[7]: `<AxesSubplot:>`

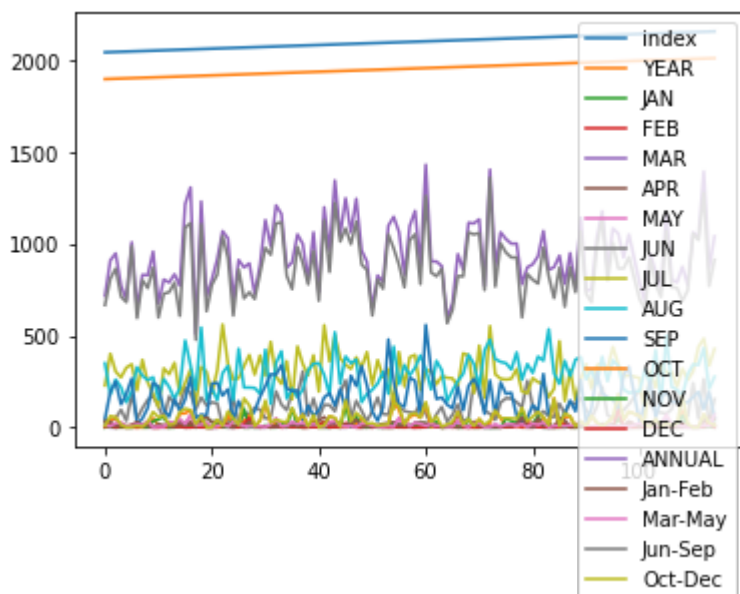

Bar chart

In [8]: `df.plot.bar()`


Out[8]: `<AxesSubplot:>`

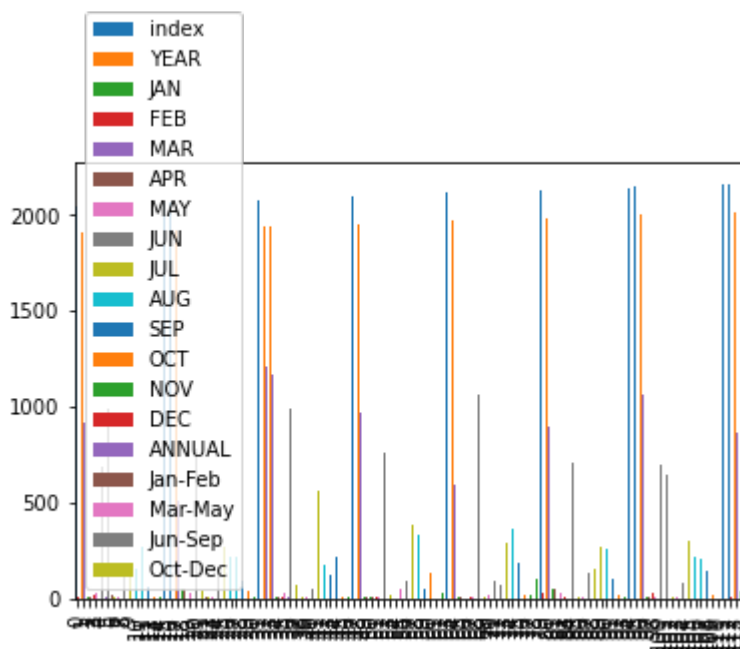

Histogram

In [9]: `df.plot.hist()`


Out[9]: `<AxesSubplot:ylabel='Frequency'>`

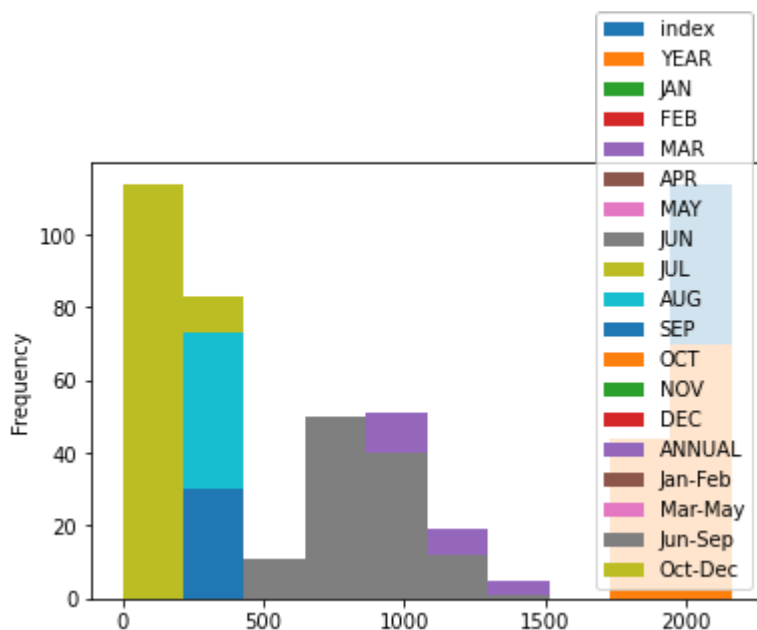

Area chart

In [10]: `df.plot.area()`


Out[10]: `<AxesSubplot:>`

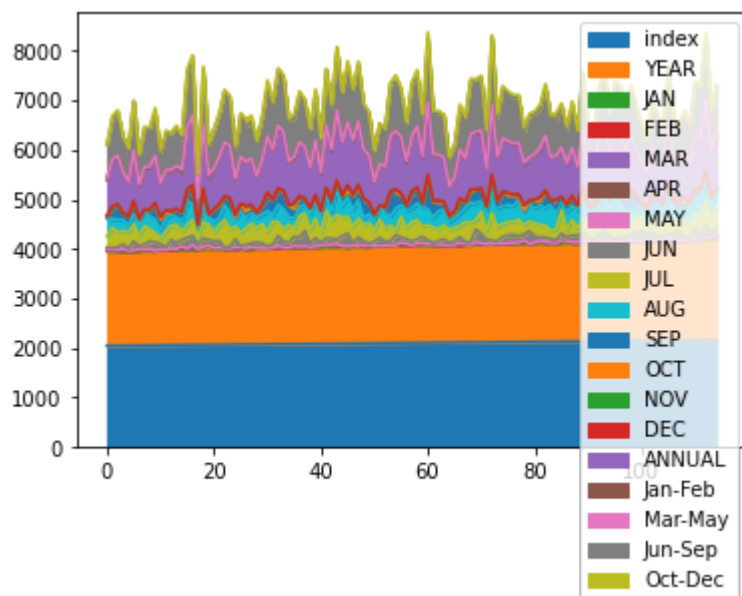

Box chart

In [11]: `df.plot.box()`


Out[11]: `<AxesSubplot:>`

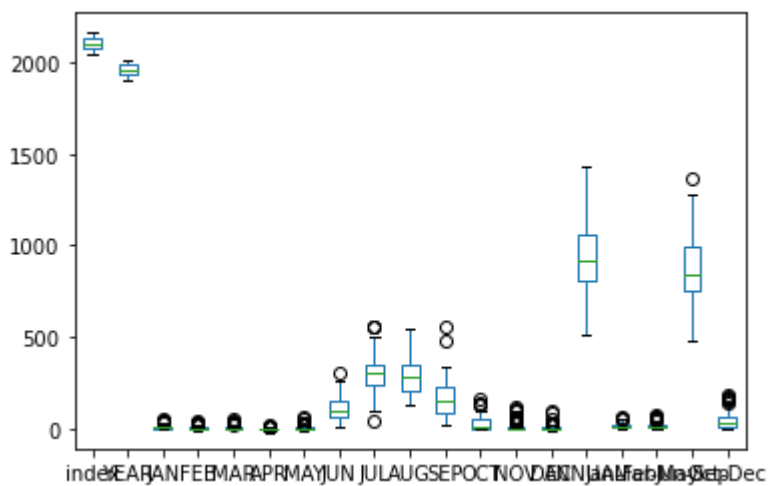

Pie chart

In [12]: `df.plot(figsize=(10, 5), color='r', label='ANNUAL')`


Out[12]: `<AxesSubplot:ylabel='ANNUAL'>`

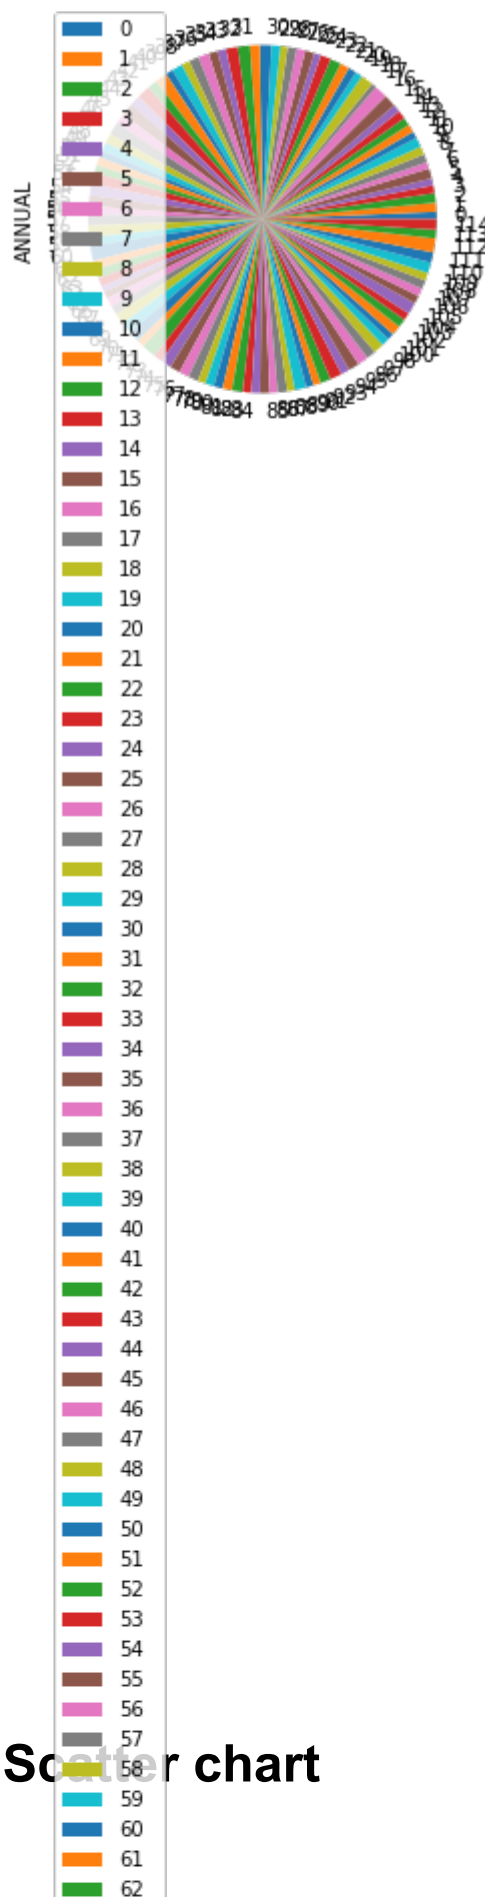

Scatter chart


```
In [13]: df.plot.scatter(x='SUBDIVISION', y='ANNUAL')
```

```
Out[13]: <AxesSubplot:xlabel='SUBDIVISION', ylabel='ANNUAL'>
```

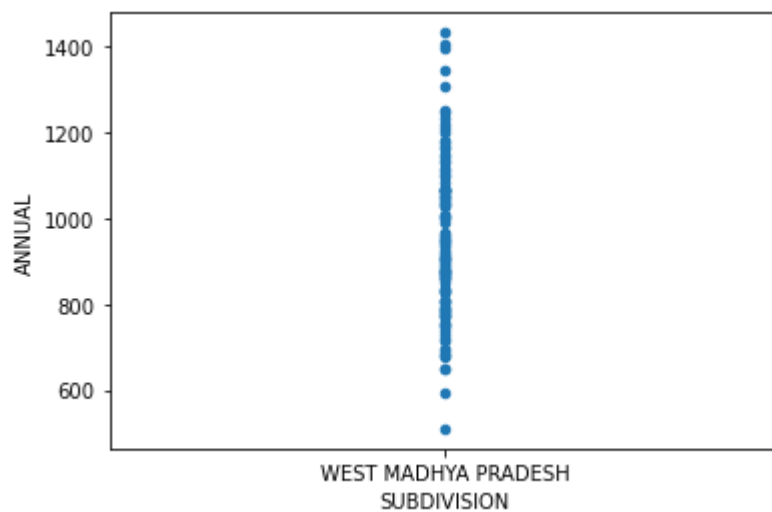

```
In [14]: df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
Int64Index: 114 entries, 0 to 114
Data columns (total 20 columns):
#   Column          Non-Null Count  Dtype
---  ---
0   index           114 non-null   int64
1   SUBDIVISION     114 non-null   object
2   YEAR            114 non-null   int64
3   JAN             114 non-null   float64
4   FEB             114 non-null   float64
5   MAR             114 non-null   float64
6   APR             114 non-null   float64
7   MAY             114 non-null   float64
8   JUN             114 non-null   float64
9   JUL             114 non-null   float64
10  AUG             114 non-null   float64
11  SEP             114 non-null   float64
12  OCT             114 non-null   float64
13  NOV             114 non-null   float64
14  DEC             114 non-null   float64
```


In [15]: `df.describe()`

Out[15]:

	index	YEAR	JAN	FEB	MAR	APR	MAY	
count	114.000000	114.000000	114.000000	114.000000	114.000000	114.000000	114.000000	11
mean	2103.631579	1957.631579	9.321930	6.307895	5.217544	2.395614	7.460526	11
std	33.252923	33.252923	11.274584	8.993755	8.973109	3.491922	10.230153	6
min	2047.000000	1901.000000	0.000000	0.000000	0.000000	0.000000	0.000000	1
25%	2075.250000	1929.250000	0.925000	0.525000	0.225000	0.200000	1.325000	6
50%	2103.500000	1957.500000	5.000000	2.800000	2.050000	1.400000	3.500000	10
75%	2131.750000	1985.750000	14.700000	8.200000	6.400000	3.000000	9.675000	14
max	2161.000000	2015.000000	54.100000	40.500000	53.500000	24.800000	62.700000	30

EDA AND VISUALIZATION

```
Out[16]: <seaborn.axisgrid.PairGrid at 0x23318a504c0>
```

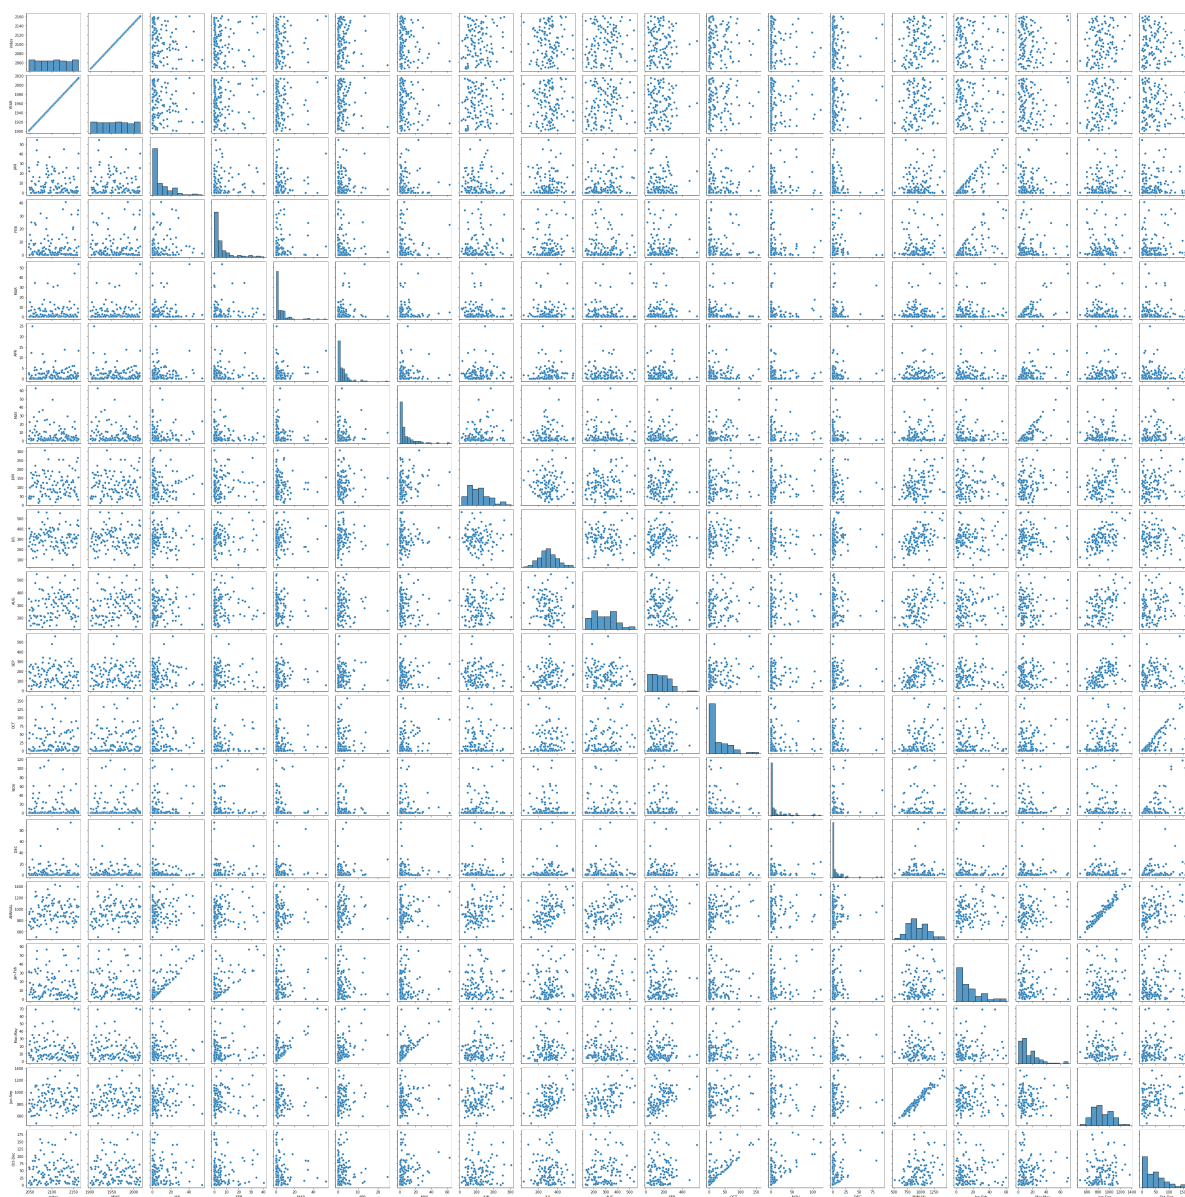


In [17]: `sns.distplot(df['ANNUAL'])`

C:\ProgramData\Anaconda3\lib\site-packages\seaborn\distributions.py:2557: FutureWarning: `distplot` is a deprecated function and will be removed in a future version. Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

warnings.warn(msg, FutureWarning)

Out[17]: `<AxesSubplot:xlabel='ANNUAL', ylabel='Density'>`

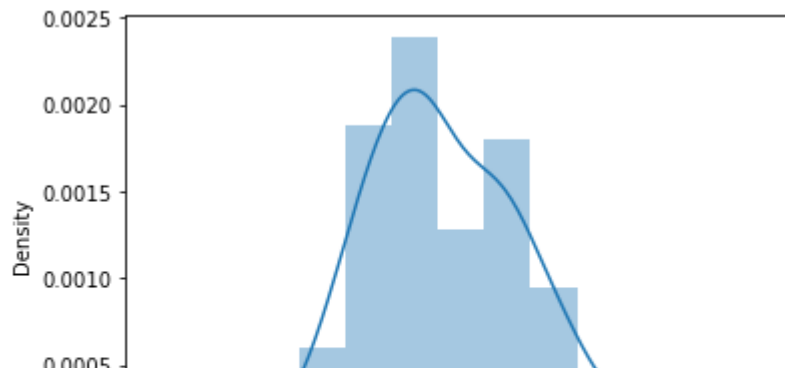

In [18]: `sns.heatmap(df_corr())`

Out[18]: `<AxesSubplot:>`

