

# 20104016

## DEENA

### Importing Libraries

```
In [1]: import numpy as np
import pandas as pd
import seaborn as sns
import matplotlib.pyplot as plt
```

### Importing Datasets

```
In [2]: df=pd.read_csv("rainfall_madhya maharashtra.csv")
```

Out[2]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OC
0	2622	MADHYA MAHARASHTRA	1901	18.8	0.6	7.7	36.6	30.4	107.7	215.9	194.1	83.7	68
1	2623	MADHYA MAHARASHTRA	1902	7.8	0.0	0.1	5.0	9.8	102.6	210.9	114.5	169.5	60
2	2624	MADHYA MAHARASHTRA	1903	7.6	0.0	0.0	3.2	77.2	86.3	281.8	155.5	142.3	74
3	2625	MADHYA MAHARASHTRA	1904	0.4	4.7	1.7	3.0	18.7	114.6	126.5	59.5	183.0	91
4	2626	MADHYA MAHARASHTRA	1905	0.0	1.2	0.0	2.3	23.6	65.0	252.8	79.0	52.6	52
...	...	...	...	...	...	...	...	...	...	...	...	...	...
110	2732	MADHYA MAHARASHTRA	2011	0.0	0.3	0.3	5.0	2.9	133.3	261.4	238.1	148.4	62
111	2733	MADHYA MAHARASHTRA	2012	0.0	0.0	0.0	3.0	1.4	67.9	203.0	187.8	129.5	95
112	2734	MADHYA MAHARASHTRA	2013	0.1	5.3	0.8	5.7	6.0	212.4	311.8	147.0	210.3	57
113	2735	MADHYA MAHARASHTRA	2014	3.1	6.2	24.4	7.5	29.8	44.0	277.9	240.3	120.4	38
114	2736	MADHYA MAHARASHTRA	2015	1.4	0.8	41.2	9.6	24.4	177.0	111.7	67.2	146.6	48

115 rows × 20 columns

# Data Cleaning and Data Preprocessing

```
In [3]: df[df.isnull()]
```

```
In [4]: df.columns
```

```
Out[4]: Index(['index', 'SUBDIVISION', 'YEAR', 'JAN', 'FEB', 'MAR', 'APR', 'MAY',  
              'JUN', 'JUL', 'AUG', 'SEP', 'OCT', 'NOV', 'DEC', 'ANNUAL', 'Jan-Feb',  
              'Mar-May', 'Jun-Sep', 'Oct-Dec'],  
             dtype='object')
```


```
In [5]: df.info()
```

```
<class 'pandas.core.frame.DataFrame'>  
Int64Index: 115 entries, 0 to 114  
Data columns (total 20 columns):  
#   Column                Non-Null Count  Dtype  
---  -  
0   index                 115 non-null   int64  
1   SUBDIVISION           115 non-null   object  
2   YEAR                  115 non-null   int64  
3   JAN                   115 non-null   float64  
4   FEB                   115 non-null   float64  
5   MAR                   115 non-null   float64  
6   APR                   115 non-null   float64  
7   MAY                   115 non-null   float64  
8   JUN                   115 non-null   float64  
9   JUL                   115 non-null   float64  
10  AUG                   115 non-null   float64  
11  SEP                   115 non-null   float64  
12  OCT                   115 non-null   float64  
13  NOV                   115 non-null   float64  
14  DEC                   115 non-null   float64  
15  ANNUAL                115 non-null   float64  
16  Jan-Feb               115 non-null   float64  
17  Mar-May               115 non-null   float64  
18  Jun-Sep               115 non-null   float64  
19  Oct-Dec               115 non-null   float64  
dtypes: float64(17), int64(2), object(1)  
memory usage: 18.9+ KB
```

## Line chart

In [6]: `df.plot.line(subplots=True)`


Out[6]: array([<AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>], dtype=object)

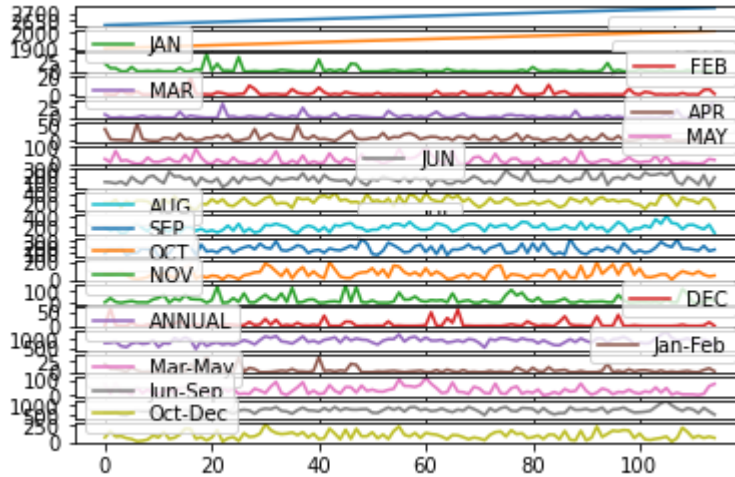

## Line chart

In [7]: `df.plot.line()`


Out[7]: <AxesSubplot:>

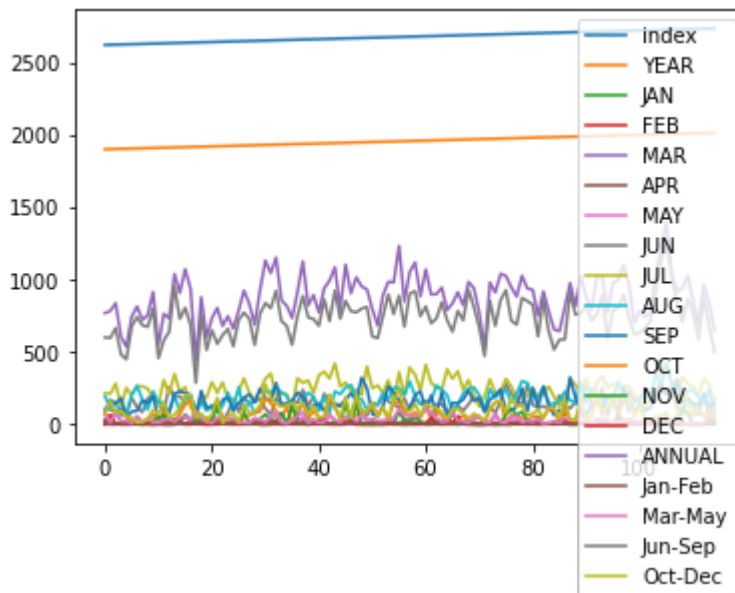

## Bar chart

```
In [8]: df.plot.bar()
```


```
Out[8]: <AxesSubplot:>
```

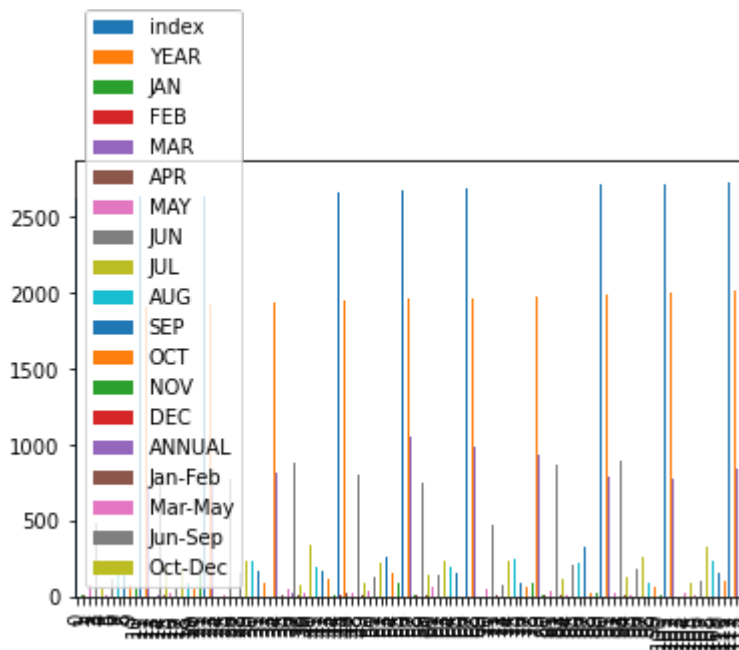

## Histogram

```
In [9]: df.plot.hist()
```


```
Out[9]: <AxesSubplot:ylabel='Frequency'>
```

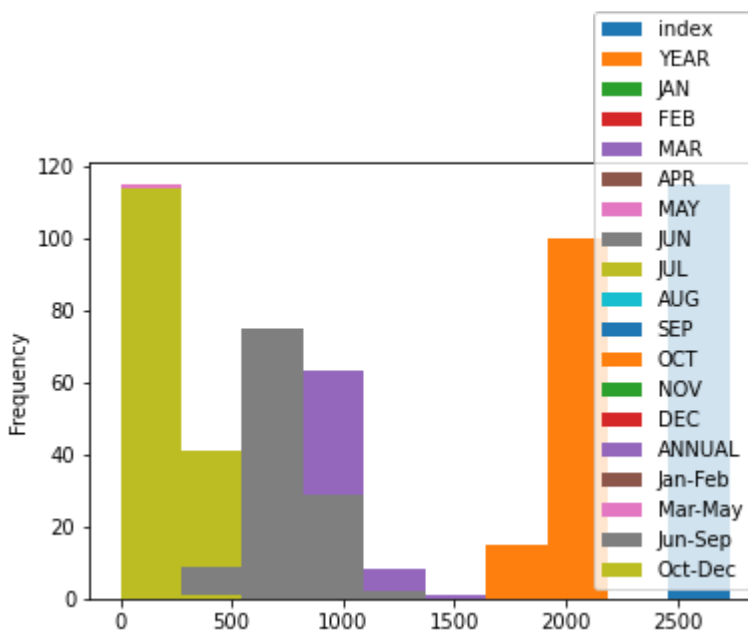

## Area chart

In [10]: `df.plot.area()`


Out[10]: `<AxesSubplot:>`

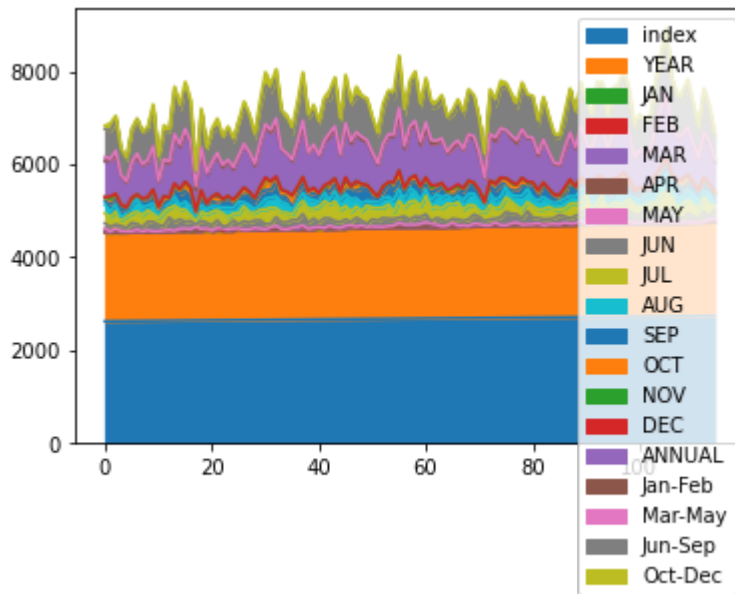

## Box chart

In [11]: `df.plot.box()`


Out[11]: `<AxesSubplot:>`

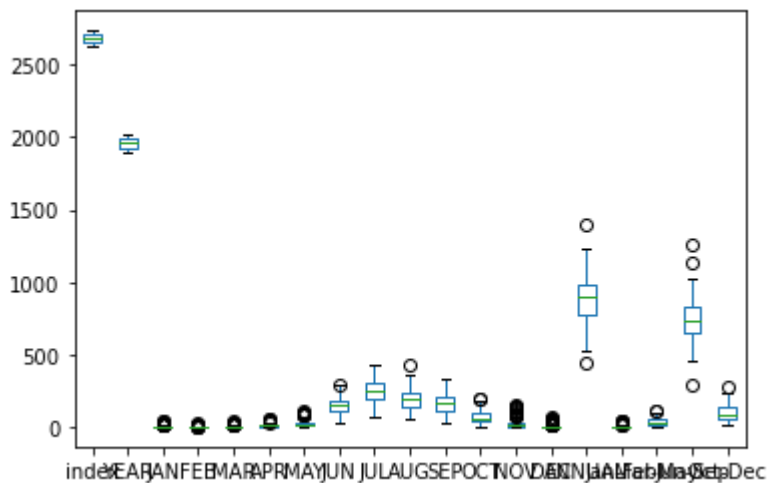

## Pie chart

In [12]: `df.plot(figsize=(10, 5), color='r', label='ANNUAL')`


Out[12]: `<AxesSubplot:ylabel='ANNUAL'>`

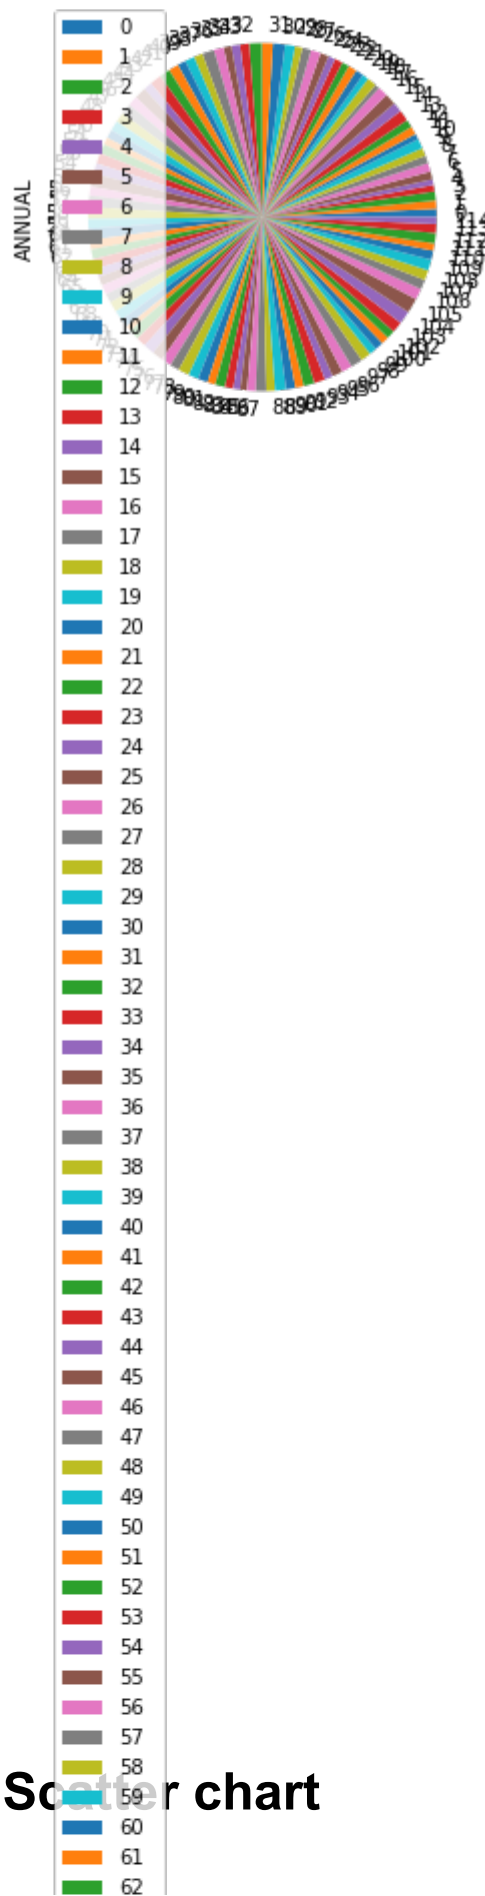

Scatter chart

In [13]: `df.plot.scatter(x='SUBDIVISION', y='ANNUAL')`

Out[13]: `<AxesSubplot:xlabel='SUBDIVISION', ylabel='ANNUAL'>`

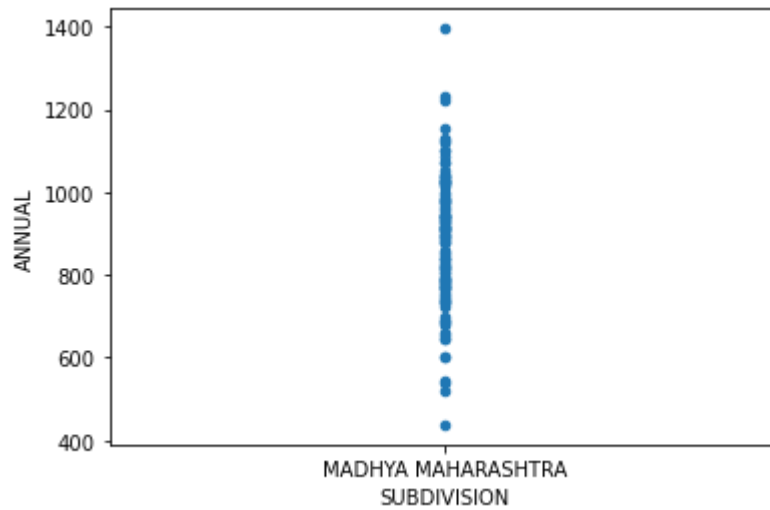

In [14]: `df.info()`

```
<class 'pandas.core.frame.DataFrame'>
Int64Index: 115 entries, 0 to 114
Data columns (total 20 columns):
#   Column          Non-Null Count  Dtype
---  -
0   index           115 non-null   int64
1   SUBDIVISION     115 non-null   object
2   YEAR            115 non-null   int64
3   JAN             115 non-null   float64
4   FEB             115 non-null   float64
5   MAR             115 non-null   float64
6   APR             115 non-null   float64
7   MAY             115 non-null   float64
8   JUN             115 non-null   float64
9   JUL             115 non-null   float64
10  AUG             115 non-null   float64
11  SEP             115 non-null   float64
12  OCT             115 non-null   float64
13  NOV             115 non-null   float64
14  DEC             115 non-null   float64
```



In [15]:

df.describe()


Out[15]:

	index	YEAR	JAN	FEB	MAR	APR	MAY	
count	115.000000	115.000000	115.000000	115.000000	115.000000	115.000000	115.000000	11
mean	2679.000000	1958.000000	3.054783	1.467826	3.596522	9.146957	22.943478	14
std	33.341666	33.341666	6.666652	2.915282	6.411625	9.402000	22.368097	5
min	2622.000000	1901.000000	0.000000	0.000000	0.000000	0.000000	0.300000	3
25%	2650.500000	1929.500000	0.000000	0.000000	0.200000	3.200000	7.350000	10
50%	2679.000000	1958.000000	0.700000	0.200000	1.500000	6.300000	15.200000	14
75%	2707.500000	1986.500000	2.600000	1.550000	4.200000	12.100000	33.000000	17
max	2736.000000	2015.000000	41.500000	20.000000	41.200000	54.500000	104.200000	29

# EDA AND VISUALIZATION

In [16]: `sns.pairplot(df)`

Out[16]: `<seaborn.axisgrid.PairGrid at 0x224e66ede80>`

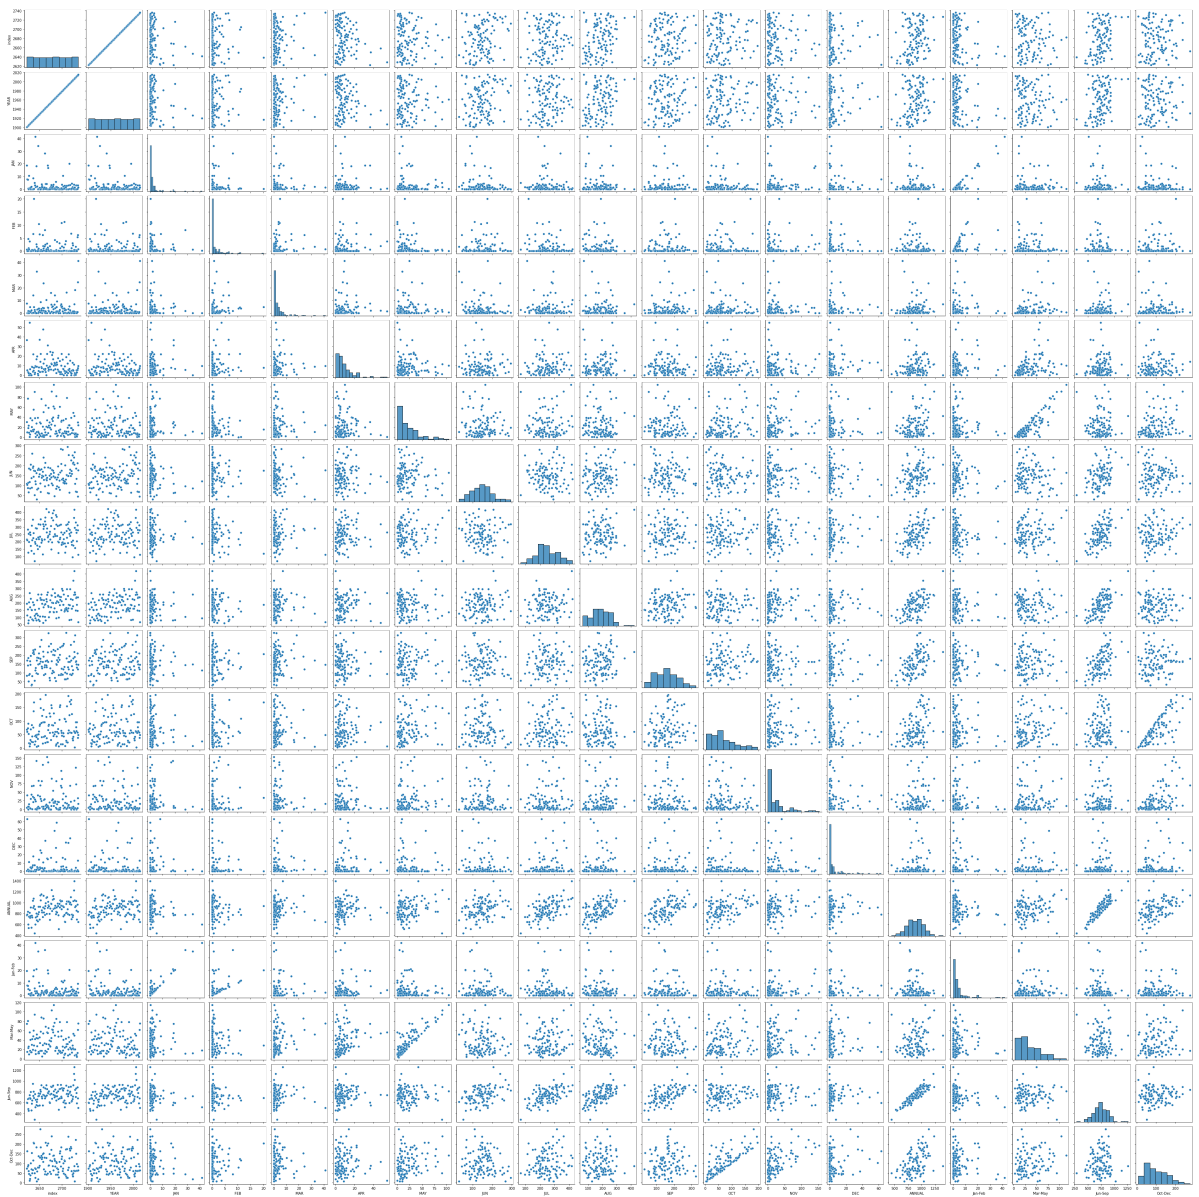


In [17]: `sns.distplot(df['ANNUAL'])`

C:\ProgramData\Anaconda3\lib\site-packages\seaborn\distributions.py:2557: FutureWarning: `distplot` is a deprecated function and will be removed in a future version. Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

warnings.warn(msg, FutureWarning)

Out[17]: `<AxesSubplot:xlabel='ANNUAL', ylabel='Density'>`

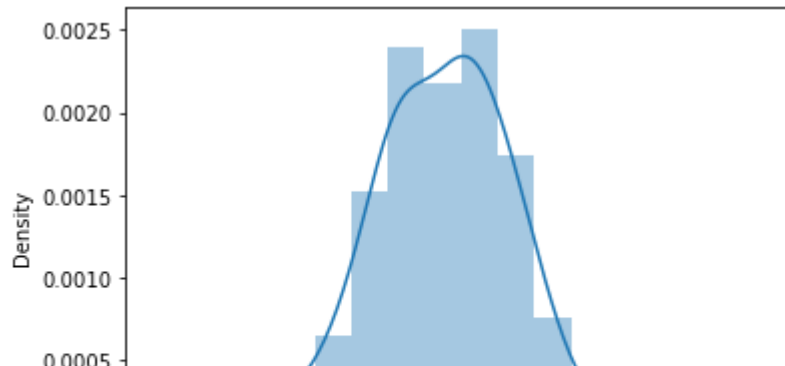

In [18]: `sns.heatmap(df.corr())`

Out[18]: `<AxesSubplot:>`

