20104016

DEENA

Importing Libraries

In [1]:
```
import numpy as np
import pandas as pd
import seaborn as sns
import matplotlib.pyplot as plt
```

Importing Datasets

In [2]:
```
df=pd.read_csv("rainfall_chhattisgarh.csv")
df
```

Out[2]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	O
0	2967	CHHATTISGARH	1901	48.9	116.5	27.8	5.5	18.4	101.6	381.0	476.7	182.8	2
1	2968	CHHATTISGARH	1902	0.6	6.5	0.4	13.9	10.3	37.2	403.8	236.6	198.1	
2	2969	CHHATTISGARH	1903	6.2	13.9	0.4	6.8	51.1	110.7	365.9	396.0	212.0	16
3	2970	CHHATTISGARH	1904	0.0	8.6	32.3	0.2	77.5	369.5	303.6	483.6	86.8	12
4	2971	CHHATTISGARH	1905	50.3	22.6	19.0	24.6	31.8	40.4	443.7	270.8	338.8	
...	...	...	...	...	...	...	...	...	...	...	...	...	...
110	3077	CHHATTISGARH	2011	0.3	11.5	2.6	35.0	16.8	183.5	272.6	379.8	382.2	
111	3078	CHHATTISGARH	2012	36.6	4.8	1.1	14.9	9.4	147.3	430.6	442.2	245.3	
112	3079	CHHATTISGARH	2013	2.8	19.7	4.9	45.8	5.7	263.6	418.8	336.6	140.9	18
113	3080	CHHATTISGARH	2014	2.3	29.0	21.4	17.3	25.0	104.9	416.7	327.7	252.7	
114	3081	CHHATTISGARH	2015	15.8	1.2	21.2	37.0	13.0	257.6	248.6	286.6	216.9	

115 rows × 20 columns

Data Cleaning and Data Preprocessing

In [3]:
```
df=df.dropna()
```

In [4]:
```
df.columns
```

Out[4]:
```
Index(['index', 'SUBDIVISION', 'YEAR', 'JAN', 'FEB', 'MAR', 'APR', 'MAY',
       'JUN', 'JUL', 'AUG', 'SEP', 'OCT', 'NOV', 'DEC', 'ANNUAL', 'Jan-Feb',
       'Mar-May', 'Jun-Sep', 'Oct-Dec'],
      dtype='object')
```

In [5]:
```
df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
Int64Index: 115 entries, 0 to 114
Data columns (total 20 columns):
 #   Column       Non-Null Count  Dtype  
---  ------       --------------  -----  
 0   index        115 non-null    int64  
 1   SUBDIVISION  115 non-null    object 
 2   YEAR         115 non-null    int64  
 3   JAN          115 non-null    float64
 4   FEB          115 non-null    float64
 5   MAR          115 non-null    float64
 6   APR          115 non-null    float64
 7   MAY          115 non-null    float64
 8   JUN          115 non-null    float64
 9   JUL          115 non-null    float64
 10  AUG          115 non-null    float64
 11  SEP          115 non-null    float64
 12  OCT          115 non-null    float64
 13  NOV          115 non-null    float64
 14  DEC          115 non-null    float64
 15  ANNUAL       115 non-null    float64
 16  Jan-Feb      115 non-null    float64
 17  Mar-May      115 non-null    float64
 18  Jun-Sep      115 non-null    float64
 19  Oct-Dec      115 non-null    float64
dtypes: float64(17), int64(2), object(1)
memory usage: 18.9+ KB
```

Line chart

In [6]:
```
df.plot.line(subplots=True)
```

Out[6]:
```
array([<AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>,
       <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>,
       <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>,
       <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>], dtype=object)
```

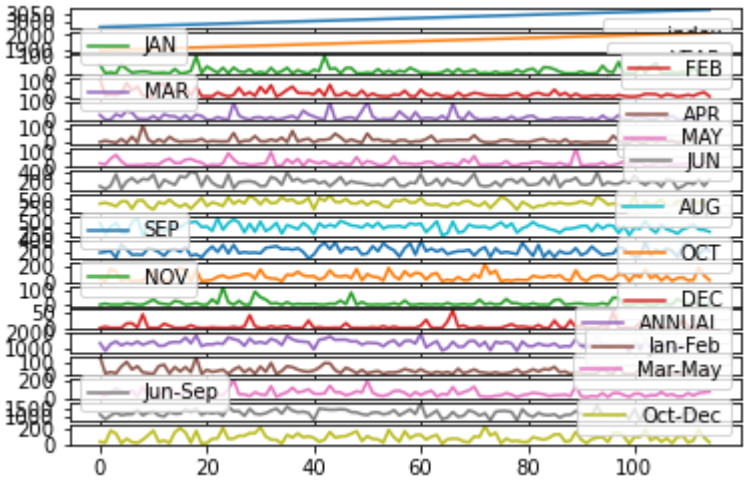

Line chart

In [7]:
```
df.plot.line()
```

Out[7]:
```
<AxesSubplot:>
```

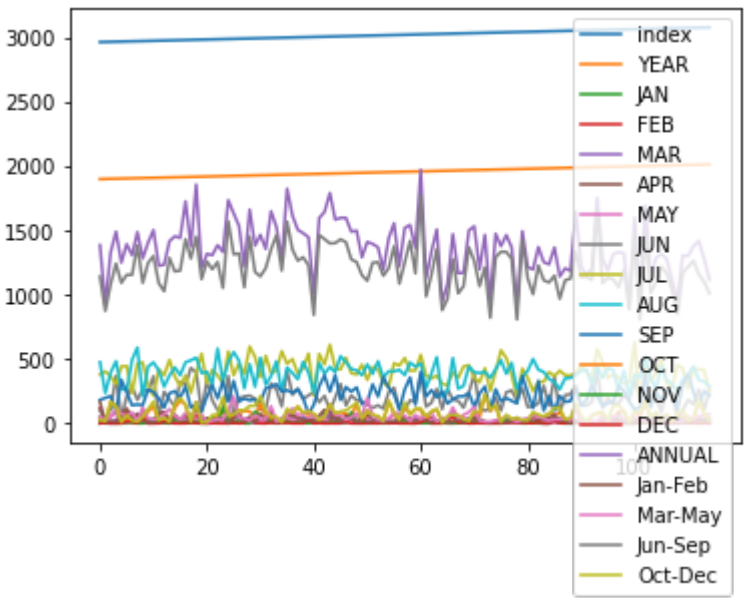

Bar chart

In [8]:
```
df.plot.bar()
```

Out[8]: <AxesSubplot:>

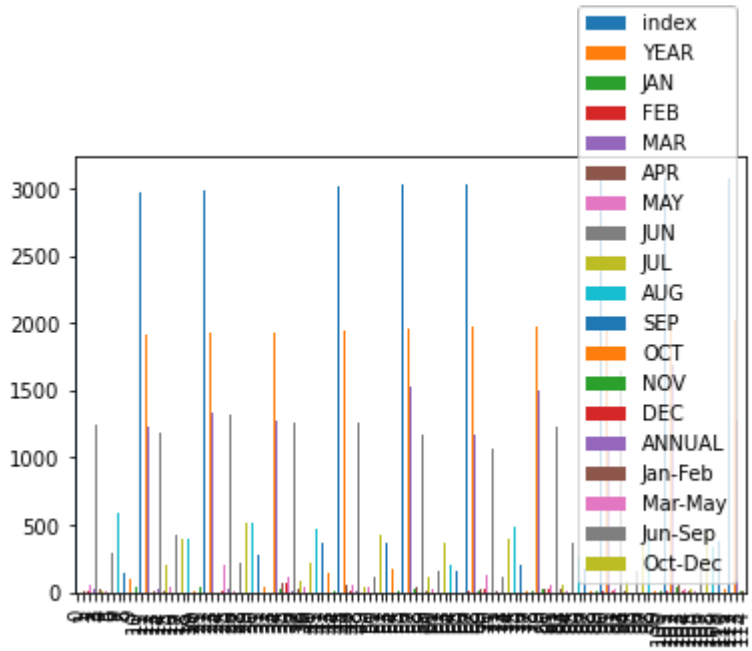

Histogram

In [9]:
```
df.plot.hist()
```

Out[9]: <AxesSubplot:ylabel='Frequency'>

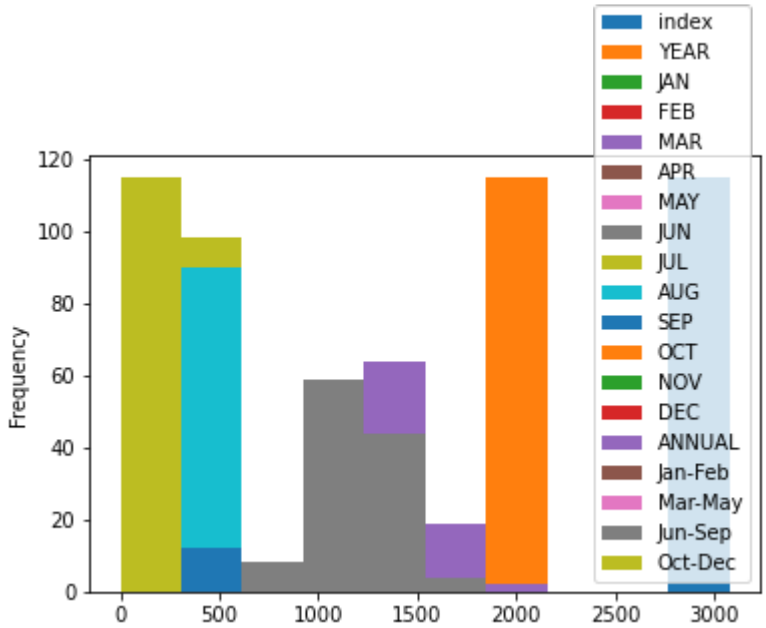

Area chart

In [10]:
```
df.plot.area()
```

Out[10]: <AxesSubplot:>

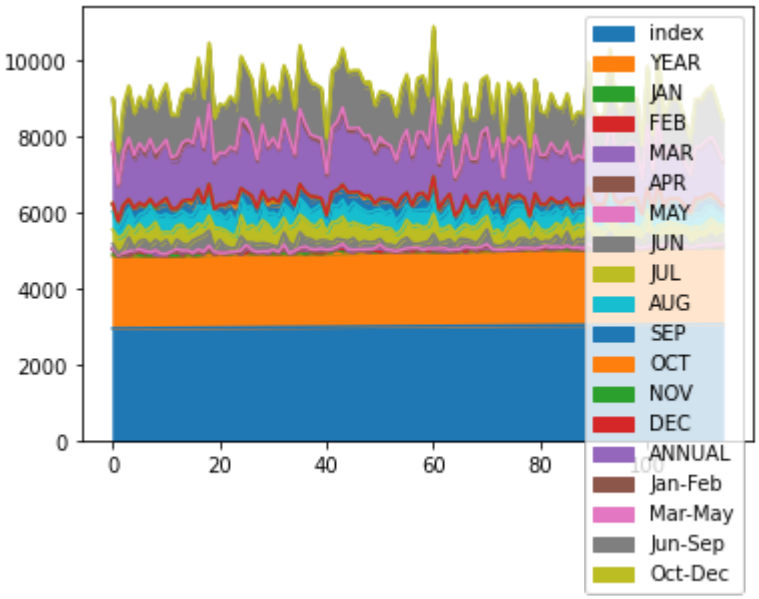

Box chart

In [11]:
```
df.plot.box()
```

Out[11]: <AxesSubplot:>

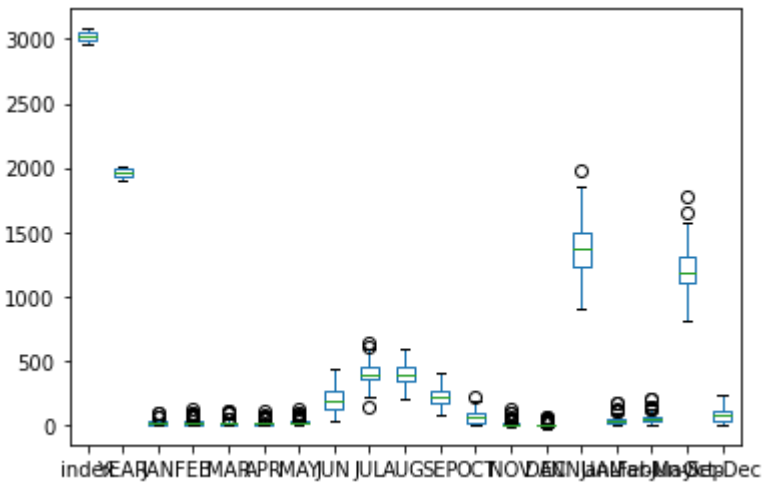

Pie chart

In [12]:
```
df.plot.pie(y='ANNUAL')
```

Out[12]:
```
<AxesSubplot:ylabel='ANNUAL'>
```

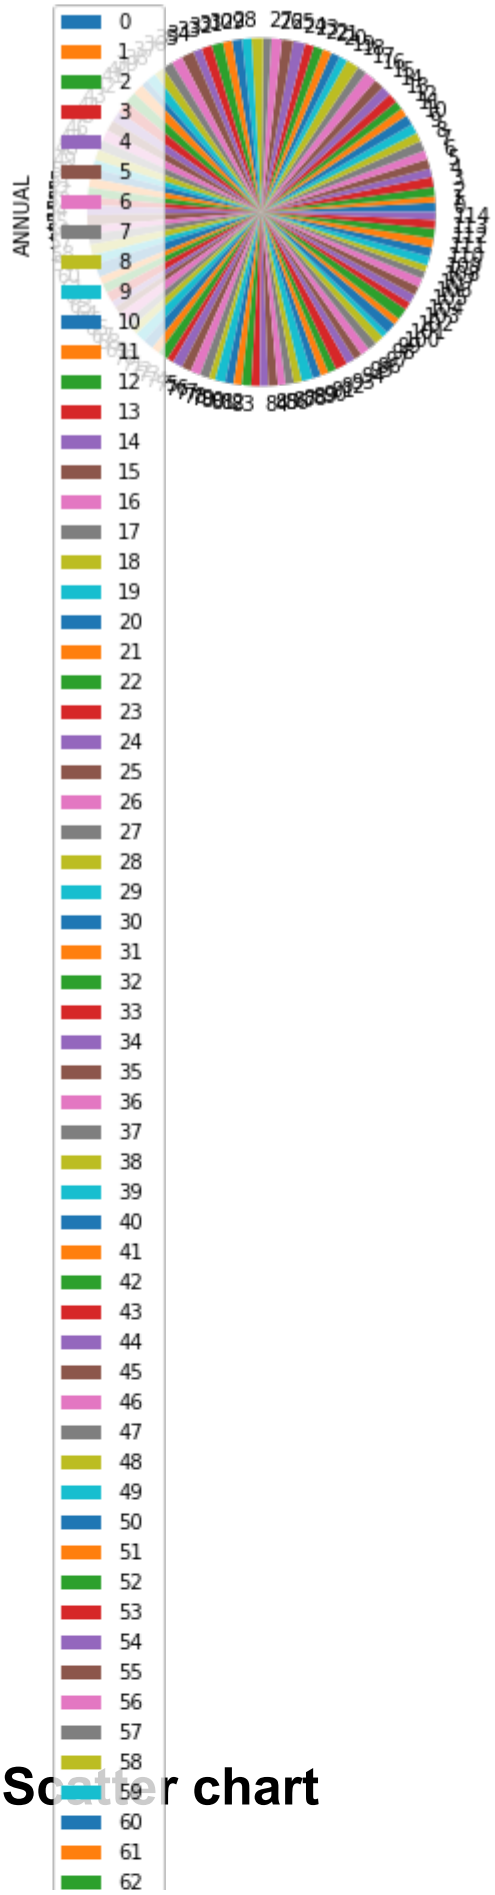

Scatter chart

In [13]:
```
df.plot.scatter(x='SUBDIVISION', y='ANNUAL')
```

Out[13]: <AxesSubplot:xlabel='SUBDIVISION', ylabel='ANNUAL'>

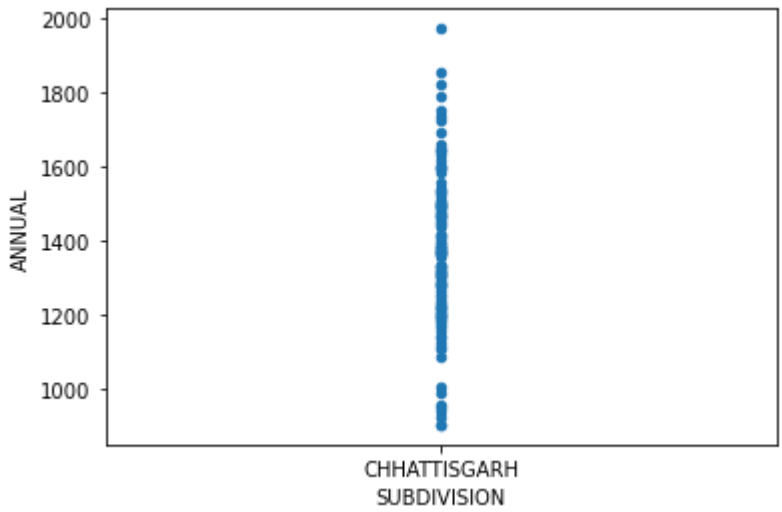

In [14]:
```
df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
Int64Index: 115 entries, 0 to 114
Data columns (total 20 columns):
 #   Column       Non-Null Count  Dtype
---  ------       --------------  -----
 0   index        115 non-null    int64
 1   SUBDIVISION  115 non-null    object
 2   YEAR         115 non-null    int64
 3   JAN          115 non-null    float64
 4   FEB          115 non-null    float64
 5   MAR          115 non-null    float64
 6   APR          115 non-null    float64
 7   MAY          115 non-null    float64
 8   JUN          115 non-null    float64
 9   JUL          115 non-null    float64
 10  AUG          115 non-null    float64
 11  SEP          115 non-null    float64
 12  OCT          115 non-null    float64
 13  NOV          115 non-null    float64
```

In [15]:
```
df.describe()
```

Out[15]:

	index	YEAR	JAN	FEB	MAR	APR	MAY	
count	115.000000	115.000000	115.000000	115.00000	115.000000	115.000000	115.000000	115
mean	3024.000000	1958.000000	14.206957	19.25913	15.266957	16.773043	21.048696	198
std	33.341666	33.341666	18.315772	23.03757	20.653922	17.125078	20.630349	90
min	2967.000000	1901.000000	0.000000	0.00000	0.000000	0.000000	0.000000	37
25%	2995.500000	1929.500000	1.450000	4.05000	2.200000	5.350000	8.700000	128
50%	3024.000000	1958.000000	6.500000	11.00000	7.900000	11.900000	15.500000	184
75%	3052.500000	1986.500000	22.100000	24.85000	21.300000	20.800000	25.150000	257
max	3081.000000	2015.000000	99.500000	116.50000	102.900000	112.800000	122.300000	431

EDA AND VISUALIZATION

In [16]:
```
sns.pairplot(df)
```

Out[16]:
```
<seaborn.axisgrid.PairGrid at 0x2bf1bf77f40>
```

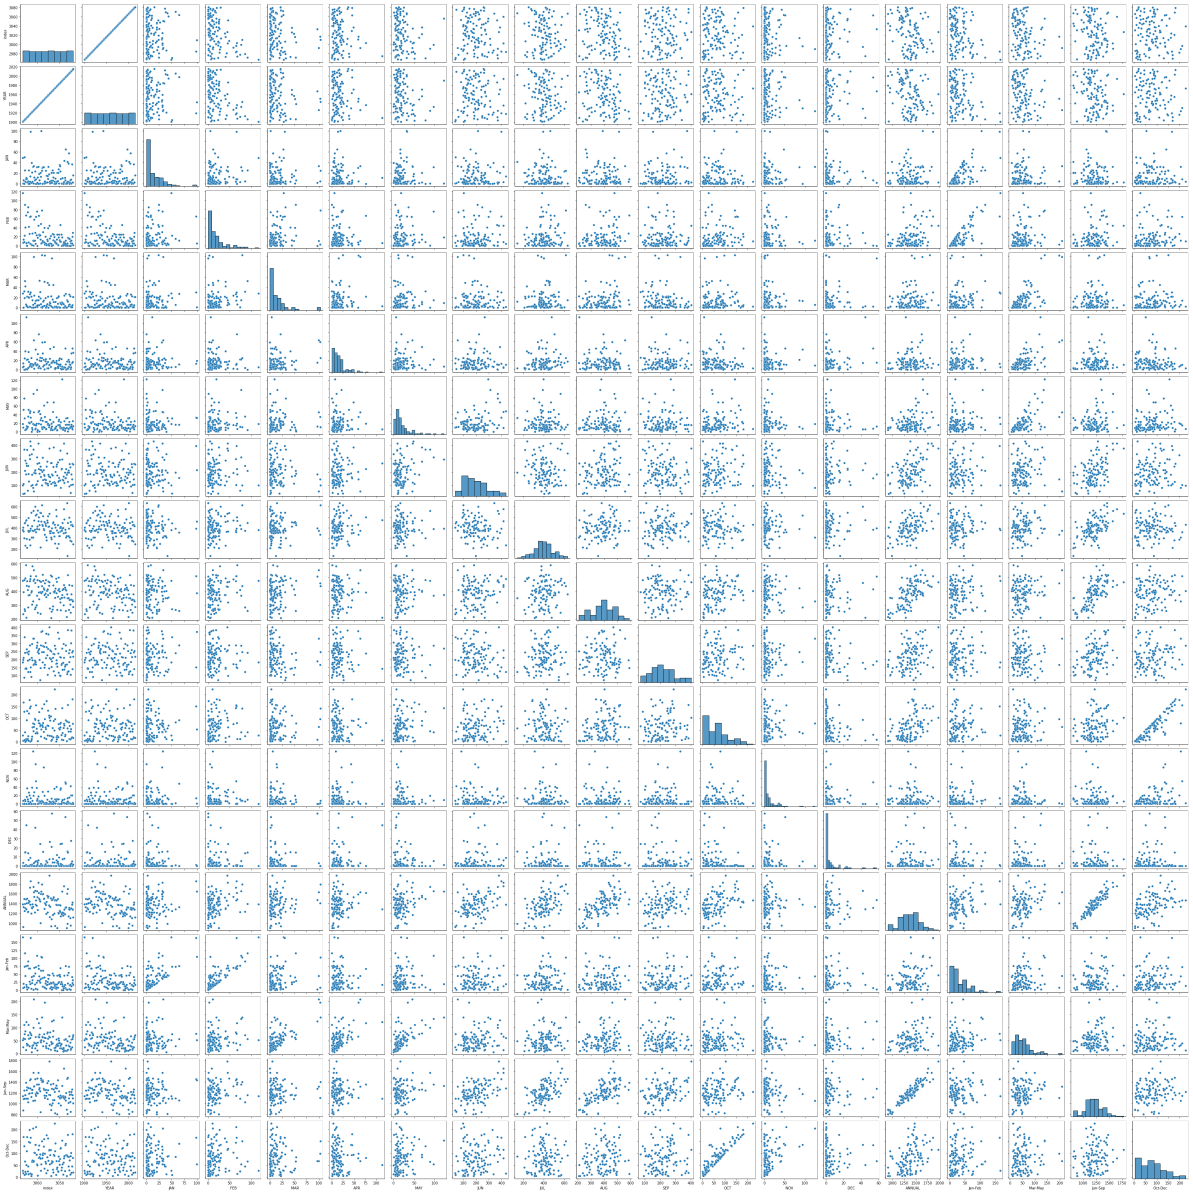

In [17]:
```
sns.distplot(df['ANNUAL'])
```

```
C:\ProgramData\Anaconda3\lib\site-packages\seaborn\distributions.py:2557: Fut
ureWarning: `distplot` is a deprecated function and will be removed in a futu
re version. Please adapt your code to use either `displot` (a figure-level fu
nction with similar flexibility) or `histplot` (an axes-level function for hi
stograms).
  warnings.warn(msg, FutureWarning)
```

Out[17]: <AxesSubplot:xlabel='ANNUAL', ylabel='Density'>

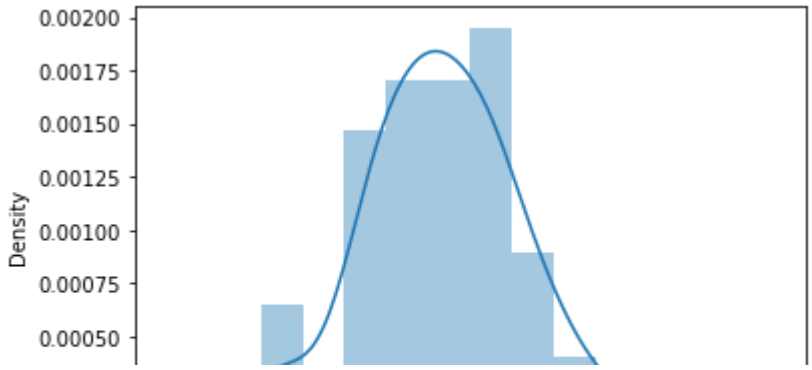

In [18]:
```
sns.heatmap(df.corr())
```

Out[18]: <AxesSubplot:>