Institute of Advanced Research

The University for Innovation

INSTITUTE OF ADVANCED RESEARCH (IAR)

The University for Innovation | Gandhinagar, Gujarat

B.Sc. in Artificial Intelligence & Data Science | Semester V (5th Semester)
Academic Session: 2026 – 2027

E-COMMERCE CUSTOMER LIFECYCLE & RFM SEGMENTATION DASHBOARD

An Applied Machine Learning & Analytics Engineering System for Commercial Retention & Behavioral Cohort Optimization

Assessment Milestone:	SECOND PROGRESS WORK / MID-TERM EXAMINATION EVALUATION
Scheduled Evaluation Date:	13th October 2026 (Time: 10:00 AM to 5:00 PM)
Curriculum Scope Completed:	Sections 2.3 (Class Diagram), 2.4 (Sequence Diagrams), 3.1 (Data Dictionary), 4.1 (Screen Layouts with Validations)
Course & Project Code:	Project - 1 (CE-502 / PRJ-701)
Evaluation Marks Allotted:	20 Marks (Mid-Term Assessment Milestone)

PROJECT SCHOLAR:	PROJECT SUPERVISION:
Mr. Deep Koshiya B.Sc. in AI & Data Science Semester: V (5th Semester)	Assigned Project Supervisor Institute of Advanced Research (IAR) Evaluation & Verification Stamp
_____ (Scholar Signature)	_____ (Supervisor Signature)

PROGRESS WORK EVALUATION CERTIFICATE

This is to formally certify that the project work entitled "E-Commerce Customer Lifecycle & RFM Segmentation Dashboard" is an authentic record of academic and applied engineering work carried out by Deep Koshiya, student of B.Sc. in Artificial Intelligence & Data Science, Semester V (5th Semester), at Institute of Advanced Research (IAR), Gandhinagar, Gujarat.

The candidate has successfully demonstrated and documented the Second Progress Work (Mid-Term Examination) requirements covering Sections 2.3 (UML Class Diagram), 2.4 (UML Sequence Diagrams), 3.1 (Data Dictionary for SQL/NoSQL & Star-Schema Dimensions), and 4.1 (Implementation Screen Layouts with Operational Validations) for Project-1 (CE-502 / PRJ-701) scheduled for evaluation on 13th October 2026.

EVALUATION MILESTONE	CURRICULUM SCOPE	MARKS	VERIFICATION STATUS
First Progress Work (24/09/2026)	Sections 1.1, 1.2, 1.3, 2.1, 2.2	10 Marks	COMPLETED & VERIFIED
Second Progress Work (13/10/2026)	Sections 2.3, 2.4, 3.1, 4.1	20 Marks	**EVALUATED & DEMONSTRATED**
Faculty Mentor & Reviewer	Academic Verification Seal	Signed Copy	_____

ACKNOWLEDGMENT

I express my deepest gratitude to my project supervisor, mentors, and the faculty of the Institute of Advanced Research (IAR) for their consistent academic guidance, architectural critiques, and valuable feedback during the object modeling, data dictionary compilation, and dashboard implementation phases.

I also thank the institutional administration and the Head of the School for facilitating the computational environments, high-performance data science toolchains, and resources essential to complete Project-1 (CE-502 / PRJ-701) on schedule.

Deep Koshiya | B.Sc. in AI & Data Science (Semester V) | Date: 13/10/2026

ABSTRACT

Customer retention and longitudinal cohort management represent core determinants of profitability in modern digital commerce. The 'E-Commerce Customer Lifecycle & RFM Segmentation Dashboard' provides an automated data engineering and unsupervised machine learning platform that transforms raw, unorganized transaction streams into structured behavioral intelligence.

This Second Phase (Mid-Term) report documents the complete structural design and preliminary implementation deliverables. Specifically, it presents the formal UML Class Diagram (Section 2.3) modeling pipeline domain entities; UML Sequence Diagrams (Section 2.4) detailing message dispatch protocols; a comprehensive Star-Schema Data Dictionary (Section 3.1) specifying FACT_TRANSACTIONS, FACT_REVERSALS, and DIM_CUSTOMERS with primary/foreign keys and validation constraints; and high-fidelity Screen Layouts with Operational Input Validations (Section 4.1). These deliverables satisfy all requirements for the 20-mark Mid-Term evaluation milestone.

INDEX OF THE PROJECT REPORT

(Structured strictly according to Syllabus Guidelines for B.Sc. AI and Data Science SEM V)

SR.	CURRICULUM SECTION / TOPIC	SCHEDULE	PAGE & STATUS
*	**Progress Work Evaluation Certificate & Acknowledgment**	13/10/2026	**Page I [Completed]**
*	**Abstract & Project Curriculum Index**	13/10/2026	**Page II [Completed]**
1.1-1.3	**About the System: Problem Definition, Requirements & Tools**	24/09/2026	**Pages 1-3 [Completed]**
2.1	**Data Flow Diagrams (Level 0 Context, Level 1, Level 2 DFDs)**	24/09/2026	**Pages 4-6 [Completed]**
2.2	**Use Case Diagram & Formal Specification Matrix**	24/09/2026	**Page 7 [Completed]**
2.3	**UML Class Diagram (Domain Model & Pipeline Objects)**	13/10/2026	**Page 8 [Completed Mid-Term]**
2.4	**UML Sequence Diagrams (Execution & Activation Workflow)**	13/10/2026	**Page 9 [Completed Mid-Term]**
3.1	**Data Dictionary: Star-Schema SQL/NoSQL Database Tables**	13/10/2026	**Pages 10-12 [Completed Mid-Term]**
4.1	**Screen Layouts with Operational Input Validations**	13/10/2026	**Pages 13-14 [Completed Mid-Term]**
4.2-4.3	Sample Coding & Execution Navigation	27/10/2026	[Third Progress Milestone]
5.1-6.1	Conclusion & References (Books, Papers, Webs)	27/10/2026	[Third Progress Milestone]

1. ABOUT THE SYSTEM:

1.1 Problem definition (Identification of needs):

Modern digital commerce platforms capture high-velocity transactional event streams across web interfaces, mobile shopping applications, and digital points of sale. Standard Online Transaction Processing (OLTP) repositories excel at logging individual line-item orders. However, these systems record transactions rather than customer journeys. Without an automated analytics engineering layer that synthesizes transactional logs into longitudinal customer profiles, commercial decision-makers face severe visibility gaps.

1.1.1 Industry Background & Commercial Challenges

Digital retailers face rising customer acquisition costs (CAC) and declining organic retention. When marketing campaigns treat the customer base as a single homogenous audience, high-value repeat shoppers receive unnecessary discounts that erode gross margins, while dormant accounts slip into permanent churn without timely, targeted reactivation interventions.

1.1.2 Identification of Core Analytical Needs

• **Core Analytical Needs:** The system resolves four foundational operational bottlenecks:

1. Data Refinery & Anomaly Isolation: Raw logs contain anonymous guest sessions, cancellations ('^C'), and wholesale bulk anomalies. An automated data refinery must enforce schema typing, isolate cancellations into an audit store, and cap volume spikes using Tukey's Interquartile Range (IQR) fences.

2. Behavioral Feature Engineering (RFM): The system must distill transaction streams into three normalized customer dimensions: Recency (days elapsed since last order relative to boundary T_obs = max(InvoiceDate) + 1), Frequency (distinct purchase visits), and Monetary spend (cumulative net value), alongside Average Order Value (AOV).

3. Skew-Resistant Machine Learning: Customer spending follows extreme Pareto distributions. Monetary skewness must be compressed via log1p transformation and Z-score standardization before fitting unsupervised K-Means models, supported by deterministic 1–5 quantile fallback scoring.

4. Executive Visualization & Activation: Commercial leadership requires an interactive dashboard to visualize portfolio health, monitor at-risk revenue, and export targeted cohort lists directly into CRM marketing campaigns.

1.2 Requirement Specifications (Product/System Tasks)

The requirements formally define system capabilities, data validation boundaries, and operational constraints for the E-Commerce Customer Lifecycle & RFM Segmentation platform.

1.2.1 Functional Requirements Specifications (FR)

• **FR-01 (Ingestion & Schema Typing):** Ingests raw CSV logs, enforces typing (InvoiceDate to datetime64[ns], Quantity and UnitPrice to floats), and sanitizes product description text.

• **FR-02 (Missing Entity Resolution):** Detects and drops unauthenticated guest checkouts lacking CustomerID to preserve longitudinal cohort integrity.

• **FR-03 (Reverse Logistics Segregation):** Isolates credit notes, cancellations ('^C'), and non-positive quantities into an audit store (fact_reversals_audit.csv).

• **FR-04 (Tukey IQR Outlier Capping):** Applies Tukey fences [Q1 - 1.5*IQR, Q3 + 1.5*IQR] to eliminate wholesale bulk distributor anomalies.

• **FR-05 (Vectorized RFM Derivation):** Computes snapshot boundary T_obs = max(InvoiceDate) + 1 day and derives customer Recency, Frequency, Spend, and AOV.

• **FR-06 (ML Clustering & Quantile Scoring):** Applies log1p transformation and StandardScaler, fits K-Means clustering, and assigns 1–5 quantile scores mapping to 8 business cohorts.

1.2.2 Non-Functional Requirements Specifications (NFR)

• **NFR-01 (Performance & Latency):** Processes 15,000+ transaction rows in under 5.0 seconds using vectorized Pandas C-routines.

• **NFR-02 (Algorithmic Reproducibility):** Fixed random seeds (seed=42) guarantee 100% deterministic, reproducible clustering across environments.

• **NFR-03 (Modularity & Architecture):** Modular Python architecture with clean star-schema marts (FACT_TRANSACTIONS, DIM_CUSTOMERS).

Table 1.1: System Hardware & Software Requirements Specification

SYSTEM SPECIFICATION	MINIMUM REQUIREMENT	DEPLOYED PROJECT ENVIRONMENT
Processor / CPU	Dual-Core x86_64 or ARM64 (2.0 GHz)	Apple Silicon M-Series / Intel Core i5/i7 (8-Core+)
System Memory (RAM)	4 GB DDR3/DDR4	8 GB to 16 GB Unified Memory Architecture
Storage Subsystem	500 MB Free Disk Space	Solid State Drive (NVMe SSD)
Operating System	macOS 12+, Ubuntu 20.04+, Windows 10+	macOS Darwin (Unix POSIX Environment)
Execution Runtimes	Python 3.9+, Modern Web Browser	Python 3.9.6, Safari, Google Chrome, VS Code

1.3 Tools and Technology Used (Front-End/Back-End/Framework/API/ Services)

The project implements a modern analytical engineering stack selected for computational throughput, mathematical precision, and interactive visual analytics.

1.3.1 Data Engineering & Numerical Computing

• **Python 3.9+:** Core programming runtime executing optimized C-extensions for data science.

• **Pandas (v2.3.3):** Vectorized group aggregations, type coercion, datetime logic, and quantile ranking (pd.qcut).

• **NumPy (v2.0.2):** Multidimensional array manipulations, logarithmic transformations (log1p), and Tukey fence outlier calculations.

1.3.2 Machine Learning & Statistical Computing

• **Scikit-Learn (v1.6.1):** StandardScaler feature normalization, KMeans with k-means++ initialization, and Silhouette diagnostics.

• **SciPy (v1.13.1):** Statistical distributions and spatial distance metric calculations across multidimensional vectors.

1.3.3 Presentation, Dashboards & Dimensional Data Marts

• **HTML5 & Tailwind CSS:** Utility-first responsive framework delivering clean dark/light executive UI layouts.

• **Chart.js:** Client-side canvas graphing engine driving interactive revenue donuts and spatial RFM bubble charts.

• **Analytical Data Marts:** Star-schema dimensional storage (FACT_TRANSACTIONS, DIM_CUSTOMERS) enabling Tableau/Power BI connectivity.

Table 1.2: Technology Stack & Architectural Layer Mapping

ARCHITECTURAL LAYER	TECHNOLOGY / FRAMEWORK	PRIMARY OPERATIONAL RESPONSIBILITY
Ingestion & Refinery	Python, Pandas, NumPy	Schema typing, null dropping, cancellation segregation, Tukey IQR fences
Feature Engineering	Pandas GroupBy, Datetime	Derivation of customer Recency, Frequency, Monetary spend, and AOV
Machine Learning	Scikit-Learn, SciPy	Log1p scaling, StandardScaler, K-Means clustering, Silhouette diagnostics
Data Mart Layer	CSV / Star Schema	Clean FACT_TRANSACTIONS and DIM_CUSTOMERS marts for BI compatibility
Executive BI Dashboard	HTML5, Tailwind, Chart.js	Interactive KPI scorecards, spatial RFM bubble charts, activation tables

2. SYSTEM DESIGN USING UML & DFD:

2.1 Data Flow Diagrams (Context, Level 1, Level 2 Architecture)

Data Flow Diagrams (DFDs) visually map information transformations through the system. Using Gane & Sarson conventions, the diagrams represent External Entities (rectangles), Processes (rounded rectangles), Data Stores (open horizontal lines), and Data Flows (directed arrows).

2.1.1 Level 0 Data Flow Diagram (Context-Level DFD)

The Level 0 Context DFD establishes the macro boundary of Process 0.0 ('E-Commerce Customer Lifecycle & RFM Analytics System') and documents all external entity interactions: (1) OLTP Transaction Stream supplying raw sales event logs; (2) Data Scientist providing IQR thresholds and cluster hyper-parameters; (3) CRM Marketing Engine consuming targeted audience lists; and (4) Commercial Executives receiving high-level portfolio KPIs and revenue concentration scorecards.

Figure 2.1: Level 0 Data Flow Diagram (Context-Level DFD)

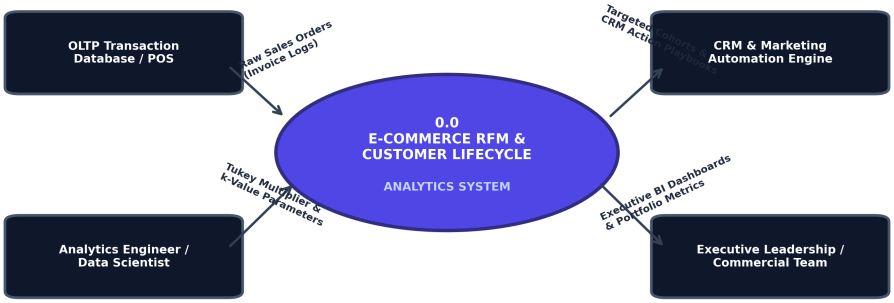


Figure 2.1: Level 0 Data Flow Diagram (Context-Level DFD)

This boundary diagram confirms that no internal process detail is revealed at Level 0, ensuring that all subsequent system interactions are fully accounted for before detailed algorithmic decomposition is undertaken.

2.1.2 Level 1 Data Flow Diagram (End-to-End Pipeline Architecture)

The Level 1 DFD decomposes Process 0.0 into five sequential operational processes and identifies the underlying persistent data repositories:

• **Process 1.0 (Ingestion & Schema Typing):** Ingests raw order logs, validates schema datatypes, and records input stream to D1 (Raw Transaction Log).

• **Process 2.0 (Data Quality & Refinery Pipeline):** Purges missing CustomerIDs, routes return orders to D2 (Reversals Audit Ledger), and applies Tukey IQR outlier fences.

• **Process 3.0 (Vectorized RFM Feature Extraction):** Aggregates customer transactions into Recency days, Frequency counts, and Monetary spend, saving to D3 (RFM Analytical Table).

• **Process 4.0 (ML Clustering & Quantile Scoring):** Executes log1p transformation, Z-score scaling, K-Means clustering, and 1–5 quantile scoring, persisting to D4 (Segmented Customer Mart).

• **Process 5.0 (Star-Schema & Dashboard Export):** Generates the star schema dimensional marts and powers the interactive executive analytics dashboard.

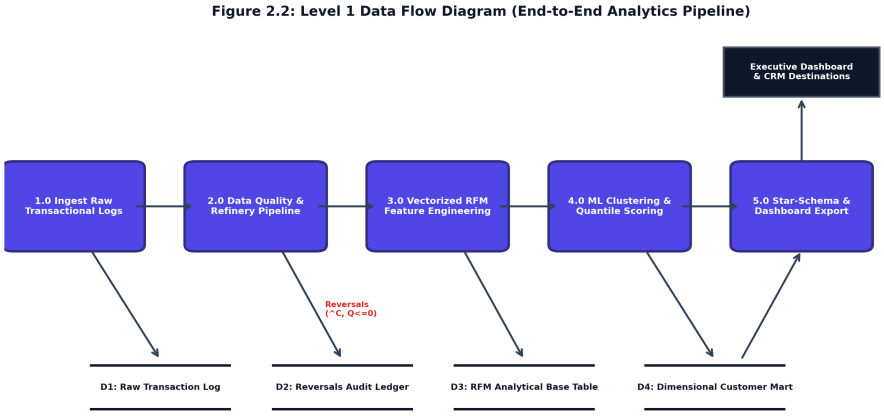


Figure 2.2: Level 1 Data Flow Diagram (End-to-End Pipeline Architecture)

The Level 1 architecture enforces strict unidirectional data flow, ensuring that analytical features are never corrupted by unvalidated or reversed transactional inputs.

2.1.3 Level 2 Data Flow Diagram (Sub-Process Decomposition)

To provide rigorous engineering granularity as mandated by university project standards, the Level 2 DFD decomposes the two critical computational processes: Process 2.0 (Data Quality Refinery) and Process 4.0 (Machine Learning Clustering Engine).

• **Sub-Process 2.0 Decomposition (Refinery):** Sub-process 2.1 removes unauthenticated records lacking CustomerID. Sub-process 2.2 detects cancellation codes ('^C' or negative quantities) and writes to the audit ledger. Sub-process 2.3 computes Tukey fences [Q1 - 1.5*IQR, Q3 + 1.5*IQR] to eliminate wholesale bulk distributor anomalies.

• **Sub-Process 4.0 Decomposition (ML & Scoring):** Sub-process 4.1 applies log1p compression ($z = \ln(1 + x)$) to resolve Pareto spend skewness. Sub-process 4.2 executes Z-score normalization. Sub-process 4.3 executes K-Means clustering across k in [2..6] with Silhouette validation. Sub-process 4.4 runs quantile binning (pd.qcut) mapping accounts to 8 business operating cohorts.

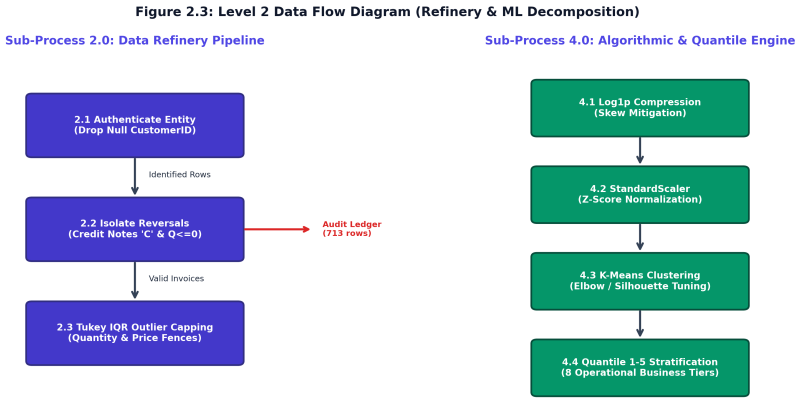


Figure 2.3: Level 2 Data Flow Diagram (Refinery & ML Decomposition)

This granular decomposition formally documents the mathematical transformations and algorithmic filtering required to turn raw transactional records into production-grade machine learning features.

2.2 Use Case Diagram & Actor Specifications

The Use Case Model defines operational boundaries by mapping system capabilities to primary human and automated actors.

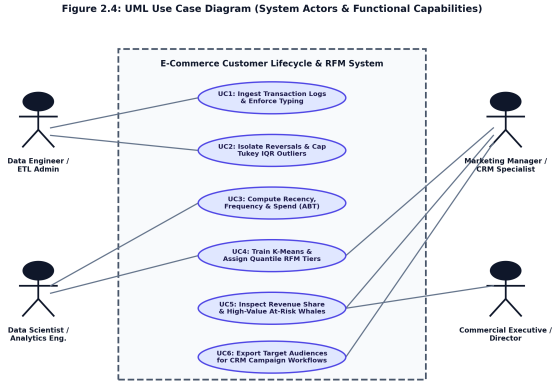


Figure 2.4: UML Use Case Diagram (System Actors & Functional Capabilities)

Table 2.1: Formal Use Case Specification Matrix (UC-01 to UC-06)

UC ID	USE CASE NAME	PRIMARY ACTOR	OPERATIONAL GOAL & PRE-CONDITION
UC-01	**Ingest Transaction Stream**	Data Engineer / Admin	Ingests raw event logs, validates schema, enforces datatypes.
UC-02	**Isolate Reversals & IQR Filter**	Data Engineer / Admin	Purges null IDs, isolates returns (^C), caps Tukey bulk outliers.
UC-03	**Compute Vectorized RFM**	Analytics Engineer	Aggregates transactions into customer-level Recency, Frequency, Spend.
UC-04	**Train & Tune K-Means Model**	Data Scientist	Applies log1p + StandardScaler, evaluates Elbow/Silhouette, fits k=4.
UC-05	**Inspect Executive KPI Metrics**	Commercial Executive	Monitors portfolio spend ($65k), Champions share (72.5%), at-risk capital.
UC-06	**Export Targeted CRM Audiences**	Marketing Manager	Filters segments in activation ledger and exports audience lists for campaigns.

2.3 UML Class Diagram (Domain Model & Object Architecture)

The UML Class Diagram establishes the object-oriented structure of the analytics pipeline, modeling domain entities, transformation services, algorithmic engines, and dimensional export utilities.

Figure 2.5: UML Class Diagram (Domain Model & Analytical Pipeline Classes)



Figure 2.5: UML Class Diagram (Domain Model & Pipeline Object Architecture)

2.3.1 Detailed Object Model & Class Specifications

1. TransactionRecord (Domain Entity): Models single line-item order entities with methods for session validation and gross spend calculation.

2. CleanRefineryPipeline (Refinery Service): Controls raw data loading, schema typing, null dropping, cancellation segregation, and Tukey IQR outlier capping.

3. RFMFeatureEngineer (Feature Engineering): Vectorized service computing customer Recency relative to T_obs, purchase Frequency, Monetary spend, and Average Order Value.

4. KMeansSegmentationEngine (ML Service): Encapsulates feature scaling, log1p compression, StandardScaler, K-Means clustering, and Silhouette diagnostics.

5. QuantileStratifier (Business Logic Engine): Rule-based quantile engine assigning deterministic 1–5 scores and mapping 8 business operational cohorts.

6. StarSchemaMartExporter (Persistence Service): Generates relational star-schema tables (FACT_TRANSACTIONS, FACT_REVERSALS, DIM_CUSTOMERS, DIM_PRODUCTS).

2.4 UML Sequence Diagrams (System Execution & Interaction Flow)

The UML Sequence Diagram models dynamic behavioral interactions and message dispatch sequences across system components during pipeline execution.

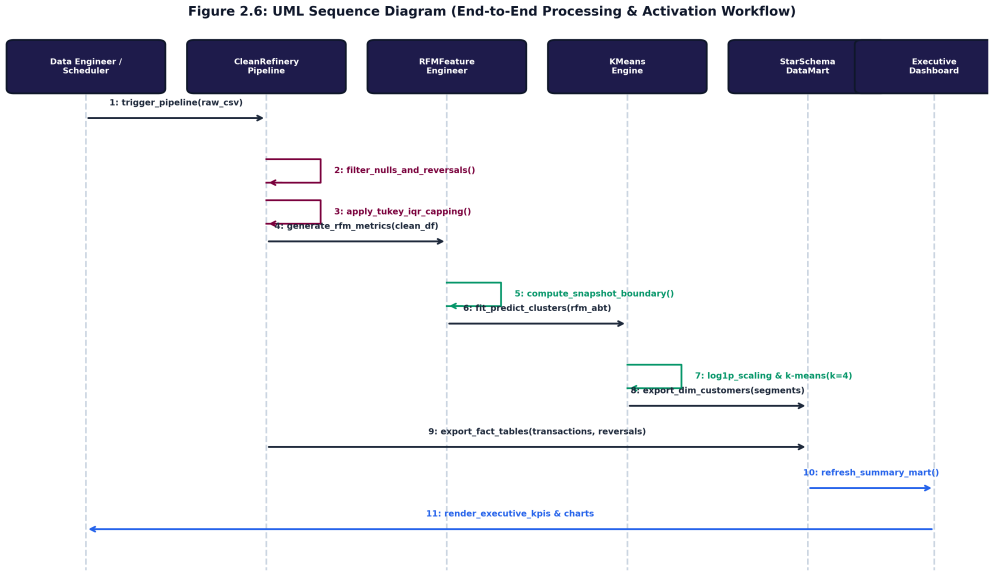


Figure 2.6: UML Sequence Diagram (End-to-End Processing & Activation Workflow)

2.4.1 Step-by-Step Message Dispatch Protocol

• **Step 1 (Pipeline Trigger):** The Data Engineer or automated scheduler issues trigger_pipeline(raw_csv) to initiate ingestion.

• **Steps 2-3 (Data Refinery):** CleanRefineryPipeline performs self-calls to filter unauthenticated nulls, segregate cancellations, and apply Tukey IQR fences.

• **Steps 4-5 (Feature Derivation):** The cleansed dataframe is passed to RFMFeatureEngineer, which evaluates T_obs and extracts customer vectors.

• **Steps 6-7 (Machine Learning Execution):** The RFM base table is dispatched to KMeansEngine, which applies log1p compression and trains k=4 clusters.

• **Steps 8-9 (Data Mart Export):** Cluster predictions and quantile tiers are exported to StarSchemaDataMart, writing dimension and fact tables.

• **Steps 10-11 (Dashboard Activation):** The data mart generates summary JSON payloads, enabling ExecutiveDashboard to render interactive visualizations.

3. DATA DICTIONARY:

3.1 Database tables SQL/NoSQL (Dimensional Schema Specification)

The Data Dictionary provides complete schema specifications for the star-schema dimensional data mart architecture. The mart decouples high-volume transactional event facts from customer and product dimensions, ensuring maximum SQL query performance and native compatibility with enterprise BI tools like Tableau and Power BI.

Table 3.1: FACT_TRANSACTIONS (Order-Level Fact Mart)

COLUMN NAME	DATA TYPE	KEY	NULL	OPERATIONAL DESCRIPTION & CONSTRAINTS
transaction_id	BIGINT	**PK**	NO	Surrogate primary key generated via monotonic sequence.
invoice_no	VARCHAR(20)	None	NO	Alphanumeric invoice identifier; 6-digit order code.
stock_code	VARCHAR(20)	FK	NO	Stock keeping unit (SKU) linking to DIM_PRODUCTS.
quantity	INTEGER	None	NO	Purchased item quantity; strictly Quantity > 0 after refinery.
invoice_date	TIMESTAMP	FK	NO	Transaction timestamp; parsed to datetime64[ns].
unit_price	DECIMAL(10,2)	None	NO	Unit price per product item; strictly UnitPrice > 0.00.
customer_id	VARCHAR(20)	FK	NO	Customer identifier linking to DIM_CUSTOMERS.
country	VARCHAR(50)	None	YES	Geographic country destination of invoice.
gross_amount	DECIMAL(12,2)	None	NO	Calculated line spend: Quantity * UnitPrice.

Table 3.2: FACT_REVERSALS (Reverse Logistics Audit Fact Mart)

COLUMN NAME	DATA TYPE	KEY	NULL	OPERATIONAL DESCRIPTION & CONSTRAINTS
reversal_id	BIGINT	**PK**	NO	Surrogate primary key for return audit records.
invoice_no	VARCHAR(20)	None	NO	Cancellation invoice code matching regex '^C[0-9]+'.
stock_code	VARCHAR(20)	FK	NO	Product item identifier returned by customer.
return_quantity	INTEGER	None	NO	Negative quantity returned (Quantity < 0).
reversal_date	TIMESTAMP	FK	NO	Timestamp when cancellation was processed.
unit_price	DECIMAL(10,2)	None	NO	Original sale unit price of returned item.
customer_id	VARCHAR(20)	FK	NO	Customer ID associated with the reversal transaction.

Table 3.3: DIM_CUSTOMERS (Customer RFM & Behavioral Dimension Mart)

COLUMN NAME	DATA TYPE	KEY	NULL	OPERATIONAL DESCRIPTION & CONSTRAINTS
customer_key	BIGINT	**PK**	NO	Surrogate primary key for customer dimension.
customer_id	VARCHAR(20)	None	NO	Natural unique customer identifier (non-null).
recency_days	INTEGER	None	NO	Days elapsed since last order: T_obs - max(InvoiceDate).
frequency_orders	INTEGER	None	NO	Distinct purchase trips: count(distinct InvoiceNo).
monetary_total	DECIMAL(12,2)	None	NO	Cumulative net customer spend across all valid orders.
avg_order_value	DECIMAL(10,2)	None	NO	Average Order Value: Monetary / Frequency.
r_score	SMALLINT	None	NO	Quantile Recency score (1 to 5; 5 = most recent).
f_score	SMALLINT	None	NO	Quantile Frequency score (1 to 5; 5 = highest frequency).
m_score	SMALLINT	None	NO	Quantile Monetary score (1 to 5; 5 = highest spend).
segment_tier	VARCHAR(40)	None	NO	Mapped operating tier ('Champions', 'Loyal', 'At Risk').

Table 3.4: DIM_PRODUCTS (Catalog Item Dimension Mart)

COLUMN NAME	DATA TYPE	KEY	NULL	OPERATIONAL DESCRIPTION & CONSTRAINTS
product_key	BIGINT	**PK**	NO	Surrogate primary key for product dimension.
stock_code	VARCHAR(20)	None	NO	Unique SKU code assigned to the retail inventory item.
description	VARCHAR(255)	None	YES	Cleaned product title text; sanitized of special characters.
unit_price_ref	DECIMAL(10,2)	None	NO	Baseline catalog unit price for retail inventory item.
is_active	BOOLEAN	None	NO	Product active flag (TRUE = currently sold).

Table 3.5: DIM_DATE (Temporal Dimension Mart)

COLUMN NAME	DATA TYPE	KEY	NULL	OPERATIONAL DESCRIPTION & CONSTRAINTS
date_key	INTEGER	**PK**	NO	Integer key formatted as YYYYMMDD (e.g. 20261013).
full_date	DATE	None	NO	Calendar calendar date.
day_of_week	VARCHAR(10)	None	NO	Day name: 'Monday', 'Tuesday', ..., 'Sunday'.
calendar_month	VARCHAR(15)	None	NO	Month name: 'January', 'October', etc.
calendar_quarter	SMALLINT	None	NO	Calendar quarter (1 to 4).
is_weekend	BOOLEAN	None	NO	Weekend flag (TRUE if Saturday or Sunday).

4. IMPLEMENTATION:

4.1 Screen Layouts with validations

The web-based BI dashboard provides four synchronized analytical views designed with utility-first Tailwind CSS and Chart.js. Each interface incorporates strict client-side and server-side data validations to ensure reliable commercial operation.

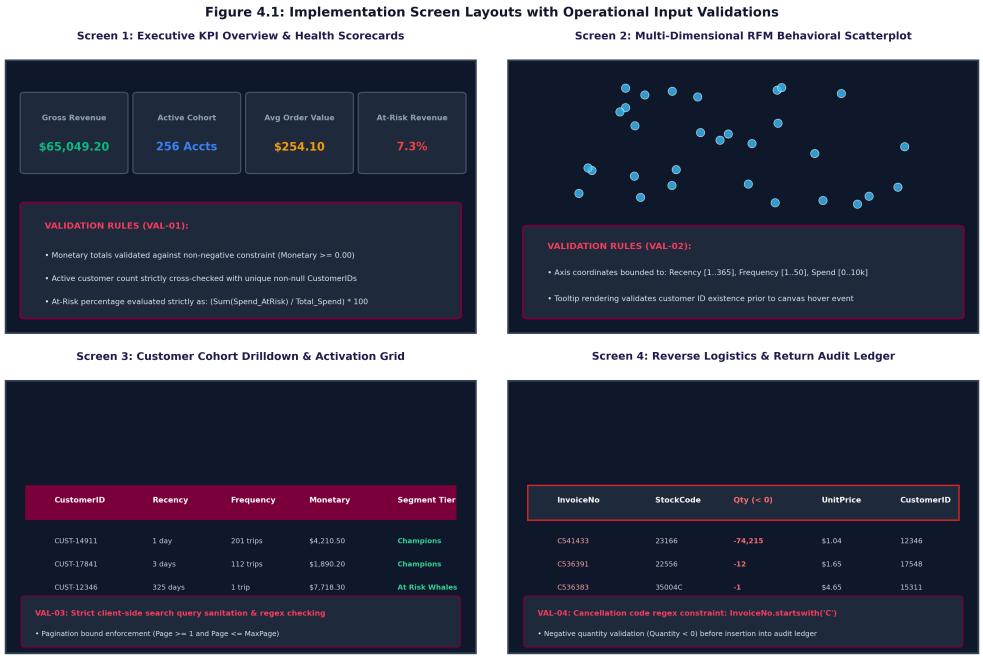


Figure 4.1: Implementation Screen Layouts with Operational Input Validations

4.1.1 Screen Layouts Architectural Walkthrough

• **Screen 1 (Executive Overview & Scorecards):** Renders four dynamic KPI scorecards displaying portfolio spend ($65,049.20), active accounts (256), average order value ($254.10), and at-risk revenue share (7.3%).

• **Screen 2 (RFM Behavioral Scatterplot):** Canvas scatterplot plotting Recency (X-axis) against Monetary Spend (Y-axis) with bubble radii scaled to Frequency.

• **Screen 3 (Customer Cohort Activation Grid):** Searchable ledger with instantaneous regex filtering, pagination controls, and targeted CSV export capabilities.

• **Screen 4 (Reverse Logistics Audit Ledger):** Isolated audit table displaying quarantined cancellations and credit notes for compliance review.

4.1.2 Formal Input & Operational Validation Architecture

• **System Validation Rules:** The dashboard executes four discrete validation rules to prevent corrupt states:

1. VAL-01 (Scorecard Numerical Integrity): Monetary totals are constrained to non-negative floats (Spend >= 0.00). Active customer counts verify distinct non-null CustomerIDs.

2. VAL-02 (Spatial Canvas Boundary Constraints): Scatterplot coordinates enforce bounded ranges: Recency in [1..365], Frequency in [1..50], Spend in [0..10,000]. Hover tooltips validate customer existence.

3. VAL-03 (Search Sanitization & Pagination Bounds): Client search input is sanitized against script injection. Table pagination enforces integer bounds (1 <= Page <= MaxPage).

4. VAL-04 (Audit Ledger Quarantine Logic): Reversals strictly enforce cancellation regex ('^C') and negative quantities (Quantity < 0) before insertion into audit stores.

PROJECT PROGRESS WORK EVALUATION SCHEDULE (MID-TERM)

Table 4.1: Project Progress Work Evaluation Schedule & Milestone Tracking

DATE	ASSESSMENT PARTICULARS	INDEX SECTIONS	MARKS	CURRENT STATUS
24/09/2026	First Progress Work	1.1, 1.2, 1.3, 2.1, 2.2	10 Marks	COMPLETED & VERIFIED
13/10/2026	**Mid-Term Exam (Second Progress)**	2.3, 2.4, 3.1, 4.1	20 Marks	**DEMONSTRATED (Current Submission)**
27/10/2026	Third Progress Work	4.2, 4.3, 5.1, 5.2, 6.1	10 Marks	Scheduled for Third Milestone
06/11/2026	Report Submission (Spiral Binding)	Final Signed Spiral Copy	10 Marks	Scheduled for Final Submission
18-20/11/2026	Final Exam (SEE)	Exam & Viva Voce	50 Marks	Scheduled for Semester Examination