


```
#include<stdio.h>
```

```
Printf("%d",marks[0]);
```

```
scanf("%d",marks[0]);
```

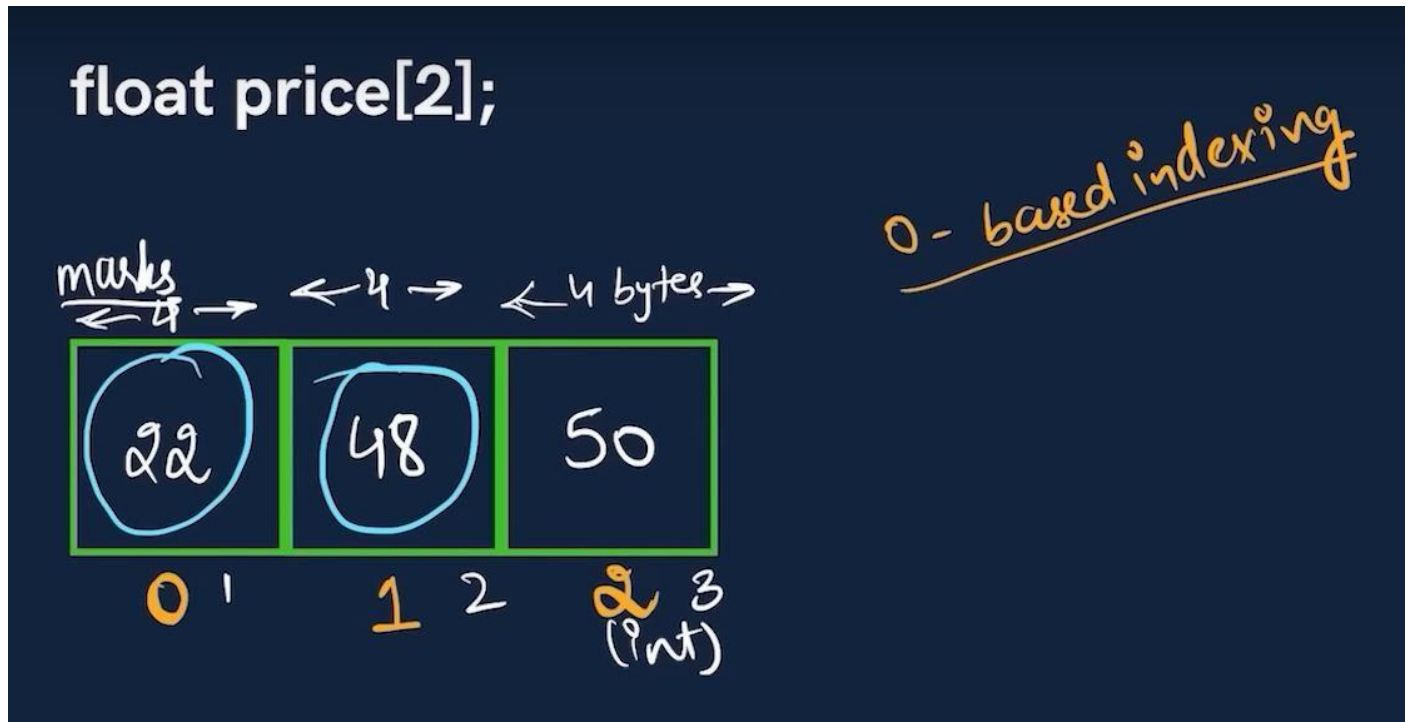

To access the '1'-block which have index '0'

```
Printf("%d",&marks[0]);
```

Similarly for the second and third block we have index '1' and '2';