


/home/james/NetBeansProjects
/ride/src/ParseFontConfigXml.h

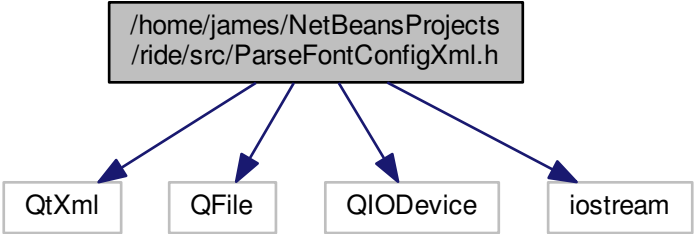

```
graph TD; A["/home/james/NetBeansProjects  
/ride/src/ParseFontConfigXml.h"] --> B[QtXml]; A --> C[QFile]; A --> D[QIODevice]; A --> E[iostream];
```

The diagram illustrates the dependencies of the header file `ParseFontConfigXml.h`. A central box at the top contains the file's path. Four arrows point downwards from this box to four separate boxes, each representing a dependency: `QtXml`, `QFile`, `QIODevice`, and `iostream`.

QtXml

QFile

QIODevice

iostream