DLS

AIRI

Image and Video Generation in 2026

Konstantin Sobolev

AIRI, Research Scientist

Fusion Brain lab

From 64-pixel faces to films with sound

IMAGES



2015 · DCGAN · 64×64 faces



2018 · StyleGAN · photoreal faces



2022 · Stable Diffusion · any prompt



2026 · HunyuanImage 3.0

VIDEO



2017 · TGAN · 64×64, 16 frames



2022 · DIGAN · 128×128



2023 · ModelScope family · silent



2026 · MiniMax H3 · 10 s, two shots, sound

What changed? Not one breakthrough, but **six ingredients** of one recipe.


DCGAN (Radford et al., 2015); StyleGAN (Karras et al., 2019); Stable Diffusion (Rombach et al., 2022); HunyuanImage 3.0 (Tencent, 2025); TGAN (Saito et al., 2017); DIGAN (Yu et al., 2022); TF-T2V (ali-vilab/VGen, 2023); MiniMax H3 (2026). Images and clips from the official GitHub repositories.

Why generate images and video?




1 Content creation

Ads, previs, music videos, game assets

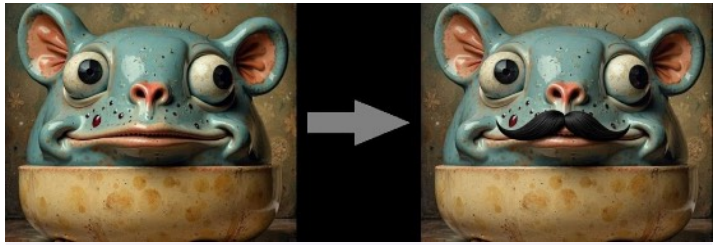

2 Editing and design

Change one object, restyle, restore

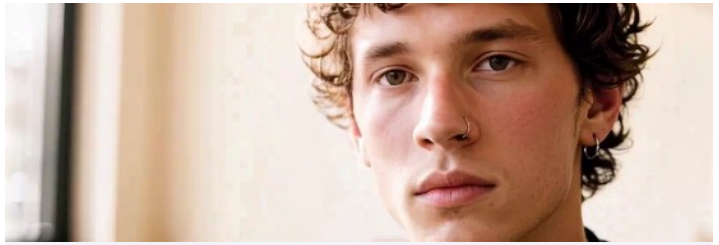


3 Communication

Avatars, dubbing with lip-sync, explainers




4 Synthetic data

Rare, dangerous scenes for cars and robots

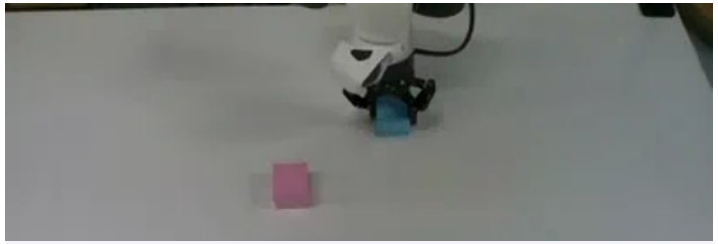

5 World models

Predict the next frame given an action

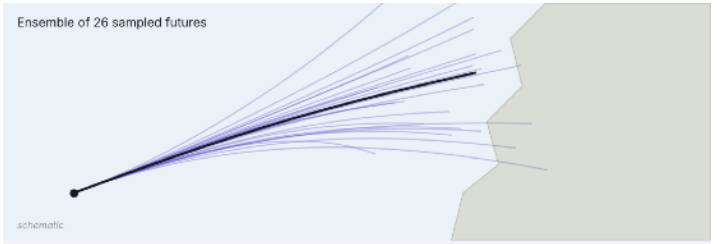


6 Science

Weather ensembles (GenCast), surgery sims

One task behind all of them: learn **p(x | condition)** – and sample from it fast and controllably.

Agenda

01	**Recap & the modern recipe**	Recap of the first two lectures as one recipe
02	**Images in 2026**	Generation = editing, data and RL, evaluation, the frontier
03	**Video in 2026**	Tokens, training, tasks, sound, inference; the frontier
04	**Beyond the clip**	Conversational editing, real time, world models
05	**Wrap-up**	What changed since 2022, try it yourself



DLS

01


Recap & the modern recipe

A fast recap of the first two lectures: from DDPM to FLUX.2 as one recipe



Recap: diffusion in 2022 and its bottlenecks

1 Forward & reverse

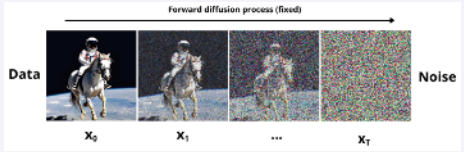

Fixed process adds Gaussian noise

A network learns to remove it, step by step

2 Training

Predict the added noise:

$$L = E \, \|\varepsilon - \varepsilon_\theta(x_t, t)\|^2$$

Simple MSE from the ELBO

3 Guidance




Classifier-free guidance:

$$\hat{\varepsilon} = \varepsilon(\varnothing) + w \cdot (\varepsilon(c) - \varepsilon(\varnothing))$$

w ↑ → fidelity ↑, diversity ↓

4 Text-to-image

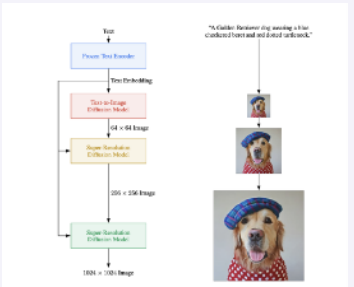


GLIDE, Imagen, DALL·E 2

Pixel space + cascades of super-resolution models

Bottlenecks of 2022: pixel space and cascades · U-Net backbone · CLIP / T5 text encoders · 50–1000 sampling steps → each of them was replaced


Ho et al., DDPM (2020); Ho & Salimans, CFG (2021); Nichol et al., GLIDE (2021); Saharia et al., Imagen (2022); Ramesh et al., DALL·E 2 (2022). Figures from the preliminary lecture.

The recipe of a 2026 generator

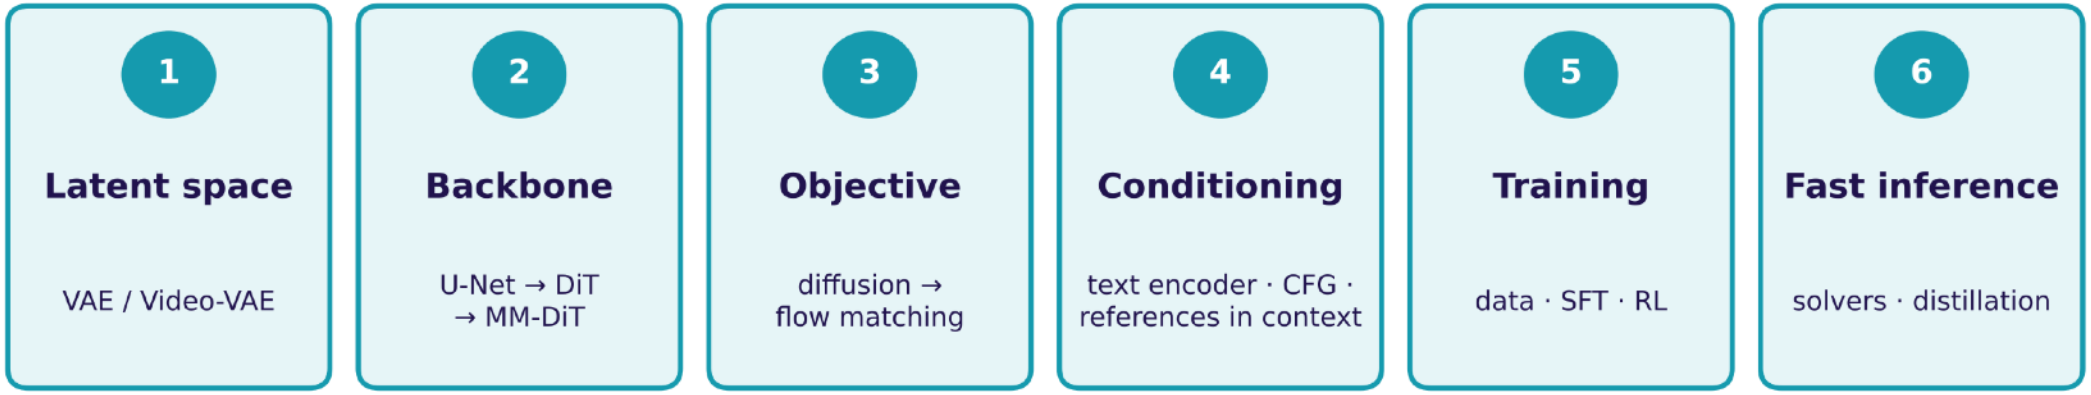

- Image and video models of 2026 share **one recipe** of six ingredients
- Next slides: what replaced each 2022 bottleneck – latent space, flow matching, transformers, LLM text encoders, few-step sampling

Latent diffusion: leave the pixel space

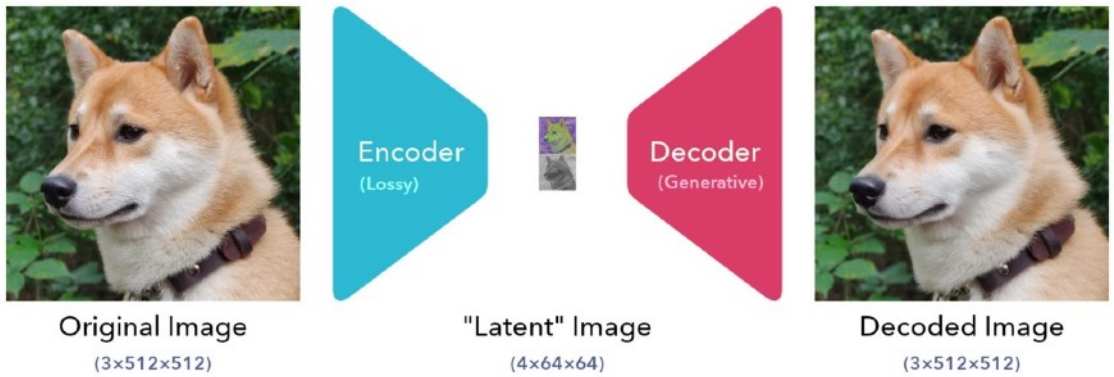

- Imagen / DALL·E 2 diffused in **pixels**, then upsampled with a cascade
- Latent diffusion: a **VAE** compresses the image 8× per side; diffusion runs in the small latent
- 512×512×3 → 64×64×4: **48× fewer values**, one model, no cascade


Every model in this lecture works in a latent space. For video the VAE also compresses time (4× fewer frames), and audio gets its own VAE.

Rombach et al., "High-Resolution Image Synthesis with Latent Diffusion Models," CVPR 2022 (Stable Diffusion).

Yesterday **Nina Konovalova**: flow matching, timestep shift

Flow matching: straight paths from noise to data

- Interpolate **linearly**: $x_t = (1 - t) \cdot x_0 + t \cdot \varepsilon$, and train the network to predict the **velocity** $v = \varepsilon - x_0$
- Same family as DDPM: predicting ε, x_0 or v differs only by the weighting and the noise schedule
- Straighter trajectories → fewer integration steps. Default since 2024: SD3, FLUX, Wan, Kandinsky 5 and 6

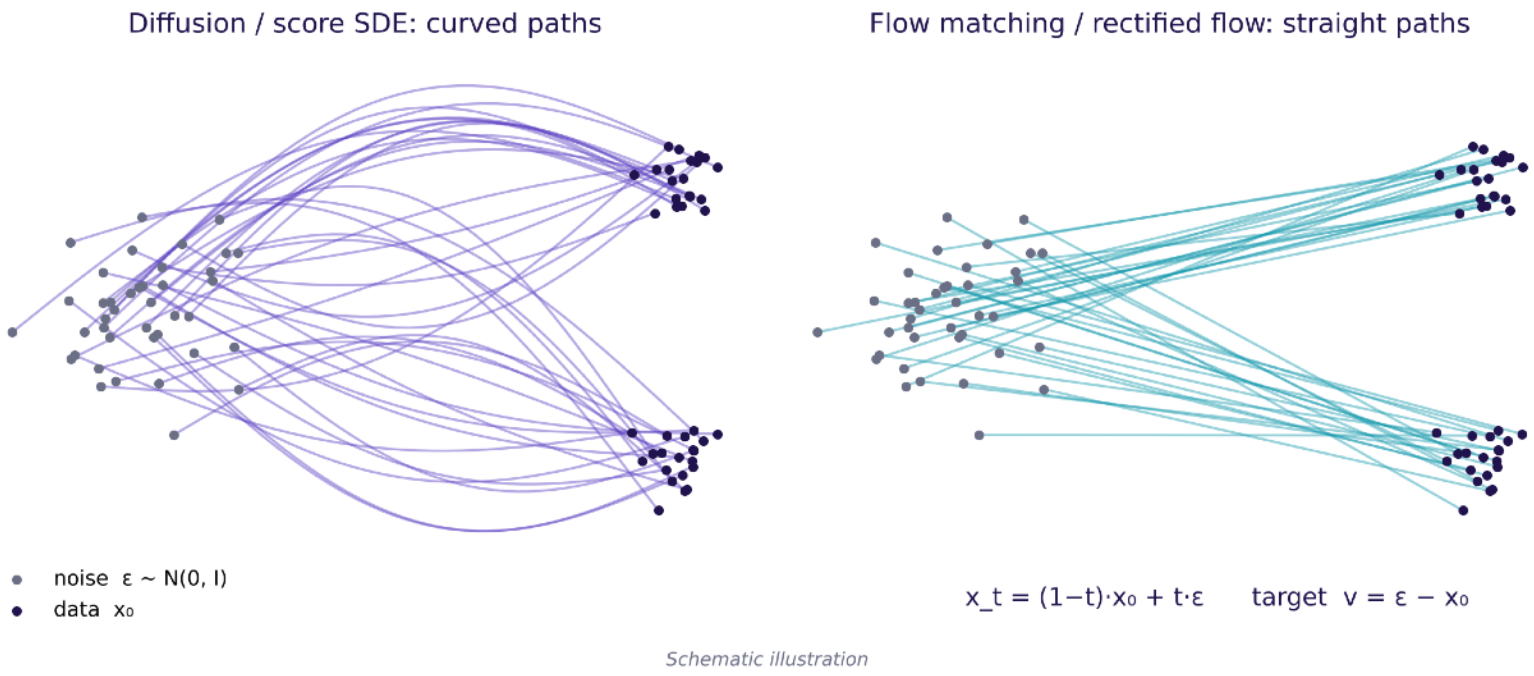


Schematic illustration

Lipman et al., "Flow Matching for Generative Modeling," ICLR 2023. Liu et al., "Rectified Flow," ICLR 2023. Esser et al., "Scaling Rectified Flow Transformers" (SD3), ICML 2024.


Yesterday **Nina Konovalova**: ViT, DiT, adaLN-Zero

From U-Net to Diffusion Transformers

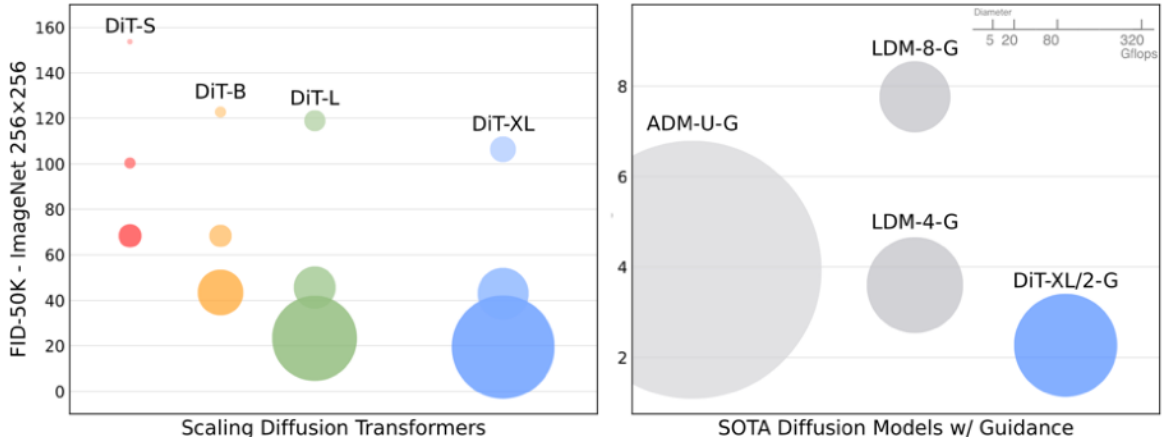

DiT: more compute per image → steadily better FID (ImageNet 256²)

- **Patchify** the latent into tokens → plain ViT blocks → unpatchify to the noise / velocity
- Timestep and class enter every block through **adaLN-Zero**: a small MLP predicts scale, shift and gate
- U-Nets plateau with size; DiT improves steadily with compute

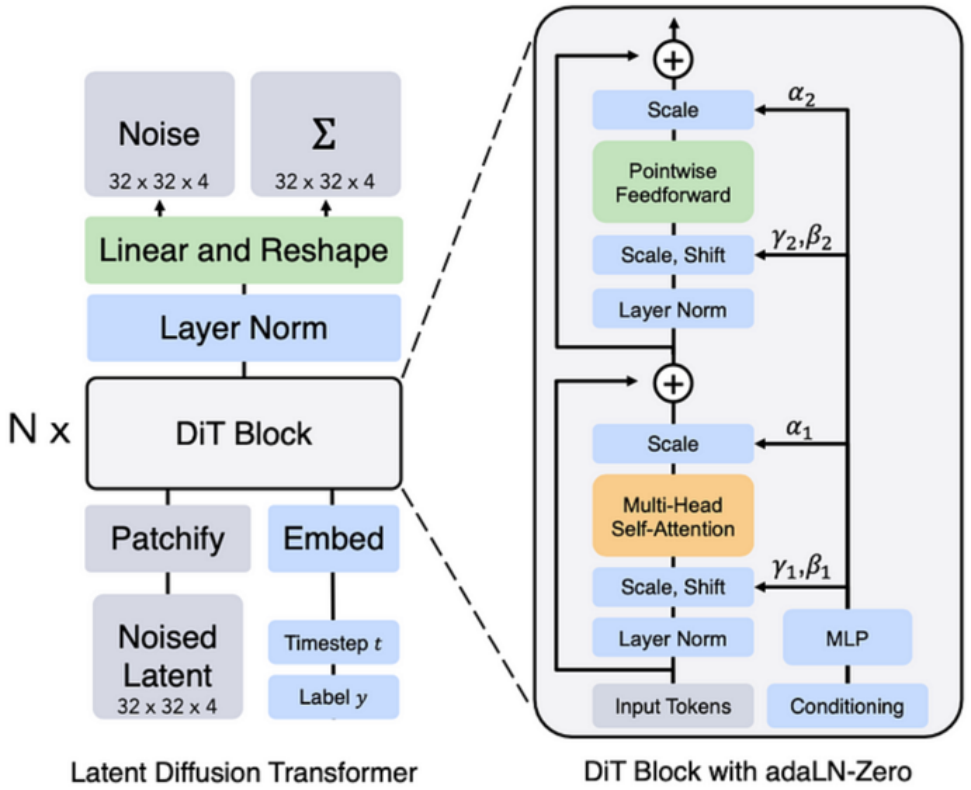

Latent DiT and the DiT block with adaLN-Zero


Peebles & Xie, "Scalable Diffusion Models with Transformers," ICCV 2023 (Fig. 3, Fig. 2).

Yesterday **Nina Konovalova**: SD3, FLUX, Z-Image

DLS


Feeding text into a DiT: two designs

Cross-attention DiT

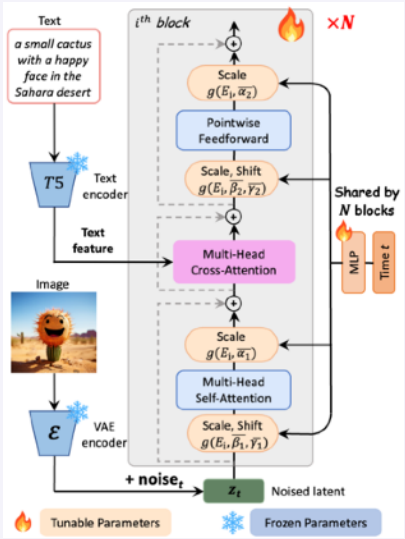

- Image tokens query the text through a **cross-attention** layer; text stays a fixed key/value memory
- Cost does not grow with prompt length inside self-attention
- PixArt-α, Wan 2.x, Kandinsky 5 / 6

MM-DiT: joint attention

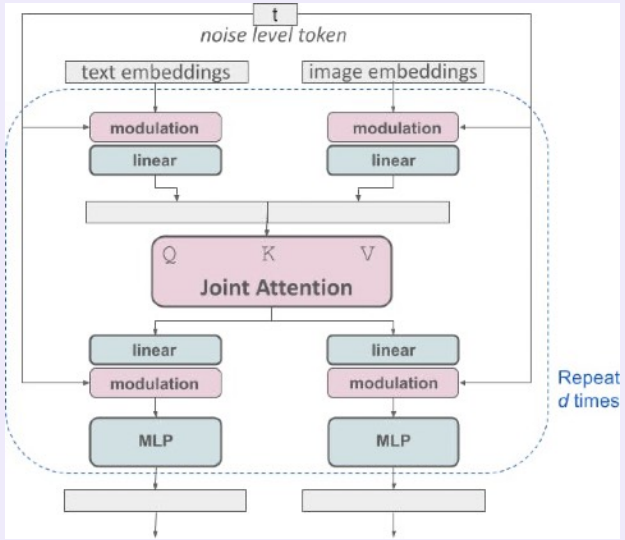

- Text and image tokens in **one sequence**; separate weights per modality, both updated in every block
- References and the image to edit are just more tokens → in-context editing
- SD3, FLUX.1, HunyuanVideo, Qwen-Image

Single-stream variant: one set of weights for all tokens – FLUX single blocks, Z-Image, MiniMax H3 (text, image, video and audio together).

Chen et al., PixArt-α, ICLR 2024 (Fig. 4). Esser et al., "Scaling Rectified Flow Transformers" (SD3, MM-DiT), ICML 2024 (Fig. 2).

Text encoders: CLIP → T5 → LLM / VLM

Model	Year	Text encoder
DALL·E 2	2022	CLIP
Imagen	2022	T5-XXL (frozen)
SD3 / FLUX.1	2024	CLIP + T5-XXL
HunyuanVideo	2024	Multimodal LLM + CLIP
FLUX.2	2025	Mistral-3 24B (VLM)
Qwen-Image / Z-Image	2025	Qwen2.5-VL-7B / Qwen3-4B
Kandinsky 5 / 6	2025–26	Qwen2.5-VL-7B + CLIP
MiniMax H3	2026	Qwen3-VL-32B


Why it matters

- Imagen: a bigger text encoder helps more than a bigger denoiser
- LLM/VLM encoders: composition, counting, long prompts, many languages
- A VLM can also read **images** → references and edits

Saharia et al., Imagen, NeurIPS 2022. Model technical reports.

Nov 5 **Lev Novitsky**: distillation

Few-step sampling: fixing the slow corner

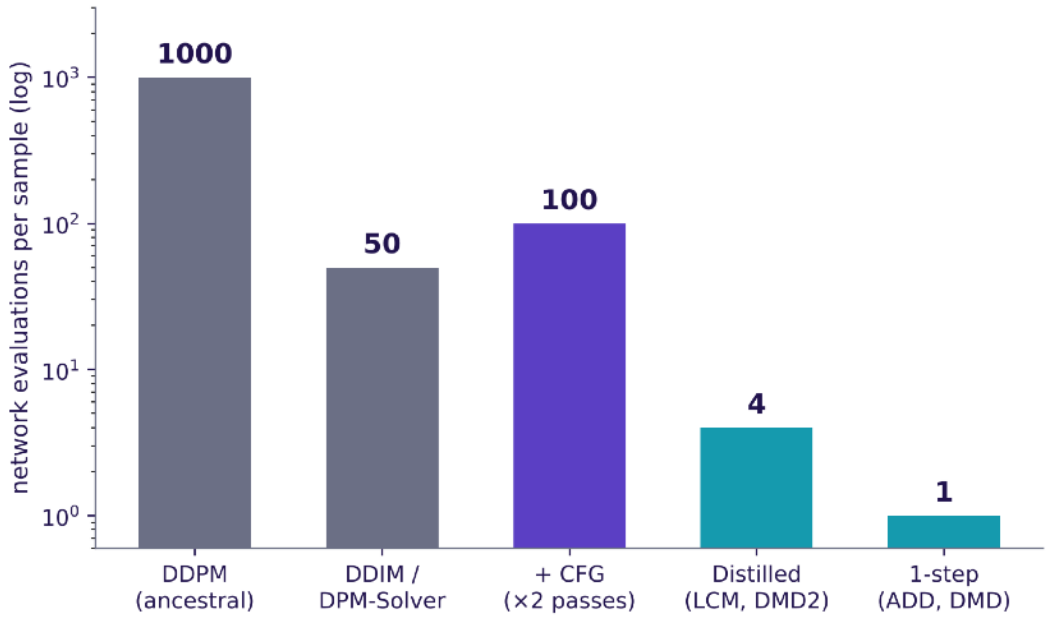

Better solvers (no training)

- DDIM, DPM-Solver, Euler for flows: 1000 → 20–50 steps

Distillation (extra training)

- **Consistency models**: jump from any x_t straight to x_0
- **Adversarial / distribution matching** (ADD, DMD2): 1–4 steps
- Kandinsky 6.0 Video: 10 steps; its super-resolution: 2


Song et al., DDIM (2021); Lu et al., DPM-Solver++ (2022); Song et al., Consistency Models (2023); Sauer et al., ADD (2023); Yin et al., DMD2 (2024).

DLS

02

Images in 2026

Generation = editing, data and RL, how models are compared, the frontier

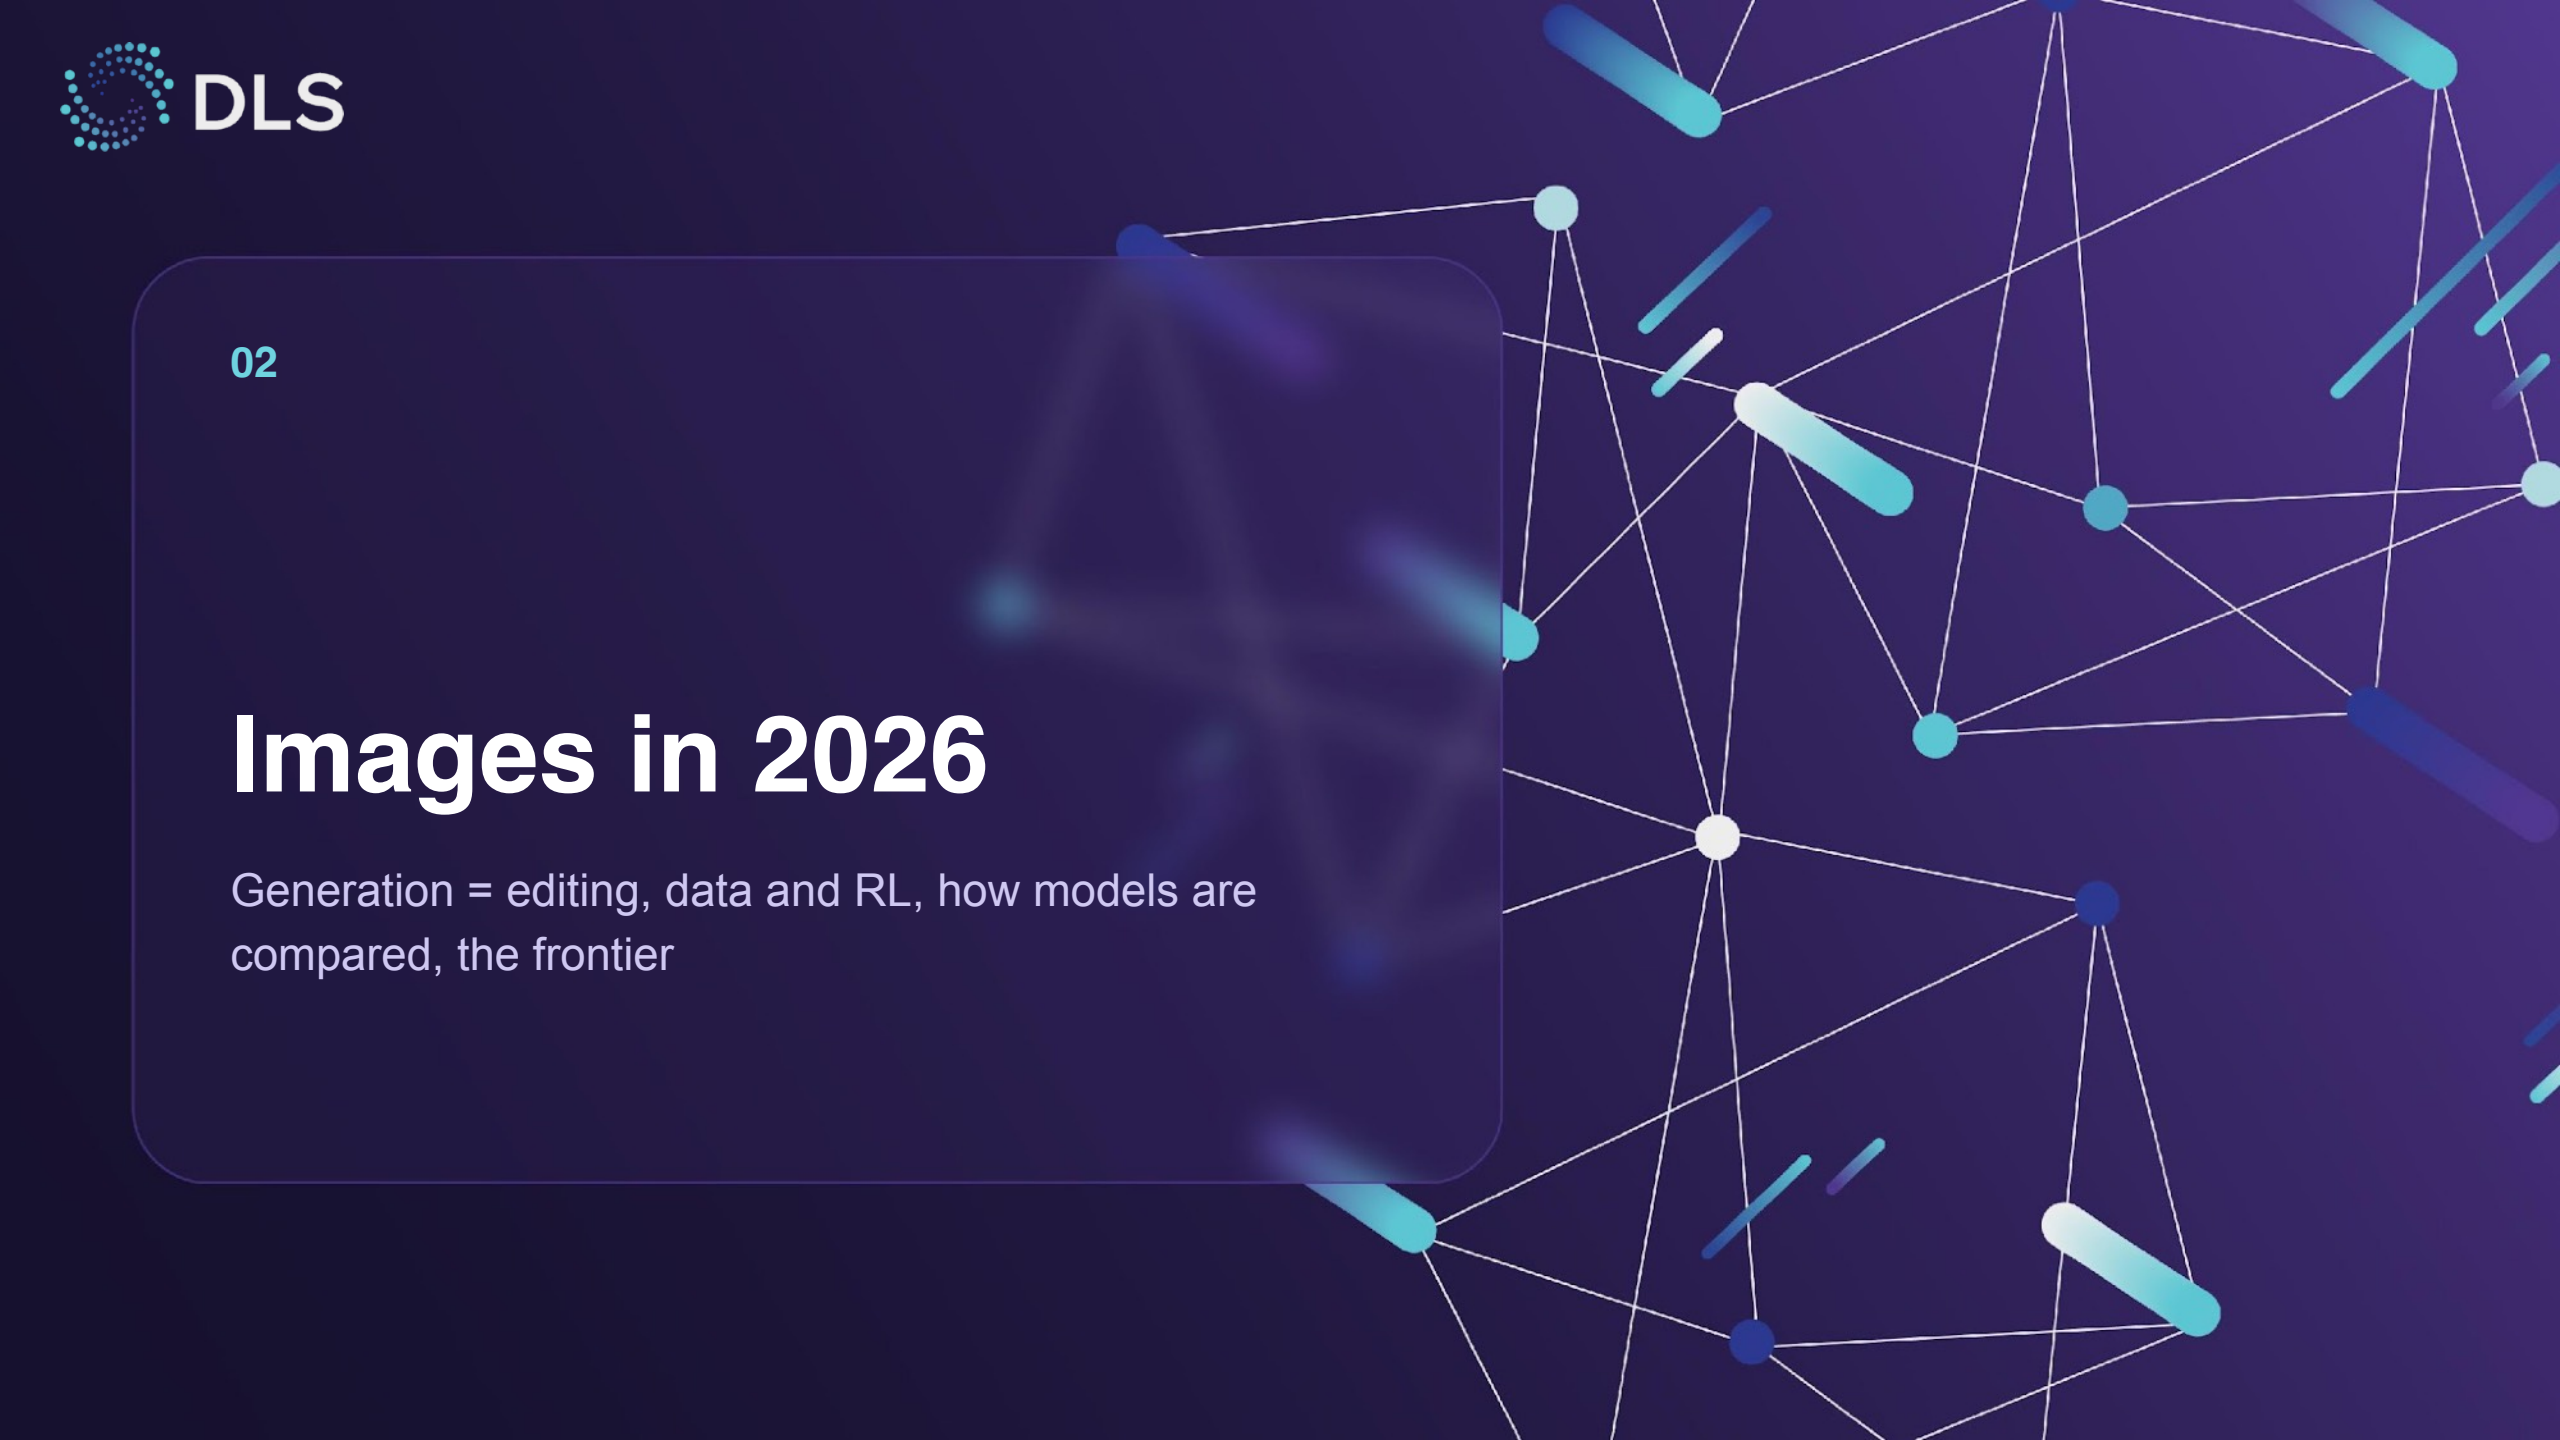

What frontier image models can do



Photorealism



Light and shadow



Typography



Long text in the scene




Artistic styles



Consistent variations



One character, many styles

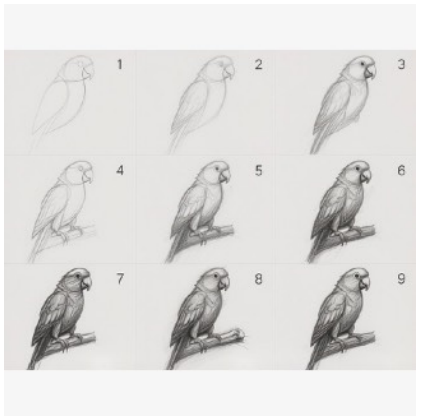


Step-by-step reasoning



360° panorama (Qwen-Image 2.1)

Images: HunyuanImage 3.0 (Tencent) and Qwen-Image / Qwen-Image 2.1 (Alibaba) official repositories, 2025–2026.

Generation and editing in one model

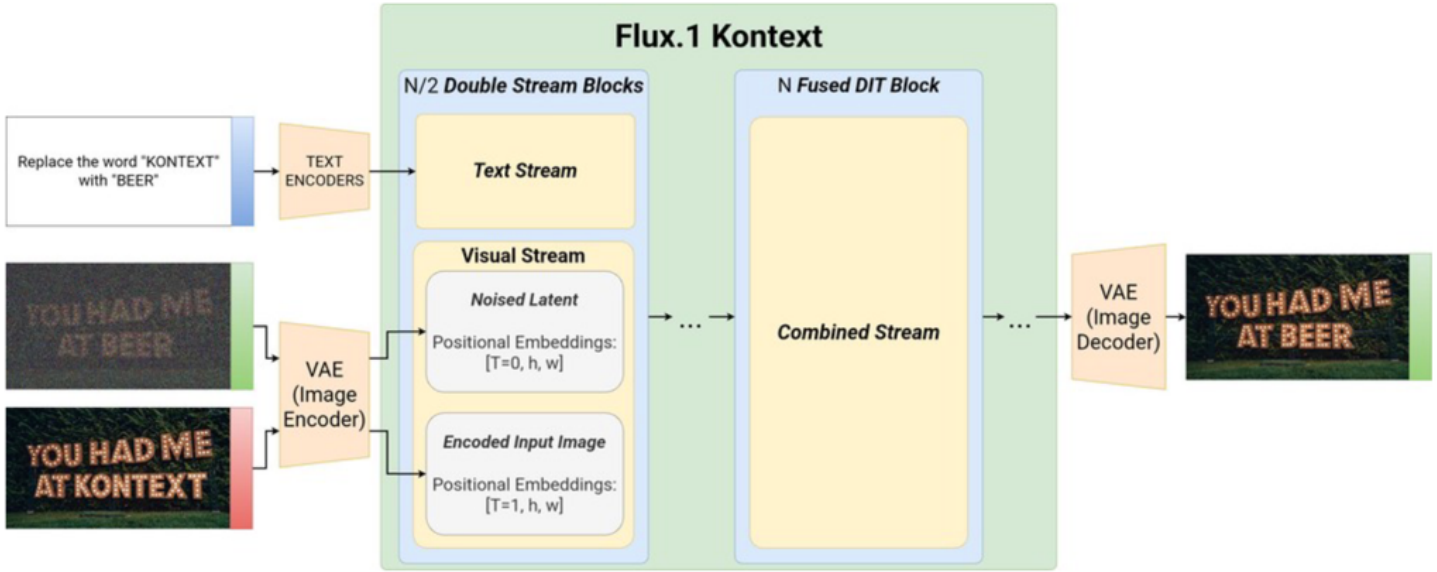

Idea

- The image to edit and the references are **just more tokens** in the MM-DiT sequence
- A position index tells them apart from the target
- A VLM encoder reads the instruction

Trained on text–image pairs **plus** millions of (reference, instruction, target) triplets → one model generates **and** edits.


2025: FLUX.1 Kontext. 2026: FLUX.2 / 3, Qwen-Image 2.1, Kandinsky 6.0 Image; GPT Image 2.5 and Nano Banana 2.1 do the same (architecture not disclosed).

Black Forest Labs, "FLUX.1 Kontext: Flow Matching for In-Context Image Generation and Editing in Latent Space," 2025.


Nov 4 **Vera Soboleva**: personalized generation

DLS

In-context models in action

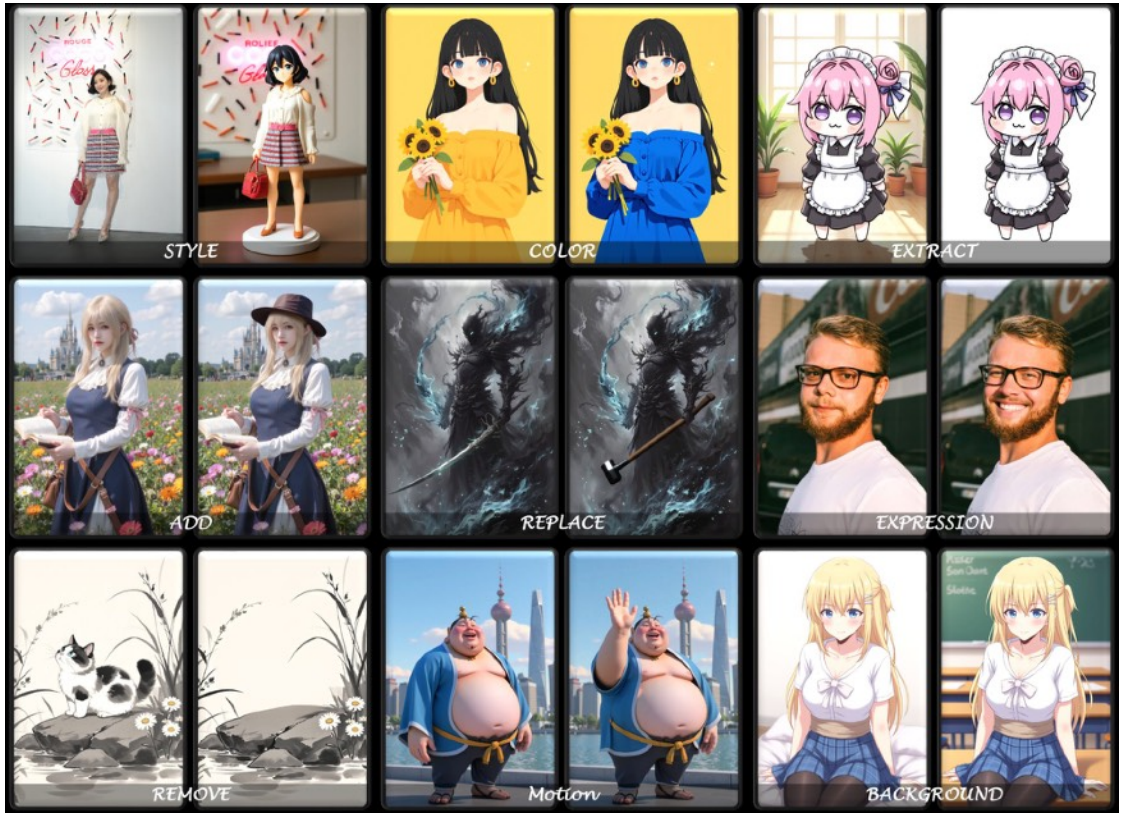

One model, many edits: style, colour, extract, add, replace, expression, remove, motion, background

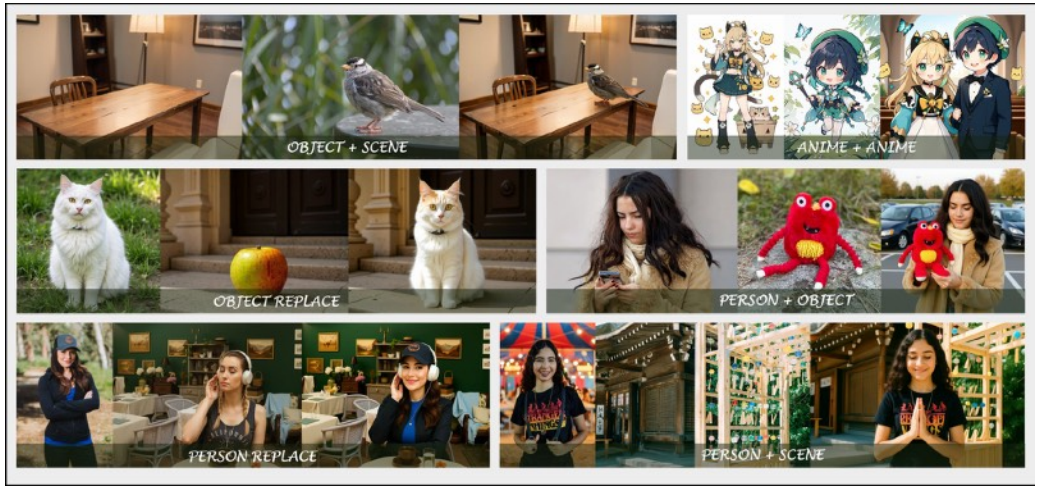

Multi-reference composition: object + scene, person + object



Multi-turn editing, same character: moustache → full body → photo → new outfit → new scene

Images: OmniGen2 (VectorSpaceLab, Apache-2.0); FLUX.1 Kontext multi-turn example (Black Forest Labs).

DLS


Where quality comes from: data and post-training

Data

- Billions of pairs filtered for quality, watermarks, text, duplicates
- **Re-captioning** with large VLMs: long, accurate, multilingual descriptions
- A small **hand-curated SFT set** (thousands) gives a large share of the final look

RL post-training

- Sample a group per prompt, score with reward models, move toward the better ones (Diffusion-DPO, Flow-GRPO)
- Risk: reward hacking – oversaturated, "plastic" results, less diversity

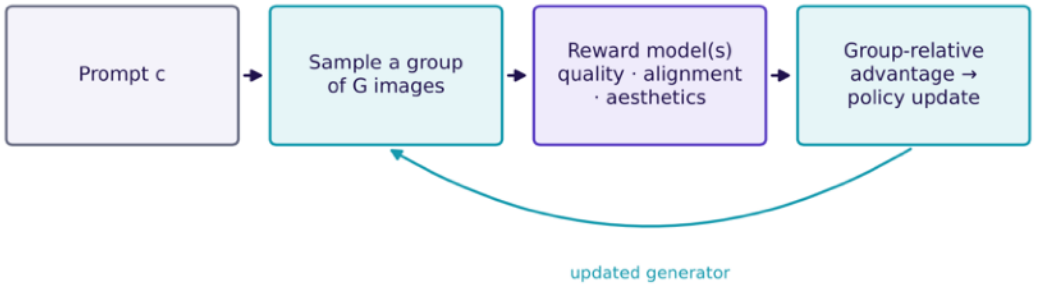

Wallace et al., Diffusion-DPO, CVPR 2024. Liu et al., Flow-GRPO, 2025. Betker et al., "Improving Image Generation with Better Captions" (DALL·E 3), 2023.

Yesterday **Nina Konovalova**: metrics, arenas

DLS

How do we know a model is better?

Automatic metrics


- **FID**: distance between real and generated feature distributions
- **CLIPScore**: text–image alignment
- **VBench**: 16 dimensions for video
- **Reward models**: ImageReward, HPSv2, PickScore

Cheap and reproducible – but correlate poorly with people at the frontier

Human preference

- Side-by-side studies on fixed prompt sets
- **Elo arenas**: blind pairwise votes (arena.ai, Artificial Analysis)
- De facto standard for ranking frontier models

Bias: favours short, pretty outputs; ignores cost and control



Heusel et al., FID (2017); Hessel et al., CLIPScore (2021); Huang et al., VBench (2024).

Nov 3 **Sergey Karpukhin**: reasoning for images


DLS

Image frontier, autumn 2026

- **GPT Image 2.5** (OpenAI, Sep): #1 on both arenas; "thinking" mode with web search
- **Nano Banana 2.1** (Google, Oct): thinking levels, Search grounding, up to 14 references, 4K
- **FLUX 3** (BFL): image API since Oct 1; open **Klein** (Oct 15) – the top open-weights image model
- **Qwen-Image 2.1** (Alibaba, Sep): open 7B, research licence; the 3.0-Pro flagship is closed
- **Kandinsky 6.0 Image Pro**: MoE + image retrieval; not on public arenas

#	Best model per lab	Lab	Elo
1	GPT Image 2.5 Sunburst	OpenAI	1222
4	Nano Banana 2.1	Google	1176
5	MAI-Image-2.6	Microsoft AI	1166
6	Grok Imagine Image 2.0	xAI	1166
8	Muse Image	Meta	1127
13	FLUX 3 Image	BFL	1117

Artificial Analysis Text-to-Image arena, 29 Oct 2026.
arena.ai (Oct): Nano Banana 2.1 #5 text-to-image, #4 multi-image edit.




artificialanalysis.ai/text-to-image (29 Oct 2026); arena.ai, "This Week in the Arena" (Oct 2026). OpenAI, ChatGPT Images 2.5 (Sep 2026). Google DeepMind, Nano Banana 2.1 model card (Oct 2026). BFL; Qwen.

DLS


03

Video in 2026

How video models work: tokens, training, tasks, sound, inference · the frontier · Kandinsky 6.0

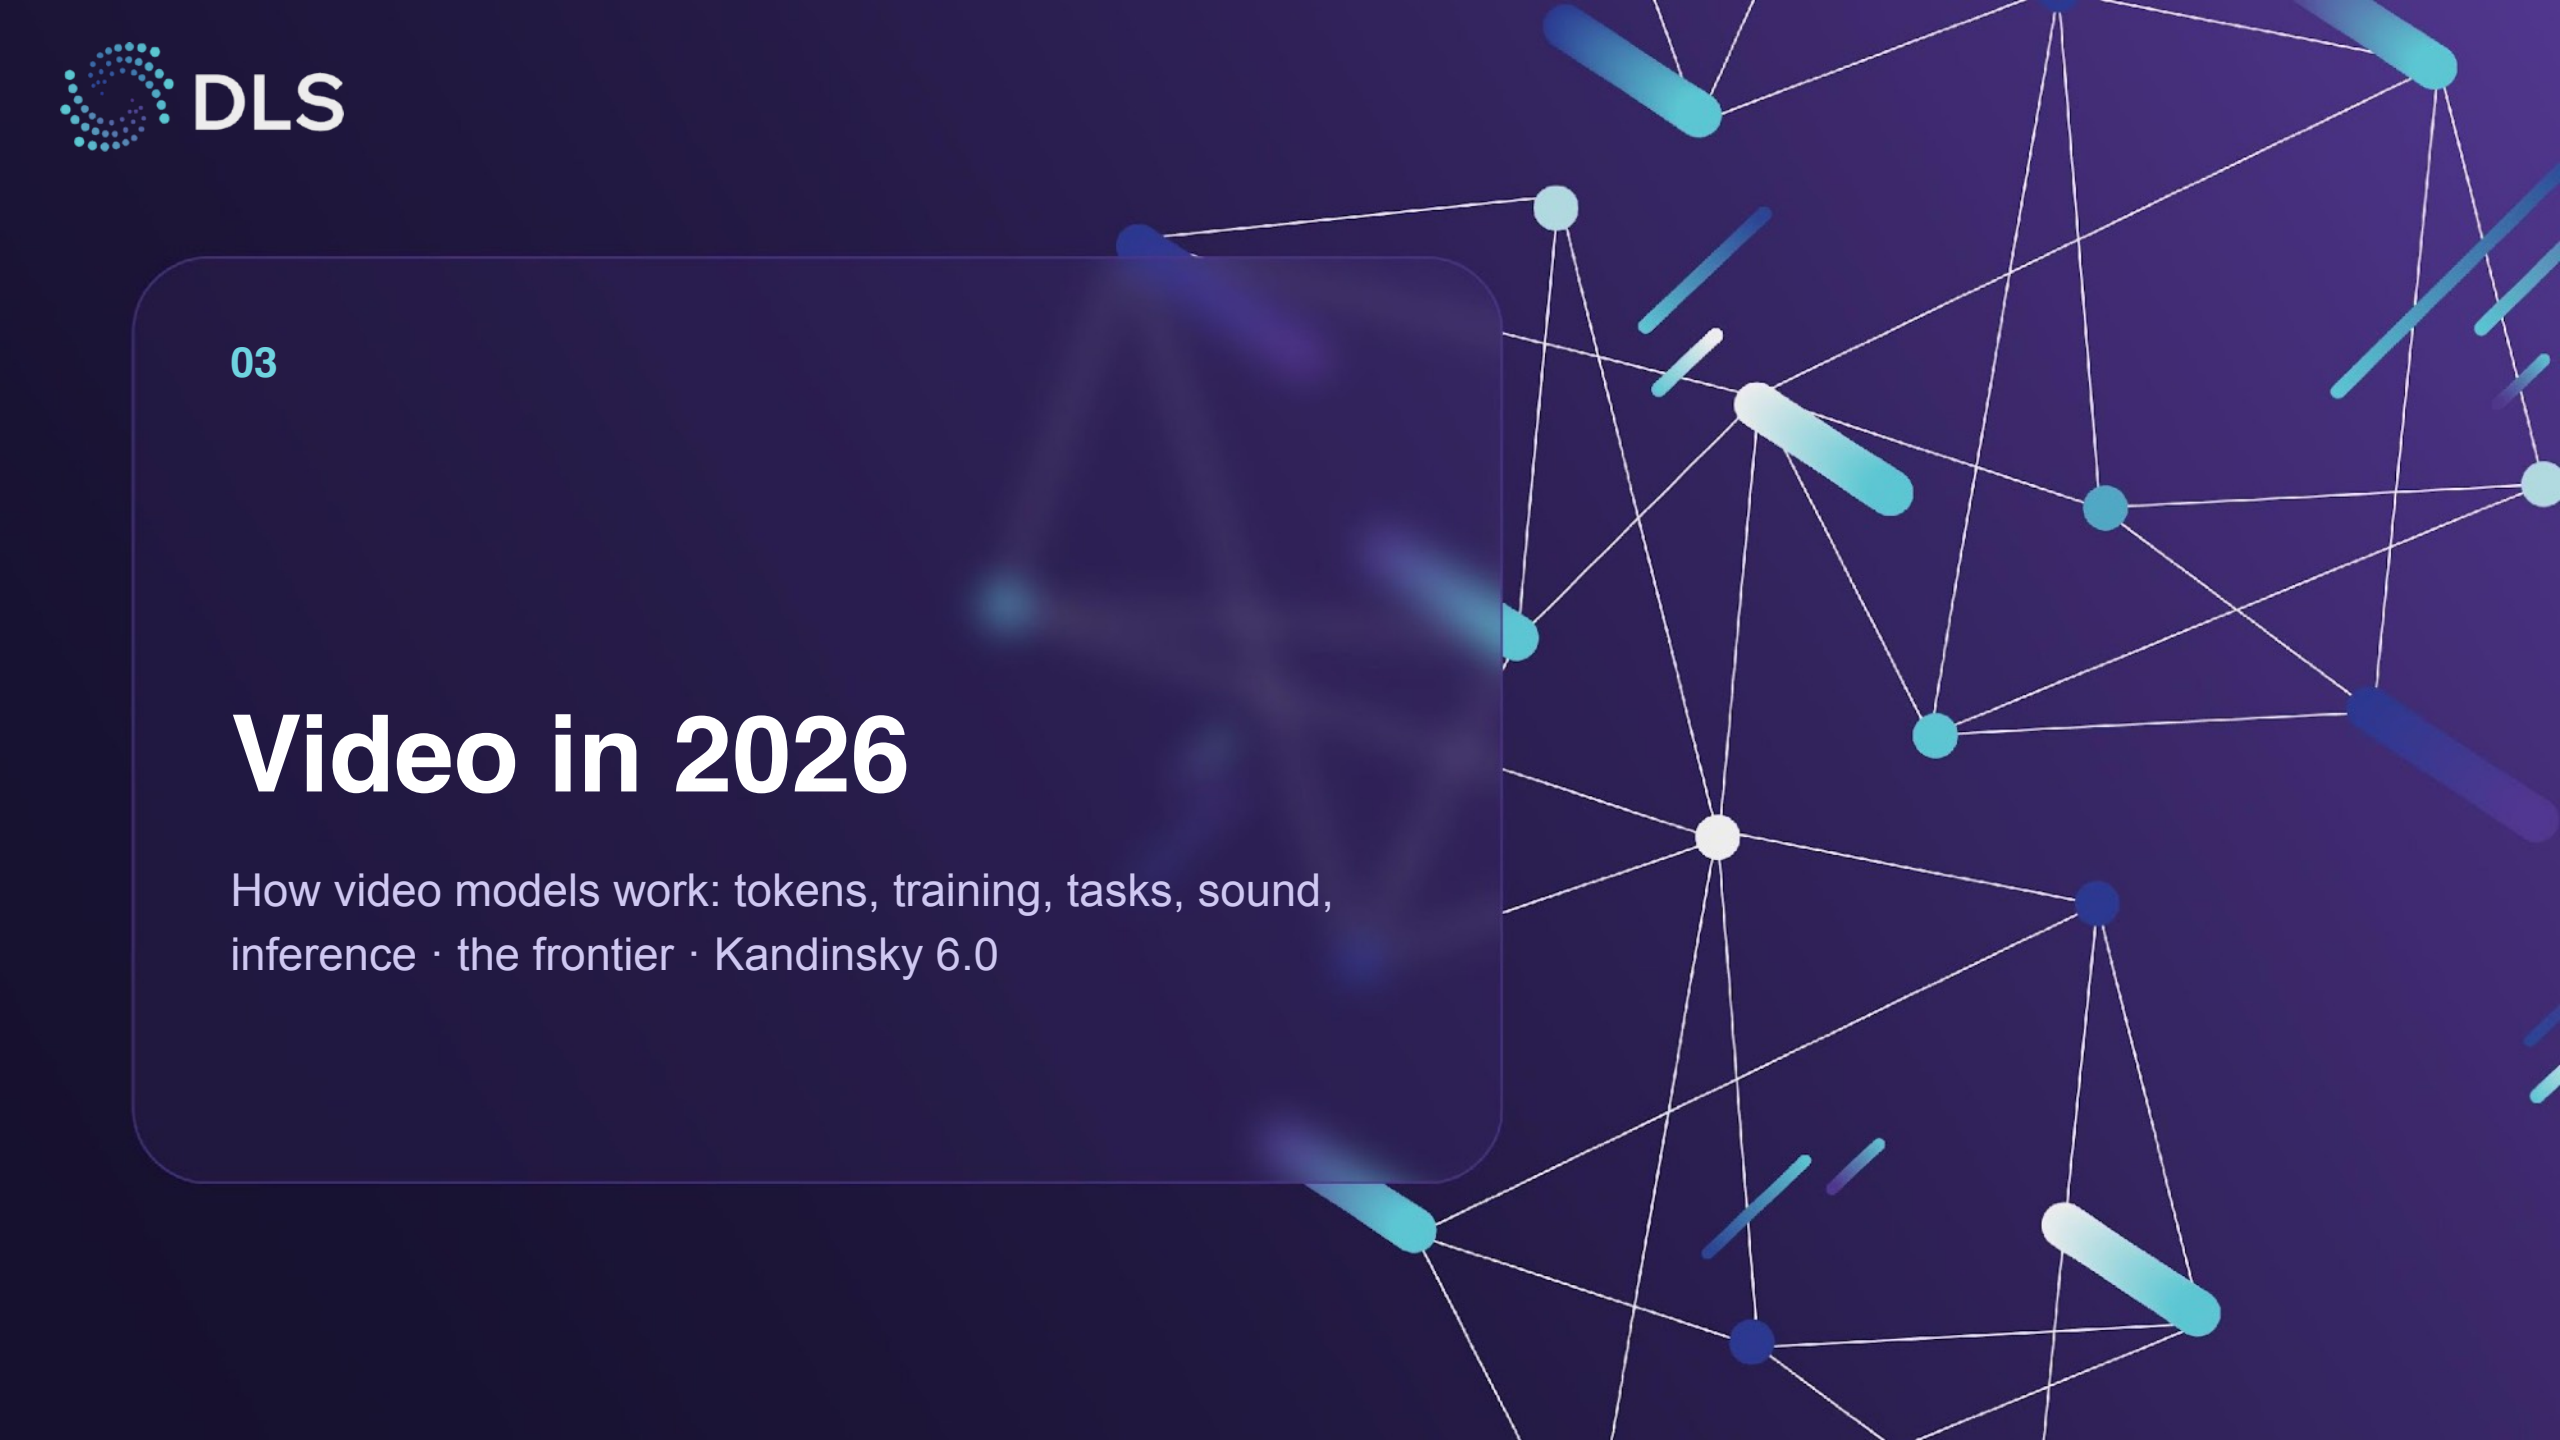


Video = images + time + sound

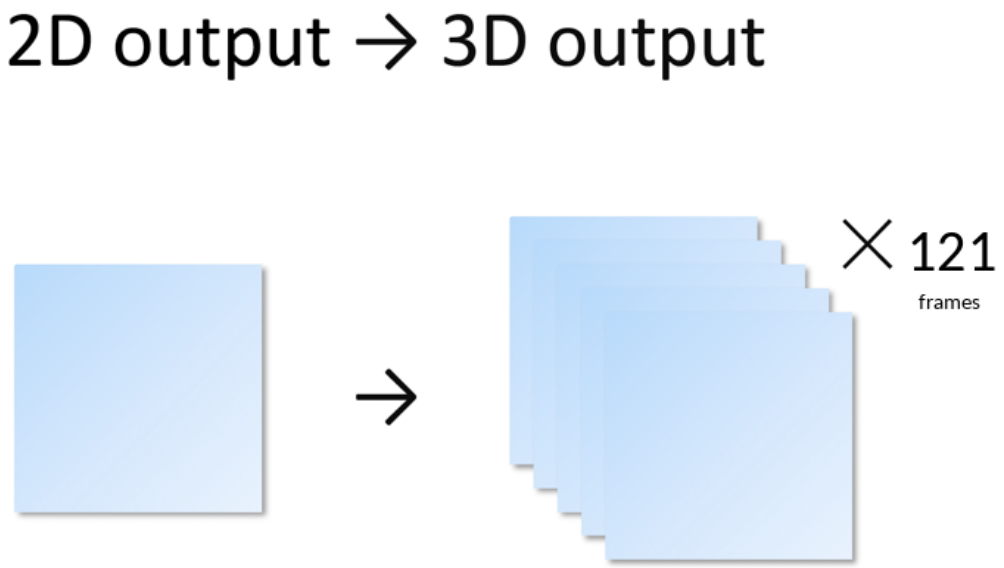


- Same recipe: latent space, DiT, flow matching, text encoder, distillation
- One more axis: B×C×**T**×H×W – 5 s at 24 fps is already **121 frames**
- Plus a second modality: **sound** generated together with the picture
- Image models are reused: video models start from image pre-training, then train on video



From image DiT to video DiT

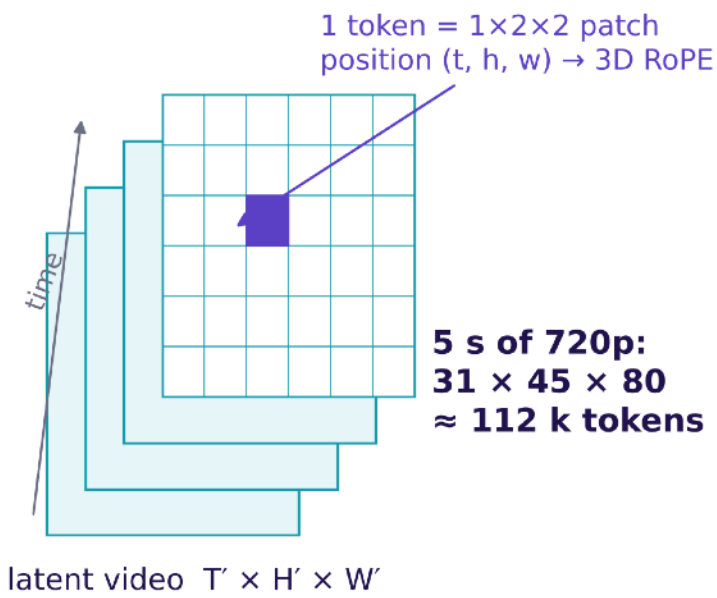

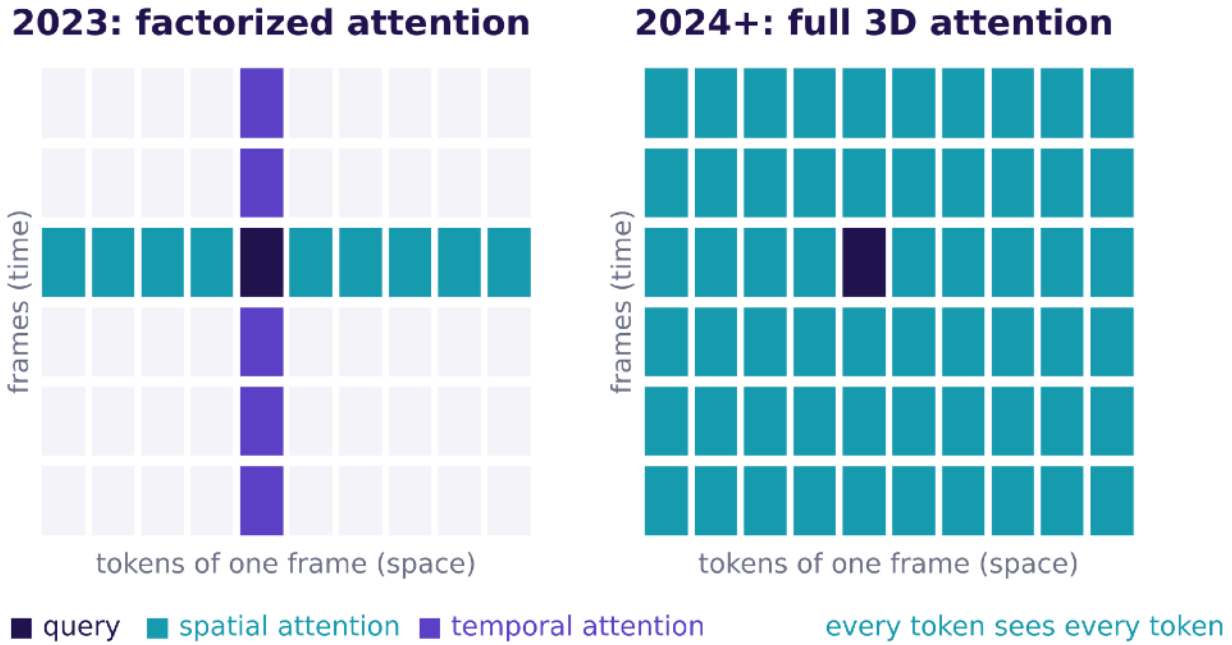

- Cut the latent video into **3D patches** → one long token sequence; **3D RoPE** tells each token its (t, h, w)
- 2023 (ModelScope, AnimateDiff): an image U-Net plus temporal layers – attention only inside a frame or along time → flicker, weak motion
- Since Sora (2024): **full 3D attention** – every token sees every other (HunyuanVideo, Wan, Kandinsky); the cost grows as N^2


Brooks et al., "Video generation models as world simulators" (Sora), 2024. Kong et al., HunyuanVideo, 2024. Wan team, "Wan: Open and Advanced Large-Scale Video Generative Models," 2025. Guo et al., AnimateDiff, ICLR 2024.

Why video is expensive

10 s of 720p	Compression T×H×W	Tokens
Raw pixels	1×1×1	55 M
Image VAE	1×8×8	864 k
Video VAE	4×8×8	216 k


- An LLM context of 2026 is ~1 M tokens – and attention is **quadratic**
- A **video VAE** compresses time too: 4× fewer latent frames
- Remaining tricks: sparse / local attention, caching, distillation

Video VAE: compress space and time

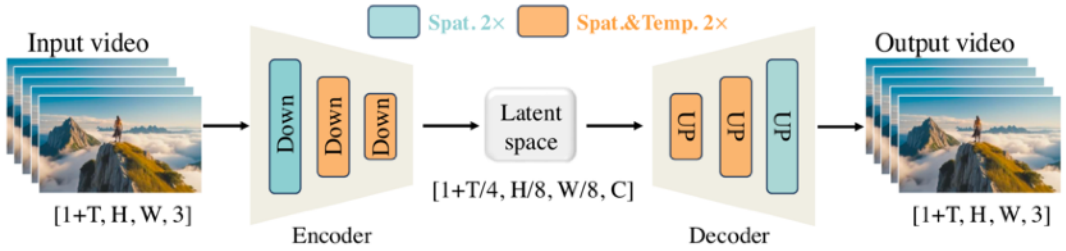

(1 + T) × H × W frames → (1 + T/4) × H/8 × W/8 latents


Causal 3D convolutions

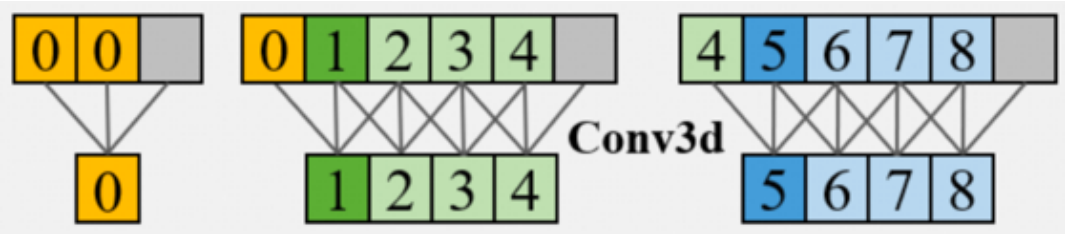

Look only backward in time → frame 1 is coded like an image

Video VAE figures: CogVideoX (Yang et al., 2024), HunyuanVideo (Kong et al., 2024).

Training a video model

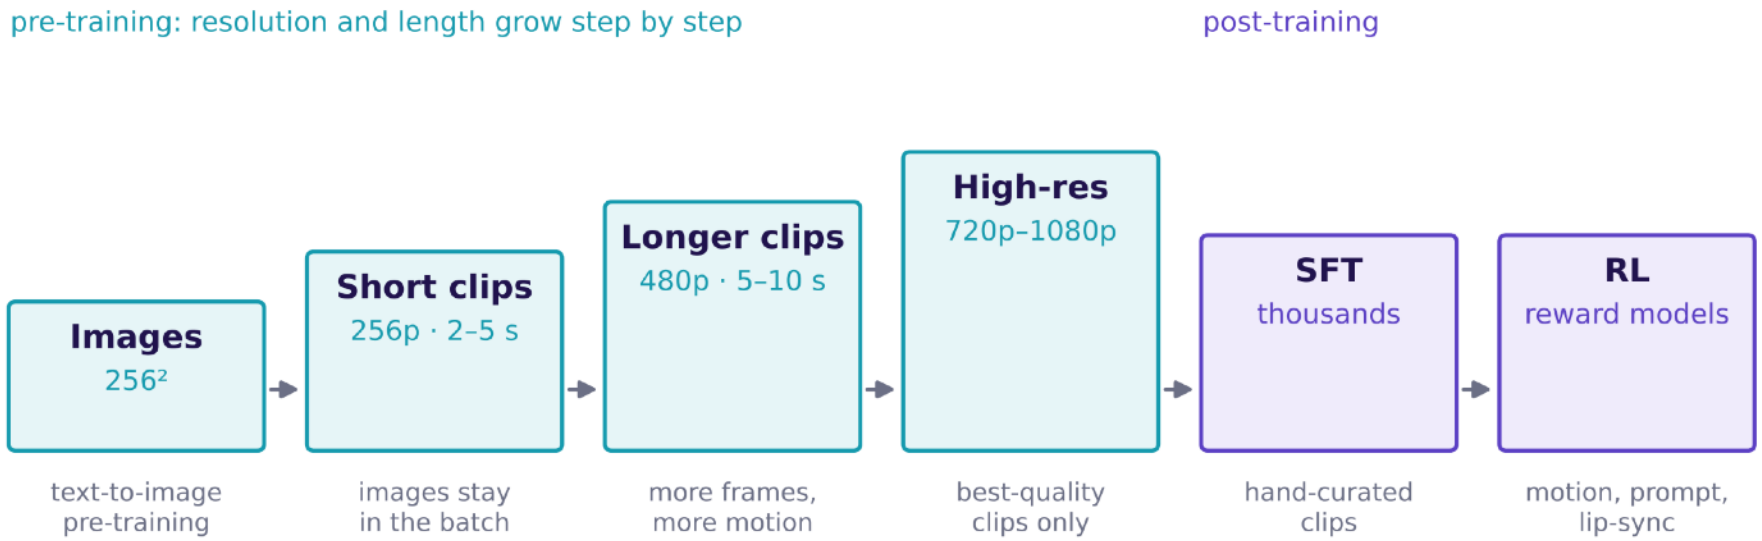

Data


- Cut long videos at scene changes; filter by motion, aesthetics, on-screen text, watermarks, duplicates
- **Re-caption** every clip with a VLM: content, motion, camera, style; for sound – speech transcripts

Schedule

- Start from an image model: an image is a one-frame video, so images stay in every batch
- Grow resolution and length step by step – most steps are spent on cheap low-res clips
- Kandinsky 6.0 Video: 20 M video scenes, 7 M audio-video clips → SFT on ~5–8 k → RL on ~3 k

Kong et al., HunyuanVideo, 2024. Wan team, 2025. "Kandinsky 6.0 Video: Foundation Models for Synchronized Video and Audio Generation," arXiv:2610.05608, 2026.

One model, many tasks

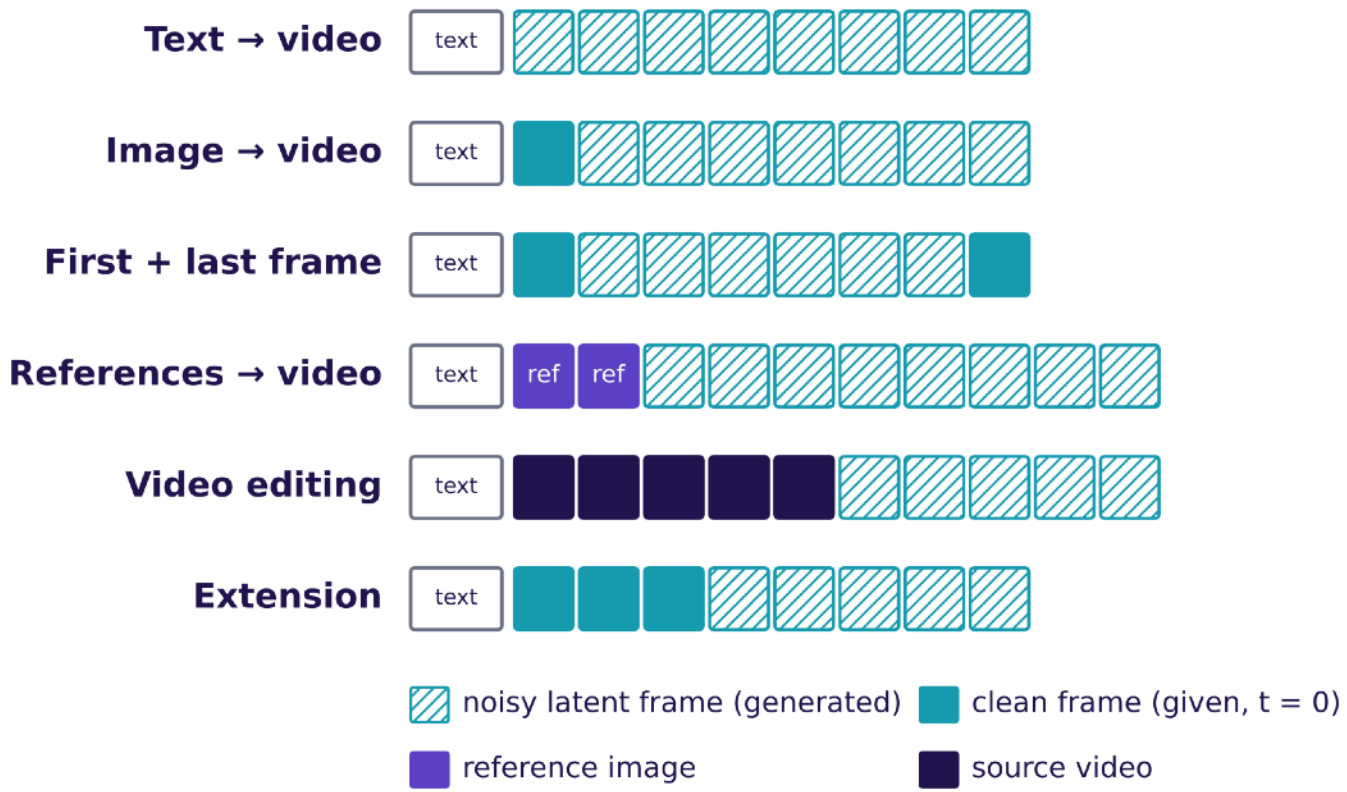


- A task = which latent frames are **given clean** and which are **generated**
- Given frames enter as extra clean tokens (in-context) or are concatenated along channels with a mask (Wan I2V)
- Train with random masks → text-to-video, image-to-video, interpolation and extension in one model
- Extension = condition on the clean past → autoregressive video in Part 4

Same idea as in-context image editing: conditions are just more tokens.

Wan team, "Wan: Open and Advanced Large-Scale Video Generative Models," 2025 (image-to-video). MiniMax-AI/MiniMax-H3, 2026. Chen et al., Diffusion Forcing, NeurIPS 2024.

Sound in the same pass


- Since **Veo 3** and **Sora 2** (2025) speech, lip-sync, foley and music are generated with the picture
- **Dual-stream DiT**: video and audio streams exchange information through cross-attention in every block
- Timing aligned through shared positions (RoPE)
- Alternative: **one stream for everything** – MiniMax H3
- Open: LTX-2, Ovi, Kandinsky 6.0 Video

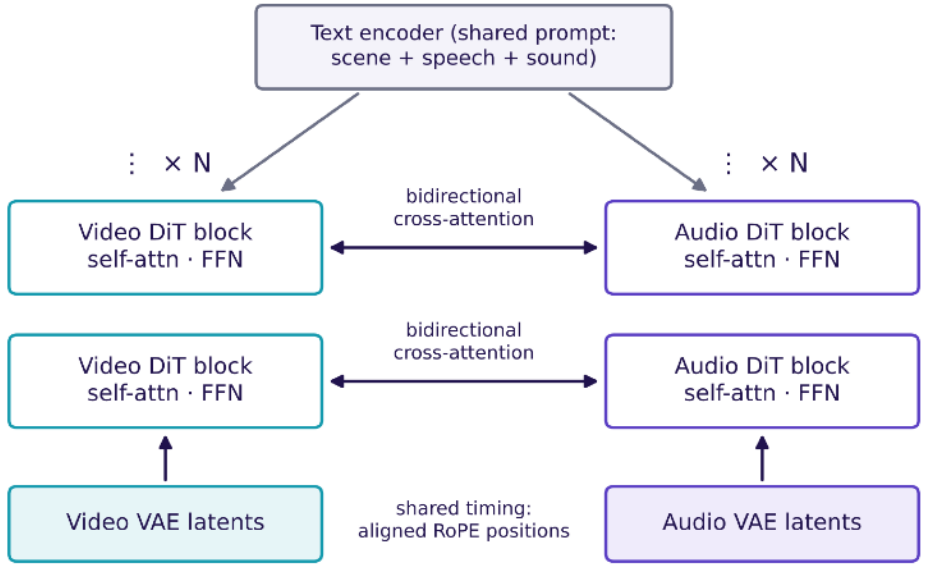

Ovi, arXiv:2510.01284 (2025). LTX-2, arXiv:2601.03233 (2026). Kandinsky 6.0 Video, arXiv:2610.05608 (2026).

From prompt to MP4: the inference pipeline

Where the compute goes: the base model makes motion and composition at low resolution; detail comes from a second, cheaper model

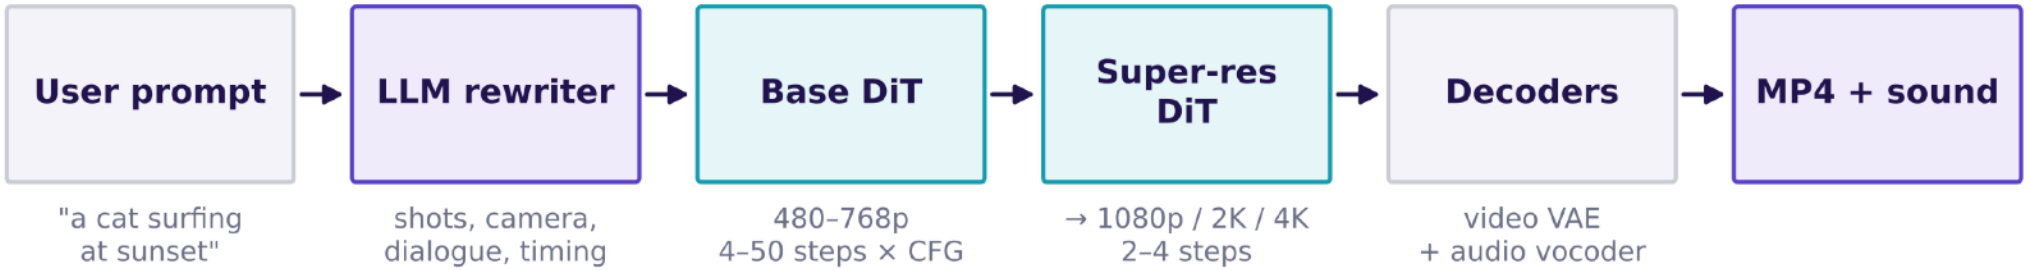

Model	Prompt	Base model	Resolution stage
MiniMax H3	Context-IR script, 5–33 k tokens (API)	768p, CFG-distilled	2K upscaler (API only)
Kandinsky 6.0 Video	Qwen2.5-VL + CLIP encoders	480p, 10 steps	Super-resolution to Full HD, 2 steps
Gemini Omni 1.1	not disclosed	720p	up to 4K

"4K" is usually a second model, and the open weights with a short prompt are not what the demo reel shows.

MiniMax-AI/MiniMax-H3 (GitHub, 2026); arXiv:2610.05608 (Kandinsky 6.0 Video); Google Gemini API docs (Gemini Omni Flash), 2026.


Video frontier: what the models can do

Model	Per generation	Resolution	Sound	References	Editing
Gemini Omni 1.1	3–10 s, extend to 40 s	720p → 4K	Speech, SFX, music	10 images + 3 videos	Conversational
Seedance 2.5	up to 30 s	4K edition (Oct)	Joint audio	30 img, 10 vid, 10 audio	Multi-shot, timestamps
FLUX 3 Video	up to 20 s	720p → 1080p	Speech, SFX	1–10 keyframes	Continuation
Wan 3.0	up to 30 s	480p–1080p	On by default	Text, docs, web pages	–
MiniMax H3 (open)	4–15 s	768p → 2K	Stereo, 11 lang.	9 img, 3 vid, 3 audio	Video editing
Kandinsky 6.0 Video (open)	5 s	480p → Full HD	44 kHz, lip-sync	First frame	–

- 2026 baseline: **sound in the same pass**, multi-shot stories, many references, editing instead of re-generation
- Open models are close in quality but behind in length, resolution and reference budget

Vendor specs (Aug–Oct 2026): Google Gemini API docs; ByteDance Seed / TechNode (Seedance 2.5 4K, 23 Oct); BFL; Alibaba; MiniMax-AI/MiniMax-H3; arXiv:2610.05608.

MiniMax H3: the strongest open video model

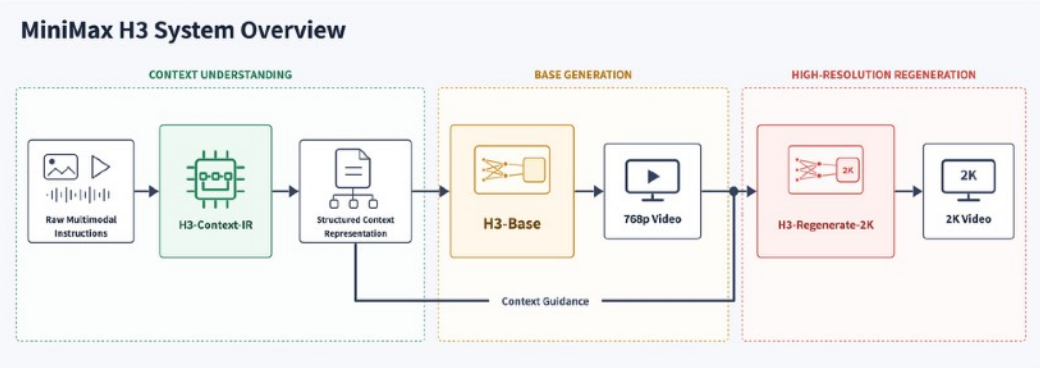

- **33B single-stream transformer**: text, image, video and audio tokens in one context
- Qwen3-VL-32B encoder; 768p, 24 fps, 4–15 s, stereo sound
- **Context-IR** rewrites the request into a 5–33k-token script; API only
- Open weights since Aug 2026: #1 image-to-video on arena.ai, #3 text-to-video on Artificial Analysis



Text → video: two shots, timed cut, orchestra



Image → video: focus pull, 7 people




Editing: new lines, referenced voice

MiniMax-AI/MiniMax-H3 (GitHub, Aug 2026): system overview and official demo videos. arena.ai text-to-video leaderboard.


Open vs closed: the gap is closing

- Open-weights **MiniMax H3** is #3, just 16 Elo behind #1 – inside the confidence interval
- But it is alone at the top: the next open model, LTX-2.5, is #24
- "Open" ≠ unrestricted: base model only, research or territorial licences (H3 excludes the US and EU)
- Counter-trend: Wan went API-only with 3.0 – and is #1
- In images the gap is wider: no open model in the top 15

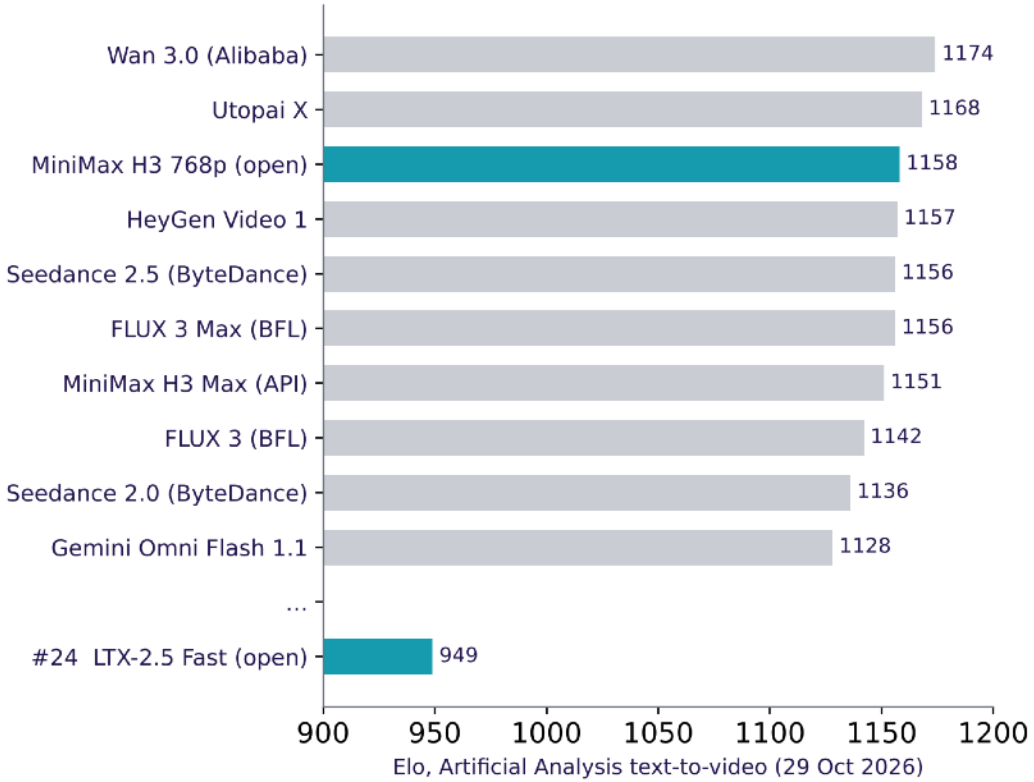

artificialanalysis.ai/video/leaderboard/text-to-video (AA-Video-T2V v2.1, with audio), 29 Oct 2026; Elo axis starts at 900.

Kandinsky 6.0 Video: the whole recipe

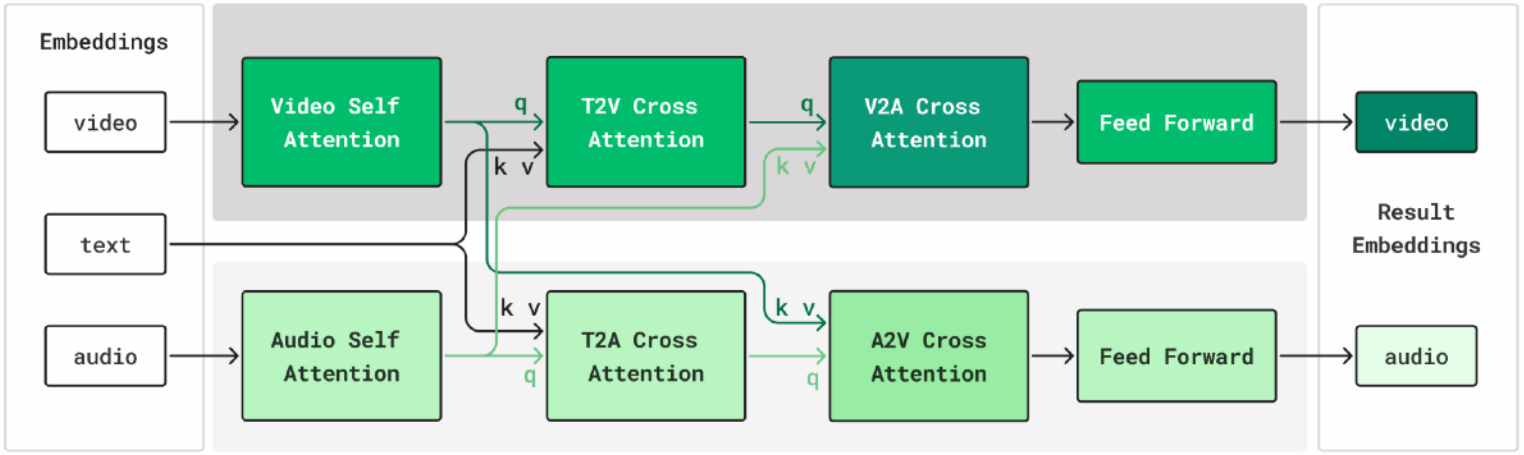

Ingredient	Kandinsky 6.0 Video
Latent space	Hunyuan video VAE + 44 kHz audio VAE
Backbone	Dual-stream DiT, Pro 29B: 19B video + 5B audio + 5B cross
Objective	Flow matching at every stage
Conditioning	Qwen2.5-VL-7B + CLIP

Ingredient	Kandinsky 6.0 Video
Data	40M audio tracks, 7M synced audio-video clips
Training	Audio alone → joint → SFT → RL
RL	Speech word error rate 0.235 → 0.124
Fast inference	10 steps; super-resolution to Full HD

"Kandinsky 6.0 Video: Foundation Models for Synchronized Video and Audio Generation," arXiv:2610.05608, Oct 2026 (Fig. 1, Sec. 2–4). Weights and code: MIT.

Kandinsky 6.0 Video: samples









Kandinsky 6.0 Video promo (github.com/kandinskylab/kandinsky-6, MIT). Click to play.

DLS

04

Beyond the clip

Conversational editing, real-time generation, world models, open problems

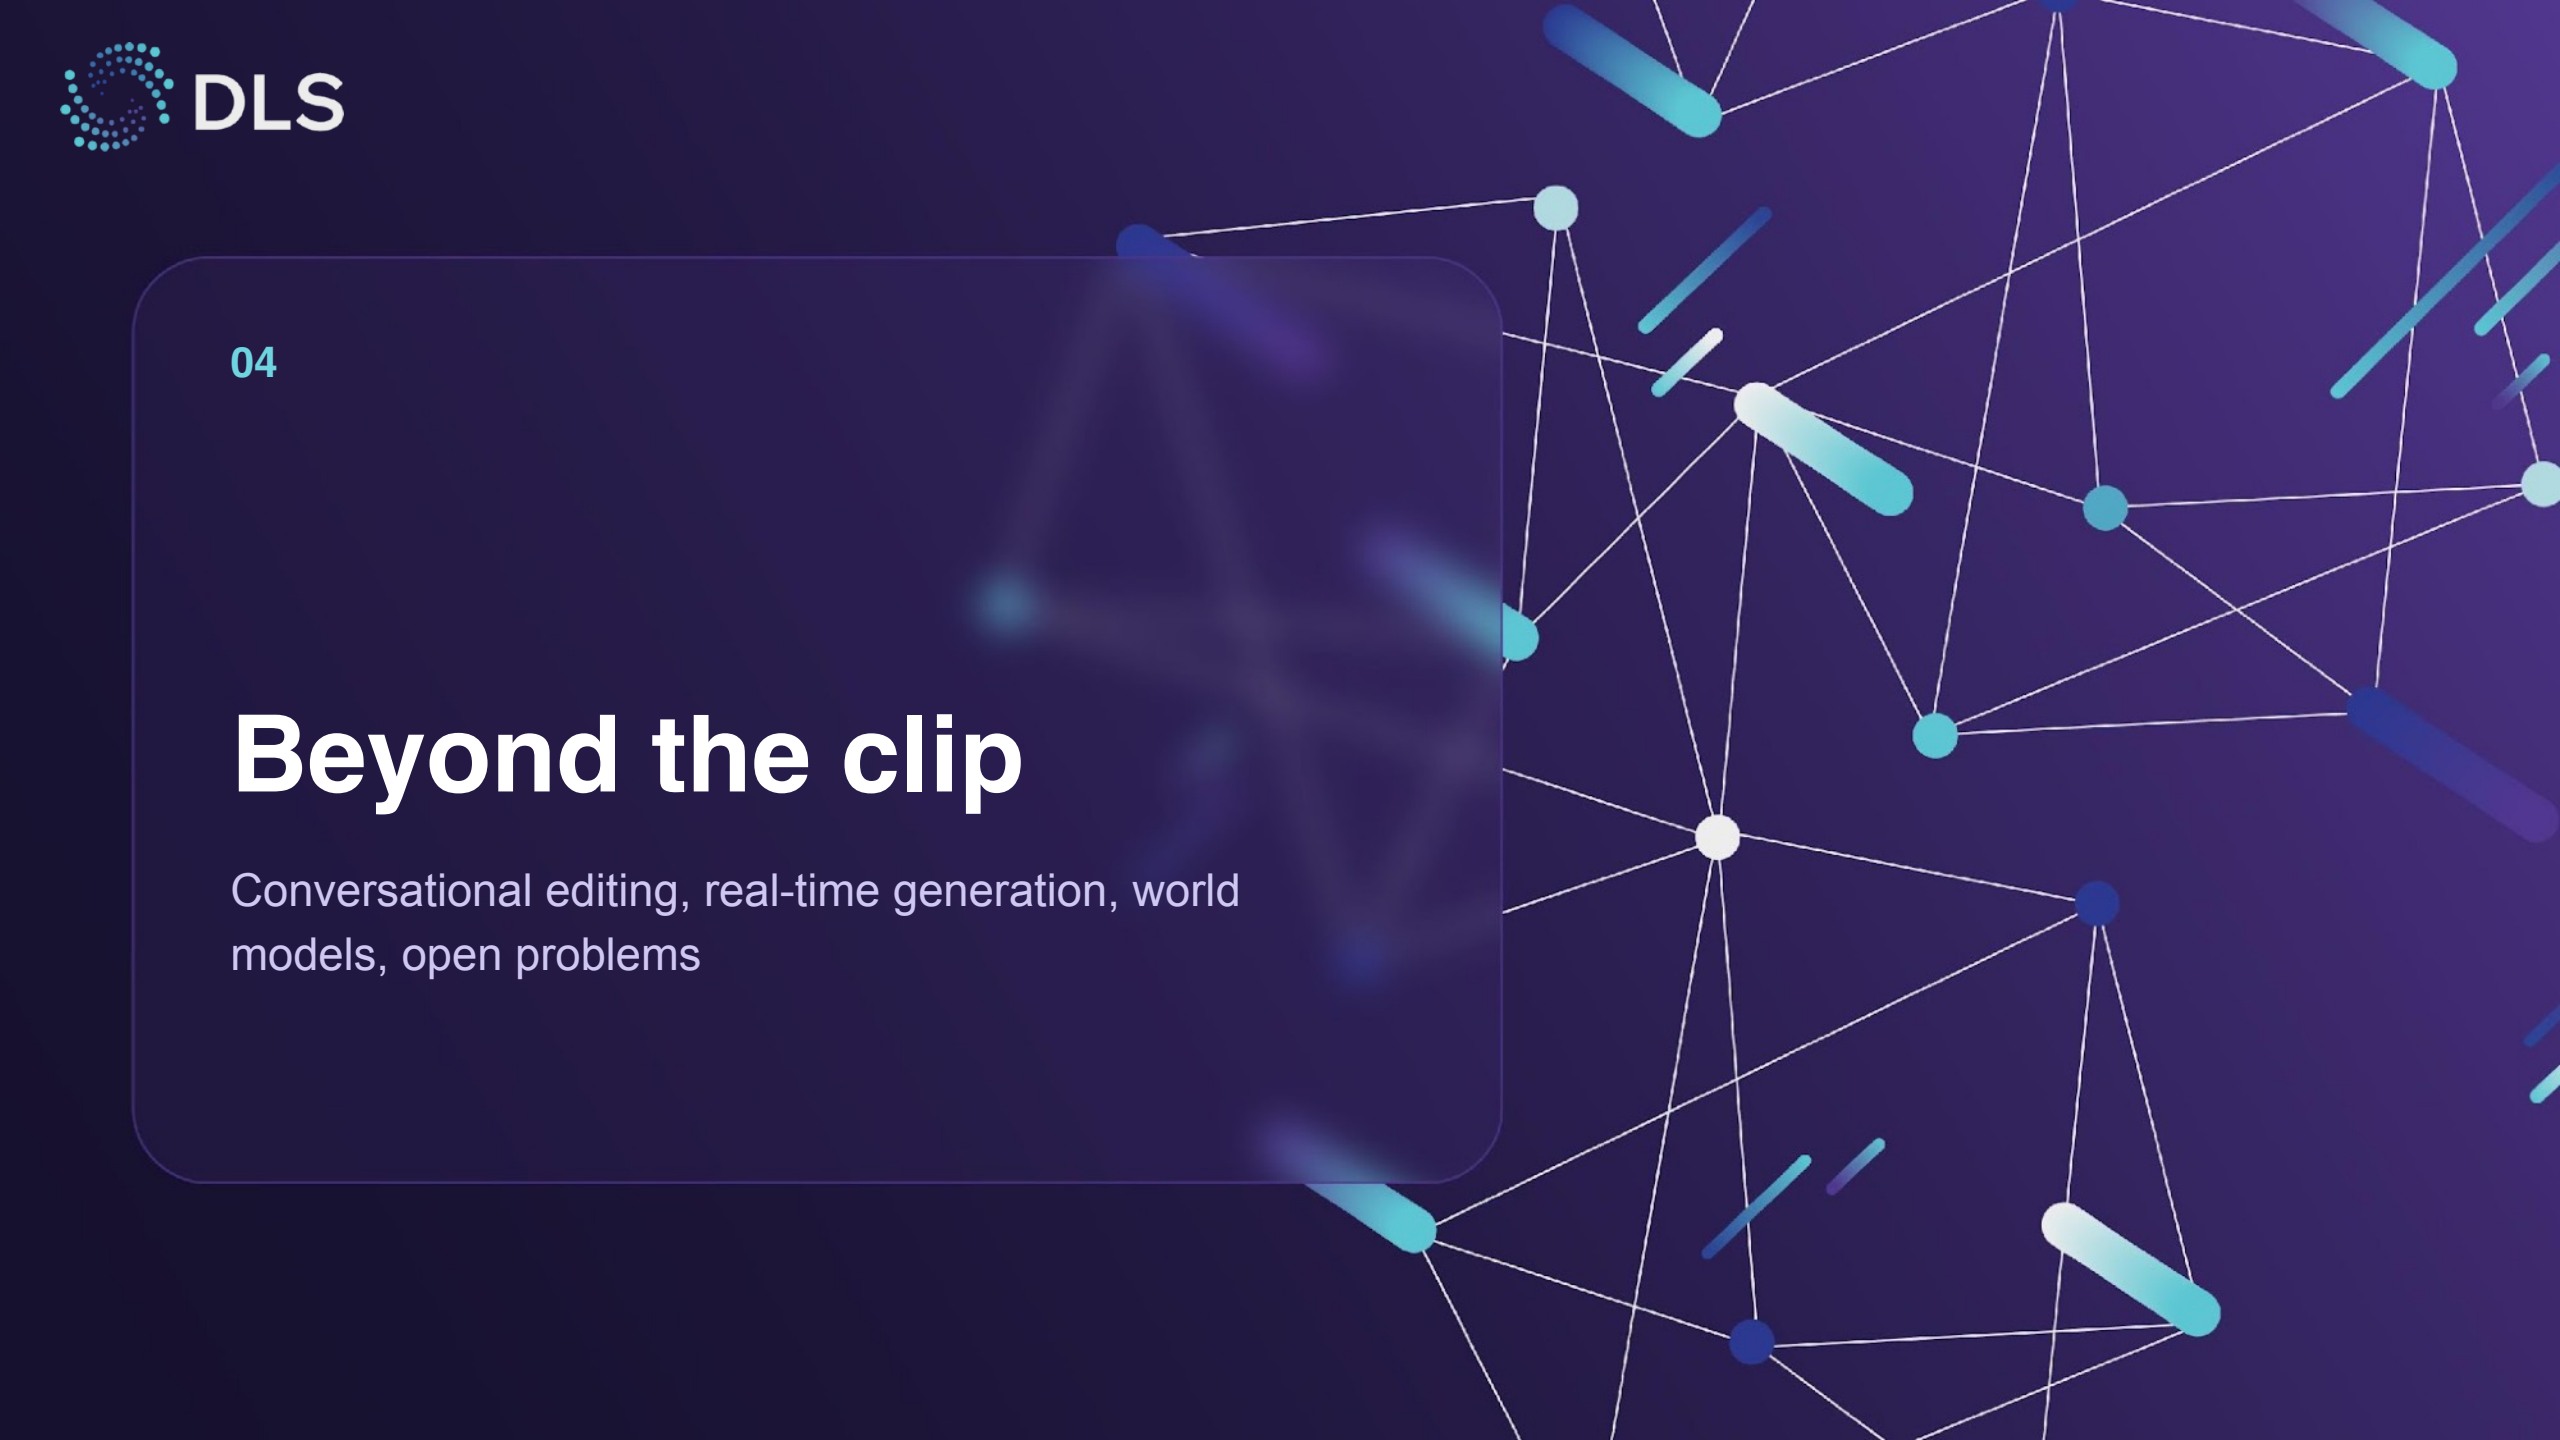

Conversational video editing: Gemini Omni

- One model creates and edits video from text, image, audio and video (Google I/O, May 2026)
- Each follow-up **edits the previous result**; anything not mentioned is preserved
- Edit your own footage; extend scenes up to 40 s; sound by default
- #1 text-to-video on arena.ai (Sep 2026); architecture not disclosed

Generation = editing, now for video.

TURN 1 · TEXT → VIDEO + AUDIO

"A woman plays the violin outdoors"

▶ result

↓ same interaction, no re-upload

TURN 2 · EDIT THE PREVIOUS VIDEO

"Make the violin invisible"

▶ result

↓ or edit your own footage

UPLOADED VIDEO · EDIT


"The mirror ripples like liquid; her arm becomes reflective"

▶ before ▶ after

Links open Google's official examples from the Gemini API docs.

Google, "Generate and edit videos with Gemini Omni Flash," Gemini API docs (ai.google.dev/gemini-api/docs/omni), 2026.

Long videos and real-time generation

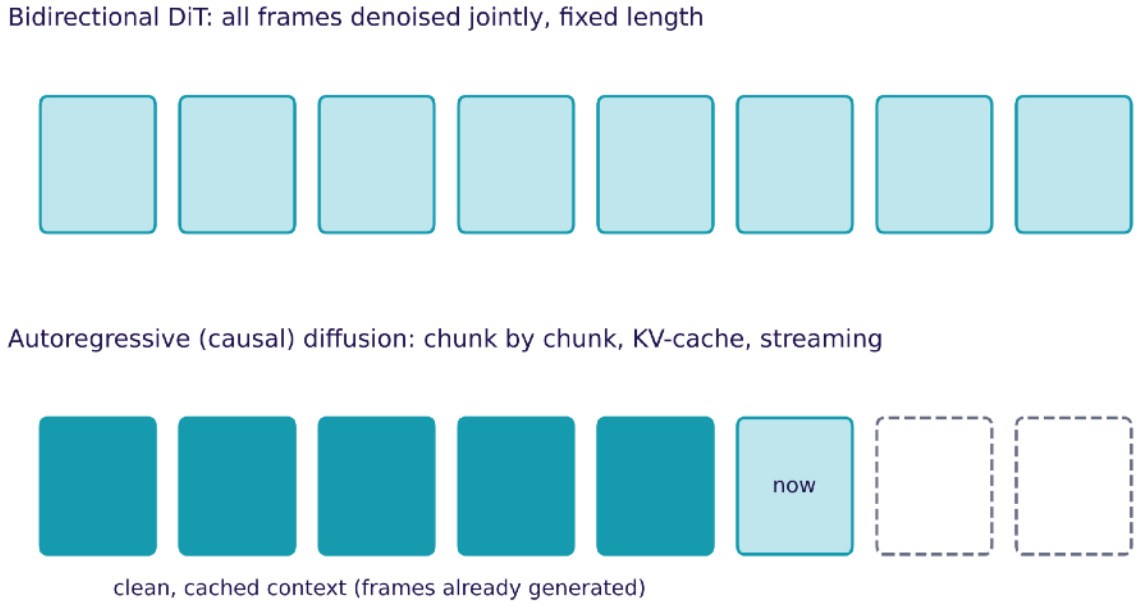


- **Bidirectional models** denoise the whole clip at once: fixed length, quadratic cost
- **Autoregressive diffusion** generates chunk by chunk from the clean past, with a KV cache – can stream indefinitely
- Train on the model's own rollouts (Self-Forcing) to reduce drift; distil to a few steps for real time

Chen et al., Diffusion Forcing (NeurIPS 2024). Yin et al., CausVid (CVPR 2025). Huang et al., Self Forcing (2025).

World models: interactive video


- Condition on **actions** (keys, camera, robot controls) → a playable simulator
- **Genie 3** (DeepMind): real-time 720p, 24 fps, about a minute of memory; public as Project Genie since Jan 2026
- Open: **Matrix-Game 3.0** (real-time 720p), **NVIDIA Cosmos 3** for robots and cars; Waymo builds its simulator on Genie 3
- **Kandinsky WM 1.0** (open, Aug 2026): image-to-video simulator for driving, robotics and physics – training data for physical AI
- Open problems: long-term memory, following actions, physics

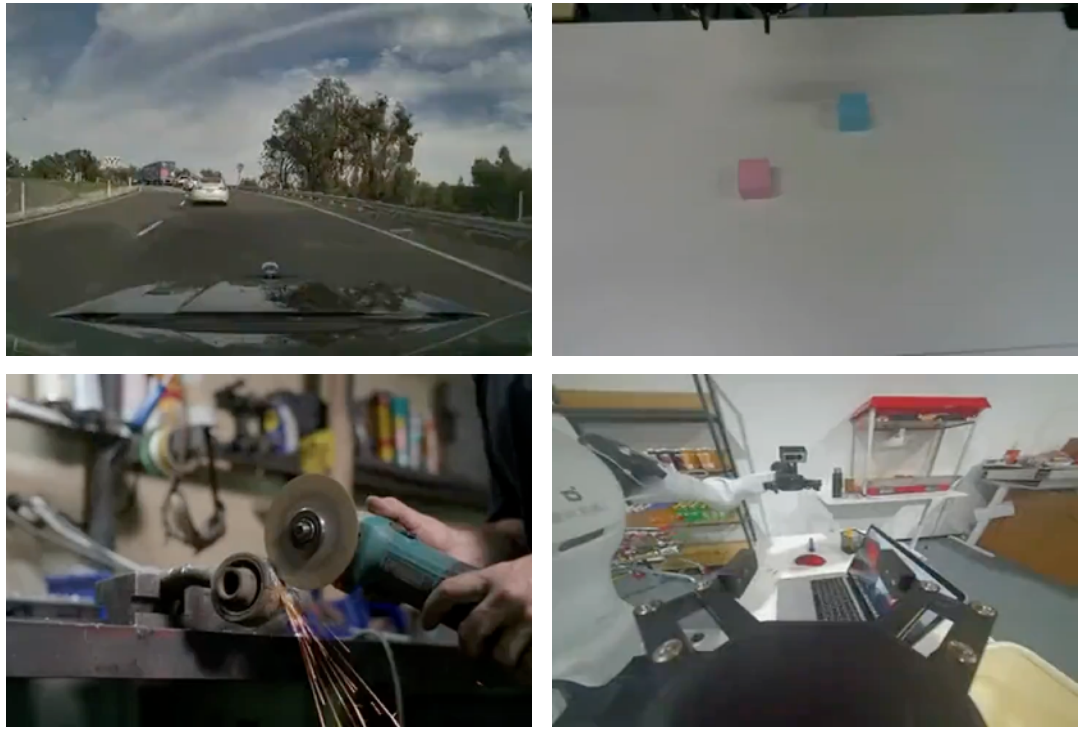

Kandinsky WM 1.0 samples (click to play)


Google DeepMind, "Genie 3," Aug 2025; Project Genie, Jan 2026. Skywork, Matrix-Game 3.0, arXiv:2604.08995. NVIDIA Cosmos 3, May 2026. Waymo World Model, Feb 2026. Kandinsky WM (MIT), Aug 2026.

What still breaks in 2026

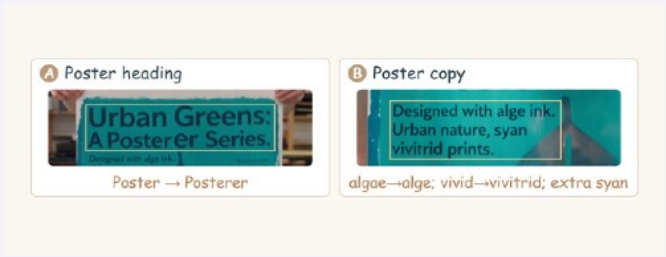


1 Text in the frame

Seedance 2.5: "Posterer", "vivitrid". Best word error rate is still 0.25

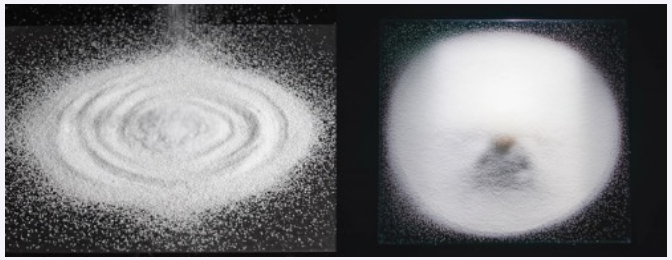

2 Physics

Chladni plate without nodal lines. Physics-IQ: best image-to-video score 55 / 100

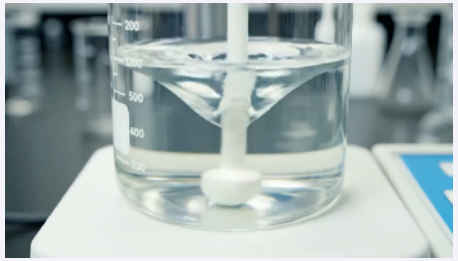

3 Changes over time

Briggs–Rauscher reaction should cycle colours; it barely changes



4 Complex prompts

Ad script: underwater shot and on-screen text get dropped

≤ 30 s

per generation

5 Consistency

Longer videos need extension; each step compounds identity drift

$3–13

per usable clip with audio

6 Cost


About four generations per usable shot

VTR-Bench, arXiv:2610.01499 (Oct 2026). AVGen-Bench (Microsoft, ICML 2026), failure cases. Physics-IQ leaderboard (google-deepmind, Oct 2026). OCDevel, "AI Video Generation in 2026".

What changed since DALL·E 2

Ingredient	2022	2026
Latent space	Pixels + cascades	Image / video / audio VAEs
Backbone	U-Net	DiT: cross-attention or MM-DiT; one or two streams for sound
Objective	ε-prediction diffusion	Flow matching
Conditioning	CLIP / T5 text	LLM/VLM encoder + references + edits in one model
Training	Pre-training on web pairs	Re-captioned data → SFT → RL
Fast inference	50–1000 steps × 2 for CFG	1–10 steps after distillation

- No single breakthrough: **every ingredient** improved, and the gains compound
- Video = the same recipe + time + sound; open video models are close behind; next: real-time generation and world models



Try it yourself

Open models

- Images: FLUX 3 Klein, Qwen-Image 2.1, Kandinsky 5.0 Image Lite
- Video: Kandinsky 6.0 Video Lite (with sound), MiniMax H3, LTX-2.5, Wan 2.2
- World model: Kandinsky WM 1.0

Tools

- Hugging Face diffusers, ComfyUI

Reading

- Lilian Weng: "What are Diffusion Models?", "Diffusion Models for Video Generation"
- Flow matching: Lipman et al. 2023; SD3 paper (Esser et al. 2024)
- Kandinsky 6.0 Video technical report (arXiv:2610.05608)
- Leaderboards: arena.ai, artificialanalysis.ai

WRAP-UP

Diffusion Week: the full schedule

Date	Time	Speaker	Affiliation	Talk
Wed, Oct 28	20:00	Nina Konovalova	DLS	Modern approaches and architectures of diffusion models
Thu, Oct 29	19:30	Konstantin Sobolev	AIRI, FusionBrain	Image and video generation in 2026 (today)
Fri, Oct 30	19:00	Nina Konovalova	DLS	Diffusion models for 3D
Mon, Nov 2	18:00	Vladimir Arkhipkin	Kandinsky Lab	How to build a billion-scale image-editing dataset
Mon, Nov 2	20:00	Nina Konovalova	DLS	Interpretability of diffusion models
Tue, Nov 3	18:00	Lev Novitsky	Kandinsky Lab	Alignment of diffusion models
Tue, Nov 3	20:00	Sergey Karpukhin	AIRI, FusionBrain	Reasoning in image generation
Wed, Nov 4	18:00	Vera Soboleva	AIRI	Personalized generation in the era of in-context models
Thu, Nov 5	18:00	Lev Novitsky	Kandinsky Lab	Distillation of diffusion models
Thu, Nov 5	20:00	Andrey Ivanyuta	Kandinsky Lab	World models
Fri, Nov 6	18:30			Closing and wrap-up

All lectures are online, in the evening; join via the DLS Telegram chat. Programme: **dls.samcs.ru/diffusionweek**

Deep Learning School, "Diffusion Week" programme, dls.samcs.ru/diffusionweek (checked 29 Oct 2026).

DLS

Thank you! Questions?

AIRI

Konstantin Sobolev
AIRI, Research Scientist
Fusion Brain lab