

TASK 1)

Create an IAM user ram, create a group Devops, add the user to the group, create a customer policy S3 with read & list permission, and attach the policy to the group.

Step 1) Create IAM User ram

Go to IAM → Users → Create User, enter username ram, and proceed to the next step

The screenshot displays the AWS IAM console's 'Create user' wizard. The top section, 'User details', shows the username 'ram' and the option to provide console access. The bottom section, 'Retrieve password', shows the console sign-in URL and password.

User details

User name: ram

The user name can have up to 64 characters. Valid characters: A-Z, a-z, 0-9, and +, =, @, _ (hyphen)

☒ Provide user access to the AWS Management Console - optional

In addition to console access, users with `SignInLocalDevelopmentAccess` permissions can use the same console credentials for programmatic access without the need for access keys.

Console password

☐ Autogenerated password

You can view the password after you create the user.

☒ Custom password

Enter a custom password for the user.

- Must be at least 8 characters long
- Must include at least three of the following mix of character types: uppercase letters (A-Z), lowercase letters (a-z), numbers (0-9), and symbols ! @ # \$ % ^ & * () _ + - (hyphen) ~ [] { } ' "

☐ Show password

☐ Users must create a new password at next sign-in - Recommended

Users automatically get the [IAMUserChangePassword](#) policy to allow them to change their own password.

Retrieve password

You can view and download the user's password below or email users instructions for signing in to the AWS Management Console. This is the only time you can view and download this password.

Console sign-in details

Console sign-in URL: <https://093468663442.signin.aws.amazon.com/console>

User name: ram

Console password: ***** [Show](#)

[Email sign-in instructions](#)

[Cancel](#) [Download .csv file](#) [Return to users list](#)

Step 2) Create IAM Group (Devops) & Add User(ram) to Group (devops)

Go to IAM → Users groups → Create groups, enter groupname Devops, add ram user to group

The first screenshot shows the 'Create user group' page in the AWS IAM console. The 'User group name' field is set to 'Devops'. Under 'Add users to the group - Optional (1/3)', the user 'ram' is selected from a list that also includes 'dev-user' and 'intern'.

The second screenshot shows the 'User groups (3)' page after the group has been created. A green notification banner at the top states 'Devops user group created.' The table below lists the user groups: 'Developers', 'Devops', and 'tester'. The 'Devops' group is highlighted, showing it has 1 user and no permissions defined.



Group name	Users	Permissions	Creation time
Developers	0	Not defined	2 days ago
Devops	1	Not defined	Now
tester	0	Not defined	21 hours ago


Step 3) Create Customer Manage Policy

Go to IAM → Policies → Create Policy, select the visual tab, and add S3 read and list permissions.

Name and Create Policy

Enter policy name S3-Read-List- and click Create Policy.

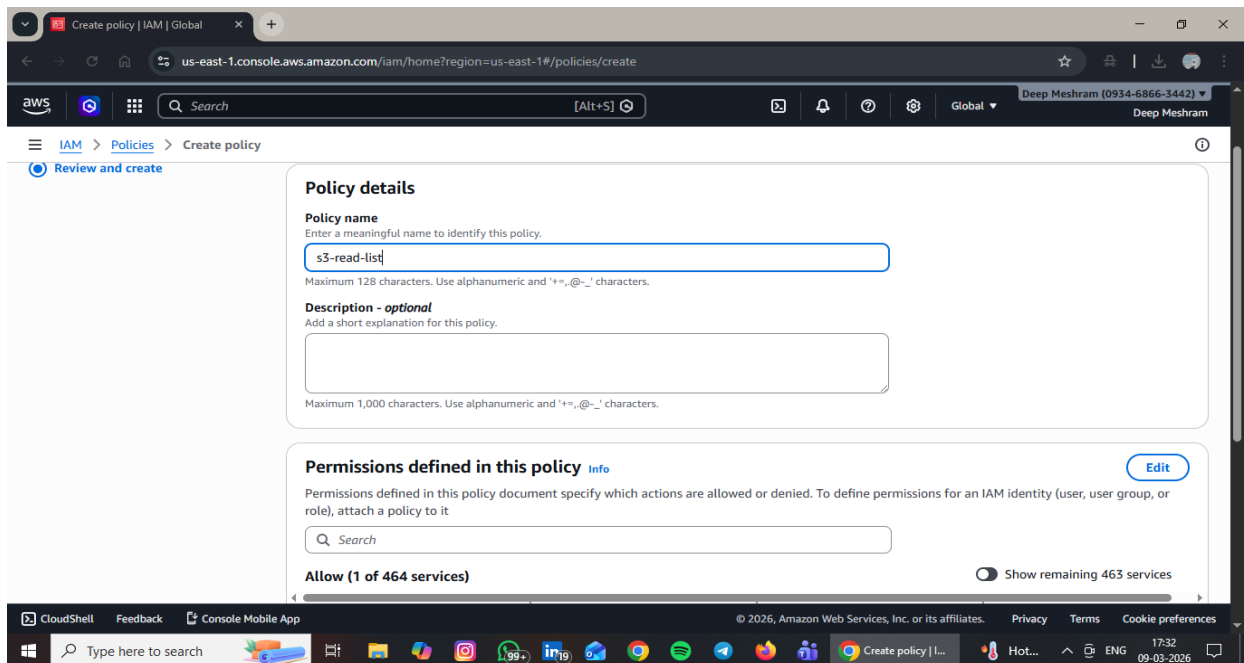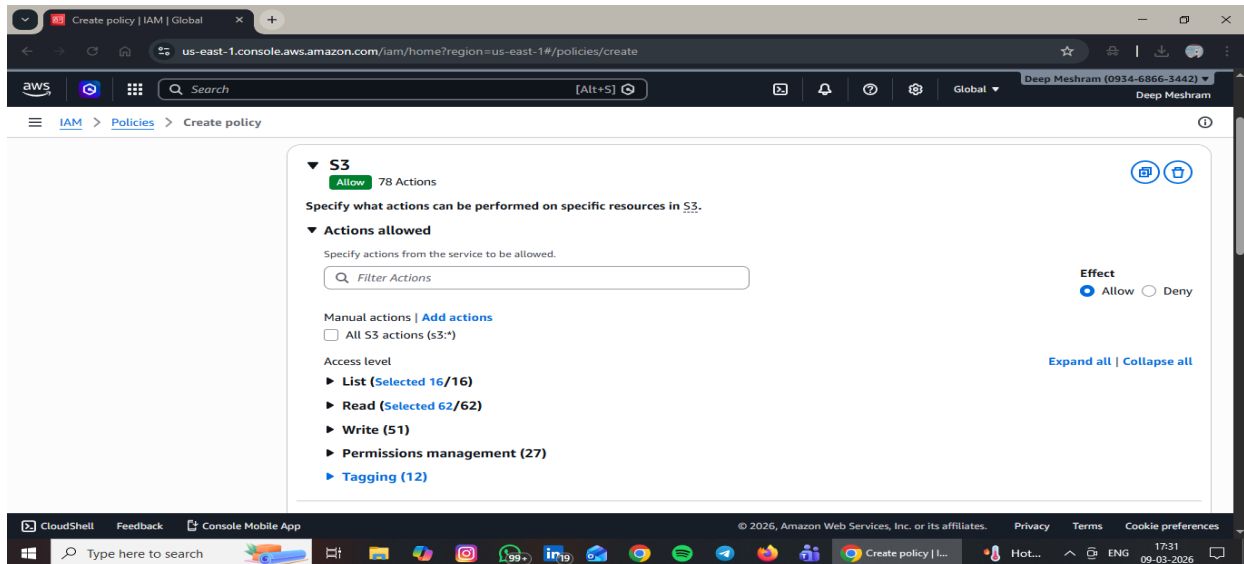

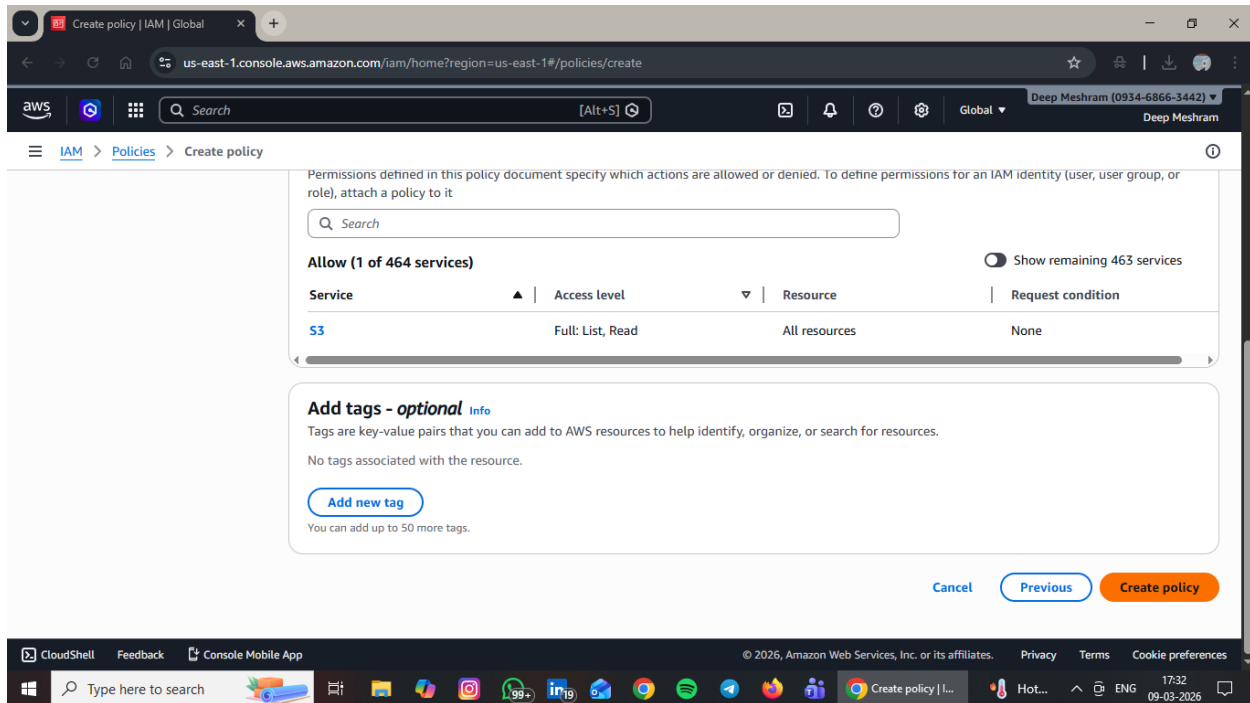

Step 4) Attach Policy to Devops Group

Go to IAM → Groups → Devops → Permissions → Attach Policies, select the created policy, and attach it.

