



EUROAQUA®

PPR & PPR-CT PLUMBING TECHNOLOGY



IS: 15801: 2008



DIN 8077/8078 Pipes
DIN 16962 Fittings

CM/L: 6700037714

Airguard

PNEUMATIC PIPING

**tension
FREE
pipes**



Ø40mm to Ø315mm



PPR & PPR-CT PIPES & FITTINGS

Ø20mm - Ø315mm

FOOD GRADE



Operating Temperature

-10°C to +99°C



Hot & Chilled Water



Infrastructure



Strong Chemicals



Air



Food



Leather



Pharma



Paper



Textile

The Leading Manufacturer and Exporter of Complete Range of PPR Pipes & Fittings

TABLE OF CONTENTS

Page No

03 ABOUT US

04 WHAT IS PPR,PPR-C,PP-RC?

06 PPR-C FITTINGS SERIS

09 PPR PIPES & FITTINGS

10 PE-RT PIPES & FITTINGS

14 TYPES OF PPR & PPR-CT PIPES

26 PPR-CT PIPES

29 TEST REPORT & CERTIFICATE

30 OTHER RANGES OF PRODUCTS

32 CLIENTS & CUSTOMERS

35 SOCIAL MEDIA

36 OUR BRANCHES



ABOUT US

Euroaqua Plumtek private limited is an ISO 9001 2015-certified organization, Initially started in the Name of Sakkthi Polymers in the year 1997 by **Er. P. Mohan MD** then incorporated as Euroaqua Plumtek Pvt Ltd in the year 2019. Our headquarters located at Sankari, Salem, Tamil Nadu and have multiple branches across India & Srilanka.

We are specialized in manufacturing PPR, PP-RCT, PE-RT, HDPE, MDPE Pipes & Fittings, PVC Flexible Hoses for Agriculture and Industries. Under the brand name **“EUROAQUA”**, **“AIRGUARD”** & **“PLUMTEK”**, which includes Taps, Faucets, Valves, Hoses and complete solution for Domestic & Industrial plumbing system. We are one of the leading Manufacturer and exporter of complete range of PPR pipes and fittings in India and first in South Asia, Introduced PP-RCT technology. We are exporting to more than 15 countries across the globe.

We aim to increase our product range to meet the every corner of a growing India with over 27 years of manufacturing experience. Expertise in bringing high quality solution to reduce bottom line Installation costs, extending the life span of piping system.



VISION

“Our vision is to achieve greater goals beyond boundaries with dedication & professionalism”



Scan for Corporate Video



MISSION

“We strive to offer our customers the cost-effective products at the excellent quality with the utmost satisfaction”



WHAT IS PPR ?

(Polypropylene Random Co-Polymer) PPR is a thermoplastic polyolefin which is processed into pipes & fittings with superior chemical & physical properties. PPR, PPR-C, PP-RC Pipes these are all same materials with different names mentioned worldwide.

**Why we need PPR ?**




They are the best carriers of high pressure potable water (Hot and Cold) in domestic as well as in industrial applications (chemicals & compressed air lines) in terms of excellent quality & price.

**When we need PPR ?**

When long term performance under adverse conditions without deviation in the standards are required, high ESCR is needed.

**Where we need PPR ?**

Areas of Advanced Piping - Food Grade / hotwater / Water tight systems / corrosion resistance / No encrustation tendency / Noise dampening plastic material / Long term pressure resistance applications / Chemical resistance / no leakage during its lifetime.

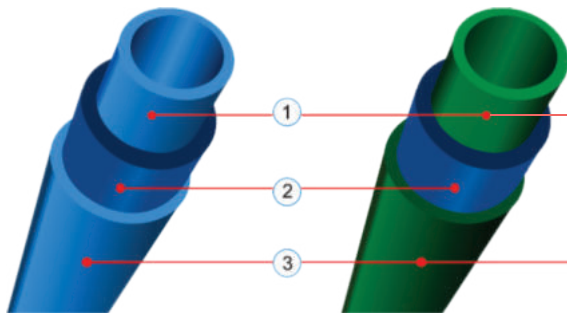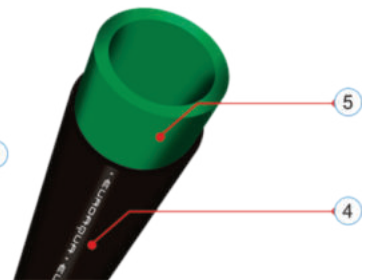PPR-FRP PIPES**3L ADVANCE PRO****PPR-2 LAYER PIPES**

- ① Anti-Microbial PPR Layer
- ② Glass Fiber Compound - FRP
- ③ UV Stabilized PP-R+FRP Layer

- ④ Strong UV Stabilized Black PPR Layer
- ⑤ PPR - Layer Pipes

PRECAUTIONS:**Transport & Handling**

The products should be handled with normal care. Pipes and fittings with imperfections should not be installed.

**Exposure to UV Rays**

It is recommended to do some protective outer layer / outer coating and avoid direct sun light exposures.

**Support**

The PPR pipes are not self contained so it is necessary to support them at specific distances.

**Low Temperatures**

At temperatures below - 5°C, following precautions should be taken Pay attention when cutting the pipe | check the cut made Avoid impact and excessive strains | Not to make elbows with very narrow radius in the presence of cold draughts, welding must be carried out in protected areas, to avoid quick cooling of the surfaces.

**Bending**

Large bends can be obtained by cold forming. If the bend radius is 8 times shorter than the dia of the pipe, it is recommended to heat up the part concerned by means of a hot air blower.

**Pipe Cutting**

Cutting should be carried out by using tools which ensure a clean cut free from burns and perpendicular to the axis.

EUROAQUA & AIRGUARD PPR Advanced Piping Technology is a new high technology system of pipes and fittings suitable for water supplies in buildings, chemicals & compressed air supply in Industries.

It has many important features including

Resistance to Abrasion and Corrosion



- ◆ No corrosion by acid and alkaline fluids with pH values between 1 and 14
- ◆ High chemical resistance
- ◆ Excellent ESCR - Longer life
- ◆ High abrasion resistance - high flow velocities possible

Very Smooth Surface of Pipes & Fittings



- ◆ No limestone or other deposits (non polar nature and no bacterial & fungal growth
- ◆ Head loss / pressure drop reduced to a minimum / negligible

Threaded Insert Fittings



- ◆ All threaded inserts are brass (min.58% Cu) with chromium plated
- ◆ Watertight assemblies with other metal elements in the installation

Low Specific Weight



- ◆ Easy transport and handling
- ◆ Lowest density as compared to conventional metal pipes (1/8th times of metal pipe)

Fitness for use in Seismic Areas



- ◆ Flexibility and toughness of the PPR pipes are best suited to be used in seismic prone areas
- ◆ The pipe is not prone to any damages

Energy Saving



- ◆ Low heat conductivity of PPR leads to 10-20% energy saving. Heat preservation and energy saving greatly minimizes heat losses during hot water flow. The heat conduction coefficient is 1/200 of metal pipes



High Internal Pressure Resistance

- ◆ Minimum 50 years lifetime.

No Negative Influence on Water Quality



- ◆ Compliance with the international standards like FDA on the use of plastic materials for the transportation of drinking water
- ◆ Since UV treated, it prevents UV passage - prevents growth of bacteria & algae

Welding Capacity



- ◆ 100% homogeneous connections, guaranteeing leak-tight (minimum 50 years), long lasting system
- ◆ Fast and easy installation
- ◆ Very good for concealed and above false roof piping applications



Silence / Sound Absorption

- ◆ Considerable noise reduction in comparison to metal



Reduced Condensation

- ◆ Low heat conductivity reduces the condensation of water on the outer surface of cold water pipes



Hygienic and Non Toxic

- ◆ All raw materials used in the production of the EUROAQUA & AIRGUARD PPR Plumbing Technology are non toxic, eco friendly, food grade in accordance with current international standards.
[EXOVA - Body cote]



COUPLER		
CODE	SIZE	PCS Pouch/Bag
EB001	20mm	40/1600
EB002	25mm	34/1020
EB003	32mm	24/600
EB004	40mm	24/360
EB005	50mm	20/200
EB006	63mm	10/100
EB007	75mm	8/64
EB008	90mm	8/48
EB009	110mm	25/25
EB010	125mm	20/20
EB011	160mm	14/14



EQUAL TEE		
CODE	SIZE	PCS Pouch/Bag
EC001	20mm	28/840
EC002	25mm	24/480
EC003	32mm	12/240
EC004	40mm	12/120
EC005	50mm	10/80
EC006	63mm	8/48
EC007	75mm	12/24
EC008	90mm	18/18
EC009	110mm	10/10
EC010	125mm	6/6
EC011	160mm	5/5
EC012	200mm	1
EC013	250mm	1
EC014	315mm	1



ELBOW 90°		
CODE	SIZE	PCS Pouch/Bag
EE001	20mm	34/1020
EE002	25mm	22/660
EE003	32mm	20/300
EE004	40mm	30/150
EE005	50mm	20/100
EE006	63mm	10/60
EE007	75mm	15/30
EE008	90mm	10/20
EE009	110mm	12/12
EE010	125mm	10/10
EE011	160mm	6/6
EE012	200mm	1
EE013	250mm	1
EE014	315mm	1



ELBOW 45°		
CODE	SIZE	PCS Pouch/Bag
EE101	20mm	30/1500
EE102	25mm	22/770
EE103	32mm	20/400
EE104	40mm	30/300
EE105	50mm	30/150
EE106	63mm	12/72
EE107	75mm	10/40
EE108	90mm	12/24
EE109	110mm	16/16
EE110	125mm	10/10
EE111	160mm	8/8



REDUCER ELBOW		
CODE	SIZE	PCS Pouch/Bag
EE601	25/20mm	30/900
EE602	32/20mm	20/500
EE603	32/25mm	24/480
EE604	40/32mm	20/200
EE605	40/25mm	20/200
EE606	40/20mm	13/195
EE607	50/40mm	12/120
EE608	50/32mm	24/120
EE609	50/25mm	24/120



FOUR WAY TEE / CROSS		
CODE	SIZE	PCS Pouch/Bag
EF001	20mm	24/550
EF002	25mm	24/360
EF003	32mm	18/180
EF004	40mm	18/90



FLANGE		
CODE	SIZE	PCS Pouch/Bag
EK101	32mm	13/104
EK102	40mm	25/75
EK103	50mm	20/60
EK104	63mm	12/60
EK105	75mm	23/46
EK106	90mm	40/40
EK107	110mm	36/36
EK108	125mm	20/20
EK109	160mm	15/15



SANDWICH FLANGE		
CODE	SIZE	PCS Pouch/Bag
EK201	160mm	5
EK202	200mm	5
EK203	250mm	3
EK204	315mm	3



REDUCER		
CODE	SIZE	PCS Pouch/Bag
EB101	25/20mm	24/1200
EB102	32/20mm	24/720
EB103	32/25mm	33/660
EB104	40/20mm	30/600
EB105	40/25mm	28/560
EB106	40/32mm	24/360
EB107	50/20mm	18/324
EB108	50/25mm	18/324
EB109	50/32mm	18/324
EB110	50/40mm	16/192
EB111	63/32mm	8/160
EB112	63/40mm	8/112
EB113	63/50mm	8/112
EB114	75/40mm	6/90
EB115	75/50mm	4/60
EB116	75/63mm	8/64
EB117	90/50mm	6/54
EB118	90/63mm	5/45
EB119	90/75mm	7/42
EB120	110/63mm	8/40
EB121	110/75mm	8/40
EB122	110/90mm	10/30
EB123	125/110mm	15/30
EB124	160/110mm	20/20
EB125	160/90mm	20/20
EB126	160/125mm	20/20
EB127A	200/110mm	12
EB127	200/160/125mm	12
EB128A	250/90mm	10
EB128B	250/110mm	10
EB128C	250/125mm	10
EB128	250/200/160mm	10
EB129A	315/110mm	6
EB129B	315/160mm	6
EB129C	315/200mm	6
EB129	315/250mm	6



FLANGE CORE		
CODE	SIZE	PCS Pouch/Bag
EK001	32mm	17/510
EK002	40mm	18/360
EK003	50mm	20/300
EK004	63mm	10/200
EK005	75mm	8/120
EK006	90mm	12/84
EK007	110mm	10/60
EK008	125mm	25/25
EK009	160mm	22/22
BUTT FUSION		
EK010	200mm	7/7
EK011	250mm	5/5
EK012	315mm	3/3



REDUCER TEE		
CODE	SIZE	PCS Pouch/Bag
EC101	25/20/25mm	22/550
EC102	32/20/32mm	18/270
EC103	32/25/32mm	25/250
EC104	40/20/40mm	20/200
EC105	40/25/40mm	15/150
EC106	40/32/40mm	16/128
EC107	50/20/50mm	20/120
EC108	50/25/50mm	17/102
EC109	50/32/50mm	14/84
EC110	50/40/50mm	16/80
EC111	63/25/63mm	9/72
EC112	63/32/63mm	9/72
EC113	63/40/63mm	9/63
EC114	63/50/63mm	8/48
EC115	75/25/75mm	6/36
EC116	75/32/75mm	6/36
EC117	75/40/75mm	6/36
EC118	75/50/75mm	5/30
EC119	75/63/75mm	10/30
EC120	90/32/90mm	8/24
EC121	90/40/90mm	8/24
EC122	90/50/90mm	8/24
EC123	90/63/90mm	8/16
EC124	90/75/90mm	8/16
EC125	110/32/110mm	7/14
EC126	110/40/110mm	7/14
EC127	110/50/110mm	7/14
EC128	110/63/110mm	6/12
EC129	110/75/110mm	12/12
EC130	110/90/110mm	12/12
EC131	125/63/125mm	12/12
EC132	125/75/125mm	12/12
EC133	125/90/125mm	12/12
EC134	125/110/125mm	12/12
EC135	160/63/160mm	6/6
EC136	160/75/160mm	6/6
EC137	160/90/160mm	6/6
EC138	160/110/160mm	6/6
EC139	160/125/160mm	4/4



END CAP		
CODE	SIZE	PCS Pouch/Bag
ED001	20mm	36/2700
ED002	25mm	20/1500
ED003	32mm	20/800
ED004	40mm	21/525
ED005	50mm	18/270
ED006	63mm	10/150
ED007	75mm	10/100
ED008	90mm	12/60
ED009	110mm	7/35
ED010	125mm	25/25
ED011	160mm	20/20

Available Colours



13



BALL VALVE			
CODE	SIZE	PCS	Pouch/Bag
EH101	20mm	18/270	
EH102	25mm	20/200	
EH103	32mm	12/120	
EH104	40mm	18/90	
EH105	50mm	12/48	
EH106	63mm	8/24	
EH107	75mm	***	

14



TANK NIPPLE		
CODE	SIZE	PCS
EB301A	25mm/3/4"	20/400
EB301	32mm/1"	20/300
EB302	40mm/1 1/4"	30/300
EB303	50mm/1 1/2"	20/200
EB304	63mm/2"	10/100

14-A



BRASS TANK NIPPLE		
CODE	SIZE	PCS
EBT301	3/4"	10/100
EBT302	1"	5/50
EBT303	1-1/4"	4/40
EBT304	1-1/2"	4/40
EBT305	2"	4/32

15



PLASTIC UNION		
CODE	SIZE	PCS
EI001	20mm	24/600
EI002	25mm	20/300
EI003	32mm	25/250
EI004	40mm	16/144
EI005	50mm	14/70
EI006	63mm	10/40

16




BYE PASS BEND		
CODE	SIZE	PCS
EJ001	20mm	15/300
EJ002	25mm	18/180
EJ003	32mm	8/80

17



CROSS OVER BEND		
CODE	SIZE	PCS
EJ101	20mm	10/300
EJ102	25mm	10/180
EJ103	32mm	8/80

18



WELD SADDLE PLAIN			
CODE	SIZE	DRILL HOLE SIZE (ID)	PCS
EL201	40x20 mm	23mm	20/520
EL202	50x20 mm	23mm	20/520
EL203	63x32 mm	30mm	20/500
EL204	63x25 mm	30mm	20/500
EL205	75x32 mm	30mm	20/500
EL206	75x25 mm	30mm	20/500
EL207	90x32 mm	30mm	20/500
EL208	90x25 mm	30mm	20/500
EL209	110x32 mm	30mm	20/500
EL210	110x25 mm	30mm	20/500
EL210A	125x25mm	30mm	20/500
EL211	125x32 mm	30mm	20/500
EL212	125x40mm	38mm	20/500
EL212A	125x50mm	38mm	20/300
EL212B	125x63mm	62mm	10/250
EL212C	125x75mm	62mm	10/200
EL213	160x25mm	30mm	20/500
EL214	160x32mm	30mm	20/500
EL215	160x40mm	38mm	20/500
EL216	160x50mm	38mm	20/300
EL217	160x63mm	62mm	10/250
EL218	160x75mm	62mm	10/200
EL219	200x25mm	30mm	20/500
EL220	200x32mm	30mm	20/500
EL220A	200x40mm	38mm	25/500
EL220B	200x50mm	38mm	20/300
EL221	200x63mm	62mm	10/250
EL222	200x75mm	62mm	10/200
EL223	200x90mm	100mm	2/20
EL224	200x110mm	100mm	2/20
EL225	250x25mm	30mm	20/500
EL226	250x32mm	30mm	20/500
EL226A	250x40mm	38mm	25/500
EL226B	250x50mm	38mm	20/300
EL227	250x63mm	62mm	10/250
EL228	250x75mm	62mm	10/200
EL229	250x90mm	100mm	2/20
EL230	250x110mm	100mm	2/20
EL231	315x25mm	30mm	20/500
EL232	315x32mm	30mm	20/500
EL232A	315x40mm	38mm	25/500
EL232B	315x50mm	38mm	20/300
EL233	315x63mm	62mm	10/250
EL234	315x75mm	62mm	10/200
EL235	315x90mm	100mm	2/20
EL236	315x110mm	100mm	2/20

19



WELD SADDLE (FEMALE THREAD)			
CODE	SIZE	DRILL HOLE SIZE (ID)	PCS
EB801	40mmx1/2"	23mm	8/320
EB802	50mmx1/2"	23mm	8/320
EB803	63mmx1/2"	30mm	10/250
EB804	63mmx3/4"	30mm	10/250
EB805	75mmx1/2"	30mm	10/250
EB806	75mmx3/4"	30mm	10/250
EB807	90mmx1/2"	30mm	10/250
EB808	90mmx3/4"	30mm	10/250
EB809	110mmx1/2"	30mm	10/250
EB810	110mmx3/4"	30mm	10/250
EB811	125mmx1/2"	30mm	10/250
EB812	125mmx3/4"	30mm	10/250
EB813	160mmx1/2"	30mm	10/250
EB814	160mmx3/4"	30mm	10/250
EB815	200mmx1/2"	30mm	10/250
EB816	200mmx3/4"	30mm	10/250
EB817	250mmx1/2"	30mm	10/250
EB818	250mmx3/4"	30mm	10/250
EB819	315mmx1/2"	30mm	10/250
EB820	315mmx3/4"	30mm	10/250

20



MALE THREAD TEE		
CODE	SIZE	PCS
EC301	20mmx1/2"	8/240
EC302	25mmx1/2"	8/160
EC303	25mmx3/4"	8/120
EC304	32mmx1/2"	10/150
EC305	32mmx3/4"	10/150
EC306	32mmx1"	7/70

21




FEMALE THREAD TEE		
CODE	SIZE	PCS
EC201	20mmx1/2"	10/300
EC202	25mmx1/2"	8/200
EC203	25mmx3/4"	7/175
EC204	32mmx1/2"	8/120
EC205	32mmx3/4"	8/120
EC206	32mmx1"	8/80
EC207	40mmx1-1/4"	8/40

22-A



WELDING DIE SET ONLY	
CODE	SIZE
EB951	Ø25mm
EB952	Ø32mm
EB953	Ø40mm

22



WELD SADDLE DIE	
CODE	SIZE
EB901	40x20mm/1/2"
EB902	50x20mm/1/2"
EB903	63x25mm/32mm/ 1/2" / 3/4"
EB904	75x25mm/32mm/ 1/2" / 3/4"
EB905	90x25mm/32mm/ 1/2" / 3/4"
EB906	110x25mm/32mm/ 1/2" / 3/4"
EB907	125x25/32mm /1/2" / 3/4"
EB908	125x40/50mm
EB908A	125x63/75mm
EB909	160x25/32mm /1/2" / 3/4"
EB910	160x40mm/50mm
EB911	160x63mm/75mm
EB911A	200x40/50mm
EB912	200x63/75/90mm/110mm
EB912A	200x90/110mm
EB912B	250x40/50mm
EB913	250x63/75/90mm/110mm
EB913A	250x90/110mm
EB913B	315x40/50mm
EB914	315x63/75/90mm/110mm
EB914A	315x90/110mm
EB915	200x25mm/32mm/ 1/2" / 3/4"
EB916	250x25mm/32mm/ 1/2" / 3/4"
EB917	315x25mm/32mm/ 1/2" / 3/4"

23



MALE THREAD UNION		
CODE	SIZE	PCS
EM101	20mmx1/2"	12/180
EM102	25mmx3/4"	10/150
EM103	32mmx1"	6/90
EM104	40mmx1-1/4"	8/80
EM105	50mmx1-1/2"	6/48
EM106	63mmx2"	4/24

24



FEMALE THREAD UNION		
CODE	SIZE	PCS
EI101	20mmx1/2"	12/180
EI102	25mmx3/4"	10/150
EI103	32mmx1"	6/90
EI104	40mmx1 1/4"	8/80
EI105	50mmx1 1/2"	6/48
EI106	63mmx2"	4/24

Drill with Proper Diameter and Make Correct ID Hole



DRILL HOLE SIZE

Heat up the Weld-in Saddle and ID of the pipe with proper Dies



Fuse weld-in saddle with Pipe permanently



Weld-in Saddles available from 40mm to 315mm sizes



Available Colours



25

METAL UNION

CODE	SIZE	PCS Pouch/Bag
EI301	20mm	12/180
EI302	25mm	10/150
EI303	32mm	6/90
EI304	40mm	8/80
EI305	50mm	6/48
EI306	63mm	5/25

26

MALE THREAD COUPLER

CODE	SIZE	PCS Pouch/Bag
EB301	20mmx1/2"	10/300
EB302	20mmx3/4"	10/200
EB303	25mmx1/2"	15/300
EB304	25mmx3/4"	10/200
EB305	32mmx1/2"	14/210
EB306	32mmx3/4"	14/210
EB307	32mmx1"	15/150
EB308A	40mmx1"	6/60
EB308	40mmx1-1/4"	6/60
EB309	50mmx1-1/2"	5/50
EB310	63mmx2"	5/40
EB311	75mmx2-1/2"	12/24
EB312	90mmx3"	3/12
EB313	110mmx4"	6/6

27

FEMALE THREAD COUPLER

CODE	SIZE	PCS Pouch/Bag
EB201	20mmx1/2"	10/300
EB202	20mmx3/4"	12/240
EB203	25mmx1/2"	12/240
EB204	25mmx3/4"	12/240
EB205	32mmx1/2"	12/240
EB206	32mmx3/4"	10/200
EB207	32mmx1"	10/150
EB208A	40mmx1"	8/80
EB208	40mmx1-1/4"	8/80
EB209	50mmx1-1/2"	5/50
EB210	63mmx2"	5/40
EB211	75mmx2-1/2"	12/24
EB212	90mmx3"	7/14
EB213	110mmx4"	6/6

28

MALE THREAD ELBOW

CODE	SIZE	PCS Pouch/Bag
EE401	20mmx1/2"	10/300
EE402	25mmx1/2"	12/240
EE403	25mmx3/4"	14/210
EE404	32mmx1/2"	8/120
EE405	32mmx3/4"	8/120
EE406	32mmx1"	10/100

28-A

WALL PLATE MALE THREAD ELBOW

CODE	SIZE	PCS Pouch/Bag
EW401	20mmx1/2"	12/240
EW402	25mmx1/2"	12/240

29-A

WALL PLATE FEMALE THREAD ELBOW

CODE	SIZE	PCS Pouch/Bag
EW201	20mmx1/2"	12/240
EW202	25mmx1/2"	12/240

29-B

TEMPLATE - ADJUSTABLE

CODE	PCS Pouch/Bag
ET001	***

(FOR WALL MIXER ELBOW)



Scan QR Code for Installation

30

STOP VALVE

CODE	SIZE	PCS Pouch/Bag
EH001	20mm	8/120
EH002	25mm	8/80
EH003	32mm	6/60
EH004	40mm	7/42
EH005	50mm	10/50
EH006	63mm	10/20

31

CONCEALED STOP VALVE

CODE	SIZE	PCS Pouch/Bag
EH001A	20mm	28/28
EH002A	25mm	28/28
EH003A	32mm	28/28



32

LONG PIPE PLUG

CODE	SIZE	PCS Pouch/Bag
ED201	1/2"	36/900
ED202	3/4"	24/600

33

PLUG

CODE	SIZE	PCS Pouch/Bag
ED101	1/2"	20/3000
ED102	3/4"	20/2000
ED103	1"	20/1000

35

PIPE CUTTER (Imported)

CODE	SIZE	PCS Pouch/Bag
EM006	20-40mm	1/48
EM007	20-63mm	1/10

36

PIPE CUTTER (Indian)

CODE	SIZE	PCS Pouch/Bag
EM006I	20-40mm	1/40
EM007I	20-75mm	1/10

34

CLAMP

CODE	SIZE	PCS Pouch/Bag
EG001	20mm	25/2500
EG002	25mm	28/1960
EG003	32mm	30/1500
EG004	40mm	20/1000
EG005	50mm	14/700
EG006	63mm	20/500

37

WELDING MACHINE (Imported)

CODE	SIZE	PCS Pouch/Bag
EL112	20-63	1/5
EL113	75-110	1/5
EL114	160	1/4
WELDING DIE ONLY		
EL106	125mm	-

38

WELDING MACHINE (Indian)

CODE	SIZE	PCS Pouch/Bag
EL112I	20-40	1/10
EL114I	20-63	1/10
EL113I	75-110	1/5

39

REPAIR SET

CODE	SIZE	PCS Pouch/Bag
EZ001	9mm	***
EZ002	11mm	***

40

WELDING DEVICE (Hydraulic Pump)

CODE	SIZE	PCS Pouch/Bag
EB30	160mm	-

Available Colours



Courtesy: Best Installation & Support Systems by Viral V Care



PPR

41	PN10 /SDR11 /S 5		
	CODE	SIZE/DxT	LENGTH/ BUNDLE
	EA001	20x2.0mm	75
	EA002	25x2.3mm	50
	EA003	32x2.9mm	30
	EA004	40x3.7mm	20
	EA005	50x4.6mm	15
	EA006	63x5.8mm	10
	EA007	75x6.8mm	7
	EA008	90x8.2mm	5
	EA009	110x10.0mm	3
	*EA010	125x11.40mm	2
	*EA011	160x14.60mm	1
	*EA012	200x18.20mm	1
	*EA013	250x22.70mm	1
	*EA014	315x28.60mm	1

42	PN16 /SDR7.4 /S3.2		
	CODE	SIZE/DxT	LENGTH/ BUNDLE
	EA201	20x2.8mm	75
	EA202	25x3.5mm	50
	EA203	32x4.4mm	30
	EA204	40x5.5mm	20
	EA205	50x6.9mm	15
	EA206	63x8.6mm	10
	EA207	75x10.3mm	7
	EA208	90x12.3mm	5
	EA209	110x15.1mm	3
	*EA210	125x16.9mm	2
	*EA211	160x21.9mm	1

43	PN20 /SDR 6 /S2.5		
	CODE	SIZE/DxT	LENGTH/ BUNDLE
	EA301	20x3.4mm	75
	EA302	25x4.2mm	50
	EA303	32x5.4mm	30
	EA304	40x6.7mm	20
	EA305	50x8.3mm	15
	EA306	63x10.5mm	10
	EA307	75x12.5mm	7
	EA308	90x15.0mm	5
	EA309	110x18.3mm	3
	*EA310	125x20.8mm	2
	*EA311	160x26.6mm	1

44	PN25 /SDR 5 /S 2 ★		
	CODE	SIZE/DxT	LENGTH/ BUNDLE
	EA401	20x4.0mm	75
	EA402	25x5.0mm	50
	EA403	32x6.4mm	30
	EA404	40x8.0mm	20
	EA405	50x10.0mm	15
	EA406	63x12.6mm	10

45	PN06 /SDR17.5 /S8.25 ★		
	CODE	SIZE	LENGTH/ BUNDLE
	EA512	200x11.4mm	1
	EA513	250x14.2mm	1
	EA514	315x17.90mm	1

46	PN04 /SDR26 /S12.5 ★		
	CODE	SIZE	LENGTH/ BUNDLE
	EA612	200x7.7mm	1
	EA613	250x8.6mm	1
	EA614	315x12.1mm	1

★ Special request only

Specification: size(mm) X wall thickness(mm)

Available Colours: ● GREEN ● BLUE ● BLACK ● WHITE ● RED

PPR - 3L ADVANCE PRO

47	PN10 /SDR11 /S 5		
	CODE	SIZE/DxT	LENGTH/ BUNDLE
	EA001A	20x2.0mm	75
	EA002A	25x2.3mm	50
	EA003A	32x2.9mm	30
	EA004A	40x3.7mm	20
	EA005A	50x4.6mm	15
	EA006A	63x5.8mm	10
	EA007A	75x6.8mm	7
	EA008A	90x8.2mm	5
	EA009A	110x10.0mm	3
	*EA010A	125x11.40mm	2
	*EA011A	160x14.60mm	1
	*EA012A	200x18.20mm	1
	*EA013A	250x22.70mm	1
	*EA014A	315x28.60mm	1


48	PN16 /SDR7.4 /S3.2		
	CODE	SIZE/DxT	LENGTH/ BUNDLE
	EA201A	20x2.8mm	75
	EA202A	25x3.5mm	50
	EA203A	32x4.4mm	30
	EA204A	40x5.5mm	20
	EA205A	50x6.9mm	15
	EA206A	63x8.6mm	10
	EA207A	75x10.3mm	7
	EA208A	90x12.3mm	5
	EA209A	110x15.1mm	3
	*EA210A	125x16.9mm	2
	*EA211A	160x21.9mm	1

49	PN20 /SDR 6 /S2.5		
	CODE	SIZE/DxT	LENGTH/ BUNDLE
	EA301A	20x3.4mm	75
	EA302A	25x4.2mm	50
	EA303A	32x5.4mm	30
	EA304A	40x6.7mm	20
	EA305A	50x8.3mm	15
	EA306A	63x10.5mm	10
	EA307A	75x12.5mm	7
	EA308A	90x15.0mm	5
	EA309A	110x18.3mm	3
	*EA310A	125x20.8mm	2
	*EA311A	160x26.6mm	1

Ø 125mm PPR PIPES &
ALL FITTINGS AVAILABLE

★ Special request only

Specification: size(mm) X wall thickness(mm)

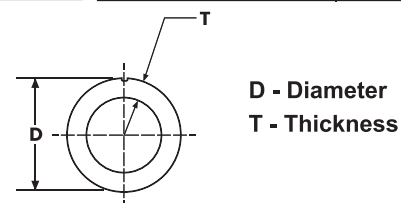Available Colours: ● GREEN ● BLUE ● BLACK ● WHITE ● RED

PPR+FRP - THERMOKING

51	PN10 /SDR11 /S 5		
	CODE	SIZE/DxT	LENGTH/ BUNDLE
	EA005F	50x4.6mm	15
	EA006F	63x5.8mm	10
	EA007F	75x6.8mm	7
	EA008F	90x8.2mm	5
	EA009F	110x10.0mm	3
	*EA010F	125x11.40mm	2
	*EA011F	160x14.60mm	1
	*EA012F	200x18.20mm	1
	*EA013F	250x22.70mm	1
	*EA014F	315x28.60mm	1

52	PN16 /SDR7.4 /S3.2		
	CODE	SIZE/DxT	LENGTH/ BUNDLE
	EA201F	20x2.8mm	75
	EA202F	25x3.5mm	50
	EA203F	32x4.4mm	30
	EA204F	40x5.5mm	20
	EA205F	50x6.9mm	15
	EA206F	63x8.6mm	10
	EA207F	75x10.3mm	7
	EA208F	90x12.3mm	5
	EA209F	110x15.1mm	3
	*EA210F	125x16.9mm	2
	*EA211F	160x21.9mm	1

53	PN20 /SDR 6 /S2.5		
	CODE	SIZE/DxT	LENGTH/ BUNDLE
	EA301F	20x3.4mm	75
	EA302F	25x4.2mm	50
	EA303F	32x5.4mm	30
	EA304F	40x6.7mm	20
	EA305F	50x8.3mm	15
	EA306F	63x10.5mm	10
	EA307F	75x12.5mm	7
	EA308F	90x15.0mm	5
	EA309F	110x18.3mm	3
	*EA310F	125x20.8mm	2
	*EA311F	160x26.6mm	1

54	PN25 /SDR 5 /S 2 ★		
	CODE	SIZE/DxT	LENGTH/ BUNDLE
	EA404F	40x8.0mm	20
	EA405F	50x10.0mm	15
	EA406F	63x12.6mm	10

55	PN06 /SDR17.5 /S8.25 ★		
	CODE	SIZE/DxT	LENGTH/ BUNDLE
	EA612F	200x11.4mm	1
	EA613F	250x14.2mm	1
	EA613F	315x18mm	1

56	PN04 /SDR26 /S12.5 ★		
	CODE	SIZE/DxT	LENGTH/ BUNDLE
	EA612F	200x7.7mm	1
	EA613F	250x8.6mm	1
	EA614F	315x12.1mm	1

★ Special request only

Specification: size(mm) X wall thickness(mm)

Available Colours: ● GREEN ● BLUE ● BLACK ● WHITE ● RED

PLUMTEK PE-RT Pipe can be supplied in both coil form & Length of Standard 3 Mtr (any Length)

1	PE-RT PIPE COIL (PN16/SDR7.4/S 3.2)		
	CODE	SIZE	PCS (BUNDLE/ROLL)
	PRTC101	20mm	30 Mtr
	PRTC102	25mm	30 Mtr
	PRTC103	32mm	30 Mtr

*30,50,60 Mtrs Coils Available

2	PE-RT PIPE COIL (PN20/SDR 6/S2.5)		
	CODE	SIZE	PCS (BUNDLE/ROLL)
	PRTC201	20mm	30 Mtr
	PRTC202	25mm	30 Mtr
	PRTC203	32mm	30 Mtr

*30,50,60 Mtrs Coils Available

3	PE-RT PIPE (PN16/SDR7.4/S 3.2)		
	CODE	SIZE	PCS (LENGTH/BUNDLE)
	PRTL101	20mm	50
	PRTL102	25mm	40
	PRTL103	32mm	30

*Standard Length 3 Mtrs

4	PE-RT PIPE (PN20/SDR6/S 2.5)		
	CODE	SIZE	PCS (LENGTH/BUNDLE)
	PRTL201	20mm	75
	PRTL202	25mm	50
	PRTL203	32mm	30

*Standard Length 3 Mtrs

5	SOCKET		
	CODE	SIZE	PCS (CTN/POUCH)
	PBSK001	20mm	100/10
	PBSK002	25mm	80/8
	PBSK003	32mm	60/6

6	ELBOW 90°		
	CODE	SIZE	PCS (CTN/POUCH)
	PBEL001	20mm	60/6
	PBEL002	25mm	50/5
	PBEL003	32mm	40/4

7	ELBOW 45°		
	CODE	SIZE	PCS (CTN/POUCH)
	PBEF001	20mm	60/6
	PBEF002	25mm	50/5
	PBEF003	32mm	40/4

8	MALE THREAD ELBOW		
	CODE	SIZE	PCS (CTN/POUCH)
	PBME001	20x1/2"	60/6
	PBME002	20x1/2"	50/5

9	FEMALE THREAD ELBOW		
	CODE	SIZE	PCS (CTN/POUCH)
	PBFE001	20x1/2"	60/6
	PBFE002	20x1/2"	50/5

10	WALL PLATE MALE THREAD ELBOW		
	CODE	SIZE	PCS (CTN/POUCH)
	PBWM001	20x1/2"	72/6
	PBWM002	25x1/2"	50/5

11	WALL PLATE FEMALE THREAD ELBOW		
	CODE	SIZE	PCS (CTN/POUCH)
	PBWF001	20x1/2"	72/6
	PBWF002	25x1/2"	50/5

12	TEMPLATE - ADJUSTABLE (WALL MIXER ELBOW)		
	CODE	PCS (CTN/POUCH)	
	PWMT001	***	

Scan QR Code for Installation

13	WALL PLATE BRASS FEMALE THREAD ELBOW		
	CODE	SIZE	PCS (CTN/POUCH)
	PRSWF001	20x1/2"	150/10
	PRSWF002	25x1/2"	120/10

14	TEE		
	CODE	SIZE	PCS (CTN/POUCH)
	PBTE001	20mm	80/8
	PBTE002	25mm	70/7
	PBTE003	32mm	30/3

15	TEE MALE THREAD		
	CODE	SIZE	PCS (CTN/POUCH)
	PBTM001	20x1/2"	60/6
	PBTM002	25x1/2"	50/5
	PBTM003	32x1/2"	40/4

16	TEE FEMALE THREAD		
	CODE	SIZE	PCS (CTN/POUCH)
	PBTF001	20x1/2"	60/6
	PBTF002	25x1/2"	50/5
	PBTF003	32x1/2"	40/4

17	MANIFOLD TEE		
	CODE	SIZE	PCS (CTN/POUCH)
	PBTF001	25x20x25mm	20/4
	PBTF002	32x20x32mm	15/3
	PBTF003	32x25x32mm	10/2

18	CONCEALED STOP VALVE		
	CODE	SIZE	PCS (CTN/POUCH)
	PBCSV001	20mm	28/1
	PBCSV002	25mm	28/1

A B C

19	STOP VALVE		
	CODE	SIZE	PCS (CTN/POUCH)
	PBSTV001	20mm	28/1
	PBSTV002	25mm	28/1

20	MALE THREAD ADAPTOR		
	CODE	SIZE	PCS (CTN/POUCH)
	PBAM001	20x1/2"	100/10
	PBAM002	25x3/4"	80/8
	PBAM003	32x1"	60/6

21	FEMALE THREAD ADAPTOR		
	CODE	SIZE	PCS (CTN/POUCH)
	PBAF001	20x1/2"	100/10
	PBAF002	25x3/4"	80/8
	PBAF003	32x1"	60/6

22	BRASS MALE THREAD ADAPTOR		
	CODE	SIZE	PCS (CTN/POUCH)
	PRSAM001	20x1/2"	250/10
	PRSAM002	25x1/2"	200/10
	PRSAM003	25x3/4"	140/10
	PRSAM004	32x1"	80/4

23	BRASS FEMALE THREAD ADAPTOR		
	CODE	SIZE	PCS (CTN/POUCH)
	PRSAF001	20x1/2"	200/10
	PRSAF002	25x1/2"	150/10

24	REDUCER		
	CODE	SIZE	PCS (CTN/POUCH)
	PBRD001	25/20mm	100/10
	PBRD002	32/25mm	60/6
	PBRD003	32/20mm	40/4

25	TANK CONNECTOR		
	CODE	SIZE	PCS (CTN/POUCH)
	PBTC001	32x1"	80/4

26	END CAP		
	CODE	SIZE	PCS (CTN/POUCH)
	PBEC001	20mm	200/10
	PBEC002	25mm	120/8
	PBEC003	32mm	80/4

27	CROSSOVER BEND		
	CODE	SIZE	PCS (CTN/POUCH)
	PBCB001	20mm	160/8
	PBCB002	25mm	100/5
	PBCB003	32mm	60/4

Prices are Per Metre for Pipe and Per Piece for Fittings



WALL CLAMP		
CODE	SIZE	PCS (CTN/POUCH)
PTWC001	20mm	500/50
PTWC002	25mm	400/40
PTWC003	32mm	300/30



LONG PIPE PLUG		
CODE	SIZE	PCS (CTN/POUCH)
P RTP001	1/2"	200/20



PIPE PLUG		
CODE	SIZE	PCS (CTN/POUCH)
P RTP101	1/2"	300/50



ENTRY SLEEVE		
CODE	SIZE	PCS (CTN/POUCH)
P BES001	20mm	500/50
P BES002	25mm	400/40
P BES003	32mm	300/30



SPACER WASHER		
CODE	SIZE	PCS (CTN/POUCH)
P B TS001	20mm	25
P B TS002	25mm	25
P B TS003	32mm	25




O-RING		
CODE	SIZE	PCS (CTN/POUCH)
P D MO001	20mm	25
P D MO002	25mm	25
P D MO003	32mm	25



GRAB RING		
CODE	SIZE	PCS (CTN/POUCH)
P SS G001	20mm	25
P SS G002	25mm	25
P SS G003	32mm	25



PIPE EDGE TRIMMER		
CODE	SIZE	PCS (CTN/POUCH)
P AL001	20-40mm	200/20



PIPE CUTTER (Imported)		
CODE	SIZE	PCS (CTN/POUCH)
EM006	20-40mm	1/ 12
EM007	20-63mm	1/ 12

PE-RT PIPE SERIES



PN10 / SDR11 / S5		
CODE	SIZE	PCS Length/Bundle
P RTL001	20x2.0mm	75
P RTL002	25x2.3mm	50
P RTL003	32x2.9mm	30
P RTL004	40x3.7mm	20
P RTL005	50x4.6mm	15
P RTL006	63x5.8mm	10
P RTL007	75x6.8mm	7
P RTL008	90x8.2mm	5
P RTL009	110x10.0mm	3
P RTL010	125x11.40mm	2
P RTL011	160x14.60mm	1



PN16 / SDR7.4 / S 3.2		
CODE	SIZE	PCS Length/Bundle
P RTL101	20x2.8mm	75
P RTL102	25x3.5mm	50
P RTL103	32x4.4mm	30
P RTL104	40x5.5mm	20
P RTL105	50x6.9mm	15
P RTL106	63x8.6mm	10
P RTL107	75x10.3mm	7
P RTL108	90x12.3mm	5
P RTL109	110x15.1mm	3
P RTL110	125x16.90mm	2
P RTL111	160x21.9mm	1



PN20 / SDR6 / S 2.5		
CODE	SIZE	PCS Length/Bundle
P RTL201	20x3.4mm	75
P RTL202	25x4.2mm	50
P RTL203	32x5.4mm	30
P RTL204	40x6.7mm	20
P RTL205	50x8.3mm	15
P RTL206	63x10.5mm	10
P RTL207	75x12.5mm	7
P RTL208	90x15.0mm	5
P RTL209	110x18.3mm	3
P RTL210	125x20.8mm	2
P RTL211	160x26.6mm	1

PLUMTEK PE-RT Socket Fusion Fittings

PERT Pipes can be joined by Socket Fusion / Welding method by using PE-RT Socket Fusion Fittings Only and welding temperature, dies are similar to PPR.

* PPR and PE-RT Cannot be Weld/Joined



COUPLER		
CODE	SIZE	PCS (CTN/POUCH)
P CR001S	20mm	1600
P CR002S	25mm	1020
P CR003S	32mm	600
P CR004S	40mm	360
P CR005S	50mm	200
P CR006S	63mm	100
P CR007S	75mm	64
P CR008S	90mm	48
P CR009S	110mm	25
P CR010S	125mm	20
P CR011S	160mm	14



EQUAL TEE		
CODE	SIZE	PCS (CTN/POUCH)
P TE001S	20mm	840
P TE002S	25mm	480
P TE003S	32mm	240
P TE004S	40mm	120
P TE005S	50mm	80
P TE006S	63mm	48
P TE007S	75mm	24
P TE008S	90mm	18
P TE009S	110mm	10
P TE010S	125mm	6
P TE011S	160mm	5



ELBOW 90°		
CODE	SIZE	PCS (CTN/POUCH)
P EN001S	20mm	1020
P EN002S	25mm	660
P EN003S	32mm	300
P EN004S	40mm	150
P EN005S	50mm	100
P EN006S	63mm	60
P EN007S	75mm	30
P EN008S	90mm	20
P EN009S	110mm	12
P EN010S	125mm	10
P EN011S	160mm	6



ELBOW 45°		
CODE	SIZE	PCS (CTN/POUCH)
P EF001S	20mm	1500
P EF002S	25mm	770
P EF003S	32mm	400
P EF004S	40mm	300
P EF005S	50mm	150
P EF006S	63mm	72
P EF007S	75mm	40
P EF008S	90mm	24
P EF009S	110mm	16
P EF010S	125mm	10
P EF011S	160mm	8



END CAP		
CODE	SIZE	PCS (CTN/POUCH)
P EC001S	20mm	2700
P EC002S	25mm	1500
P EC003S	32mm	800
P EC004S	40mm	525
P EC005S	50mm	270
P EC006S	63mm	150
P EC007S	75mm	100
P EC008S	90mm	60
P EC009S	110mm	35
P EC010S	125mm	25
P EC011S	160mm	20



REDUCER ELBOW		
CODE	SIZE	PCS (CTN/POUCH)
P RE001S	25/20mm	900
P RE002S	32/20mm	500
P RE003S	32/25mm	480
P RE004S	40/32mm	200
P RE005S	40/25mm	200
P RE006S	40/20mm	195
P RE007S	50/40mm	120
P RE008S	50/32mm	120
P RE009S	50/25mm	120

Prices are Per Metre for Pipe and Per Piece for Fittings

207




MALE THREAD COUPLER		
CODE	SIZE	PCS (CTN/POUCH)
PCM001S	20x1/2"	300
PCM002S	20x3/4"	200
PCM003S	25x1/2"	300
PCM004S	25x3/4"	200
PCM005S	32x1/2"	210
PCM006S	32x3/4"	210
PCM007S	32x1"	150
PCM007SA	40x1"	60
PCM008S	40x1-1/4"	60
PCM009S	50x1-1/2"	50
PCM010S	63x2"	40
PCM011S	75x2-1/2"	24
PCM012S	90x3"	12
PCM013S	110x4"	6

210



FEMALE THREAD ELBOW		
CODE	SIZE	PCS (CTN/POUCH)
PET001S	20x1/2"	300
PET002S	25x1/2"	240
PET003S	25x3/4"	180
PET004S	32x1/2"	150
PET005S	32x3/4"	120
PET006S	32x1"	100
PET007S	40x1-1/4"	50
PET008S	50x1-1/2"	50

215



FEMALE THREAD TEE		
CODE	SIZE	PCS (CTN/POUCH)
PTF001S	20x1/2"	300
PTF002S	25x1/2"	200
PTF003S	25x3/4"	160
PTF004S	32x1/2"	120
PTF005S	32x3/4"	120
PTF006S	32x1"	80
PTF007S	40x1-1/4"	40

218



METAL UNION		
CODE	SIZE	PCS (CTN/POUCH)
PUN001S	20mm	180
PUN002S	25mm	150
PUN003S	32mm	90
PUN004S	40mm	80
PUN005S	50mm	48
PUN006S	63mm	25

220



FLANGE		
CODE	SIZE	PCS (CTN/POUCH)
PFL001S	32mm	104
PFL002S	40mm	75
PFL003S	50mm	60
PFL004S	63mm	60
PFL005S	75mm	46
PFL006S	90mm	40
PFL007S	110mm	36
PFL008S	125mm	20
PFL009S	160mm	15

221



FLANGE CORE		
CODE	SIZE	PCS (CTN/POUCH)
PFC001S	32mm	570
PFC002S	40mm	360
PFC003S	50mm	300
PFC004S	63mm	200
PFC005S	75mm	120
PFC006S	90mm	84
PFC007S	110mm	60
PFC008S	125mm	25
PFC009S	160mm	22

208



FEMALE THREAD COUPLER		
CODE	SIZE	PCS (CTN/POUCH)
PCF001S	20x1/2"	300
PCF002S	20x3/4"	240
PCF003S	25x1/2"	240
PCF004S	25x3/4"	240
PCF005S	32x1/2"	240
PCF006S	32x3/4"	200
PCF007S	32x1"	150
PCF007SA	40x1"	80
PCF008S	40x1-1/4"	80
PCF009S	50x1-1/2"	50
PCF010S	63x2"	40
PCF011S	75x2-1/2"	24
PCF012S	90x3"	14
PCF013S	110x4"	6

211



WALL PLATE MALE THREAD ELBOW		
CODE	SIZE	PCS (CTN/POUCH)
PWM001S	20x1/2"	240
PWM002S	25x1/2"	240

212



WALL PLATE FEMALE THREAD ELBOW		
CODE	SIZE	PCS (CTN/POUCH)
PWF001S	20x1/2"	240
PWF002S	25x1/2"	240

216



MALE THREAD UNION		
CODE	SIZE	PCS (CTN/POUCH)
PUM001S	20mm	180
PUM002S	25mm	150
PUM003S	32mm	90
PUM004S	40mm	80
PUM005S	50mm	48
PUM006S	63mm	24

219



PLASTIC UNION		
CODE	SIZE	PCS (CTN/POUCH)
PUP001S	20mm	600
PUP002S	25mm	300
PUP003S	32mm	250
PUP004S	40mm	144
PUP005S	50mm	70
PUP006S	63mm	40

222



REDUCER		
CODE	SIZE	PCS (CTN/POUCH)
PRR001S	25/20mm	1200
PRR002S	32/20mm	720
PRR003S	32/25mm	660
PRR004S	40/20mm	600
PRR005S	40/25mm	560
PRR006S	40/32mm	360
PRR007S	50/20mm	324
PRR008S	50/25mm	324
PRR009S	50/32mm	324
PRR010S	50/40mm	192
PRR011S	63/32mm	160
PRR012S	63/40mm	112
PRR013S	63/50mm	112
PRR014S	75/40mm	90
PRR015S	75/50mm	60
PRR016S	75/63mm	64
PRR017S	90/50mm	54
PRR018S	90/63mm	45
PRR019S	90/75mm	42
PRR020S	110/63mm	40
PRR021S	110/75mm	40
PRR022S	110/90mm	30
PRR023S	125/110mm	30
PRR024S	160/90mm	20
PRR025S	160/110mm	20
PRR026S	160/125mm	20

209



MALE THREAD ELBOW		
CODE	SIZE	PCS (CTN/POUCH)
PEM001S	20x1/2"	300
PEM002S	25x1/2"	240
PEM003S	25x3/4"	210
PEM004S	32x1/2"	120
PEM005S	32x3/4"	120
PEM006S	32x1"	100

213



TEMPLATE - ADJUSTABLE (WALL MIXER ELBOW)	
CODE	PCS (CTN/POUCH)
PTE001	***


Scan QR Code for Installation

214




MALE THREAD TEE		
CODE	SIZE	PCS (CTN/POUCH)
PTM001S	20x1/2"	240
PTM002S	25x1/2"	160
PTM003S	25x3/4"	120
PTM004S	32x1/2"	150
PTM005S	32x3/4"	150
PTM006S	32x1"	70

217



FEMALE THREAD UNION		
CODE	SIZE	PCS (CTN/POUCH)
PUF001S	20mm	180
PUF002S	25mm	150
PUF003S	32mm	90
PUF004S	40mm	80
PUF005S	50mm	48
PUF006S	63mm	24

223



REDUCER TEE		
CODE	SIZE	PCS (CTN/POUCH)
PTR001S	25/20/25mm	550
PTR002S	32/20/32mm	270
PTR003S	32/25/32mm	250
PTR004S	40/20/40mm	200
PTR005S	40/25/40mm	150
PTR006S	40/32/40mm	128
PTR007S	50/20/50mm	120
PTR008S	50/25/50mm	102
PTR009S	50/32/50mm	84
PTR010S	50/40/50mm	80
PTR011S	63/25/63mm	72
PTR012S	63/32/63mm	72
PTR013S	63/40/63mm	63
PTR014S	63/50/63mm	48
PTR015S	75/25/75mm	36
PTR016S	75/32/75mm	36
PTR017S	75/40/75mm	36
PTR018S	75/50/75mm	30
PTR019S	75/63/75mm	30
PTR020S	90/32/90mm	24
PTR021S	90/40/90mm	24
PTR022S	90/50/90mm	24
PTR023S	90/63/90mm	16
PTR024S	90/75/90mm	16
PTR025S	110/32/110mm	14
PTR026S	110/40/110mm	14
PTR027S	110/50/110mm	14
PTR028S	110/63/110mm	12
PTR029S	110/75/110mm	12
PTR030S	110/90/110mm	12
PTR031S	125/63/125mm	12
PTR032S	125/75/125mm	12
PTR033S	125/90/125mm	12
PTR034S	125/110/125mm	12
PTR035S	160/63/160mm	6
PTR036S	160/75/160mm	6
PTR037S	160/90/160mm	6
PTR038S	160/110/160mm	6
PTR039S	160/125/160mm	4

Prices are Per Metre for Pipe and Per Piece for Fittings

224



FOUR WAY TEE/CROSS

CODE	SIZE	PCS (CTN/POUCH)
PFT001S	20mm	550
PFT002S	25mm	360
PFT003S	32mm	180
PFT004S	40mm	90

227



STOP VALVE

CODE	SIZE	PCS (CTN/POUCH)
PSV001S	20mm	120
PSV002S	25mm	80
PSV003S	32mm	60
PSV004S	40mm	42
PSV005S	50mm	50
PSV006S	63mm	20

228



CONCEALED STOP VALVE

CODE	SIZE	PCS (CTN/POUCH)
PCS001S	20mm	28
PCS002S	25mm	28
PCS003S	32mm	28



A



B



C

229



CLAMP

CODE	SIZE	PCS (CTN/POUCH)
PCL001S	20mm	2500
PCL002S	25mm	1960
PCL003S	32mm	1500
PCL004S	40mm	1000
PCL005S	50mm	700
PCL006S	63mm	500

225



WELD SADDLE (PLAIN)

CODE	SIZE	PCS (CTN/POUCH)
PWP001S	40x20 mm	520
PWP002S	50x20 mm	520
PWP003S	63x32 mm	500
PWP004S	63x25 mm	500
PWP005S	75x32 mm	500
PWP006S	75x25 mm	500
PWP007S	90x32 mm	500
PWP008S	90x25 mm	500
PWP009S	110x32 mm	500
PWP010S	110x25 mm	500
PWP010SA	125x25 mm	500
PWP011S	125x32 mm	500
PWP012S	125x40mm	500
PWP012SA	125x50mm	300
PWP012SB	125x63mm	250
PWP012SC	125x75mm	200
PWP013S	160x25mm	500
PWP014S	160x32mm	500
PWP015S	160x40mm	500
PWP016S	160x50mm	300
PWP017S	160x63mm	250
PWP018S	160x75mm	200

230



BYE - PASS BEND

CODE	SIZE	PCS (CTN/POUCH)
PBB001S	20mm	300
PBB002S	25mm	180
PBB003S	32mm	80


233



PIPE PLUG

CODE	SIZE	PCS (CTN/POUCH)
PPP001S	1/2"	3000
PPP002S	3/4"	2000
PPP003S	1"	1000

226



WELD SADDLE (FEMALE THREAD)

CODE	SIZE	PCS (CTN/POUCH)
PWF001S	40x1/2"	320
PWF002S	50x1/2"	320
PWF003S	63x1/2"	250
PWF004S	63x3/4"	250
PWF005S	75x1/2"	250
PWF006S	75x3/4"	250
PWF007S	90x1/2"	250
PWF008S	90x3/4"	250
PWF009S	110x1/2"	250
PWF010S	110x3/4"	250
PWF011S	125x1/2"	250
PWF012S	125x3/4"	250
PWF013S	160x1/2"	250
PWF014S	160x3/4"	250

231



CROSS OVER BEND

CODE	SIZE	PCS (CTN/POUCH)
PCB001S	20mm	300
PCB002S	25mm	180
PCB003S	32mm	80

232



LONG PIPE PLUG


CODE	SIZE	PCS (CTN/POUCH)
PLP001S	1/2"	900
PLP002S	3/4"	600

234



TANK NIPPLE

CODE	SIZE	PCS (CTN/POUCH)
PTN001SA	25mm/3/4"	400
PTN001S	32mm/1"	300
PTN002S	40mm/1-1/4"	300
PTN003S	50mm/1 -1/2"	200
PTN004S	63mm/2"	100

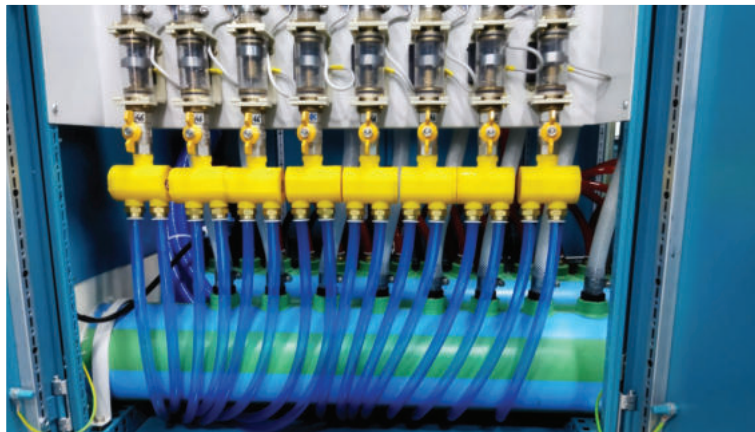

Material (Normal used for Hot water)	EUROAQUA PP-R PLUMBING TECHNOLOGY	Iron	Steel	Copper	Aluminium
Thermal Conductivity at 20°C in W/mk	0.1 to 0.24	45 to 60	45 to 60	300 to 400	200 to 250

Types of PPR & PPR-CT Pipes

1. PPR Mono Layer

2. PPR Double Layer with strong black outer UV Stabilized

3. PPR-3L Advance Pro

Outer UV Treated PPR, Middle PPR & Inner Anti Microbial PPR Layer

4. Thermoking Pipe series

a) PPR FRP PPR Three layer with glass fiber reinforcement middle layer

b) PPR | FRP | PPR-FR Middle layer with glass fiber reinforcement and outer layer with fire retardant material

5. Fire Safe


PPR - FR Red in colour can be used for fire safety piping

6. PPR - Pipes Colours

All these pipes are available in

EUROAQUA - Green colour

AIRGUARD - Blue colour and also in all PPR-CT ranges

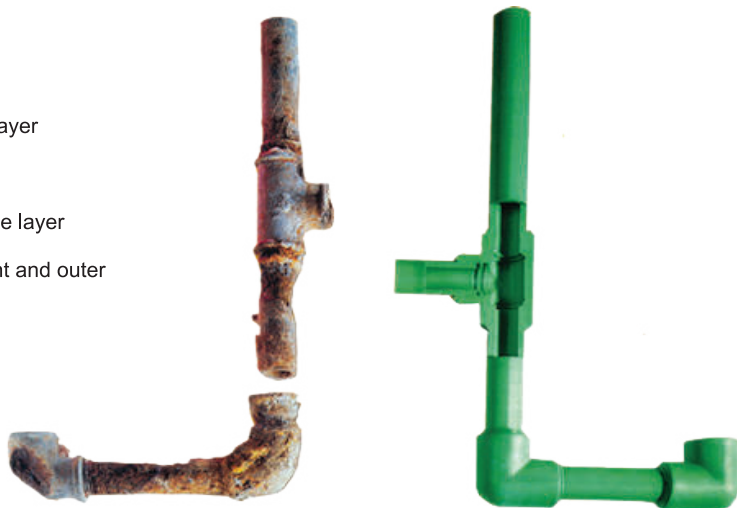

Fields of Applications

- ◆ Industrial systems like conveying compressed air pressure, aggressive fluids like acid and alkaline solutions, effluent, sewage disposal and leak proof joints
- ◆ Water purifying / Pharmaceutical plants for clean water
- ◆ Chilled water circuit for refrigeration units and chillers
- ◆ Lines for conveying liquid food products - Food Grade
- ◆ Hot and Cold Water Supplying pipes (-10°C to +99°C)
- ◆ Potable water pipe networks for cold and hot water installations i.e., in residential buildings, hospitals, hotels, office and school buildings etc
- ◆ Radiator heating pipes, Room heating system, under floor heating pipes
- ◆ Pipe networks for rainwater utilization systems
- ◆ Pipe for Agriculture use & Horticulture use



Ø40mm to Ø315mm

PPR - Weld-in Saddle

EUROAQUA / AIRGUARD PPR Weld in Saddle is the innovative and easy method for industrial installations. This will decrease our expenses and gives better look to the installation as well. This is to avoid use of many Reducers / Tees and cost saving also give better appearance to the installation. The pipe sizes available with us are between 40mm to 315mm. We are the first company in India, Introduced this technology in year 2011.

Drill with Proper Diameter and Make Correct ID Hole



Fuse weld-in saddle with Pipe permanently



Heat up the Weld-in Saddle and ID of the pipe with proper Dies



Weld-in Saddles available from 40mm to 315mm sizes




Advantages of Weld - in Saddle

- ◆ Easy & Good Installation
- ◆ Cost & time Savings
- ◆ Good line appearance

Uses of Weld - in Saddle

- ◆ Substitution for reducing tees
- ◆ Making branches in main line and risers
- ◆ Sensor fixers like temperature and pressure gauge etc

Insulation for Chilling Water




Metal Pipe



PPR-C Pipes
(Less Insulation Thickness)

Thermoking PPR-FR Composite Pipes

EUROAQUA / AIRGUARD THERMOKING PPR - FRP Composite Pipes are specially designed for various industrial needs. It is basically with innovative composite technology of plastic with extremely low thermal coefficient fibre reinforcement. It will control the linear thermal expansion to about 70% so that PPR pipe line sagging is controlled.

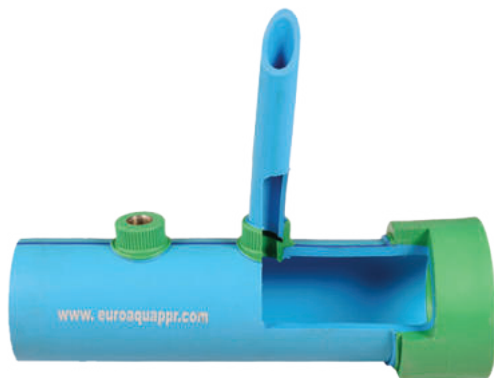

Advantages

- ◆ Low thermal conductivity. It requires very thin insulation or no insulation when using chilled water & hot water/chemical applications.
- ◆ High resistance to corrosion, acids & chlorides.
- ◆ Very good chemical resistance
- ◆ High heat stability
- ◆ High impact strength
- ◆ High Environmental Stress Cracking Ratio (ESCR)
- ◆ Very good welding property which ensure leak proof joints, energy savings
- ◆ Smooth inner surface, less friction, no noise
- ◆ Thermal expansion is controlled by 70%, line sagging is controlled
- ◆ Hygienic and Non-Toxic Food Grade

Applications

- ◆ Compressed air lines for Hot and Cold air
- ◆ Chilled water application & air conditioning
- ◆ Transportation of chemicals & aggressive fluids
- ◆ Effluent treatment plants (ETP)
- ◆ Ship buildings and swimming pools
- ◆ Pharmaceuticals, food grade applications
- ◆ Solar heaters, under floor heating
- ◆ Vacuum Pipelines
- ◆ R.O. Water Pipeline.




Support Intervals

Pipe Diameter (m/m)													
	20	25	32	40	50	63	75	90	110	160	200	250	315
Temp°C	Support Intervals (cm)												
0	120	140	160	180	205	230	245	260	290	340	370	400	440
20	90	105	120	135	155	175	185	195	215	270	300	340	375
30	90	105	120	135	155	175	185	195	210	255	285	310	340
40	85	95	110	125	145	165	175	185	200	245	280	300	320
50	85	95	110	125	145	165	175	185	190	205	240	270	300
60	80	90	105	120	135	155	165	175	180	195	220	250	280
70	70	80	95	110	130	145	155	165	170	185	210	240	270

Linear Expansion

The following schemes demonstrate some important cases:

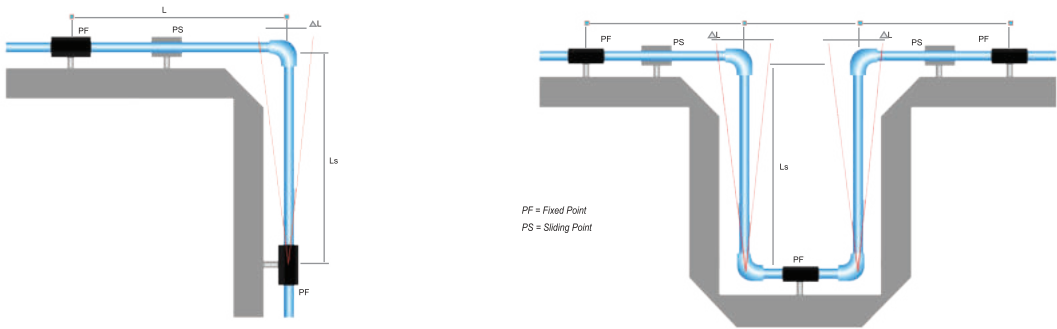

Linear expansion depends on the temperature variation the pipes are exposed to. Cold water pipes have low linear expansion and hence can be neglected. But in case of hot water and heating installations, the linear expansion must be considered and the installations must be planned and performed accordingly.

Calculation of Linear Expansion

Calculation Example : Linear Expansion

Symbol	Meaning	Value	Measuring unit
Δ	Linear Expansion	?	mm
α_1	Coefficient of Linear expansion Euroaqua PPR stable composite pipe	0.03	mm/mk
α_2	Coefficient of Linear expansion Euroaquappr Faster composite pipe	0.035	mm/mk
α_2	Linear expansion coefficient	0.15	mm/mk
L	Pipe length	25	m
T_w	Working temperature	60	°C
T_M	Installation temperature	20	°C
ΔT	Temperature Difference between working and installation temperature ($\Delta T = T_w - T_M$)	40	K


The Linear expansion Δl is calculated according to the following formula: $\Delta l = \alpha \times L \times \Delta T$

Material : EUROAQUA® - PPR - FRP Composite Pipe ($\alpha = 0.03\text{mm/mk}$)

$\Delta l = 0.03 \text{ mm/mk} \times 25.0 \text{ m} \times 40\text{k}$

$\Delta l = 30.0\text{mm}$

Length expansion comparison : Faster Composite - to Standard PPR-Pipe

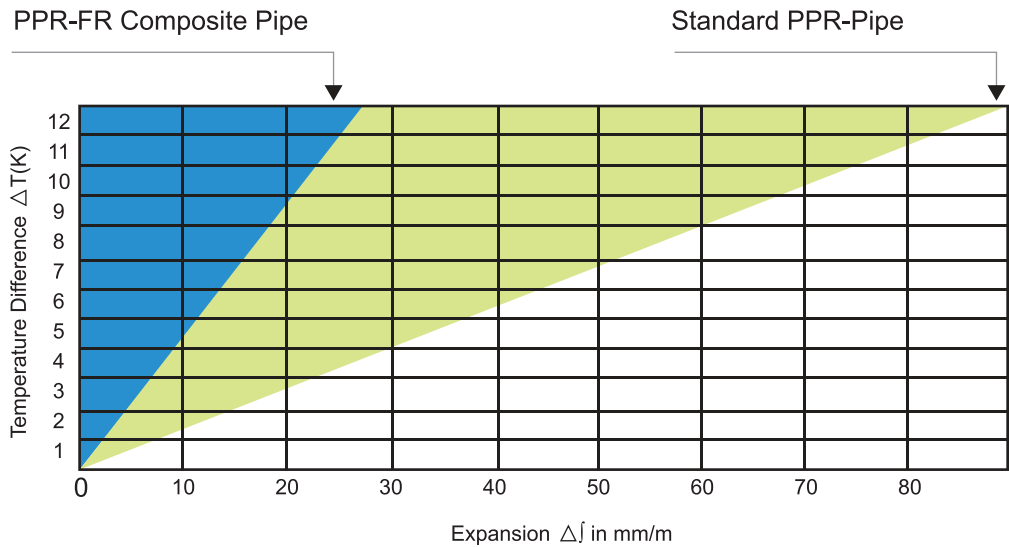

Permissible Working Pressure

Temp °c	Service Life	EUROAQUA & AIRGUARD			EUROAQUA & AIRGUARD	
		PPR	PPR	PPR	THERMOKING	
		SDR 11	SDR 7.4	SDR 6	PPR-FR SDR-11	PPR-FR SDR-7.4
		PN 10	PN 16	PN 20		
0°C	1	35	37.2	47	27.8	43.2
	5	22.3	35.5	45.5	26.2	40.7
	10	21.3	34.2	43.6	26.6	39.7
	25	20.0	33.7	42.5	24.7	38.3
	50	19.6	32.2	41.8	24.1	37.4
	100	19.6	31.3	40.4	23.5	36.4
10°C	1	21.1	33.4	42.0	25.7	39.5
	5	20.0	31.6	39.8	24.2	37.5
	10	19.3	30.6	38.5	23.6	36.6
	25	18.7	29.6	37.3	22.8	35.3
	50	18.2	28.8	36.3	22.2	34.4
	100	17.7	28.1	35.4	21.6	33.5
20°C	1	18.0	28.6	36.0	23.8	36.8
	5	16.9	26.8	33.8	22.3	34.6
	10	16.4	26.1	32.8	21.7	33.7
	25	16.0	25.3	31.8	21	32.5
	50	15.5	24.5	30.9	20.4	31.7
	100	15.0	23.8	29.9	19.9	30.9
30°C	1	15.3	24.3	30.6	20.2	31.3
	5	14.4	22.8	28.7	18.9	29.4
	10	13.9	22.0	27.7	18.4	28.6
	25	13.3	21.3	26.8	17.8	27.5
	50	13.1	20.7	25.1	17.3	26.8
	100	12.8	20.2	25.5	16.8	26
40°C	1	12.9	20.5	25.8	17.1	26.6
	5	12.1	19.2	24.2	16	24.9
	10	11.8	18.7	23.6	15.6	24.1
	25	11.3	18.0	22.6	15	23.2
	50	11.0	17.5	22.0	14.8	22.6
	100	10.7	16.2	21.3	14.1	21.9
50°C	1	11.0	17.5	22.0	14.5	22.5
	5	10.2	16.2	20.4	13.5	21
	10	9.9	15.7	19.7	13.1	20.4
	25	9.6	15.2	19.1	12.6	19.6
	50	9.3	14.7	18.5	12.2	19
	100	8.9	14.2	17.8	11.9	18.4
60°C	1	9.3	14.7	18.5	12.2	a
	5	8.0	13.7	17.2	11.4	17.7
	10	8.3	13.2	16.6	11	17.1
	25	8.0	12.6	15.9	10.6	16.4
	50	7.7	12.1	15.3	10.3	15.9
70°C	1	7.8	12.4	15.6	10.3	16
	5	7.2	11.4	14.3	9.6	14.8
	10	7.0	11.1	14.0	9.2	14.3
	25	6.1	9.6	12.1	8	12.5
	50	5.1	8.1	10.2	9.2	10.5
80°C	1	6.5	10.4	13.1	8.6	13.4
	5	5.7	9.1	11.5	7.7	11.9
	10	4.8	7.6	9.6	6.5	10
	25	3.8	6.1	7.6	5.2	8
90°C	1	5.4	9.3	10.8	7.2	11.2
	5	4.9	8.0	10	5.1	7.8
	10	6.5	6.5	8.5	4.3	6.6
95°C	1	4.0	7.3	9.2	5.2	9.5
	5	3.0	4.8	6.1	4.5	6.6
	10	2.6	4.0	5.1	3.9	5.8

SDR = Standard Diameter Ratio = $\frac{\text{Outside Dia (OD)}}{\text{Wall Thickness}}$

PN = Normal Pressure

$$S = \frac{\text{SDR} - 1}{2} \quad (S = \text{Pipe Index as per ISO:4065})$$



Standard for Pipe Fittings

STANDARDS	FIELDS
DIN 1998	Drinking water line installation.
DIN 2999	Whitworth pipe threads for tubes and fittings.
DIN 4109	Sound insulation in building constructions.
DIN 8077	Polypropylene (pp) pipes dimensions.
DIN 8078	Polypropylene (pp) pipes general quality requirements and testing.
DIN 16962	Polypropylene (pp) pipes Fittings.
DIN 16928	Pipe connections and components - pipes of thermoplastic materials, pipe joints, element for pipe, laying, general directions.
DIN 16928 (6-9)	Pipe joints and elements for polypropylene (pp) pressure pipelines, types 1 and 2; injection molded elbows for socket - welding, dimension.
DIN 16925.5	Pipe joints and elements for polypropylene (pp) for pipes under, - part 5; General quality
DIN 2207.11	Welding regulations for plastic pipes.
DIN 2203	Test of thermoplastic pipe fitting for weld.
DIN 2208.1	Machines and devices for welding thermoplastic pipes.
EN ISO 15874 (1-7)	Plastic piping systems for hot and cold water installations polypropylene (pp).
IS 15801 : 2008/BIS	BUREAU OF INDIAN STANDARDS - ISI

Testing & Quality Control



PPR vs Other Products

PROPERTIES	PP-R / PE-RT	GI	COPPER	PE	CPVC	ALUMINIUM
Service Life (Years)	50 Years Plus	2-5 Years	10-25 Years	20-30 Years	20-30 Years	20-30 Years
Temperature Resistance	Very Good	Excellent	Excellent	Good	Good	Poor
Food Grade	Excellent, Hygienic	Non-Hygienic	Non-Hygienic	Good	Non-Hygienic	Non-Hygienic
Heat Loss	Negligible - Very	Very High	Very High	Moderate	Moderate	High
Chemical Resistance	Excellent	Very Weak	Weak	Good	Good	Weak
Maximum Safe Working Temp°c	100	High	High	80	80	High
Easiness in Repair / Maintenance	Easy/Nil	Huge Cost	Huge Cost	Expensive	Expensive	Very Expensive
Corrosion / Abrasion Resistance	Excellent	Very Low	Very Low	Good	Moderate	Good
Friction Factor	Very Low	High	High	Low	Low	Moderate
Reliability	Very Good	Poor	Ok/Expensive	Average	Average	Moderate
Joint Reliability/Leak Proof (Maximum:100, Minimum: 0)	100	0-50	0-50	0-80	0-80	0-50
Joining Method	Simple Heat Fusion	Conventional	Conventional	Butt Fusion	Special Solvent Chemical	O-Ring
Joining Skill	Very Simple & even unskilled labour can do this job easily	Need Skilled Labour	Need Skilled Labour	Need Skilled Labour	Need Special Attention & Skilled Labour	Need Special Attention & Skilled Labour
Joining Time	Few Seconds	Few Hrs	Few Hrs	Few Minutes	Few Minutes	Few Minutes
Joining Life Commissioning	Immediate	24 Hours	24 Hours	Few Hours	24 Hours	Immediate
Easiness in Fittings	Very Easy	Difficult	Difficult	Easy	Easy	Ok
Laying (Easiest = 100 & Hardest=0)	100	0-50	0-50	0-80	0-80	0-50
Electrical Conductivity	Nil	More	More	Nil	Nil	More

* PE-RT Very Good UV Stability

Indoor Hot & Cold Water Plumbing Pipe & Fittings Pipe Selection Chart

The Table lists the permissible working pressure for pipes with different pressure class under specific temperature and work life. Under normal work pressure and condition, the life of EUROAQUA PPR - Pipe system can reach 50 years at least.

Temp°C	PN10 / SDR 11		PN16 / SDR 7.4		PN20 / SDR 6		PN25 / SDR 5	
	Mpa	Kg/cm ²	Mpa	Kg/cm ²	Mpa	Kg/cm ²	Mpa	Kg/cm ²
10	1.91	19.10	3.02	30.20	3.80	38.00	4.78	47.80
20	1.63	16.30	2.58	25.80	3.24	32.00	4.09	40.90
30	1.37	13.70	2.17	21.70	2.73	27.30	3.44	34.40
40	1.15	11.50	1.84	18.40	2.30	23.00	2.90	29.00
50	0.98	9.80	1.55	15.50	1.95	19.50	2.46	24.60
60	0.82	8.20	1.28	12.80	1.62	16.20	2.04	20.40
70	0.62	6.20	0.98	9.80	1.23	12.30	1.55	15.50
80	0.39	3.90	0.65	6.50	0.77	7.70	0.98	9.80
95	0.27	2.70	0.41	4.10	0.52	5.20	0.65	6.50

WATER CONTENT & WEIGHT / MTR DETAIL

PPR	PN10 / SDR 11 / S5		PN16 / SDR 7.4 / S3.2		PN20 / SDR 6 / S2.5	
DIMENSION	Lit/m	Kg/mtr	Lit/m	Kg/mtr	Lit/m	Kg/mtr
20mm	0.21	0.107	0.16	0.148	0.14	0.172
25mm	0.32	0.164	0.25	0.23	0.22	0.266
32mm	0.53	0.261	0.43	0.37	0.35	0.434
40mm	0.83	0.412	0.65	0.575	0.56	0.671
50mm	1.31	0.638	1.03	0.896	0.87	1.04
63mm	2.08	1.01	1.65	1.41	1.38	1.65
75mm	2.96	1.41	2.33	2.01	1.96	2.36
90mm	4.24	2.03	3.35	2.87	2.83	3.36
110mm	6.33	3.01	5.11	4.3	4.23	5.01
125mm	10.1	3.9	9.1	5.53	8.3	6.47
160mm	13.45	6.38	10.61	9	13.3	10.6
200mm	16.3	9.95	14.5	14.1	-	-
250mm	20.3	15.5	18.1	22.1	-	-
315mm	25.7	24.6	-	-	-	-

FUSION WELDING DATA

Dimension mm	Welding Depth mm	Heating Time Sec	Welding Time Sec	Cooling Time Min
20	14	5	4	3
25	15	7	4	3
32	17	9	6	5
40	18	13	6	5
50	20	19	6	5
63	25	26	9	7
75	27	32	9	8
90	30	42	9	9
110	34	54	10	9
160	42	65	12	14
200	Butt Fusion			
250	Butt Fusion			
315	Butt Fusion			

THERMAL CONDUCTIVITY

Material	(W/m k)
PPR/PE-RT	0.24
HDPE	0.5
Concrete	1.5
Steel / Gi	50
Copper	390
Aluminum	220

ENERGY / HEAT LOSS %

Material	(W/m k)
PPR/PE-RT	1
HDPE	2.1
Concrete	6.3
Steel / Gi	200
Copper	1600
Aluminum	900