

Activities Brave Web Browser Tue Aug 1 20:04:50 32 %

Sunbeam JPG to PDF - Convert your ima (2) WhatsApp +

Not secure | students.sunbeamapps.org/quiz-app/app-quiz-summary?id=64c8c3c19a0e0d3bbbb465f2

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Summary

Summary of your recent exam

Result: **Pass**

Marks: **26/38**

Percentage: **68.42 %**

Questions: **38**

Correct Answers: **26**

Attempted: **38**

1. Which Angular directive is used to binds the value of HTML controls (input, select, textarea) to application data?

Answers

1. ng-cloak
2. ng-model
3. ng-bind
4. ng-blur

2. What will be the output of the below code in the console?

File: any_module.js

```
exports.name = 'Rabbit';
```

Code:



Activities Brave Web Browser Tue Aug 1 20:04:58 32 %

Sunbeam JPG to PDF - Convert your ima | (2) WhatsApp +

Not secure | students.sunbeamapps.org/quiz-app/app-quiz-summary?id=64c8c3c19a0e0d3bbbb465f2

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard

Quiz >

Feedback >

Messages

Recorded Sessions

Online Sessions

Profile

Help

1. Which Angular directive is used to binds the value of HTML controls (input, select, textarea) to application data?

2. What will be the output of the below code in the console?
File: any_module.js
`exports.name = 'Rabbit';`
Code:
`var any_module = require('./anyModule');
console.log((function(settings){
 return settings.split('').reverse().join('')
})(any_module.name));`

Answers

1. Rabbit

2. Error

3. undefined

4. tibbaR

3. Which of the following are Node.js streams types?

Brave Web Browser icons: Notepad, Document, Back, Gear, VS Code, Sunbeam logo, File, SSD, Recycle Bin, Grid.

Activities Brave Web Browser Tue Aug 1 20:05:01 32 %

Sunbeam JPG to PDF - Convert your ima [2] Screenshot captured
Not secure | students.sunbeam...

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard

Quiz >

Feedback >

Messages

Recorded Sessions

Online Sessions

Profile

Help

Screenshot captured
You can paste the image from the clipboard.

```
var any_module = require('./anymodule');
console.log((function(settings){
    return settings.split('').reverse().join('')
})(any_module.name));
```

3. Which of the following are Node.js streams types?

Answers

1. Readable
2. Writable
3. Duplex
4. All of the above

4. Which of the following class is used to create and consume custom events in Node.js?

5. what does angular an NgForm component represents in an HTML web page

6. The rest parameters in a function is used when _____.



Activities Brave Web Browser Tue Aug 1 20:05:03 32 %

Sunbeam JPG to PDF - Convert your Ima | 2 Screenshot captured
Not secure | students.sunbeam...

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard

Quiz >

Feedback >

Messages

Recorded Sessions

Online Sessions

Profile

Help

Screenshot captured
You can paste the image from the clipboard.

```
var any_module = require('./anymodule');
console.log((function(settings){
    return settings.split('').reverse().join('')
})(any_module.name));
```

3. Which of the following are Node.js streams types?

4. Which of the following class is used to create and consume custom events in Node.js?

Answers

1. [EventEmitter](#)
2. [Events](#)
3. [NodeEvent](#)
4. [None of the above](#)

5. what does angular an NgForm component represents in an HTML web page

6. The rest parameters in a function is used when _____.



Activities Brave Web Browser Tue Aug 1 20:05:05 32 %

Sunbeam JPG to PDF - Convert your Ima | 2 Screenshot captured
Not secure | students.sunbeam...

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard

Quiz >

Feedback >

Messages

Recorded Sessions

Online Sessions

Profile

Help

Screenshot captured
You can paste the image from the clipboard.

```
var any_module = require('./anymodule');
console.log((function(settings){
    return settings.split('').reverse().join('')
})(any_module.name));
```

3. Which of the following are Node.js streams types?

4. Which of the following class is used to create and consume custom events in Node.js?

5. what does angular an NgForm component represents in an HTML web page

Answers

1. textarea
2. form elements
3. submit button
4. Lable

6. The rest parameters in a function is used when _____.

Activities Brave Web Browser Tue Aug 1 20:05:07 32 %

Sunbeam JPG to PDF - Convert your Ima | 2 Screenshot captured
Not secure | students.sunbeam...

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard Quiz Feedback Messages Recorded Sessions Online Sessions Profile Help

4. Which of the following class is used to create and consume custom events in Node.js?

5. what does angular an NgForm component represents in an HTML web page


6. The rest parameters in a function is used when _____.

Answers

1. The types of parameters is not known
2. The number of parameters is not known
3. The function needs to be executed asynchronously
4. The function is called recursively

7. What will be the output of the following JavaScript code?

```
<p id="demo"></p>
<script>
function demoFunction()
{
    var str = "\nIs th\nis it?";
    var patt1 = /^is/m;
    var result = str.match(patt1);
```

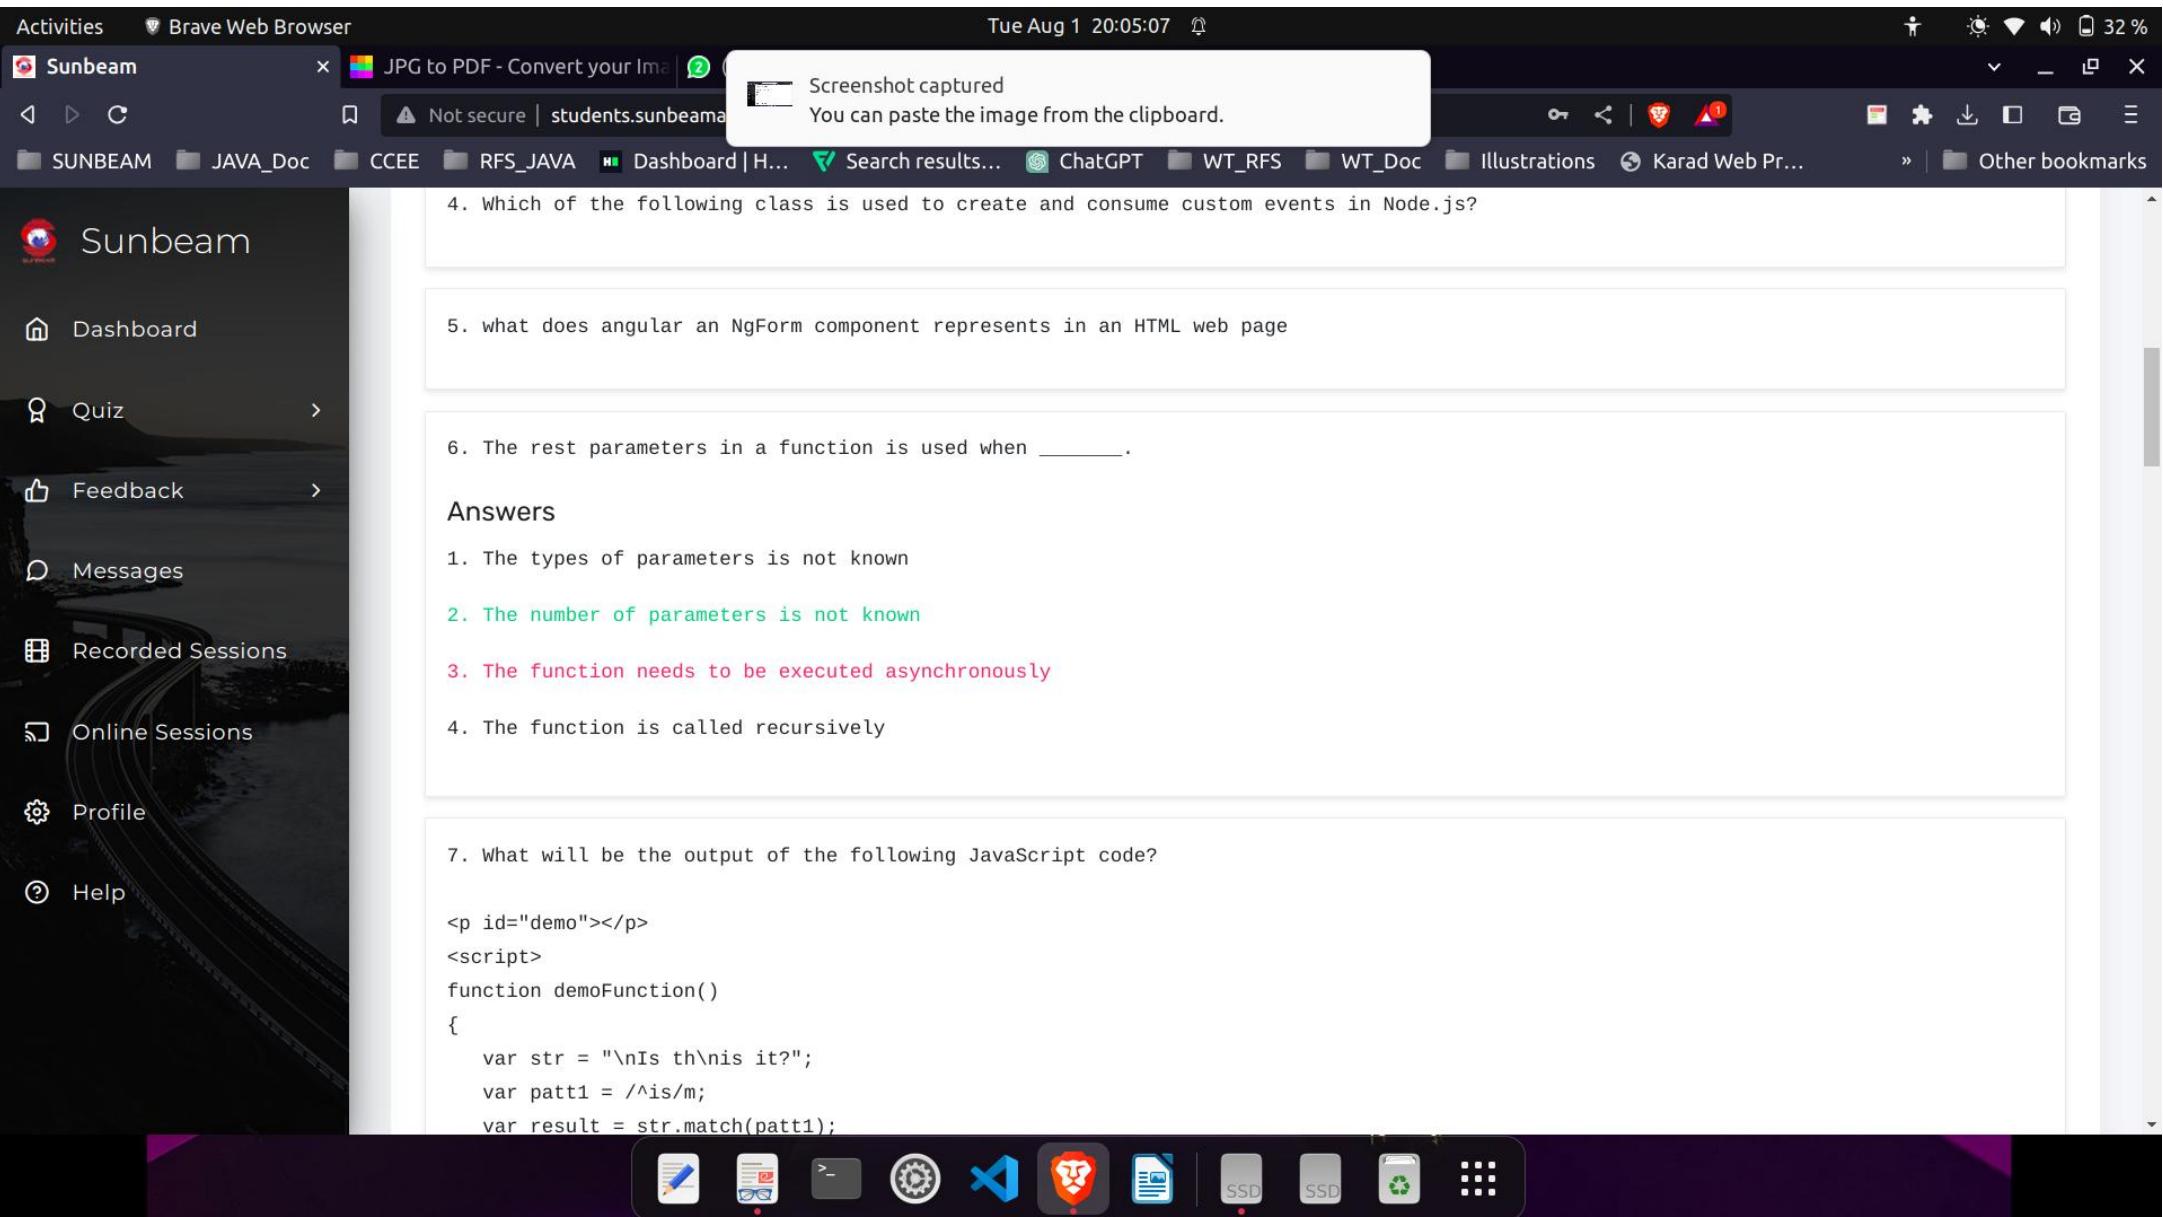

Activities Brave Web Browser Tue Aug 1 20:05:10 32 %

Sunbeam JPG to PDF - Convert your ima [2] Screenshot captured
Not secure | students.sunbeam...

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard

Quiz >

Feedback >

Messages

Recorded Sessions

Online Sessions

Profile

Help

6. The rest parameters in a function is used when _____.

7. What will be the output of the following JavaScript code?

```
<p id="demo"></p>
<script>
function demoFunction()
{
    var str = "\nIs th\nis it?";
    var patt1 = /^is/m;
    var result = str.match(patt1);
    document.getElementById("demo").innerHTML = result;
}
</script>
```


Answers

1. IS

2. is

3. Error

4. Undefined

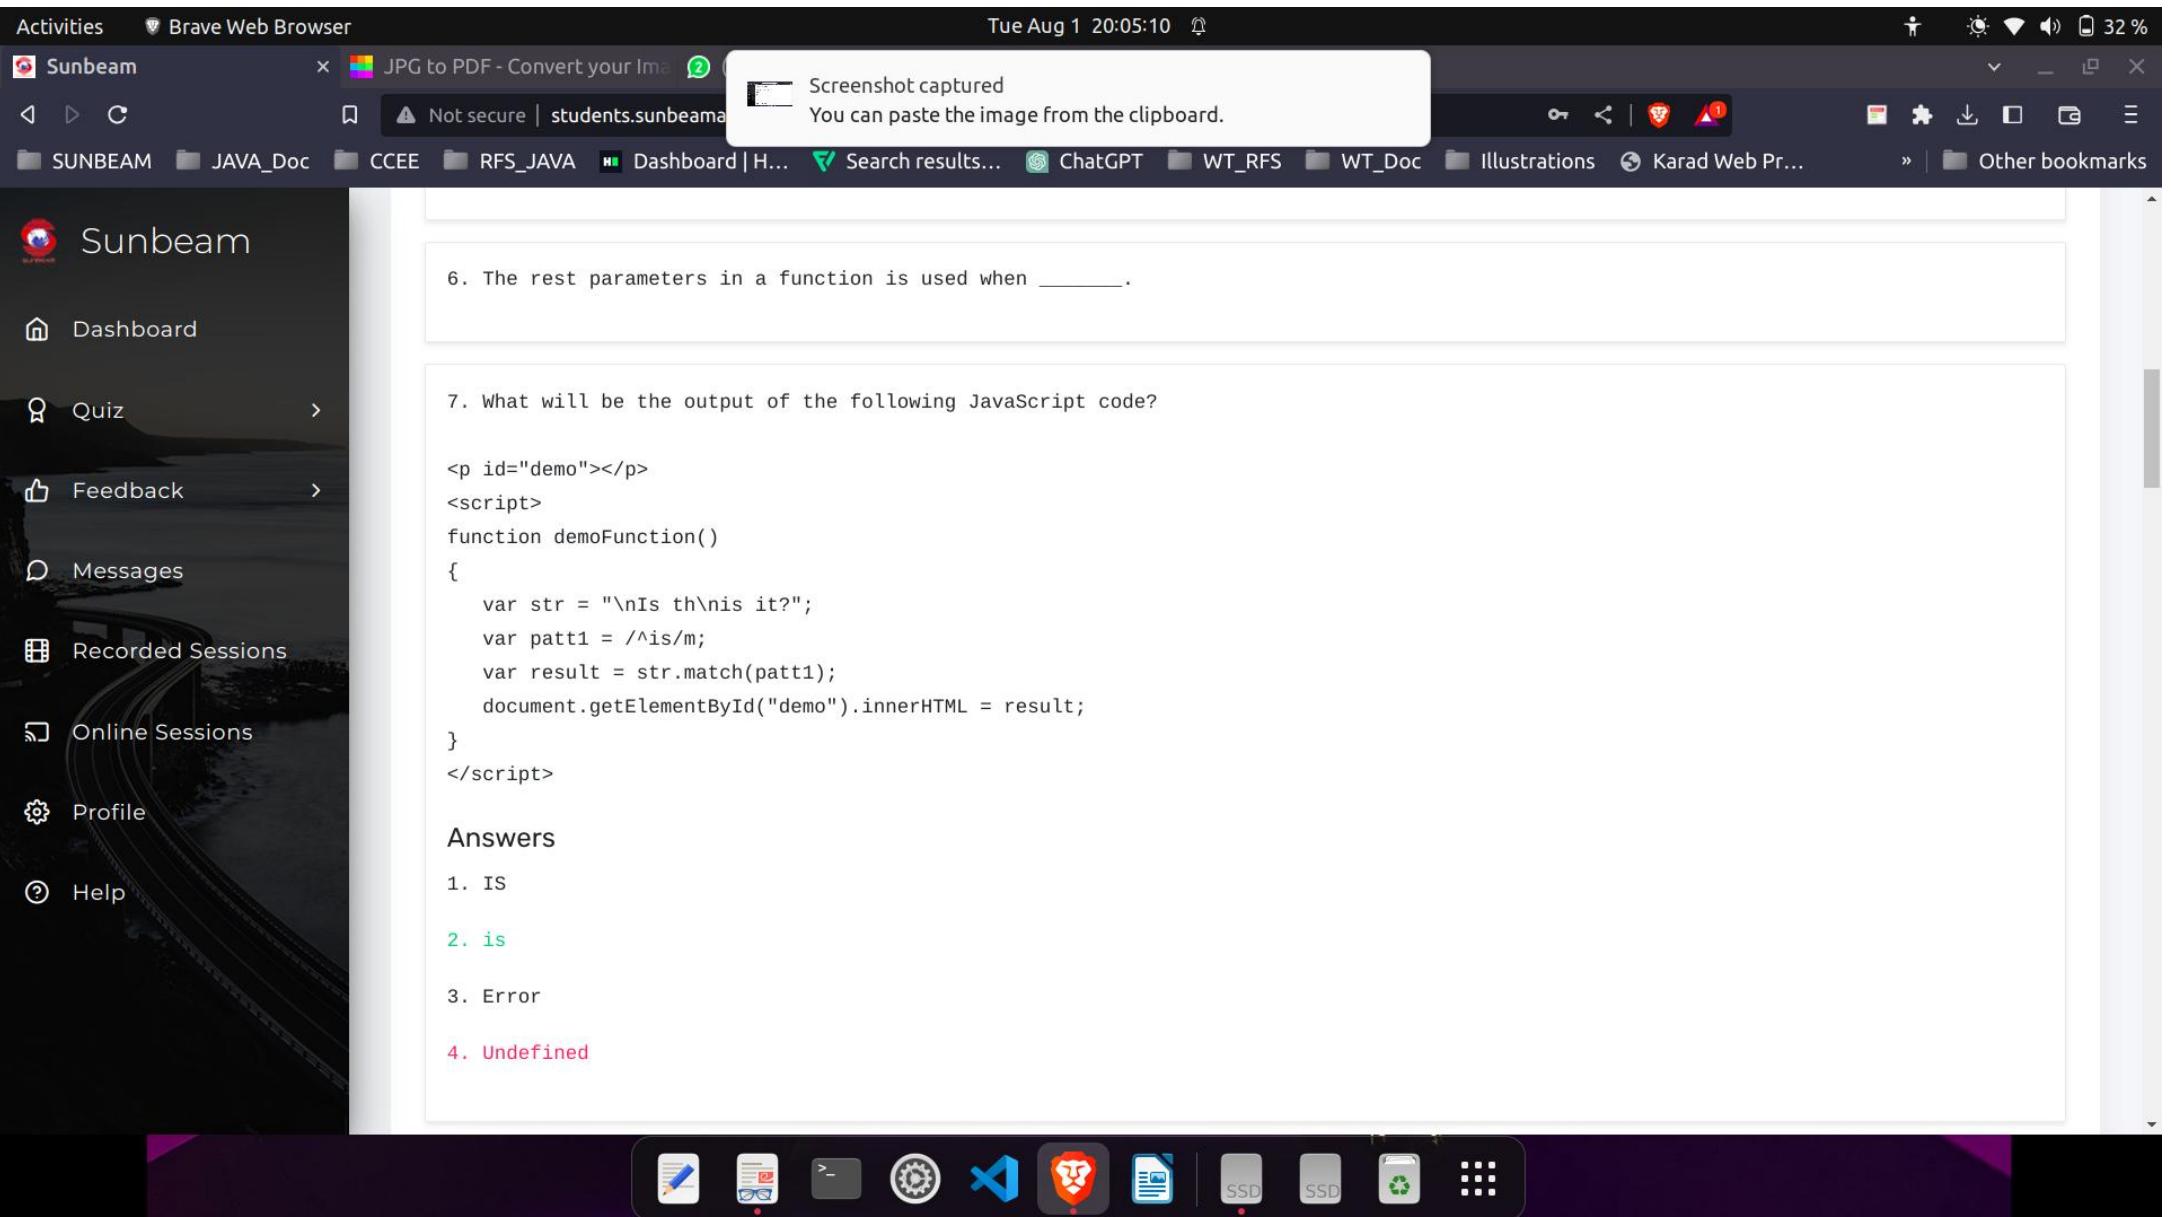

Activities Brave Web Browser Tue Aug 1 20:05:12 32 %

Sunbeam JPG to PDF - Convert your ima [2] Screenshot captured
Not secure | students.sunbeam...

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

- Dashboard
- Quiz >
- Feedback >
- Messages
- Recorded Sessions
- Online Sessions
- Profile
- Help

`function demoFunction()
{
 var str = "\nIs th\nnis it?";
 var patt1 = /^is/m;
 var result = str.match(patt1);
 document.getElementById("demo").innerHTML = result;
}
</script>`

8. What is .subscribe?

Answers

- Streams data in asynchronously
- Streams data in synchronously
- Both a and b
- None of above

9. What should you do in your code to improve your application's performance?

- Use gzip compression
- Don't use synchronous functions
- Do logging correctly
- Handle exceptions properly



Activities Brave Web Browser Tue Aug 1 20:05:20 32 %

Sunbeam JPG to PDF - Convert your Ima | 2 Screenshot captured
Not secure | students.sunbeam...

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard

Quiz >

Feedback >

Messages

Recorded Sessions

Online Sessions

Profile

Help

Screenshot captured
You can paste the image from the clipboard.

```
document.getElementById("demo").innerHTML = result;  
}  
</script>
```

8. What is .subscribe?

9. What should you do in your code to improve your application's performance?
1 - Use gzip compression
2 - Don't use synchronous functions
3 - Do logging correctly
4 - Handle exceptions properly

Answers

1. 1 and 2

2. 1,2 and 3

3. only 1

4. all 1,2, 3,4

10. Which are the different Data Types supported by Typescript?



Activities Brave Web Browser Tue Aug 1 20:05:23 32 %

Sunbeam JPG to PDF - Convert your Ima | 2 Screenshot captured
Not secure | students.sunbeam... You can paste the image from the clipboard.

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard Quiz Feedback Messages Recorded Sessions Online Sessions Profile Help

10. Which are the different Data Types supported by Typescript?

Answers

1. Boolean var bValue: boolean = false
2. Number var age: number = 16
3. String var name: string = "jon"
4. All of the above mentioned

11. In N0dejs what is use of underscore varable in REPL session

12. How can we create chainable route handlers for a route path in ExpressJS app?

13. Find output of the following program ?

```
$ node
> 15 + ( 2 * 4 ) - 8
```

14. What function arguments are available to Express in Route handlers?



Activities Brave Web Browser Tue Aug 1 20:05:24 32 %

Sunbeam JPG to PDF - Convert your Ima | 2 Screenshot captured
Not secure | students.sunbeam... You can paste the image from the clipboard.

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard

Quiz >

Feedback >

Messages

Recorded Sessions

Online Sessions

Profile

Help

10. Which are the different Data Types supported by Typescript?

11. In N0dejs what is use of underscore varable in REPL session

Answers

1. to Store the result
2. to get the last command used
3. to get the last result
4. None of the above

12. How can we create chainable route handlers for a route path in ExpressJS app?

13. Find output of the following program ?

```
$ node
> 15 + ( 2 * 4 ) - 8
```

14. What function arguments are available to Express in Route handlers?



Activities Brave Web Browser Tue Aug 1 20:05:26 32 %

Sunbeam JPG to PDF - Convert your Ima | 2 Screenshot captured
Not secure | students.sunbeam... You can paste the image from the clipboard.

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard

Quiz >

Feedback >

Messages

Recorded Sessions

Online Sessions

Profile

Help

10. Which are the different Data Types supported by Typescript?

11. In N0dejs what is use of underscore varable in REPL session

12. How can we create chainable route handlers for a route path in ExpressJS app?

Answers

1. Using app.router()
2. Using app.route()
3. Using app.routing()
4. All of these

13. Find output of the following program ?

```
$ node  
> 15 + ( 2 * 4 ) - 8
```

14. What function arguments are available to Express in Route handlers?



Activities Brave Web Browser Tue Aug 1 20:05:28 32 %

Sunbeam JPG to PDF - Convert your Ima | 2 Screenshot captured
Not secure | students.sunbeam...

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

- Dashboard
- Quiz >
- Feedback >
- Messages
- Recorded Sessions
- Online Sessions
- Profile
- Help

10. Which are the different Data Types supported by Typescript?

11. In N0dejs what is use of underscore varable in REPL session

12. How can we create chainable route handlers for a route path in ExpressJS app?

13. Find output of the following program ?

```
$ node
> 15 + ( 2 * 4 ) - 8
```

Answers

1. 15

2. Error

3. undefined

4. None of the above

14. What function arguments are available to Express in Route handlers?



Activities Brave Web Browser Tue Aug 1 20:05:30 32 %

Sunbeam JPG to PDF - Convert your ima | (2) WhatsApp +

Screenshot captured
Not secure | students.sunbeamapps.org/quiz/app/appQuizSummary?id=64c8c7c19a0e0d3bbbb465f2
You can paste the image from the clipboard.

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard Quiz Feedback Messages Recorded Sessions Online Sessions Profile Help

13. Find output of the following program ?

```
$ node  
> 15 + ( 2 * 4 ) - 8
```

14. What function arguments are available to Express.js Route handlers?

Answers

1. req - the request object
2. res - the response object
3. next
4. All of the above

15. How Observables are Used?

16. All are backported features of TypeScript, except...

Activities Brave Web Browser Tue Aug 1 20:05:31 32 %

Sunbeam x JPG to PDF - Convert your Ima | 2 Screenshot captured
Not secure | students.sunbeam... You can paste the image from the clipboard.

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard Quiz Feedback Messages Recorded Sessions Online Sessions Profile Help

13. Find output of the following program ?

\$ node
> 15 + (2 * 4) - 8

14. What function arguments are available to Express.js Route handlers?

15. How Observables are Used?

Answers

1. The Reactive Forms Module uses reactive programming and Observables for listening to user input
2. The @output() decorator in a component takes an EventEmitter instance. EventEmitter is a subclass of the RxJS Observable
3. None of above
4. Both a and b

16. All are backported features of TypeScript, except...

Brave Web Browser icons: Notepad, Document, Back, Gear, VS Code, Lion logo, File, SSD, Recycle Bin, Grid.

Activities Brave Web Browser Tue Aug 1 20:05:34 32 %

Sunbeam JPG to PDF - Convert your Ima | 2 Screenshot captured
Not secure | students.sunbeam... You can paste the image from the clipboard.

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

 Sunbeam

Dashboard

Quiz >

Feedback >

Messages

Recorded Sessions

Online Sessions

Profile

Help

15. How Observables are Used?

16. All are backported features of TypeScript, except...

Answers

1. Arrows
2. Classes
3. Modules
4. Methods

17. How can we create instance of http module?

18. How many listeners can be attached to an event in NodeJS?

19. How can we create chainable route handlers for a route path in ExpressJS app?



Activities Brave Web Browser Tue Aug 1 20:05:35 32 %

Sunbeam JPG to PDF - Convert your ima | 2 Screenshot captured
Not secure | students.sunbeam... You can paste the image from the clipboard.

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

 Sunbeam

Dashboard Quiz Feedback Messages Recorded Sessions Online Sessions Profile Help

15. How Observables are Used?

16. All are backported features of TypeScript, except....

17. How can we create instance of http module?

Answers

1. var http = require("http")
2. var http = new require("http")
3. var http = new http()
4. None of the above

18. How many listeners can be attached to an event in NodeJS?

19. How can we create chainable route handlers for a route path in ExpressJS app?



Activities Brave Web Browser Tue Aug 1 20:05:37 32 %

Sunbeam JPG to PDF - Convert your Ima | 2 Screenshot captured
Not secure | students.sunbeam... You can paste the image from the clipboard.

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

- Dashboard
- Quiz >
- Feedback >
- Messages
- Recorded Sessions
- Online Sessions
- Profile
- Help

15. How Observables are Used?

16. All are backported features of TypeScript, except....

17. How can we create instance of http module?

18. How many listeners can be attached to an event in NodeJS?

Answers

1. 10
2. 50
3. unlimited
4. none of the above

19. How can we create chainable route handlers for a route path in ExpressJS app?

Activities Brave Web Browser Tue Aug 1 20:05:39 32 %

Sunbeam JPG to PDF - Convert your ima (2) WhatsApp +

Not secure | students.sunbeamapps.org/quiz-app/app-quiz-summary?id=64c8c3c19a0e0d3bbbb465f2

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard

Quiz >

Feedback >

Messages

Recorded Sessions

Online Sessions

Profile

Help

16. All are backported features of TypeScript, except...

17. How can we create instance of http module?

18. How many listeners can be attached to an event in NodeJS?

19. How can we create chainable route handlers for a route path in ExpressJS app?

Answers

1. Using `app.route()`
2. Using `app.router()`
3. Using `app.routing()`
4. none of the above

20. Node.js terminal (REPL) is used for _____.

Brave Web Browser icons: Not secure, SSL, ChatGPT, WT_RFS, WT_Doc, Illustrations, Karad Web Pr..., Other bookmarks.

Activities Brave Web Browser Tue Aug 1 20:05:41 32 %

Sunbeam JPG to PDF - Convert your ima [2] Screenshot captured
Not secure | students.sunbeam... You can paste the image from the clipboard.

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard Quiz Feedback Messages Recorded Sessions Online Sessions Profile Help

17. How can we create instance of http module?

18. How many listeners can be attached to an event in NodeJS?

19. How can we create chainable route handlers for a route path in ExpressJS app?

20. Node.js terminal (REPL) is used for _____.

Answers

1. testing node.js/JavaScript expressions
2. executing browser's JavaScript expressions.wrong
3. the preview of node.js application.
4. None of the above

21. Route paths, in combination with a request method, define the endpoints at which requests can be made.
Which of following are valid form of route path?

22. Is the code below valid?



Activities Brave Web Browser Tue Aug 1 20:05:44 32 %

Sunbeam JPG to PDF - Convert your ima (2) WhatsApp +

Not secure | students.sunbeamapps.org/quiz-app/app-quiz-summary?id=64c8c3c19a0e0d3bbbb465f2

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard Quiz Feedback Messages Recorded Sessions Online Sessions Profile Help

17. How can we create instance of http module?

18. How many listeners can be attached to an event in NodeJS?

19. How can we create chainable route handlers for a route path in ExpressJS app?

20. Node.js terminal (REPL) is used for _____.

21. Route paths, in combination with a request method, define the endpoints at which requests can be made.
Which of following are valid form of route path?

Answers

1. strings
2. string patterns
3. regular expressions
4. All of above

22. Is the code below valid?



Activities Brave Web Browser Tue Aug 1 20:05:48 32 %

Sunbeam JPG to PDF - Convert your Ima | 2 Screenshot captured
Not secure | students.sunbeam...

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard Quiz Feedback Messages Recorded Sessions Online Sessions Profile Help

Which of following are valid form of route path?


22. Is the code below valid?

```
var cb0 = function (req, res, next) {  
  console.log('CB0')  
  next()  
}  
  
var cb1 = function (req, res, next) {  
  console.log('CB1')  
  next()  
}  
  
app.get('/example/d', [cb0, cb1], function (req, res, next) {  
  console.log('the response will be sent by the next function ...')  
  next()  
}, function (req, res) {  
  res.send('Hello from D!')  
})
```

Answers

1. Yes

2. No

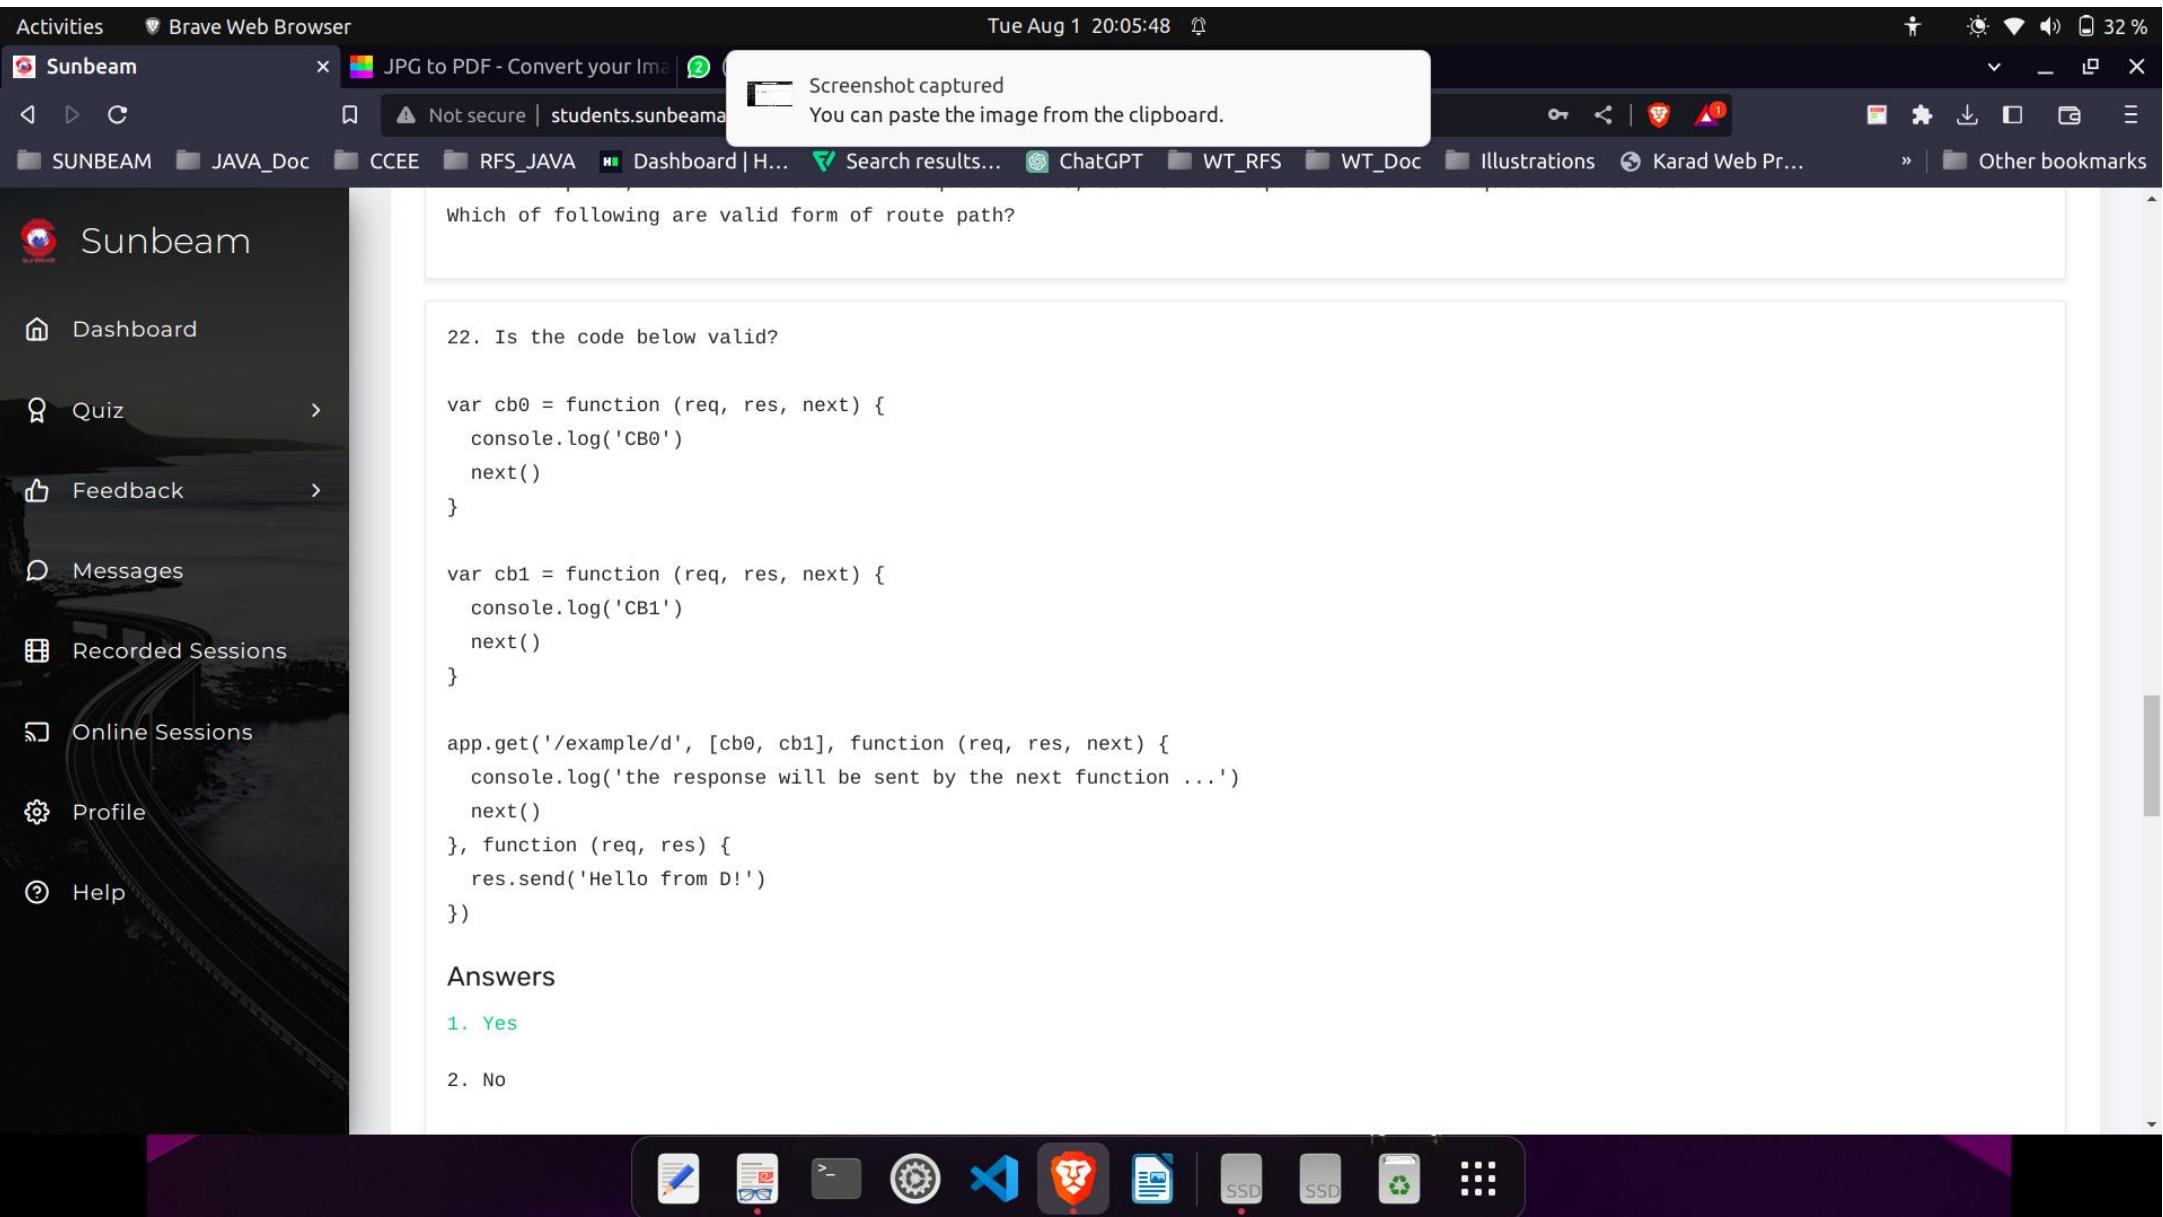

Activities Brave Web Browser Tue Aug 1 20:05:53 32 %

Sunbeam JPG to PDF - Convert your image Screenshot captured
Not secure | students.sunbeam...

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

- Dashboard
- Quiz >
- Feedback >
- Messages
- Recorded Sessions
- Online Sessions
- Profile
- Help

app.get('/example/d', [cb0, cb1], function (req, res, next) {
 console.log('the response will be sent by the next function ...')
 next()
, function (req, res) {
 res.send('Hello from D!')
})

23. Simple or complex functionality organized in a single or multiple JavaScript files which can be reused throughout your Node.js application is called _____.

Answers

1. Module
2. Library
3. Package
4. Function

24. In ExpressJS, the method app.all(path, callback [, callback ...]) can accept all HTTP methods

25. What is Callback?

26. The provides() function and the exports object are used to _____

27. How many Node object methods are available?



Activities Brave Web Browser Tue Aug 1 20:05:58 32 %

Sunbeam JPG to PDF - Convert your Ima | 2 Screenshot captured
Not secure | students.sunbeam... You can paste the image from the clipboard.

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard

Quiz >

Feedback >

Messages

Recorded Sessions

Online Sessions

Profile

Help

res.send('Hello from D!')

}

23. Simple or complex functionality organized in a single or multiple JavaScript files which can be reused throughout your Node.js appl

24. In ExpressJS, the method app.all(path, callback [, callback ...]) can accept all HTTP methods

Answers


1. True

2. False

25. What is Callback?

26. The provides() function and the exports object are used to _____

27. How many Node object methods are available?

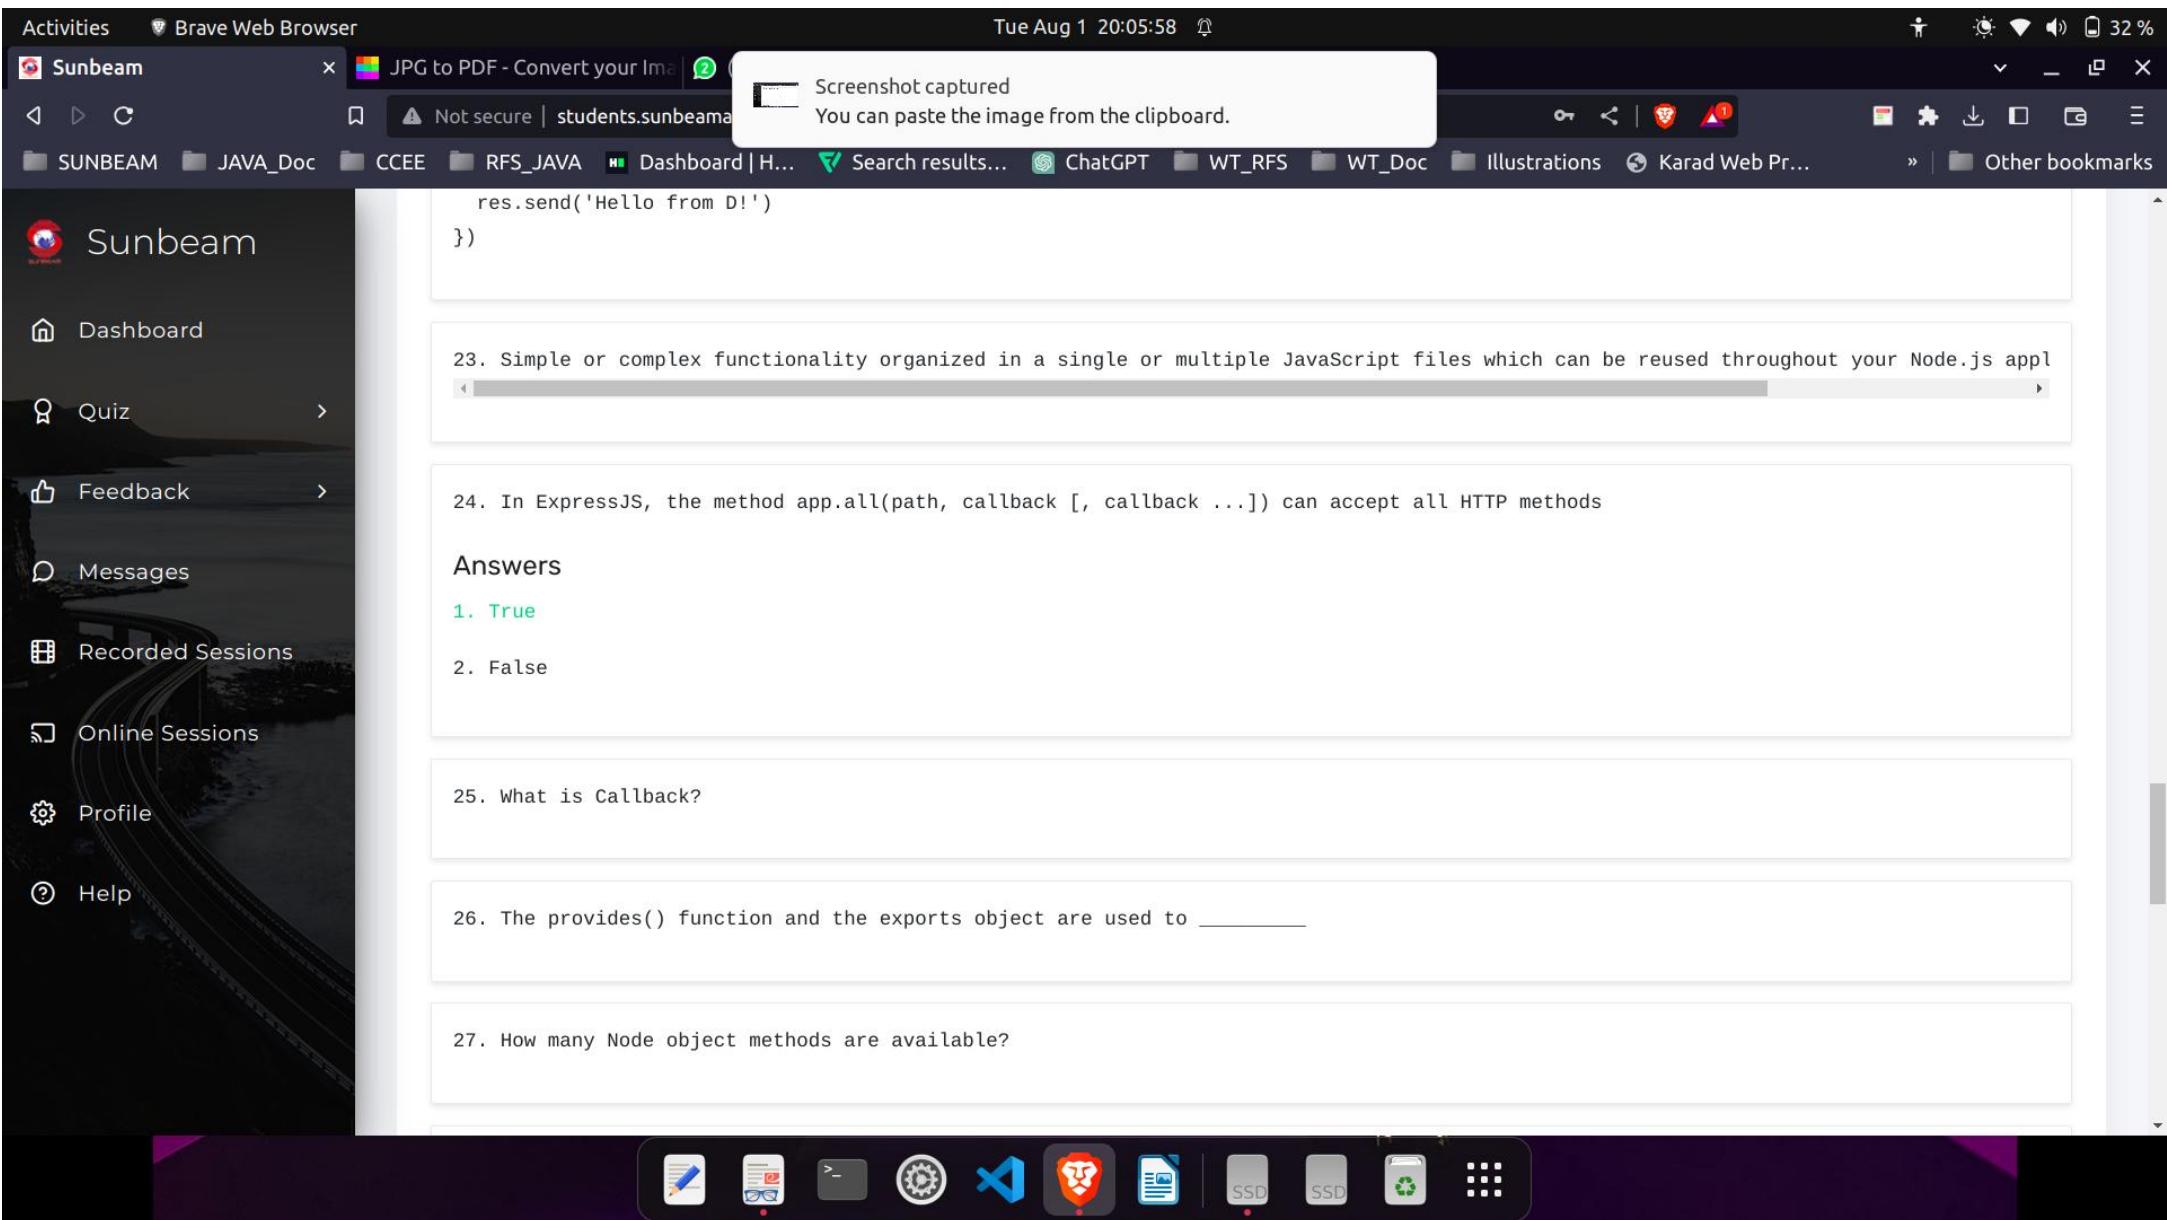

Activities Brave Web Browser Tue Aug 1 20:06:00 32 %

Sunbeam JPG to PDF - Convert your Ima | 2 Screenshot captured
Not secure | students.sunbeam... You can paste the image from the clipboard.

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard Quiz Feedback Messages Recorded Sessions Online Sessions Profile Help

res.send('Hello from D!')

})

23. Simple or complex functionality organized in a single or multiple JavaScript files which can be reused throughout your Node.js appl

24. In ExpressJS, the method app.all(path, callback [, callback ...]) can accept all HTTP methods


25. What is Callback?

Answers

1. Callback is an asynchronous equivalent for a function.
2. Callback is a technique in which a method call back the caller method.
3. Both A and B
4. None of the above.

26. The provides() function and the exports object are used to _____

Brave Web Browser icon bar: Notepad, Document, Terminal, Gear, VS Code, Lion logo, File, SSD, Recycle Bin, Grid icon.

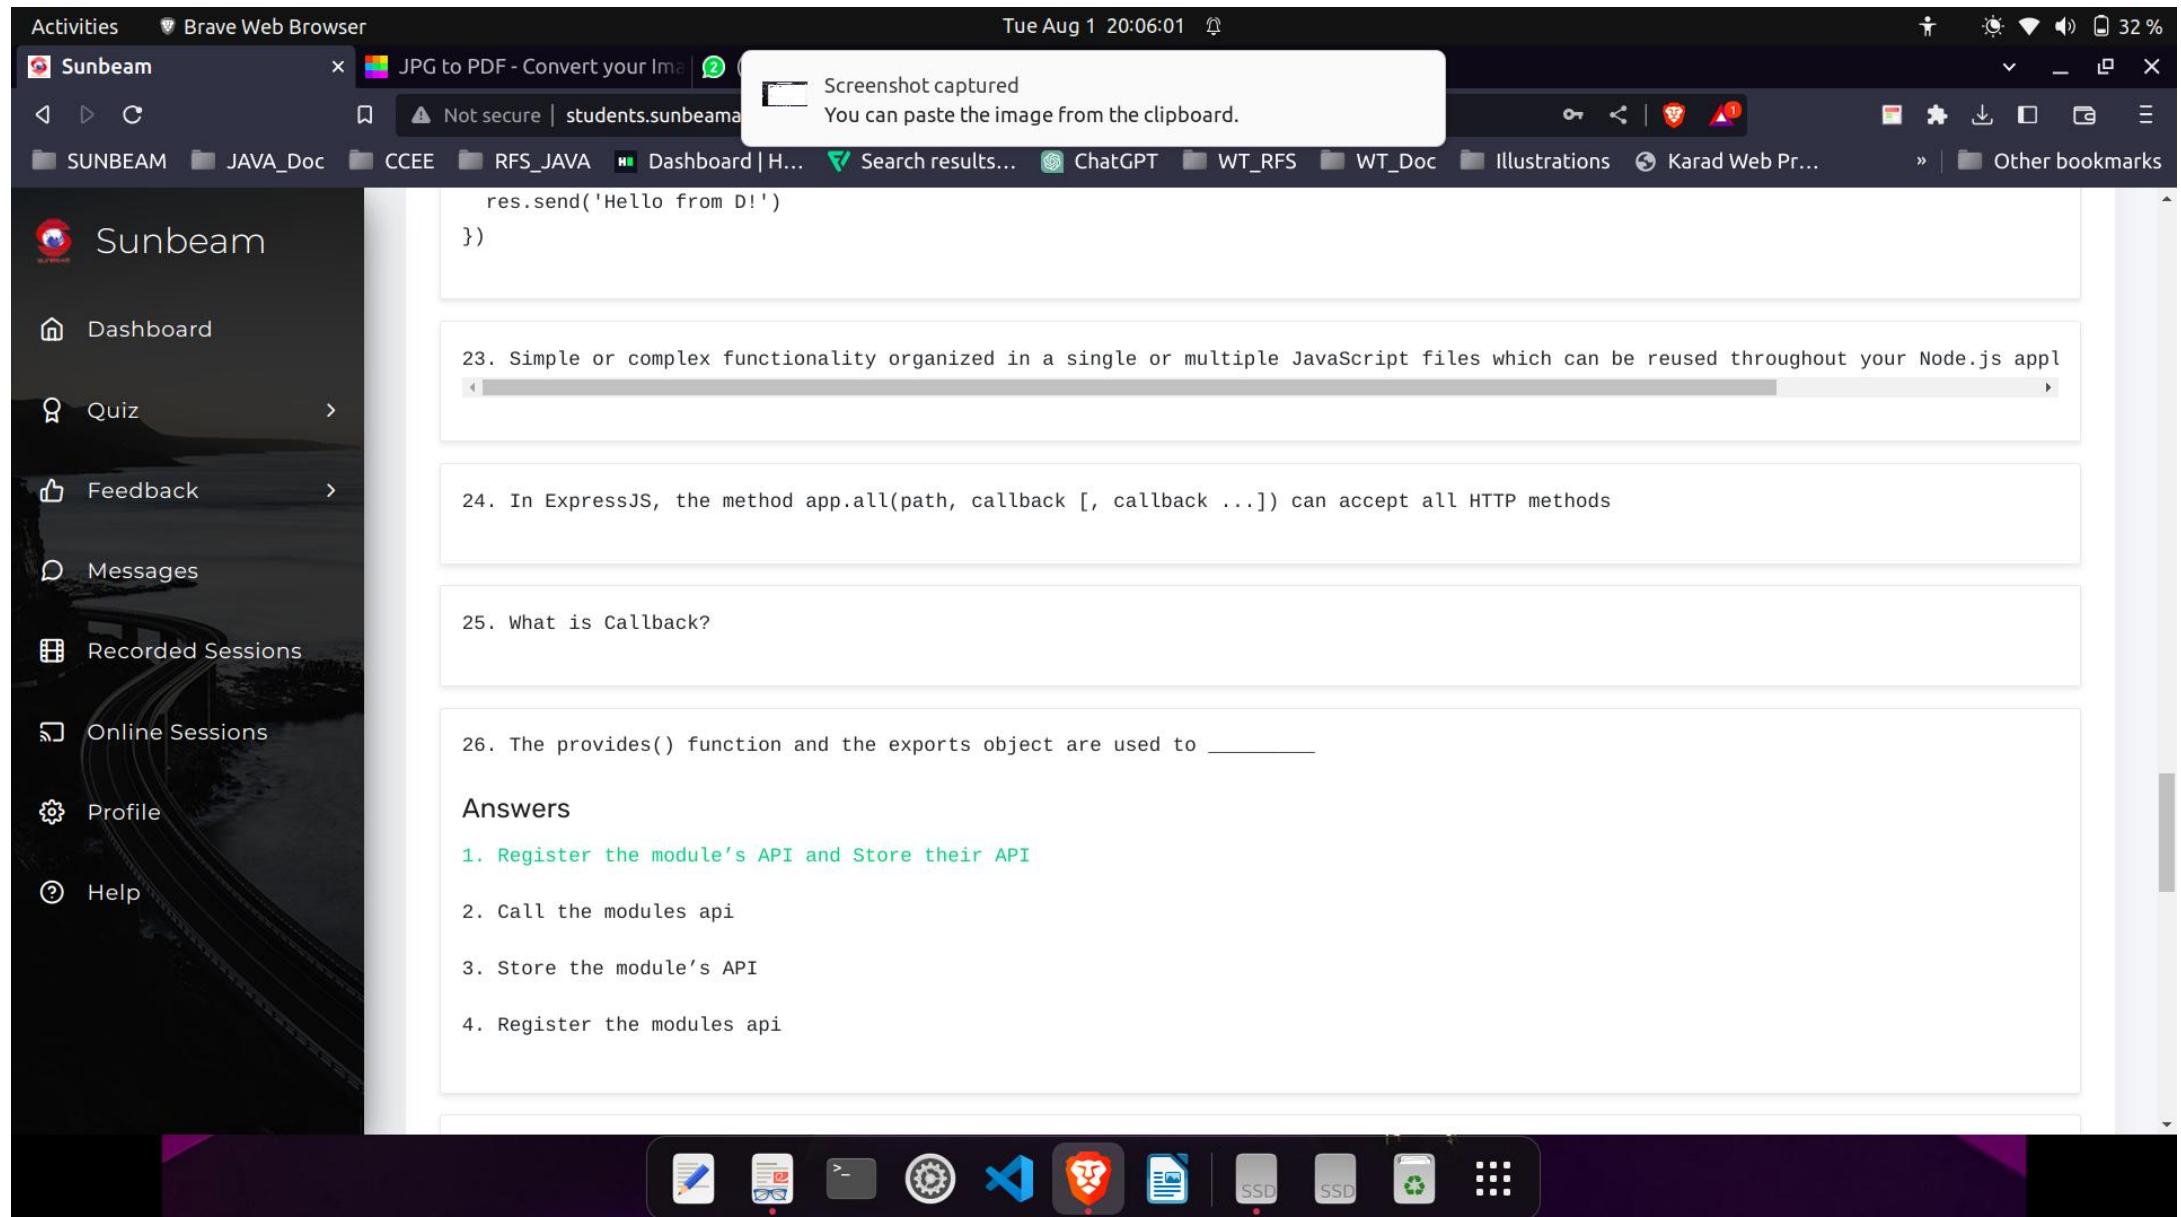

Activities Brave Web Browser Tue Aug 1 20:06:03 32 %

Sunbeam JPG to PDF - Convert your Ima | 2 Screenshot captured
Not secure | students.sunbeam...

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard Quiz Feedback Messages Recorded Sessions Online Sessions Profile Help

26. The provides() function and the exports object are used to _____

27. How many Node object methods are available?

Answers

1. 18
2. 19
3. 20
4. 21

28. Which of the following tool automates various tasks of Node.js application?

29. What would be the output of following ?

```
var str = "SUNBEAMK";
var output = str.substring(5, 7);
console.log(output);
```

30. x !== y will returns true if and only if _____

Brave Web Browser icons: Notepad, Document, Back, Gear, VS Code, Lion logo, File, SSD, Recycle Bin, Grid.

Activities Brave Web Browser Tue Aug 1 20:06:05 32 %

Sunbeam JPG to PDF - Convert your ima | Screenshot captured
Not secure | students.sunbeam...

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard

Quiz >

Feedback >

Messages

Recorded Sessions

Online Sessions

Profile

Help

26. The provides() function and the exports object are used to _____

27. How many Node object methods are available?

28. Which of the following tool automates various tasks of Node.js application?


Answers

1. Express.js
2. GruntJS
3. NPM
4. None of the above

29. What would be the output of following ?

```
var str = "SUNBEAMK";
var output = str.substring(5, 7);
console.log(output);
```

30. x !== y will returns true if and only if _____

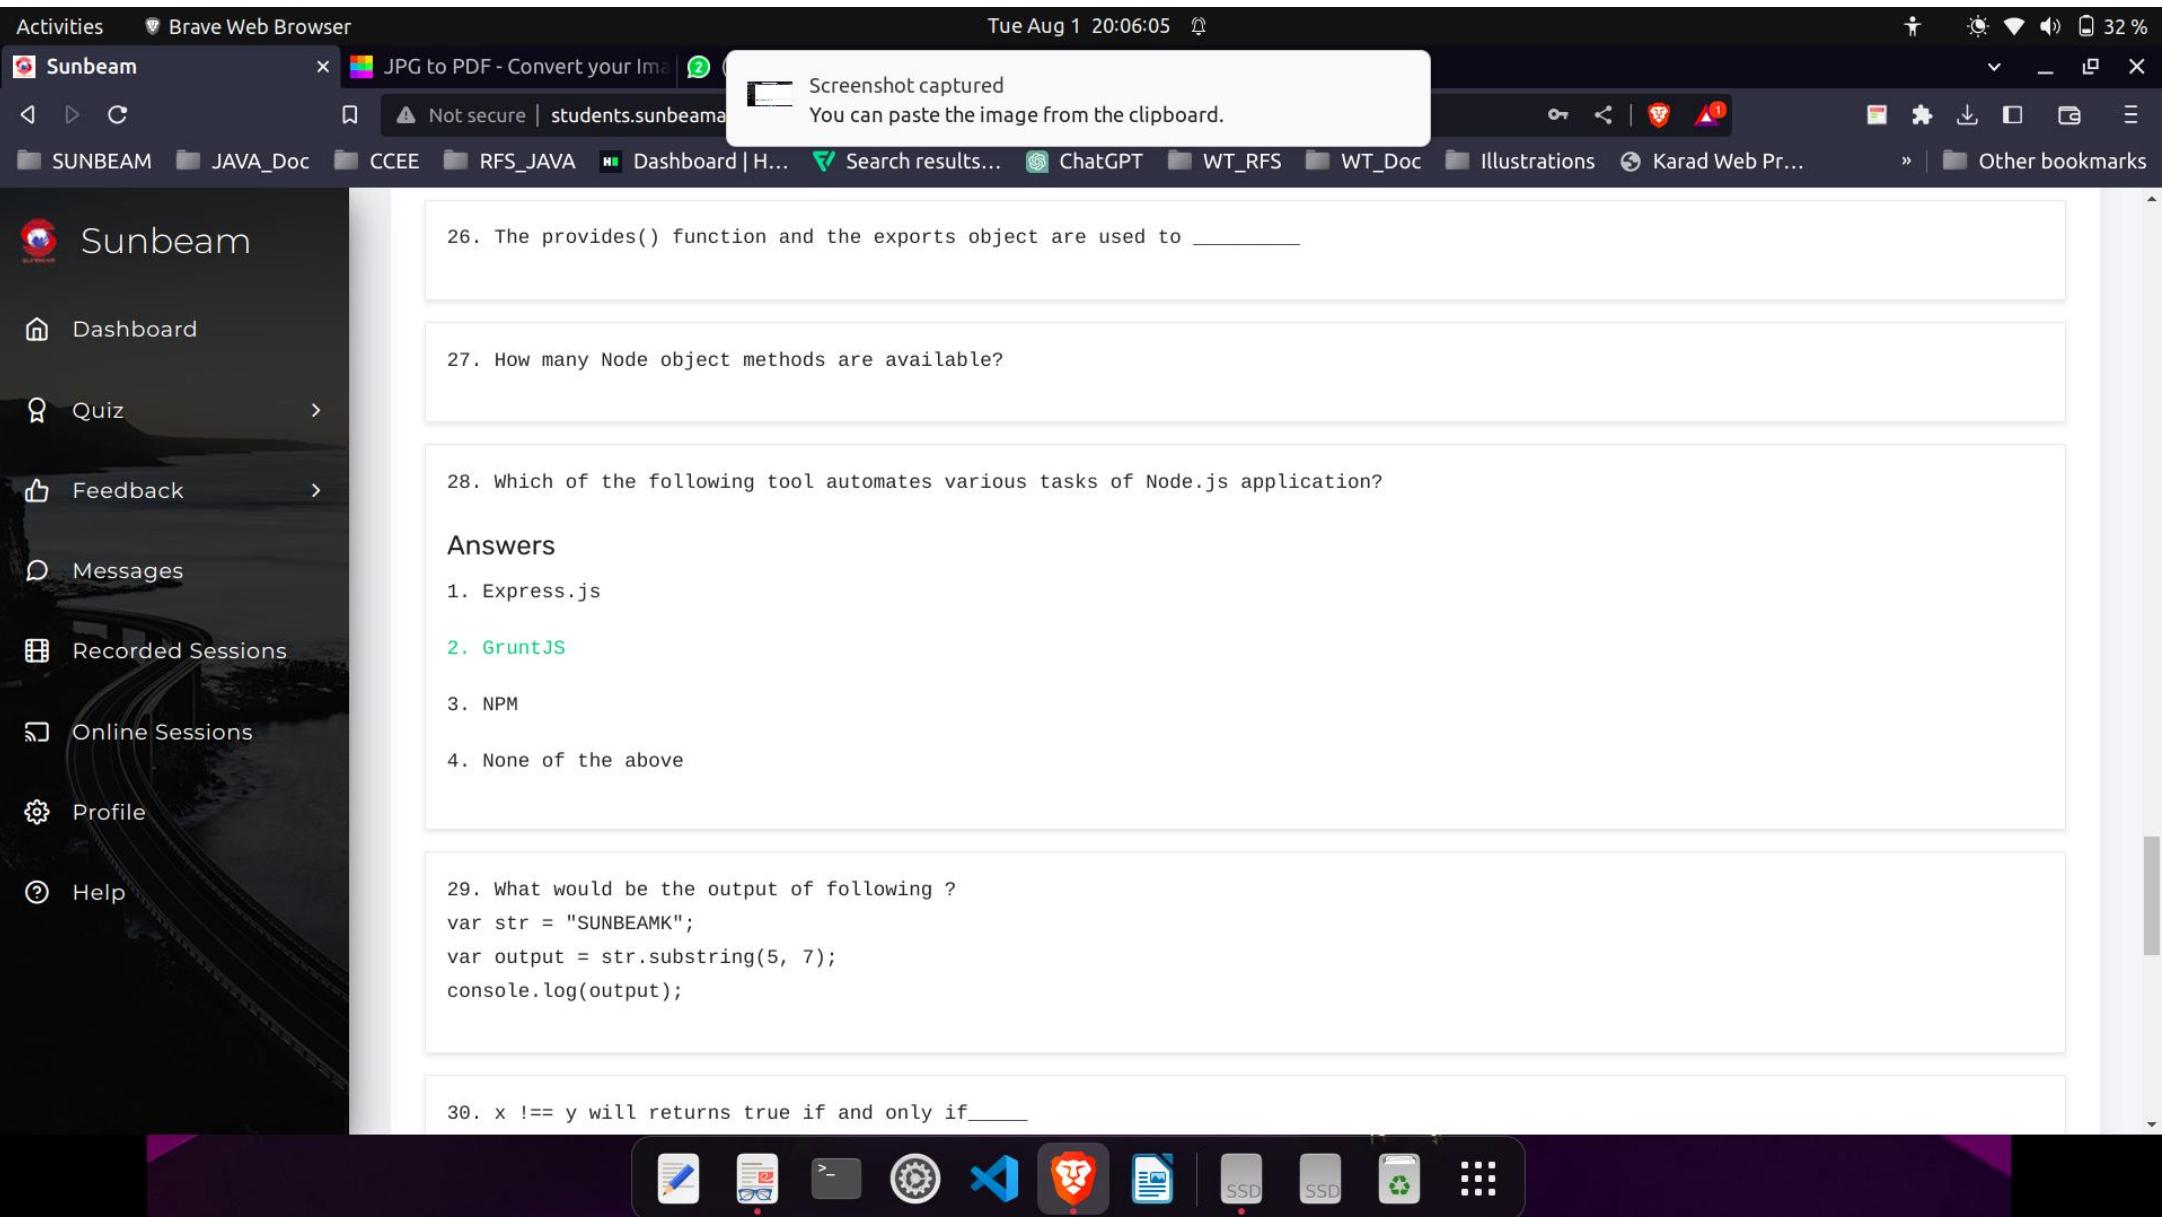

Activities Brave Web Browser Tue Aug 1 20:06:06

Sunbeam JPG to PDF - Convert your Ima | 2 Screenshot captured
Not secure | students.sunbeam...

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

 Sunbeam

Dashboard Quiz Feedback Messages Recorded Sessions Online Sessions Profile Help

26. The provides() function and the exports object are used to _____

27. How many Node object methods are available?

28. Which of the following tool automates various tasks of Node.js application?

29. What would be the output of following ?

```
var str = "SUNBEAMK";
var output = str.substring(5, 7);
console.log(output);
```

Answers

1. MK
2. AMK
3. AM
4. MKA

30. x !== y will returns true if and only if_____

Brave Web Browser icons: Notepad, Document, Back, Gear, VS Code, Lion logo, File, SSD, Recycle Bin, Grid.

Activities Brave Web Browser Tue Aug 1 20:06:10 32 %

Sunbeam JPG to PDF - Convert your Ima | 2 Screenshot captured
Not secure | students.sunbeam...

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

27. How many Node object methods are available?

28. Which of the following tool automates various tasks of Node.js application?

29. What would be the output of following ?


```
var str = "SUNBEAMK";
var output = str.substring(5, 7);
console.log(output);
```

30. x !== y will returns true if and only if_____

Answers

1. if x is not equal to y, and they are not of the same type
2. if x is not equal to y, or they are not of the same type
3. if x is equal to y, and they are of the same type
4. if x is equal to y, or they are of the same type

31. Which is the correct syntax for reading the file in nodejs

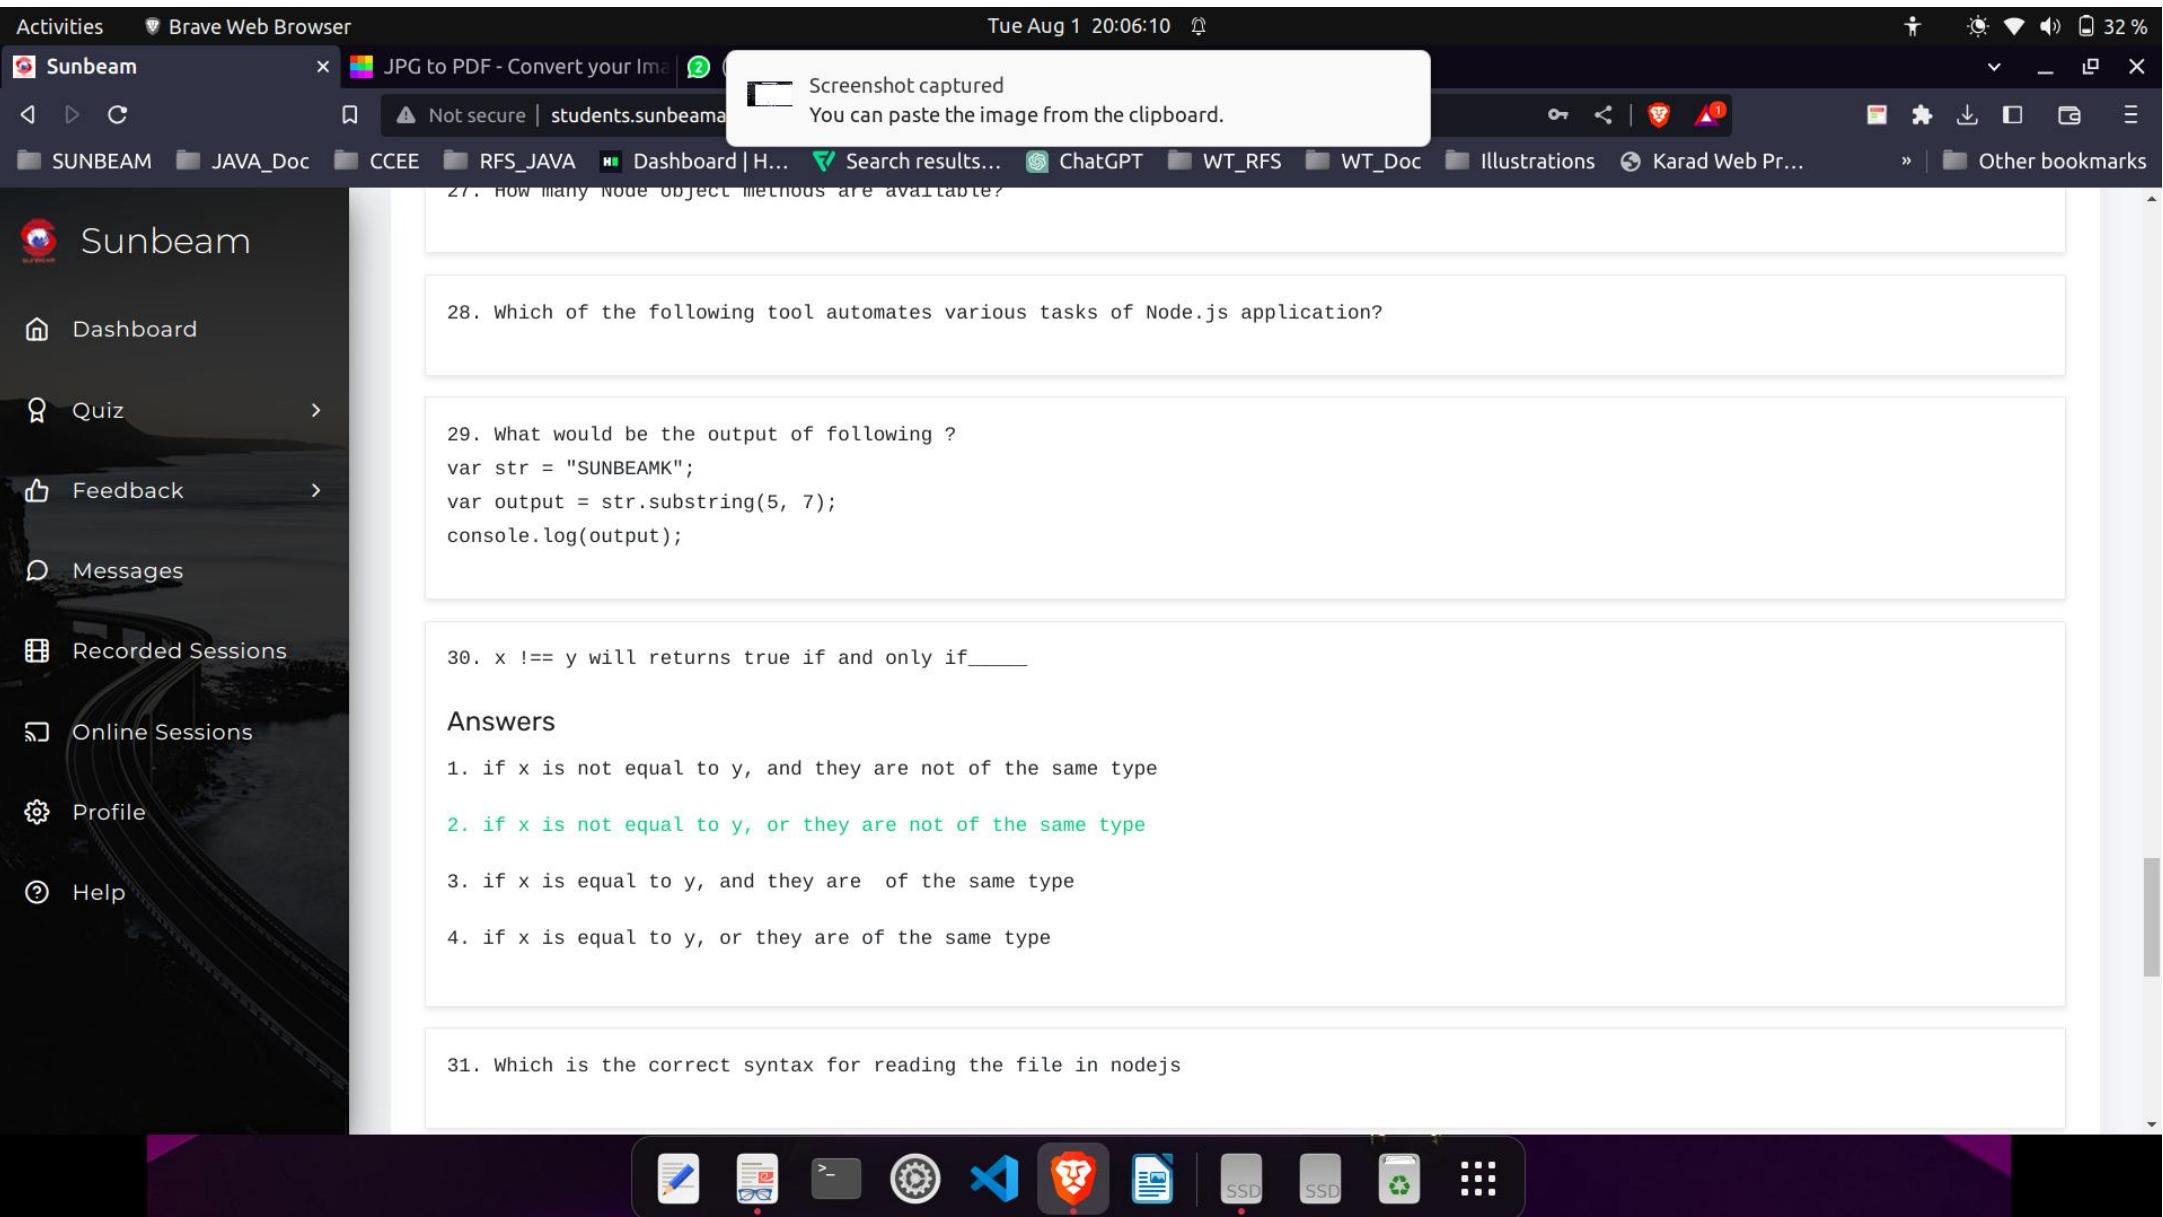

Activities Brave Web Browser Tue Aug 1 20:06:13 32 %

Sunbeam JPG to PDF - Convert your ima [2] Screenshot captured
Not secure | students.sunbeam...

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

- Dashboard
- Quiz >
- Feedback >
- Messages
- Recorded Sessions
- Online Sessions
- Profile
- Help

29. What would be the output of following ?
`var str = "SUNBEAMK";
var output = str.substring(5, 7);
console.log(output);`

30. `x !== y` will returns true if and only if_____

31. Which is the correct syntax for reading the file in nodejs

Answers

- `fs.read(fd, buffer, offset, length, position, callback)`
- `fs.readFile(fd, buffer, offset, length, position, callback)`
- `fs.readPath(fd, buffer, offset, length, position, callback)`
- All of the above

32. Which of the following is not a data type in Java Script ?



Activities Brave Web Browser Tue Aug 1 20:06:16 32 %

Sunbeam JPG to PDF - Convert your Ima | 2 Screenshot captured
Not secure | students.sunbeam...

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

- Dashboard
- Quiz >
- Feedback >
- Messages
- Recorded Sessions
- Online Sessions
- Profile
- Help

29. What would be the output of following ?
`var str = "SUNBEAMK";
var output = str.substring(5, 7);
console.log(output);`

30. `x !== y` will returns true if and only if_____

31. Which is the correct syntax for reading the file in nodejs

32. Which of the following is not a data type in Java Script ?

Answers

1. **Float**
2. **Undefined**
3. **Boolean**
4. **Object**

Brave Web Browser Screenshot captured
Not secure | students.sunbeam...

SSD SSD SSD SSD

Activities Brave Web Browser Tue Aug 1 20:06:18 32 %

Sunbeam JPG to PDF - Convert your Ima | 2 Screenshot captured
Not secure | students.sunbeam... You can paste the image from the clipboard.

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard

Quiz >

Feedback >

Messages

Recorded Sessions

Online Sessions

Profile

Help

console.log(output);

30. x !== y will returns true if and only if_____

31. Which is the correct syntax for reading the file in nodejs

32. Which of the following is not a data type in Java Script ?

33. which is the correct command to install Node.js express

Answers

1. install express

2. apt-get install express

3. npm install express

4. All of the above

34. Which method of String object Splits a String object into an array of strings by separating the string into substrings.

Activities Brave Web Browser Tue Aug 1 20:06:20 32 %

Sunbeam JPG to PDF - Convert your ima | 2 Screenshot captured
Not secure | students.sunbeam... You can paste the image from the clipboard.

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

 Sunbeam

Dashboard

Quiz >

Feedback >

Messages

Recorded Sessions

Online Sessions

Profile

Help

34. Which method of String object Splits a String object into an array of strings by separating the string into substrings.

Answers

1. slice()
2. substr()
3. replace()
4. split()

35. Which of the Following HTTP methods is commonly used in REST based architecture for providing a read only access to a resource .

36. State true or false "The callback function is used in node.js to handle many of the server's requests."

37. What is the significance of padding in css ?

38. What would be the output of following
var x = 11;



Activities Brave Web Browser Tue Aug 1 20:06:22 32 %

Sunbeam x JPG to PDF - Convert your ima | 2 Screenshot captured
Not secure | students.sunbeam... You can paste the image from the clipboard.

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard

Quiz >

Feedback >

Messages

Recorded Sessions

Online Sessions

Profile

Help

34. Which method of String object Splits a String object into an array of strings by separating the string into substrings.

35. Which of the Following HTTP methods is commonly used in REST based architecture for providing a read only access to a resource .

Answers

1. POST

2. GET


3. DELETE

4. PUT

36. State true or false "The callback function is used in node.js to handle many of the server's requests."

37. What is the significance of padding in css ?

38. What would be the output of following
var x = 11;

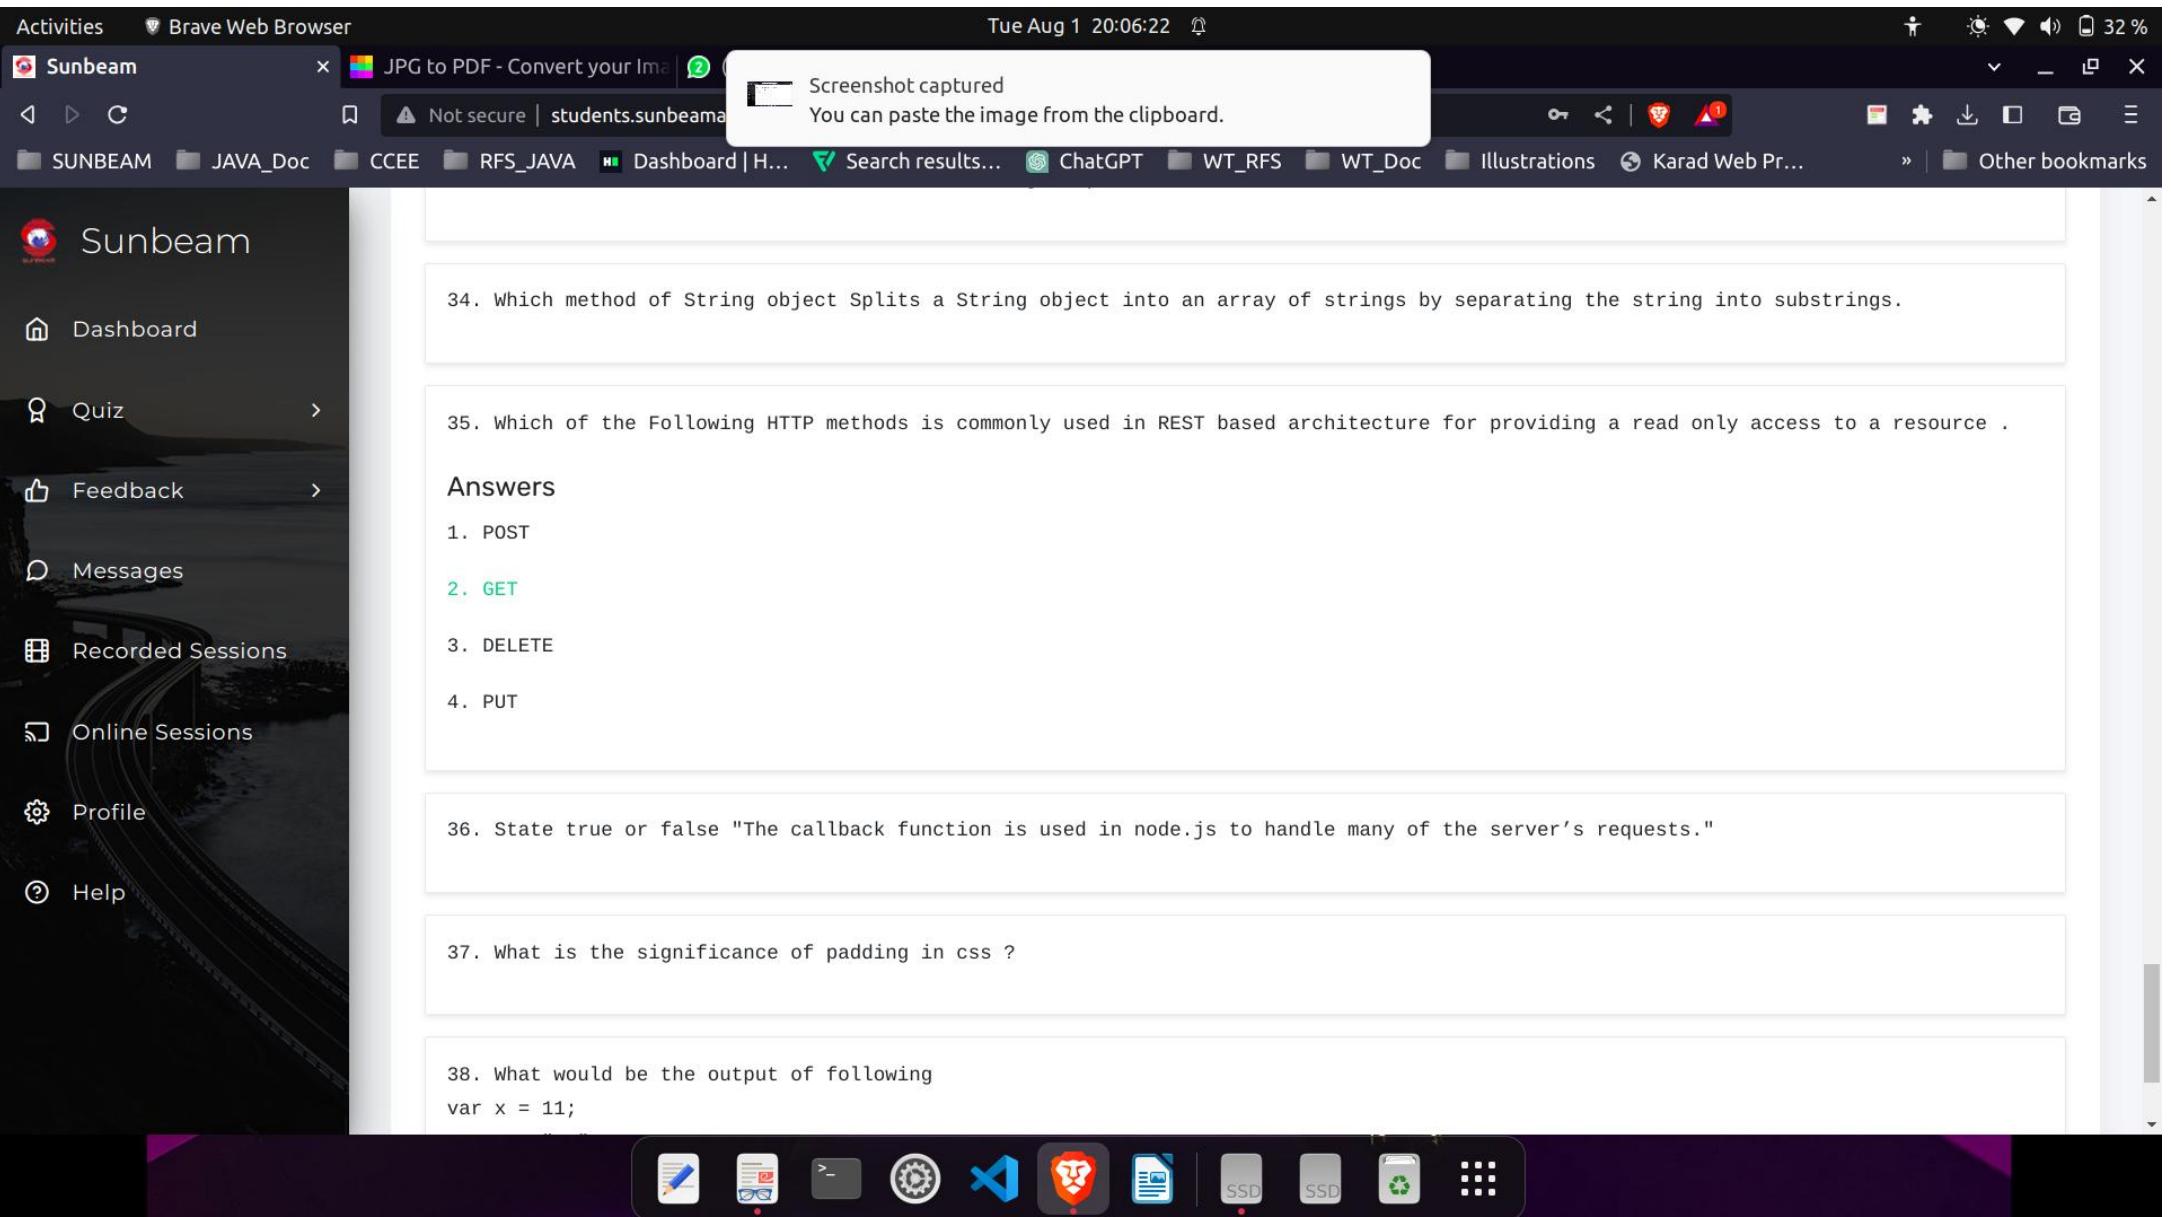

Activities Brave Web Browser Tue Aug 1 20:06:24 32 %

Sunbeam JPG to PDF - Convert your lma | (2) WhatsApp +

Not secure | students.sunbeamapps.org/quiz-app/app-quiz-summary?id=64c8c3c19a0e0d3bbbb465f2

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

 Sunbeam

Dashboard

Quiz >

Feedback >

Messages

Recorded Sessions

Online Sessions

Profile

Help

34. Which method of String object Splits a String object into an array of strings by separating the string into substrings.

35. Which of the Following HTTP methods is commonly used in REST based architecture for providing a read only access to a resource .

36. State true or false "The callback function is used in node.js to handle many of the server's requests."

Answers

1. False

2. True

37. What is the significance of padding in css ?

38. What would be the output of following

```
var x = 11;
var y = "22";
var z = x + y
console.log(z);
```

Brave Web Browser icons: Notepad, Document, Back, Gear, VS Code, Sunbeam logo, File, SSD, Recycle Bin, Grid.

Activities Brave Web Browser Tue Aug 1 20:06:26 32 %

Sunbeam JPG to PDF - Convert your Ima | 2 Screenshot captured
Not secure | students.sunbeam... You can paste the image from the clipboard.

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard

Quiz >

Feedback >

Messages

Recorded Sessions

Online Sessions

Profile

Help

34. Which method of String object Splits a String object into an array of strings by separating the string into substrings.

35. Which of the Following HTTP methods is commonly used in REST based architecture for providing a read only access to a resource .


36. State true or false "The callback function is used in node.js to handle many of the server's requests."

37. What is the significance of padding in css ?

Answers

1. Used for border
2. Used for matting
3. Used for space
4. Used for margin

38. What would be the output of following
`var x = 11;`

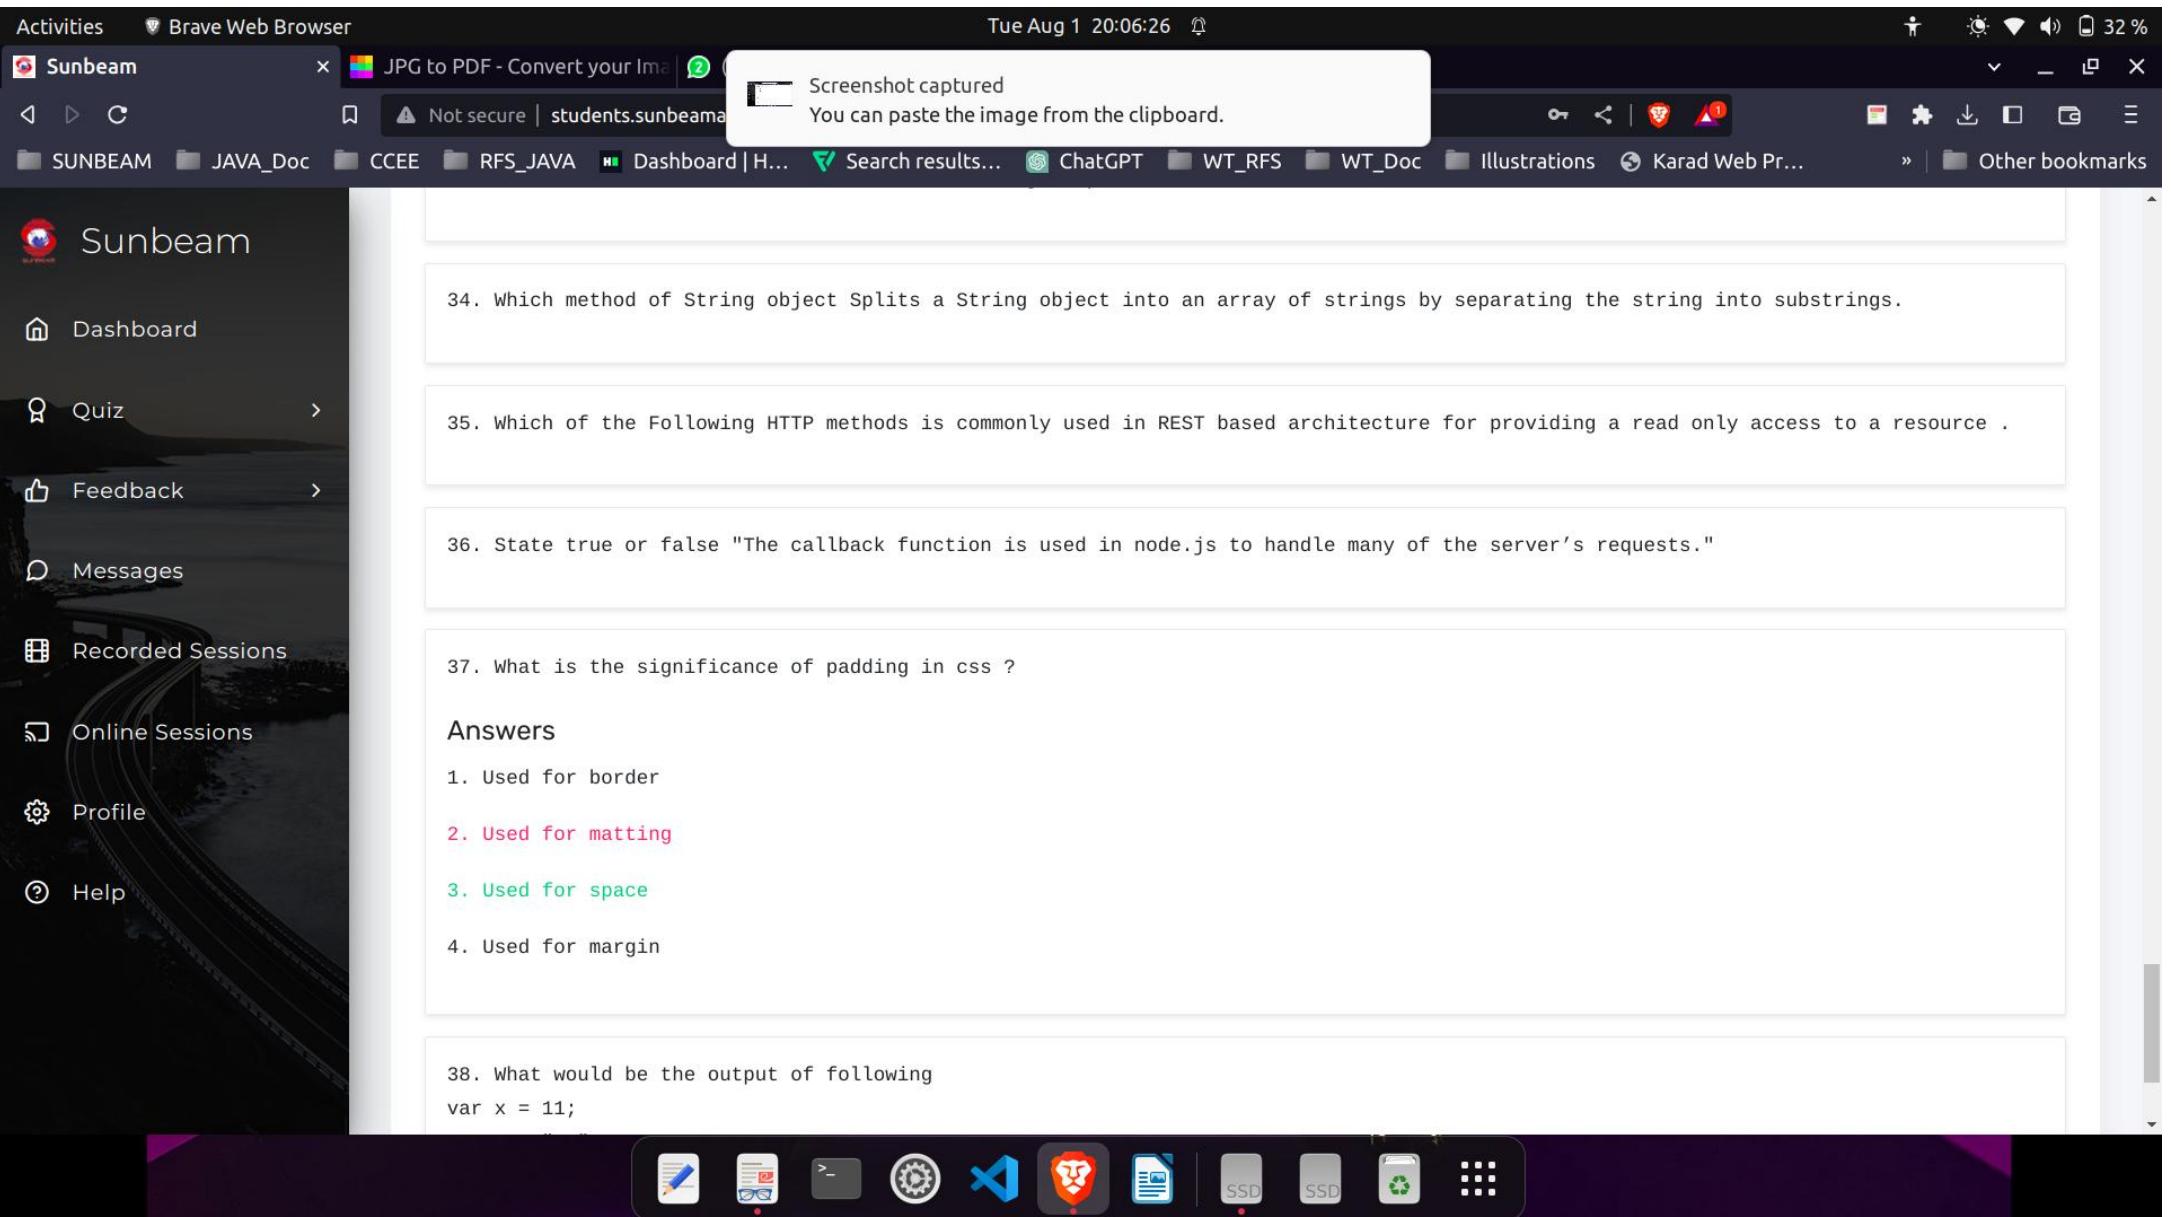

Activities Brave Web Browser Tue Aug 1 20:06:28

Sunbeam JPG to PDF - Convert your ima

Screenshot captured
You can paste the image from the clipboard.

SUNBEAM JAVA_Doc CCEE RFS_JAVA Dashboard | H... Search results... ChatGPT WT_RFS WT_Doc Illustrations Karad Web Pr... Other bookmarks

Sunbeam

Dashboard

Quiz >

Feedback >

Messages

Recorded Sessions

Online Sessions

Profile

Help

36. State true or false "The callback function is used in node.js to handle many of the server's requests."

37. What is the significance of padding in css ?

38. What would be the output of following

```
var x = 11;
var y = "22";
var z = x + y
console.log(z);
```

Answers

1. 33

2. 32

3. 1122

4. None of the above

© 2023 Sunbeam

Brave Web Browser