Cucumber Report

Start : Nov 19, 9:26:19.253 pm	*End : Nov 19, 9:26:27.912 pm*	*Duration : 8.659 s*
Features	Scenarios	Steps

PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 5 SKIPPED - 0	PASSED - 0 FAILED - 0 SKIPPED - 40

Features: 1

Scenarios: 5

Steps: 40

Pass %

0 %
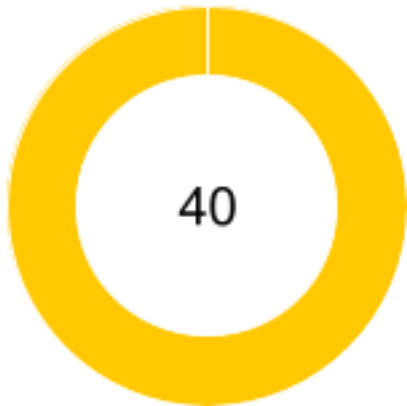
Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
Login an account in orangehrm.com	8.659 s	5	0	5	0	40	0	0	40

#	Feature Name	Scenario Name
1	*Login an account in orangehrm.com*	*Login with valid credentials*
2		*Login with invalid credentials*
3		*Adding new customer to project info*
4		*Adding new Organaization Structure*
5		*Editing the myinfo data*

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@ValidCredentials	1	0	1	0	1	0	1	0
@InvalidCredentials	1	0	1	0	1	0	1	0
@TimeField	1	0	1	0	1	0	1	0
@SelectingOrganization	1	0	1	0	1	0	1	0
@Accessingmyinfo	1	0	1	0	1	0	1	0
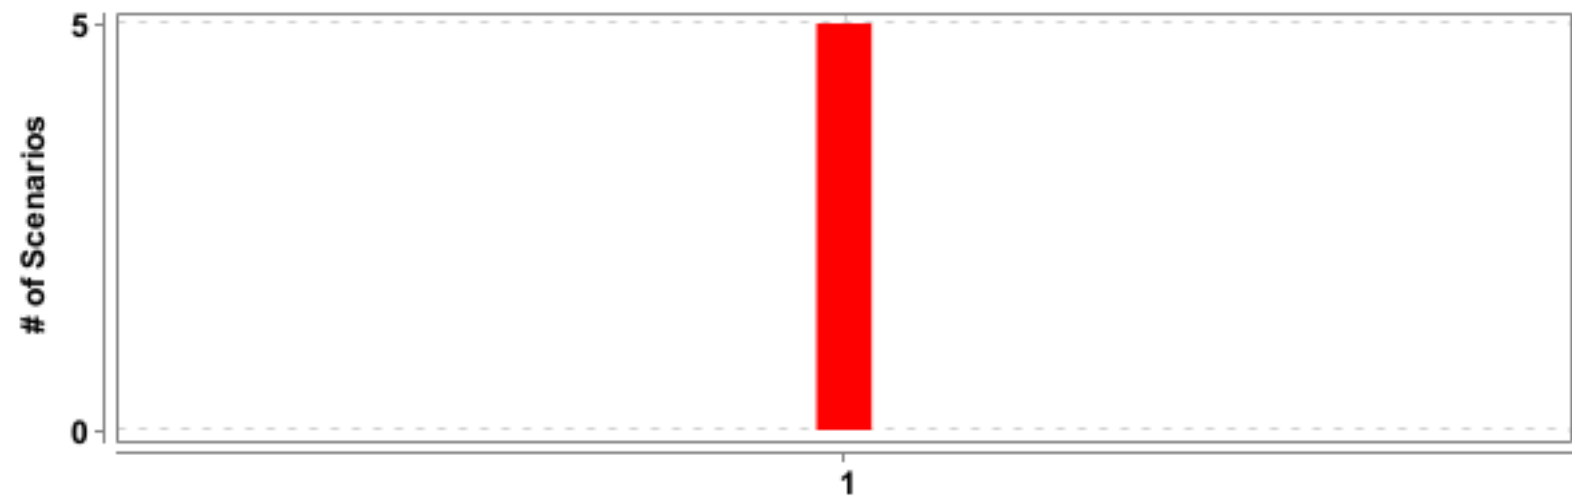
#	Feature Name	T	P	F	S	Duration
1	Login an account in orangehrm.com	5	0	5	0	8.659 s
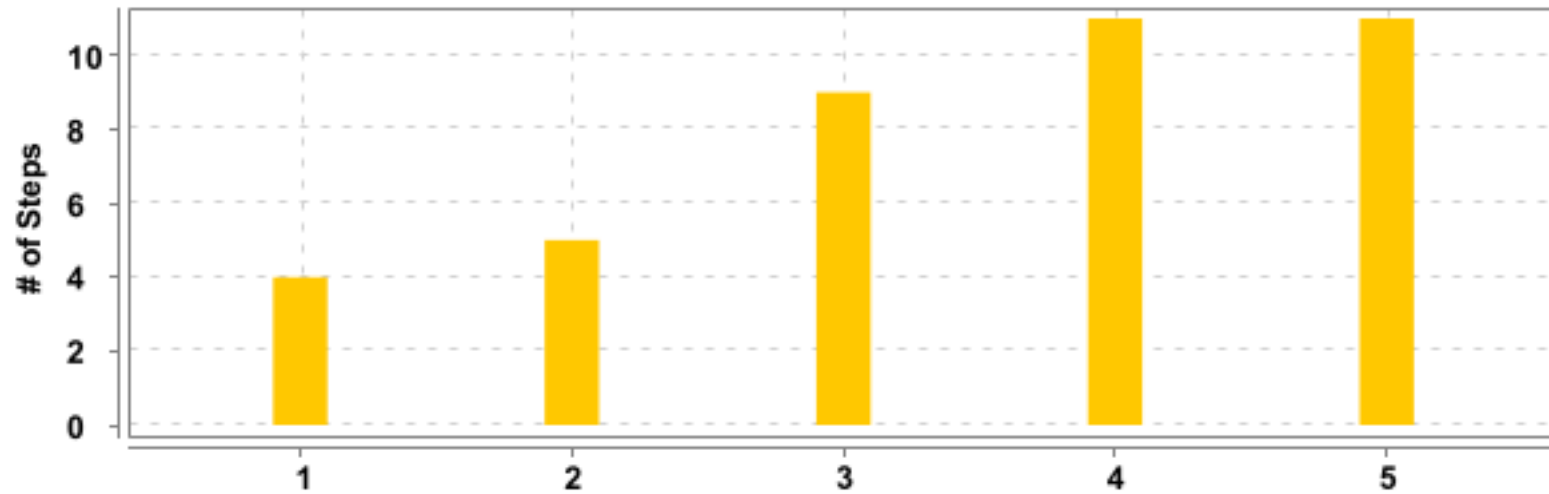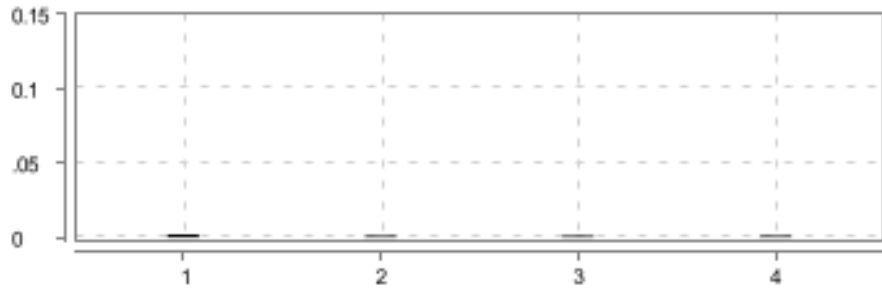
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Login an account in orangehrm.com	Login with valid credentials	4	0	0	4	3.319 s
2		Login with invalid credentials	5	0	0	5	1.267 s
3		Adding new customer to project info	9	0	0	9	1.283 s
4		Adding new Organaization Structure	11	0	0	11	1.373 s
5		Editing the myinfo data	11	0	0	11	1.244 s

Login an account in orangehrm.com

FAILED	DURATION - 8.659 s	Scenarios		Steps	
		Total - 5		Total - 40	
/ 9:26:19.253 pm // 9:26:27.912 pm /		Pass - 0	**5**	Pass - 0	**40**
		Fail - 5		Fail - 0	
		Skip - 0		Skip - 40	

Login with valid credentials

FAILED	DURATION - 3.319 s		Steps	
/ 9:26:19.262 pm // 9:26:22.581 pm /			Total - 4	
Login an account in orangehrm.com			Pass - 0	**4**
			Fail - 0	
@ValidCredentials			Skip - 4	

#	Step / Hook Details	Status	Duration
	BEFORE - com.stepdefinition.HookClass.setUp()	FAILED	3.231 s

	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: session not created: Microsoft Edge failed to start: crashed. (session not created: DevToolsActivePort file doesn't exist) (The process started from msedge location C:\Program Files (x86)\Microsoft\Edge\Application\msedge.exe is no longer running, so msedgedriver is assuming that msedge has crashed.) Host info: host: 'LAPTOP-2PTAM6EL', ip: '192.168.1.10' Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.1' Driver info: org.openqa.selenium.edge.EdgeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: MicrosoftEdge, ms:edgeOptions: {args: [], binary: C:\Program Files (x86)\Micr..., extensions: []}}]}]
	    at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140)
	    at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96)
	    at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)
	    at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:236)
	    at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:163)
	    at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:108)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:60) at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:56) at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:48) at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:44) at com.utility.HelperClass.<init>(HelperClass.java:18) at com.utility.HelperClass.setUpDriver(HelperClass.java:37) at com.stepdefinition.HookClass.setUp(HookClass.java:15)		
1	Given User is on the orangehrm.com homepage	SKIPPED	0.002 s
2	When User enters the valid username and password	SKIPPED	0.001 s
3	And User clicks the login button	SKIPPED	0.001 s
4	Then User sees the login successful message	SKIPPED	0.001 s
	AFTER - com.stepdefinition.HookClass.tearDown(io.cucumber.java.Scenario)	FAILED	0.012 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.utility.HelperClass.getDriver()" is null at com.stepdefinition.HookClass.tearDown(HookClass.java:21)		

Login with invalid credentials

FAILED	DURATION - 1.267 s		Steps
/ 9:26:22.634 pm // 9:26:23.901 pm /			Total - 5
			Pass - 0
Login an account in orangehrm.com			Fail - 0
@InvalidCredentials			Skip - 5

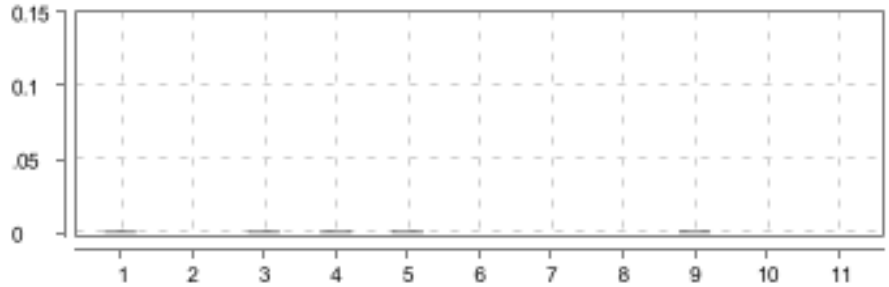| #	Step / Hook Details	Status	Duration
	BEFORE - com.stepdefinition.HookClass.setUp()	FAILED	1.242 s

	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: session not created: Microsoft Edge failed to start: crashed. (session not created: DevToolsActivePort file doesn't exist) (The process started from msedge location C:\Program Files (x86)\Microsoft\Edge\Application\msedge.exe is no longer running, so msedgedriver is assuming that msedge has crashed.) Host info: host: 'LAPTOP-2PTAM6EL', ip: '192.168.1.10' Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.1' Driver info: org.openqa.selenium.edge.EdgeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: MicrosoftEdge, ms:edgeOptions: {args: [], binary: C:\Program Files (x86)\Micr..., extensions: []}}]}]
	    at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140)
	    at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:236) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:163) at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:108) at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:60) at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:56) at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:48) at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:44) at com.utility.HelperClass.<init>(HelperClass.java:18) at com.utility.HelperClass.setUpDriver(HelperClass.java:37) at com.stepdefinition.HookClass.setUp(HookClass.java:15)		
1	Given User is on the orangehrm.com homepage	SKIPPED	0.001 s
2	When User enters the invalid username "Admin1"	SKIPPED	0.001 s
3	And User enters the invalid password "admin1"	SKIPPED	0.003 s
4	And User clicks the login button	SKIPPED	0.001 s
5	Then Login is unsuccessful with error messages	SKIPPED	0.001 s
	AFTER - com.stepdefinition.HookClass.tearDown(io.cucumber.java.Scenario)	FAILED	0.002 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.utility.HelperClass.getDriver()" is null at com.stepdefinition.HookClass.tearDown(HookClass.java:21)		

Adding new customer to project info

FAILED   DURATION - 1.283 s

/ 9:26:23.932 pm // 9:26:25.215 pm /

Login an account in orangehrm.com

@TimeField

Steps
Total - 9
Pass - 0
Fail - 0
Skip - 9

9

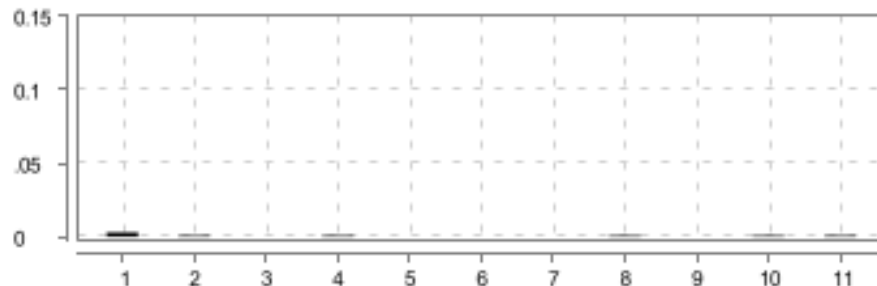| #	Step / Hook Details	Status	Duration
	BEFORE - com.stepdefinition.HookClass.setUp()	FAILED	1.247 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: session not created: Microsoft Edge failed to start: crashed. (session not created: DevToolsActivePort file doesn't exist) (The process started from msedge location C:\Program Files (x86)\Microsoft\Edge\Application\msedge.exe is no longer running, so msedgedriver is assuming that msedge has crashed.) Host info: host: 'LAPTOP-2PTAM6EL', ip: '192.168.1.10' Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.1' Driver info: org.openqa.selenium.edge.EdgeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: MicrosoftEdge, ms:edgeOptions: {args: [], binary: C:\Program Files (x86)\Micr..., extensions: []}}]}] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:236) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:163) at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:108) at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:60) at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:56) at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:48) at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:44) at com.utility.HelperClass.<init>(HelperClass.java:18) at com.utility.HelperClass.setUpDriver(HelperClass.java:37) at com.stepdefinition.HookClass.setUp(HookClass.java:15)		
1	Given User is on the orangehrm.com homepage	SKIPPED	0.001 s
2	When User enters the valid username and password	SKIPPED	0.004 s
3	And User clicks the login button	SKIPPED	0.001 s
4	When user selects the time feature	SKIPPED	0.000 s
5	When user selects the projectinfo category	SKIPPED	0.000 s
6	When user selects the customer option	SKIPPED	0.000 s
7	When user clicks the add button	SKIPPED	0.000 s
8	When user adds the addcustomer name, description, and clicks the save button	SKIPPED	0.000 s
9	Then user sees the added customer details	SKIPPED	0.001 s
	AFTER - com.stepdefinition.HookClass.tearDown(io.cucumber.java.Scenario)	FAILED	0.003 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.utility.HelperClass.getDriver()" is null at com.stepdefinition.HookClass.tearDown(HookClass.java:21)		

Adding new Organaization Structure

FAILED	DURATION - 1.373 s	Steps
/ 9:26:25.253 pm // 9:26:26.626 pm /		Total - 11
		Pass - 0
Login an account in orangehrm.com		Fail - 0
@SelectingOrganization		Skip - 11

#	Step / Hook Details	Status	Duration
	BEFORE - com.stepdefinition.HookClass.setUp()	FAILED	1.345 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: session not created: Microsoft Edge failed to start: crashed. (session not created: DevToolsActivePort file doesn't exist) (The process started from msedge location C:\Program Files (x86)\Microsoft\Edge\Application\msedge.exe is no longer running, so msedgedriver is assuming that msedge has crashed.) Host info: host: 'LAPTOP-2PTAM6EL', ip: '192.168.1.10' Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.1' Driver info: org.openqa.selenium.edge.EdgeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: MicrosoftEdge, ms:edgeOptions: {args: [], binary: C:\Program Files (x86)\Micr..., extensions: []}}]}] 　　at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) 　　at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) 　　at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) 　　at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) 　　at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) 　　at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) 　　at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) 　　at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:236) 　　at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:163) 　　at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:108) 　　at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:60) 　　at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:56) 　　at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:48) 　　at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:44) 　　at com.utility.HelperClass.<init>(HelperClass.java:18) 　　at com.utility.HelperClass.setUpDriver(HelperClass.java:37) 　　at com.stepdefinition.HookClass.setUp(HookClass.java:15)		
1	Given User is on the orangehrm.com homepage	SKIPPED	0.001 s
2	When User enters the valid username and password	SKIPPED	0.000 s
3	And User clicks the login button	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
4	And User clicks admin feature	SKIPPED	0.001 s
5	And user selects Organization category	SKIPPED	0.001 s
6	And User selects Structure in organaization category	SKIPPED	0.000 s
7	And User enables Edit function	SKIPPED	0.000 s
8	And User clicks Add button	SKIPPED	0.000 s
9	And User enters unit identification number,name,description	SKIPPED	0.001 s
10	And user clicks save	SKIPPED	0.000 s
11	Then User should be able to see structure added sucessfully	SKIPPED	0.000 s
	AFTER - com.stepdefinition.HookClass.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.utility.HelperClass.getDriver()" is null at com.stepdefinition.HookClass.tearDown(HookClass.java:21)	FAILED	0.004 s

Editing the myinfo data

FAILED	DURATION - 1.244 s
/ 9:26:26.668 pm // 9:26:27.912 pm /	
Login an account in orangehrm.com	
@Accessingmyinfo	

Steps
Total - 11
Pass - 0
Fail - 0
Skip - 11

11

#	Step / Hook Details	Status	Duration
	BEFORE - com.stepdefinition.HookClass.setUp()	FAILED	1.216 s

	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: session not created: Microsoft Edge failed to start: crashed. (session not created: DevToolsActivePort file doesn't exist) (The process started from msedge location C:\Program Files (x86)\Microsoft\Edge\Application\msedge.exe is no longer running, so msedgedriver is assuming that msedge has crashed.) Host info: host: 'LAPTOP-2PTAM6EL', ip: '192.168.1.10' Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.1' Driver info: org.openqa.selenium.edge.EdgeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: MicrosoftEdge, ms:edgeOptions: {args: [], binary: C:\Program Files (x86)\Micr..., extensions: []}}]}]
	   at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140)
	   at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96)
	   at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68)
	   at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:236) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:163) at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:108) at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:60) at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:56) at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:48) at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:44) at com.utility.HelperClass.<init>(HelperClass.java:18) at com.utility.HelperClass.setUpDriver(HelperClass.java:37) at com.stepdefinition.HookClass.setUp(HookClass.java:15)		
1	Given User is on the orangehrm.com homepage	SKIPPED	0.003 s
2	When User enters the valid username and password	SKIPPED	0.001 s
3	And User clicks the login button	SKIPPED	0.000 s
4	And user clicks the Myinfo category	SKIPPED	0.001 s
5	And user enters the firstname, lastname, and nickname	SKIPPED	0.000 s
6	And user enters the employeeid, otherid, Driver's License Number, License Expiry Date, SSN Number, and SIN Number	SKIPPED	0.000 s
7	And user enters the select the value of Nationality, Marital Status, Date of Birth, and Gender	SKIPPED	0.000 s
8	And user clicks the save button	SKIPPED	0.001 s
9	And user selects the blood group	SKIPPED	0.000 s
10	And user clicks the bloodgroup save button	SKIPPED	0.001 s
11	Then user is able to see the edited details	SKIPPED	0.001 s
	AFTER - com.stepdefinition.HookClass.tearDown(io.cucumber.java.Scenario)	FAILED	0.002 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.utility.HelperClass.getDriver()" is null at com.stepdefinition.HookClass.tearDown(HookClass.java:21)		