

Feature	Feature Scenario				Step				
Name	Duration	T	P	F	S	T	P	F	S
Login an account in orangehrm.com	6.979 s	1	0	1	0	10	0	1	9

FAIL & SKIP SCENARIOS -- 3 --

#	Feature Name	Scenario Name
-	Login an account in orangehrm.com	Adding Employee Status


TAG		Scer	nario			Feature		
Name	T	P	F	S	T	P	F	S
@AddingEmployeeStatus	1	0	1	0	1	0	1	0

FEATURES SUMMARY -- 5 --



#	Feature Name	T	P	F	S	Duration
1	Login an account in orangehrm.com	1	0	1	0	6.979 s

SCENARIOS SUMMARY -- 6 --

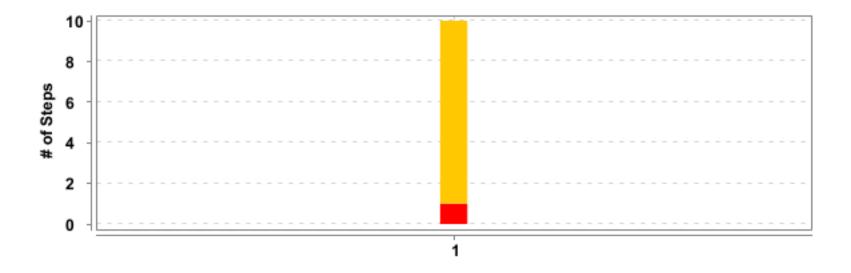


#	Feature Name	Scenario Name	T	P	F	S	Duration	
1	Login an account in orangehrm.com	Adding Employee Status	10	0	1	9	6.974 s	

DETAILED SECTION -- 7 --

## Login an account in orangehrm.com

FAILED	DURATION - 6.979 s	Scenarios		Steps	
		Total - 1		Total - 10	
/ 1:05:15.566 pm // 1	1:05:22.545 pm /	Pass - 0	1	Pass - 0	10
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 9	

## **Adding Employee Status**

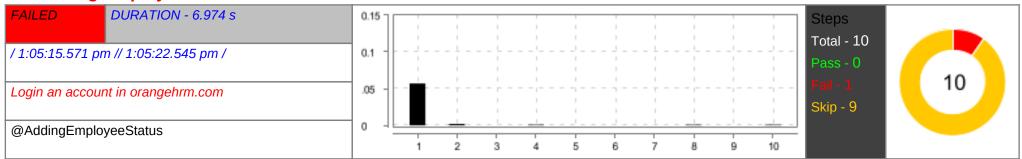

#	Step / Hook Details	Status	Duration
1	Given User is on the orangehrm.com homepage	FAILED	0.057 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinition.OrangeHRMStepDefinition		
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)		
	at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)		
	at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)		
	at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:56)		
	at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:84)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)		
	at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)		

:	Step / Hook Details	Status	Duration
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148)		
	at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146)		
	at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)		
	at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)		
	Caused by: java.lang.reflect.InvocationTargetException		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)		
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)		
	45 more Caused by: org.openga.selenium.InvalidSelectorException: Compound class names not permitted For documentation on this		
e	error, please visit: https://www.selenium.dev/documentation/webdriver/troubleshooting/errors#invalid-selector-exception Build info: version:		
	4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info:		
C	Iriver.version: unknown		

DETAILED SECTION -- 9 --

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.By\$ByClassName. <init>(By.java:309)</init>		
	at org.openqa.selenium.By.className(By.java:100)		
	at org.openqa.selenium.support.AbstractFindByBuilder.buildByFromShortFindBy(AbstractFindByBuilder.java:42)		
	at org.openqa.selenium.support.FindBy\$FindByBuilder.buildIt(FindBy.java:83)		
	at org.openqa.selenium.support.pagefactory.Annotations.buildBy(Annotations.java:82)		
	at org.openqa.selenium.support.pagefactory.DefaultElementLocator. <init>(DefaultElementLocator.java:58)</init>		
	at org.openqa.selenium.support.pagefactory.DefaultElementLocator. <init>(DefaultElementLocator.java:46)</init>		
	at org.openqa.selenium.support.pagefactory.DefaultElementLocatorFactory.createLocator(DefaultElementLocatorFactory.java:32)		
	at org.openqa.selenium.support.pagefactory.DefaultFieldDecorator.decorate(DefaultFieldDecorator.java:55)		
	at org.openqa.selenium.support.PageFactory.proxyFields(PageFactory.java:109)		
	at org.openqa.selenium.support.PageFactory.initElements(PageFactory.java:101)		
	at org.openqa.selenium.support.PageFactory.initElements(PageFactory.java:88)		
	at org.openqa.selenium.support.PageFactory.initElements(PageFactory.java:76) at com.actions.AdminActions. <init>(AdminActions.java:12)</init>		
	at com.stepdefinition.OrangeHRMStepDefinition. <init>(OrangeHRMStepDefinition.java:17)</init>		
		OLUBBER	0.000
2	When User enters the valid username and password	SKIPPED	0.002 s
3	And User clicks the login button	SKIPPED	0.000 s
4	And User clicks admin feature	SKIPPED	0.001 s
5	When User selects Job	SKIPPED	0.000 s
6	When User selects Employee Status	SKIPPED	0.000 s
7	When User Clicks on Add button	SKIPPED	0.000 s
8	When User Enters the Employee Status	SKIPPED	0.001 s
9	When User Clicks on Save button	SKIPPED	0.000 s
10	Then User Recevices Successfully Saved message	SKIPPED	0.001 s
	AFTER - com.stepdefinition.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.716 s
	Adding Employee Status		