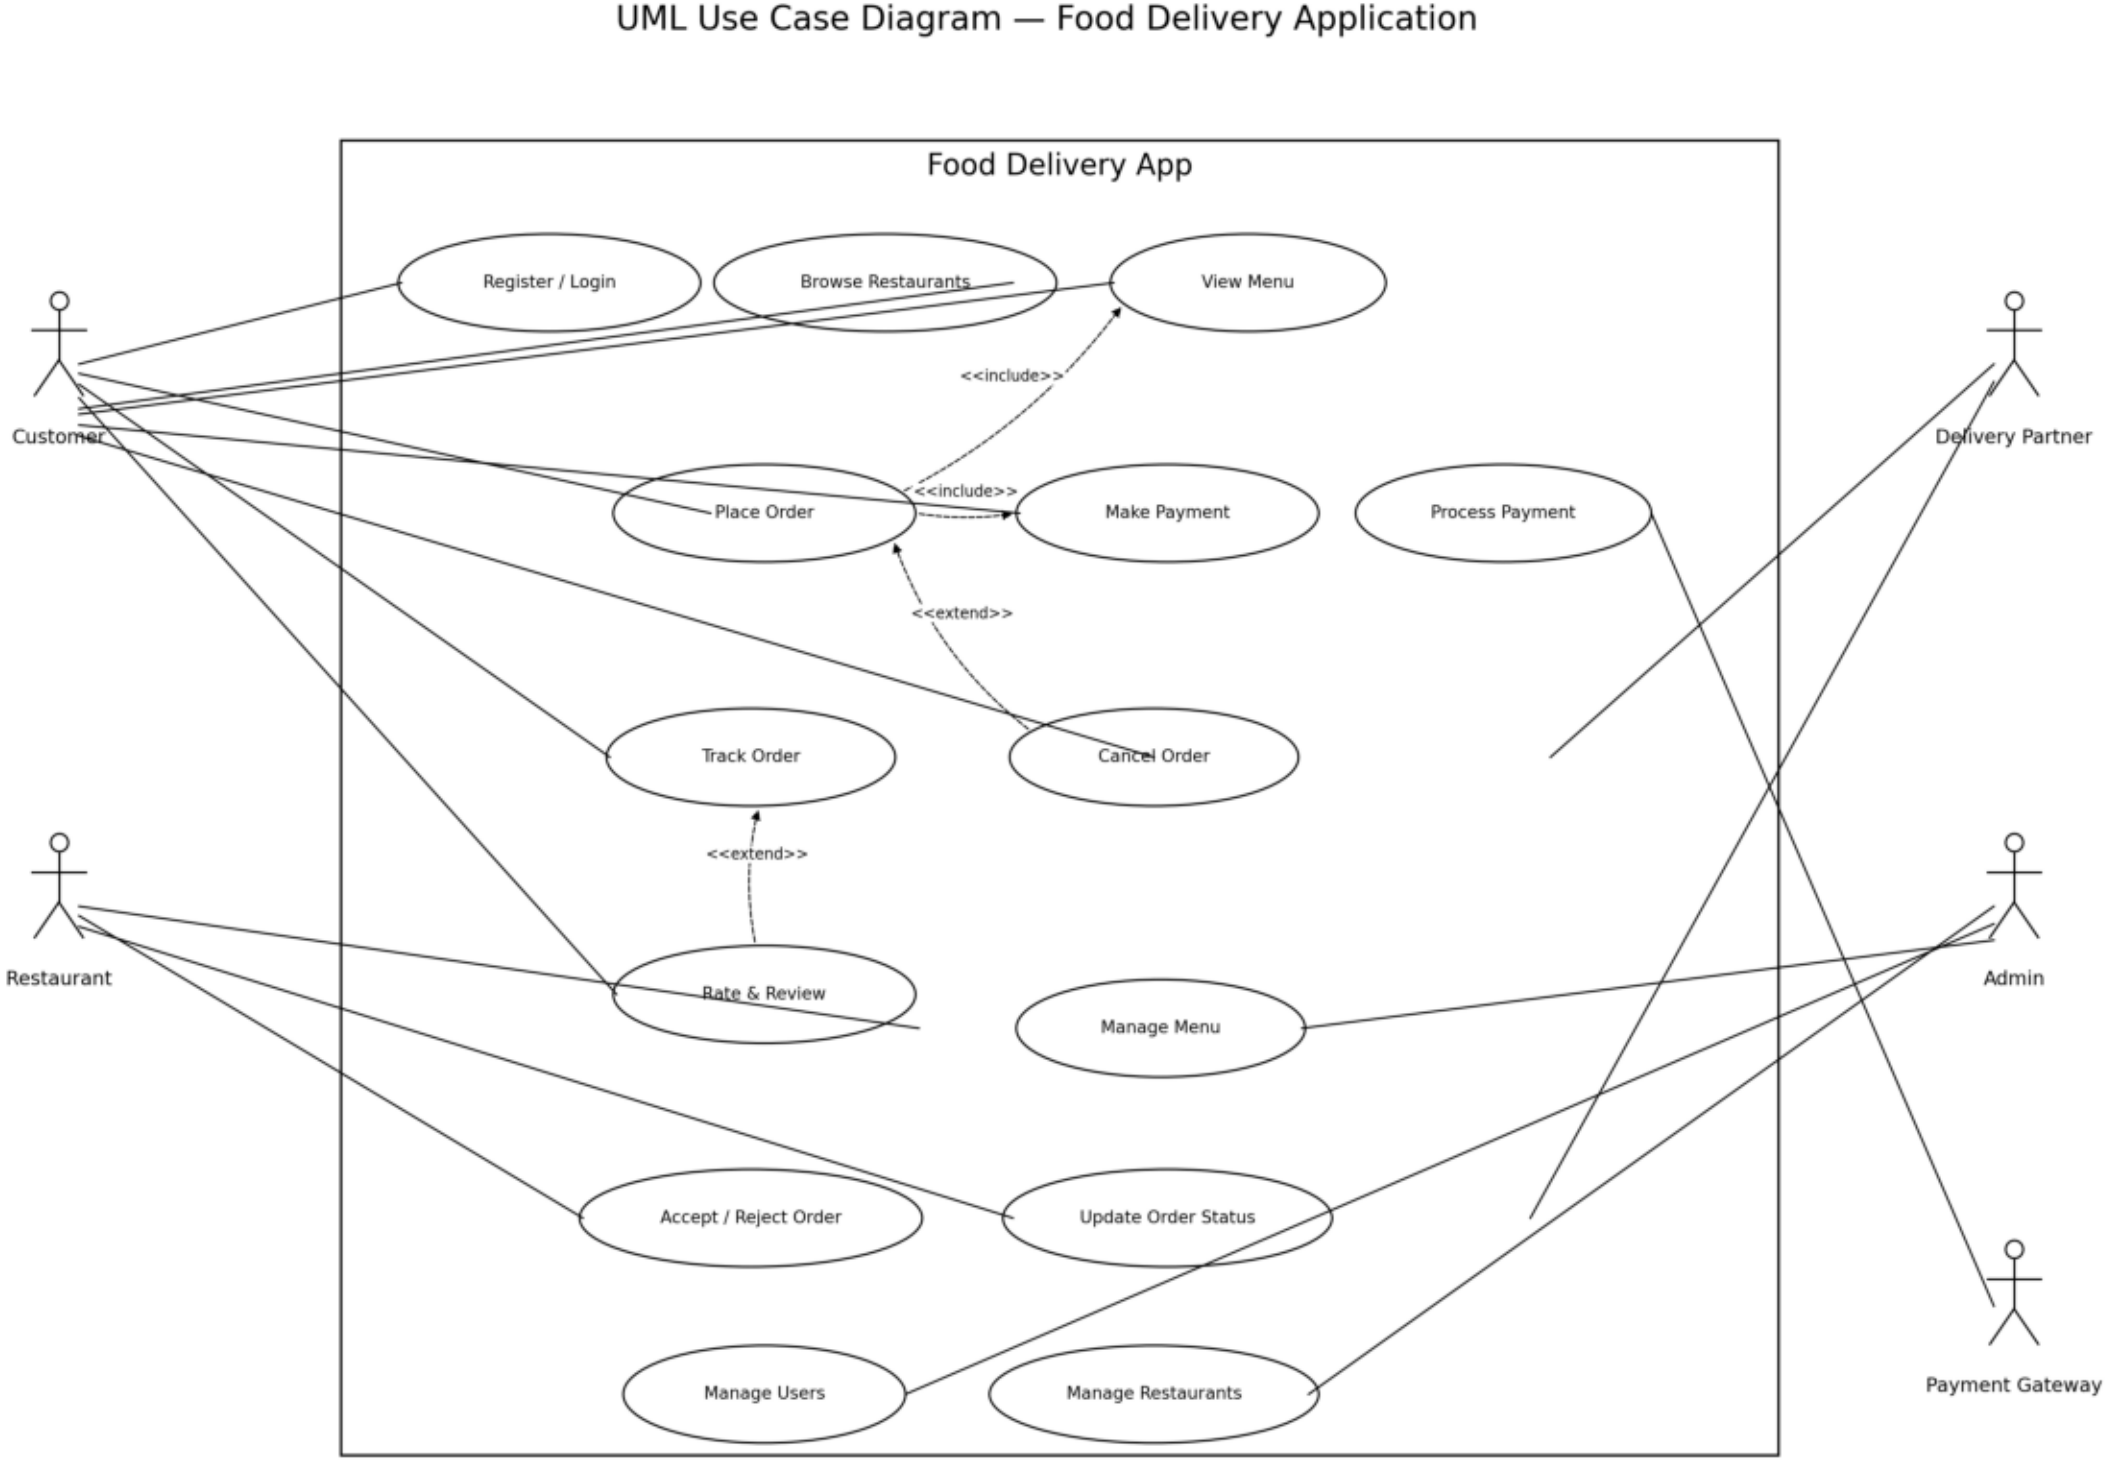

UML Use Case Diagram — Food Delivery Application
Food Delivery App
Register / Login
Browse Restaurants
View Menu
Place Order
Make Payment
Process Payment
Track Order
Cancel Order
Rate & Review
Manage Menu
Accept / Reject Order
Update Order Status
Manage Users
Manage Restaurants
<<include>>
<<include>>
<<extend>>
<<extend>>
Customer
Restaurant
Delivery Partner
Admin
Payment Gateway

Use Case Specifications

1. Register / Login

Actor(s): Customer

Function: Create an account or authenticate an existing customer.

Precondition: User is not authenticated; registration requires valid details.

Postcondition: Customer account is created or a valid session is established.

2. Browse Restaurants

Actor(s): Customer

Function: View available restaurants, cuisines, ratings, offers, and delivery information.

Precondition: Customer has opened the application.

Postcondition: Restaurant list matching the selected filters/location is displayed.

3. View Menu

Actor(s): Customer

Function: Display restaurant menu items, prices, availability, and details.

Precondition: Restaurant exists and its menu is available.

Postcondition: Customer can view item details and select items for an order.

4. Place Order

Actor(s): Customer

Function: Select items, enter delivery details, review the cart, and submit the order.

Precondition: Customer is logged in; cart contains valid available items; delivery address is available.

Postcondition: Order is created with an order ID and sent to the restaurant for processing.

5. Make Payment

Actor(s): Customer, Payment Gateway

Function: Initiate and complete payment for the selected order.

Precondition: Order exists and the payable amount is calculated.

Postcondition: Payment result is recorded as successful or failed; order payment status is updated.

Use Case Specifications

1. Rate & Review

Actor(s): Customer

Function: Submit a rating and textual review after order completion.

Precondition: Customer has a completed eligible order.

Postcondition: Rating/review is stored and associated with the restaurant/order.

2. Manage Menu

Actor(s): Restaurant

Function: Add, update, remove, or mark menu items available/unavailable.

Precondition: Restaurant user is authenticated and authorized.

Postcondition: Restaurant menu reflects the latest changes.

3. Accept / Reject Order

Actor(s): Restaurant

Function: Accept or reject a newly received order based on availability/capacity.

Precondition: A new order has been received by the restaurant.

Postcondition: Order status becomes accepted or rejected and the customer is notified.

4. Update Order Status

Actor(s): Restaurant, Delivery Partner

Function: Update preparation, pickup, out-for-delivery, and delivered states.

Precondition: The actor is authorized and the order is active.

Postcondition: The order status is updated and visible to relevant users.

5. Manage Users

Actor(s): Admin

Function: View, activate, deactivate, or manage user accounts and access.

Precondition: Admin is authenticated with required privileges.

Postcondition: User account/access information is updated.