


5. Demonstrate CI Integration by Running Jenkins in a Docker Container

Program 5

-Dockerfile

-Docker-compose.yaml

Step 1: Create a Docker file and add this code

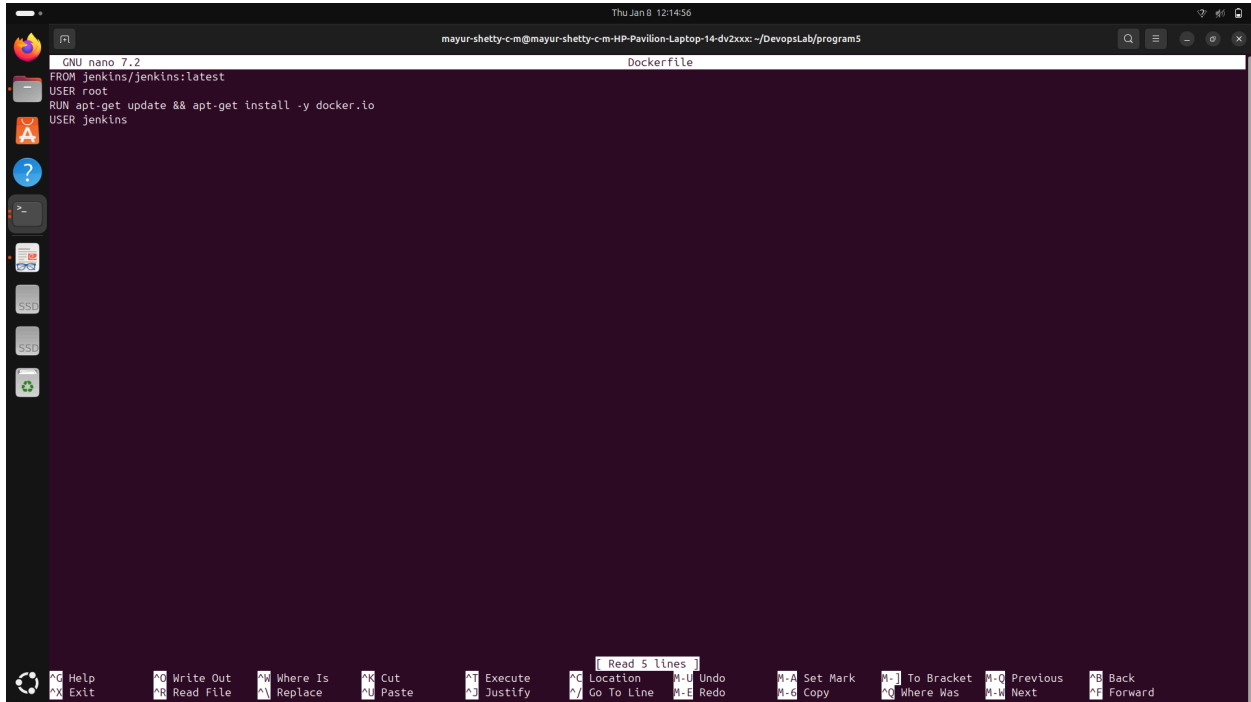


The screenshot shows a terminal window with the title bar "GNU nano 7.2" and the file name "Dockerfile". The content of the Dockerfile is as follows:

```
FROM jenkins/jenkins:latest
USER root
RUN apt-get update && apt-get install -y docker.io
USER jenkins
```

The terminal window also shows a sidebar with various icons and a bottom status bar with keyboard shortcuts.

Step 2: Create a Docker-compose.yaml file and add this code

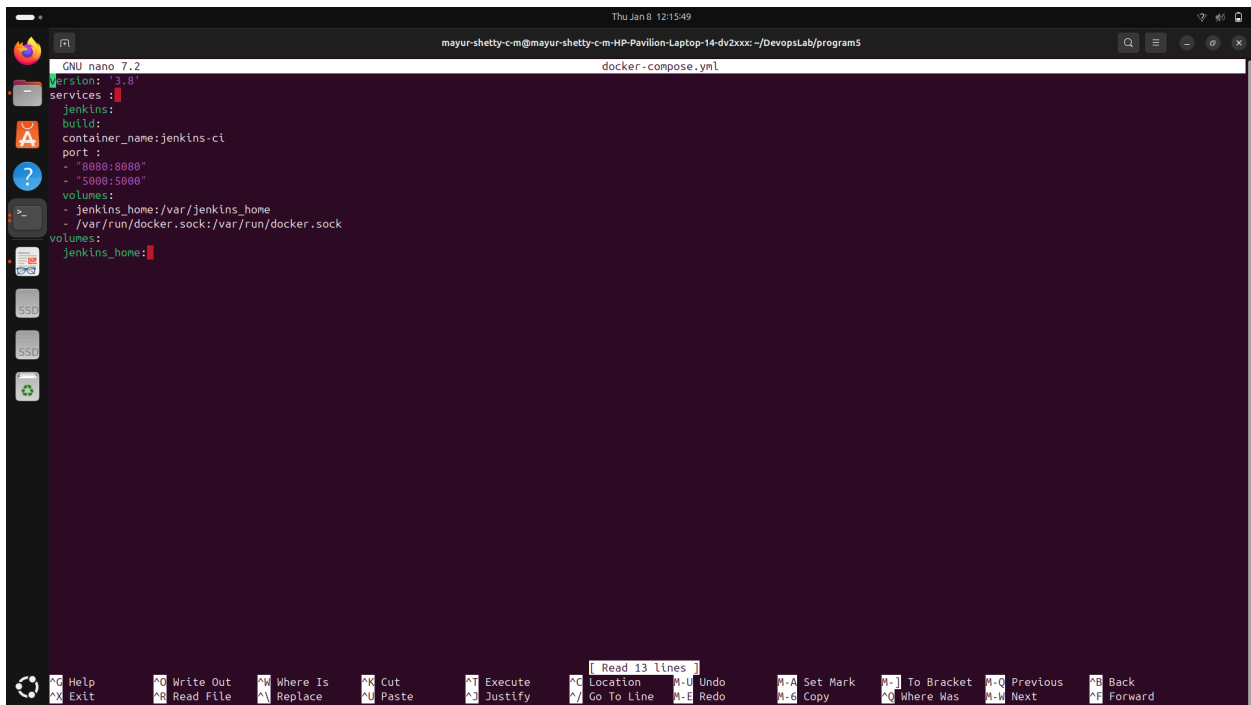

The screenshot shows a terminal window with the title bar "GNU nano 7.2" and the file name "docker-compose.yaml". The content of the docker-compose.yaml file is as follows:

```
version: '3.8'
services:
  jenkins:
    build:
      container_name: jenkins-ci
    port:
      - "8080:8080"
      - "5000:5000"
    volumes:
      - jenkins_home:/var/jenkins_home
      - /var/run/docker.sock:/var/run/docker.sock
    volumes:
      jenkins_home:
```

The terminal window also shows a sidebar with various icons and a bottom status bar with keyboard shortcuts.

Step 3: Build the docker file
Docker build -t program 5 .

Getting Started

Unlock Jenkins

To ensure Jenkins is securely set up by the administrator, a password has been written to the log ([not sure where to find it?](#)) and this file on the server:

```
/var/jenkins_home/secrets/initialAdminPassword
```

Please copy the password from either location and paste it below.

Administrator password

Continue