

Program 4: Integrate git with Docker for Source controlled application builds

Step 1: Create a directory and change to it

mkdir program4

cd program4

```
1rv24mc040-haripriya@haripriya-ASUS:~/Devops_lab$ mkdir program4
```

```
1rv24mc040-haripriya@haripriya-ASUS:~/Devops_lab$ cd program4
```

Step 2 : Initialize npm

npm init -y

```
1rv24mc040-haripriya@haripriya-ASUS:~/Devops_lab/program4$ npm init -y
```

Wrote to /home/1rv24mc040-haripriya/Devops_lab/program4/package.json:

```
{
  "name": "program4",
  "version": "1.0.0",
  "description": "",
  "main": "index.js",
  "scripts": {
    "test": "echo \"Error: no test specified\" && exit 1"
  },
  "keywords": [],
  "author": "",
  "license": "ISC"
}
```

Step 3: Create index.js

nano index.js

Step 4: Create Dockerfile

nano Dockerfile

Step 5 : install dependencies

npm install express

```
1rv24mc040-haripriya@haripriya-ASUS:~/Devops_lab/program4$ npm install express
```


```
added 68 packages, and audited 69 packages in 3s
```

```
18 packages are looking for funding
```

```
run `npm fund` for details
```


```
found 0 vulnerabilities
```

Step 6: Create a git repository in github

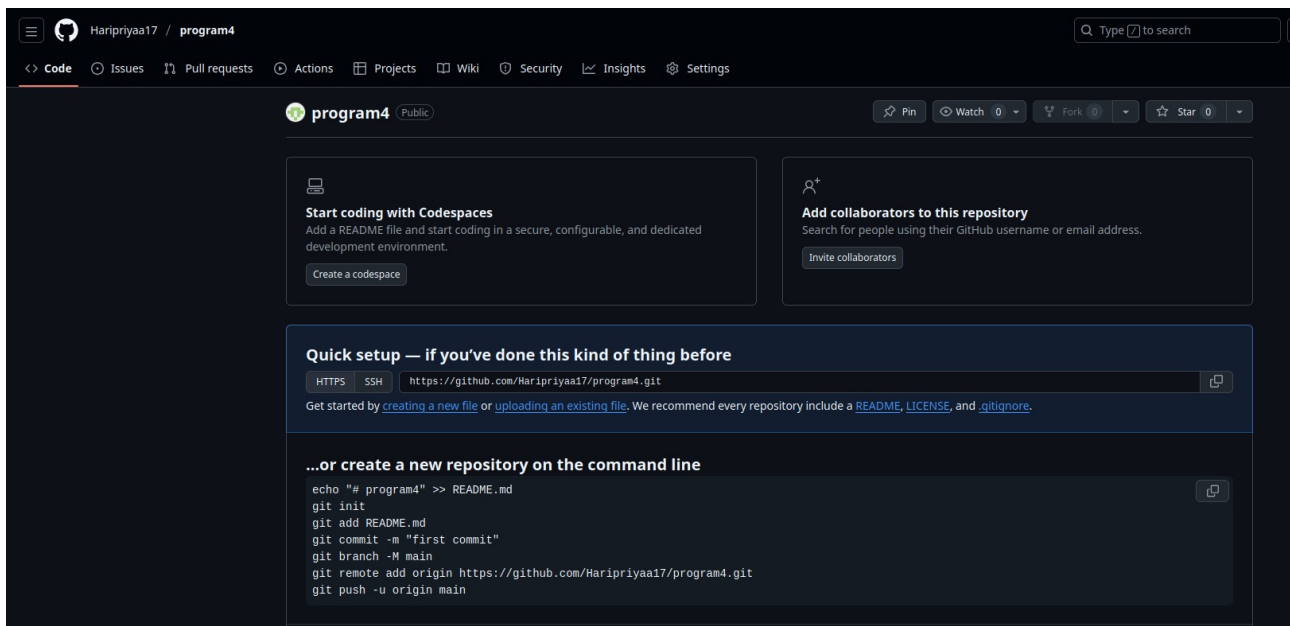

Step 7: Create a PAT and copy the password

Settings -> Developer Settings -> Personal Access Tokens -> Classic Tokens -> Create token

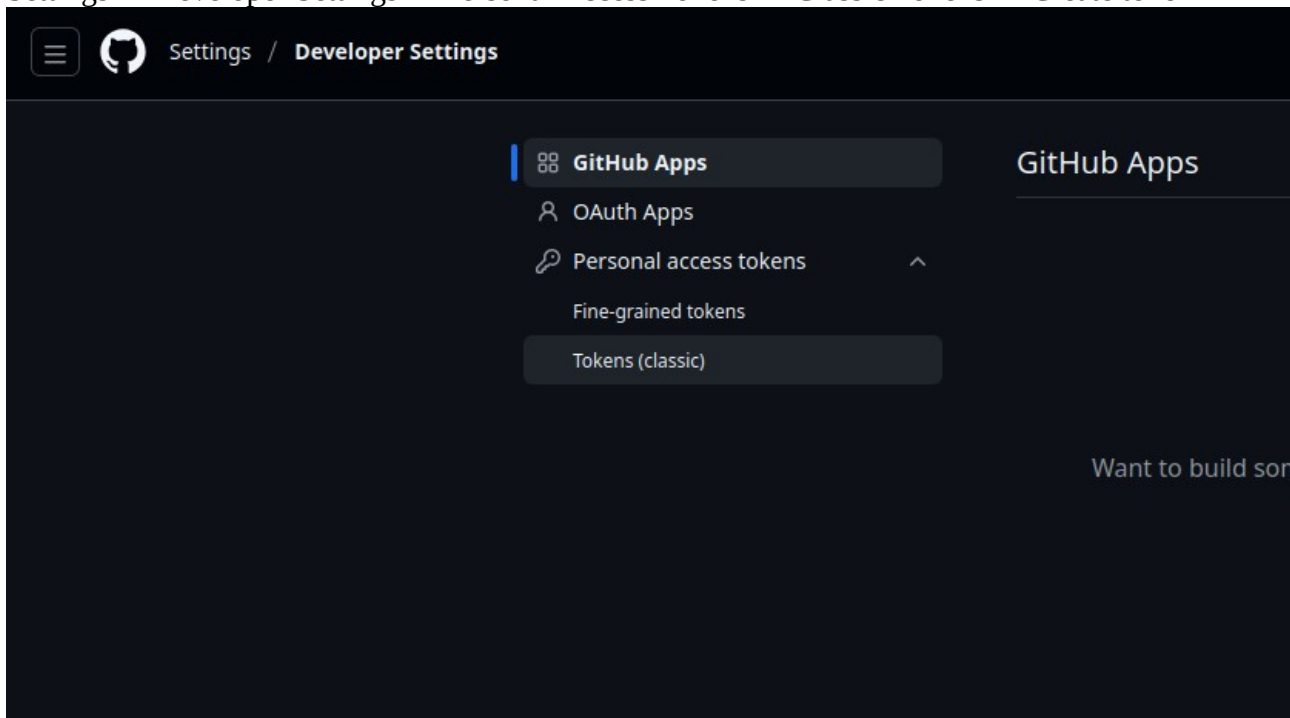

Step 8: Git commands to push to the repo

git init

```
1rv24mc040-haripriya@haripriya-ASUS:~/Devops_lab/program4$ git init
hint: Using 'master' as the name for the initial branch. This default branch name
hint: is subject to change. To configure the initial branch name to use in all
hint: of your new repositories, which will suppress this warning, call:
hint: git config --global init.defaultBranch <name>
hint:
```

git add .

git commit -m "Initial commit"

```
1rv24mc040-haripriya@haripriya-ASUS:~/Devops_lab/program4$ git add .
```

```
1rv24mc040-haripriya@haripriya-ASUS:~/Devops_lab/program4$ git commit -m "Initial Commit"
```

```
[master (root-commit) 9780e6d] Initial Commit
```

```
636 files changed, 72749 insertions(+)
```

```
create mode 100644 Dockerfile
```

```
create mode 100644 index.js
```

```
create mode 100644 node_modules/.package-lock.json
```

git branch -M main

git remote add origin https://github.com/Haripriyaa17/program4.git

```
1rv24mc040-haripriya@haripriya-ASUS:~/Devops_lab/program4$ git branch -M main
```

```
1rv24mc040-haripriya@haripriya-ASUS:~/Devops_lab/program4$ git remote add origin https://github.com/Haripriyaa17/program4.git
```

git push -u origin main

```
1rv24mc040-haripriya@haripriya-ASUS:~/Devops_lab/program4$ git push -u origin main
```

```
Username for 'https://github.com': Haripriyaa17
```

```
Password for 'https://Haripriyaa17@github.com':
```

```
Enumerating objects: 719, done.
```

```
Counting objects: 100% (719/719), done.
```

```
Delta compression using up to 12 threads
```

```
Compressing objects: 100% (666/666), done.
```

```
Writing objects: 100% (719/719), 725.03 KiB | 5.29 MiB/s, done.
```

```
Total 719 (delta 143), reused 0 (delta 0), pack-reused 0
```

```
remote: Resolving deltas: 100% (143/143), done.
```

```
To https://github.com/Haripriyaa17/program4.git
```

```
* [new branch]      main -> main
```

```
branch 'main' set up to track 'origin/main'.
```

Add the username and PAT for password

Step 9 : Check the repository for the upload of files