

PROGRAM 5 :

STEP 1 : Create Dockerfile

```
rv24mc028_chethanacs@Elite:~/DEVops/prg4$ cd ..
rv24mc028_chethanacs@Elite:~/DEVops$ mkdir prg5
rv24mc028_chethanacs@Elite:~/DEVops$ cd prg5
rv24mc028_chethanacs@Elite:~/DEVops/prg5$ docker --version
Docker version 28.5.1, build e180ab8

rv24mc028_chethanacs@Elite:~/DEVops/prg5$ cat Dockerfile
FROM jenkins/jenkins:lts
USER root
RUN apt-get update && apt-get install -y docker.io

USER jenkins
rv24mc028_chethanacs@Elite:~/DEVops/prg5$
```

STEP 2: Create docker-compose.yml

```
rv24mc028_chethanacs@Elite:~/DEVops/prg5$ cat docker-compose.yml
version: '3.8'

services:
  jenkins:
    build: .
    container_name: jenkins-ci
    ports:
      - "8080:8080"
      - "50000:50000"
    volumes:
      - jenkins_home:/var/jenkins_home
      - /var/run/docker.sock:/var/run/docker.sock

volumes:
  jenkins_home:
```

STEP 3: Build Jenkins image

```

rv24mc028_chethanacs@Elite:~/DEVops/prg5$ docker compose build
WARN[0000] /home/rv24mc028_chethanacs/DEVops/prg5/docker-compose.yml: the attribute `version` is obsolete, it will be ignored, please remove it to avoid potential confusion
[+] Building 14.1s (5/7)
=> [internal] load local bake definitions 0.0s
=> => reading from stdin 527B 0.0s
=> [internal] load build definition from Dockerfile 0.0s
=> => transferring dockerfile: 138B 0.0s
=> [internal] load metadata for docker.io/jenkins/jenkins:lts 8.2s
=> [auth] jenkins/jenkins:pull token for registry-1.docker.io 0.0s
=> [internal] load .dockerignore 0.0s
=> => transferring context: 2B 0.0s
=> [1/2] FROM docker.io/jenkins/jenkins:lts@sha256:1e407df1a9bcb122cc4d7 5.8s
=> => resolve docker.io/jenkins/jenkins:lts@sha256:1e407df1a9bcb122cc4d7 0.0s
=> => sha256:75109de20007f9345278f298f4534d443409e234b 12.71kB / 12.71kB 0.0s
=> => sha256:b768bbb699b5f1b6579e23e7253ae1157a339a20a2e 2.58kB / 2.58kB 0.0s
=> => sha256:2f1ecb09fa362ebe652038ecbfcc64a84b042991e9d 4.19MB / 5.24MB 5.8s
=> => sha256:68cdef48000203f6c12f5c50b01fcfc4104bd620333 1.23kB / 1.23kB 1.1s

```

STEP 5: Run Jenkins container

```

rv24mc028_chethanacs@Elite:~/DEVops/prg5$ docker compose up -d
WARN[0000] /home/rv24mc028_chethanacs/DEVops/prg5/docker-compose.yml: the attribute `version` is obsolete, it will be ignored, please remove it to avoid potential confusion
[+] Running 1/1
✔ Container jenkins-ci Started 0.2s
rv24mc028_chethanacs@Elite:~/DEVops/prg5$ docker ps

```

CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS
653b06c4f19b	prg5-jenkins	"/usr/bin/tini -- /u..."	5 minutes ago	Up 5 minutes

```

0.0.0.0:8080->8080/tcp, [::]:8080->8080/tcp, 0.0.0.0:50000->50000/tcp, [::]:50000->50000/tcp jenkins-ci
rv24mc028_chethanacs@Elite:~/DEVops/prg5$ █

```

STEP 6: Open Jenkins UI



localhost:8080/login?from=%2F



Incognito

Relaunch to update

Getting Started


Unlock Jenkins

To ensure Jenkins is securely set up by the administrator, a password has been written to the log ([not sure where to find it?](#)) and this file on the server:

```
/var/jenkins_home/secrets/initialAdminPassword
```

Please copy the password from either location and paste it below.

Administrator password

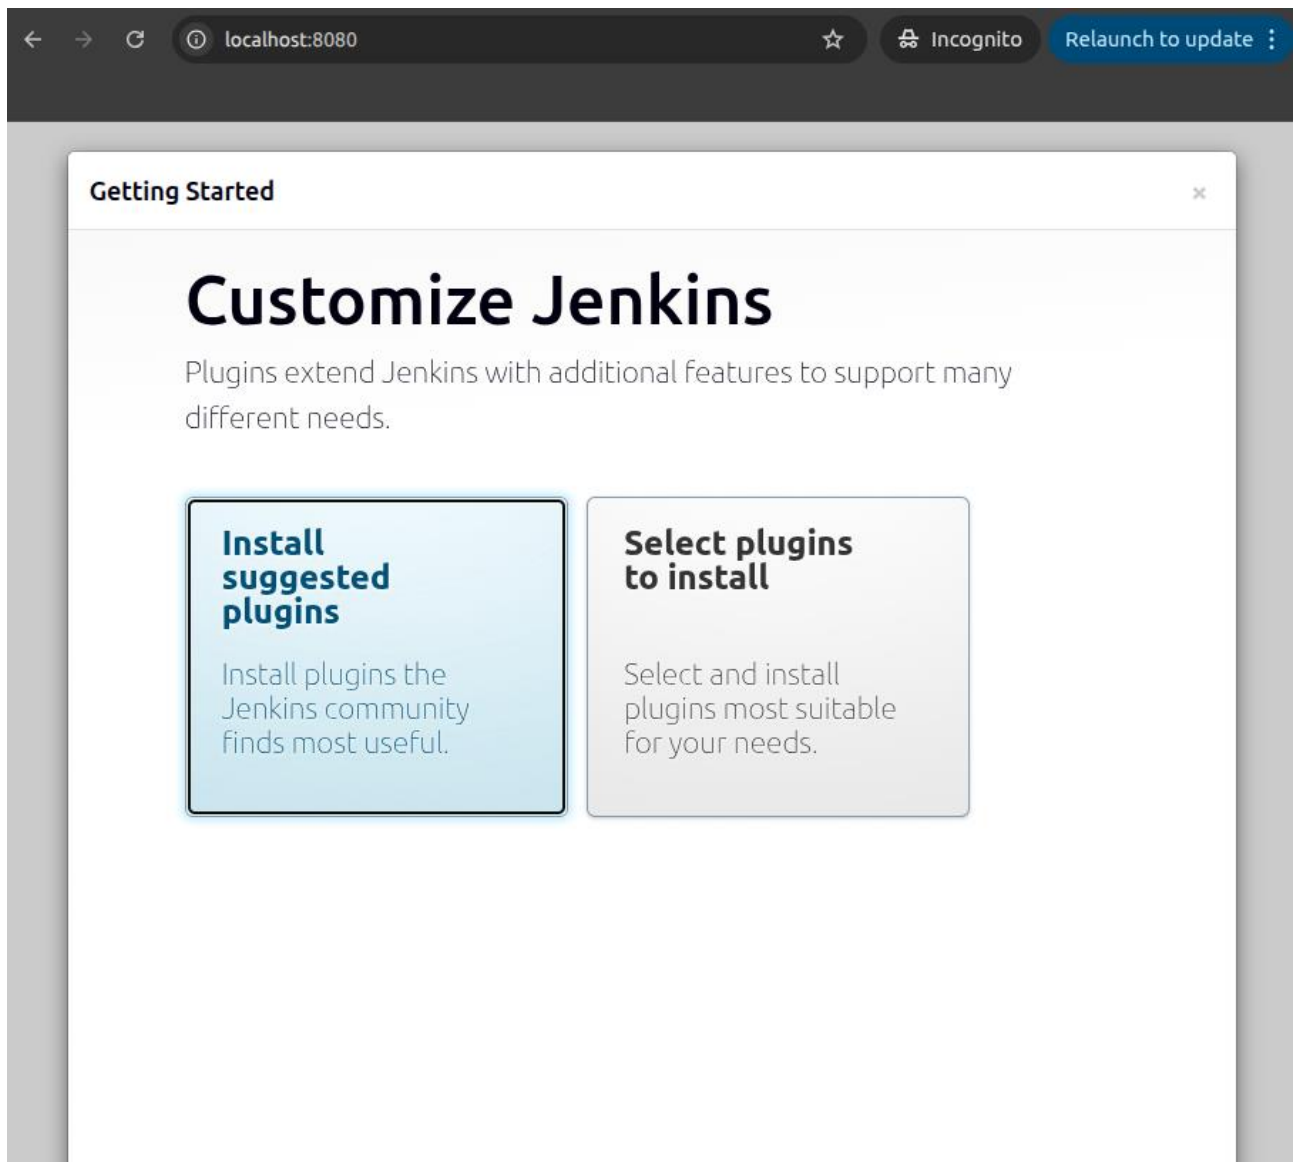

STEP 7: List docker images

```
rv24mc028_chethanacs@Elite:~/DEVops/prg5$ docker images
```

IMAGE	ID	DISK USAGE	Info →	U	In Use
			CONTENT	SIZE	EXTRA
chethanacs/prog6:latest	6fbac874f99e	1.09GB		0B	
chethanacs/program-6:latest	98ed240053a9	1.09GB		0B	
ghcr.io/chethana-cs/prog6:la...	6fbac874f99e	1.09GB		0B	
ghcr.io/chethana-cs/program-...	98ed240053a9	1.09GB		0B	
image1:latest	637a2e774d35	8.32MB		0B	U
image2:latest	7a2a8c3d09cd	8.32MB		0B	U
jenkins/jenkins:lts-jdk11	2771c4579171	471MB		0B	U
kickbase/stable:v0.0.48	c6b5532e987b	1.31GB		0B	U
mynignix:latest	3a22a07896ab	8.32MB		0B	
prg5-jenkins:latest	2ab5f6965c66	934MB		0B	U
prog6:latest	6fbac874f99e	1.09GB		0B	
program-6:latest	98ed240053a9	1.09GB		0B	
program4:latest	bcf59b722488	196MB		0B	U
yourdockerhubname/program-6:...	98ed240053a9	1.09GB		0B	

```
rv24mc028_chethanacs@Elite:~/DEVops/prg5$
```

