

Prerequisites :

- Java 8 installed
- VS Code IDE.

1: UDP-Go Back N Protocol

[Github link](#) There are two Subfolders associated with UDP - Go back N


1. UDP_GO_BACK_N_CLIENT
2. UDP_GO_BACK_N_SERVER

Always run server first and then run the client

1.1: UDP_GO_BACK_N_SERVER :

The job of this module is to accept packet and store it in the file and also send ACK back for the packet received. Following are the step to be followed to run the UDP_GO_BACK_N_SERVER

1. Click on the Run and Debug icon on the IDE.
2. Select **ServerApp<UDP_GO_BACK_N_SERVER>** from the launch config file.
3. As the you select and run new terminal will pop
 - Enter server port number (eg: 9093)
 - Enter file name to where the packets to be stored (eg : serverCopyFile)

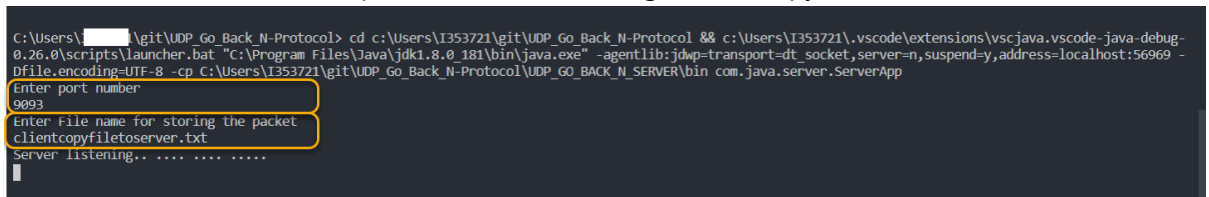

```
C:\Users\I353721\git\UDP_Go_Back_N-Protocol> cd c:\Users\I353721\git\UDP_Go_Back_N-Protocol && c:\Users\I353721\.vscode\extensions\vscjava.vscode-java-debug-0.26.0\scripts\launcher.bat "C:\Program Files\Java\jdk1.8.0_181\bin\java.exe" -agentlib:jdwp=transport=dt_socket,server=n,suspend=y,address=localhost:56969 -Dfile.encoding=UTF-8 -cp C:\Users\I353721\git\UDP_Go_Back_N-Protocol\UDP_GO_BACK_N_SERVER\bin com.java.server.ServerApp
Enter port number
9093
Enter File name for storing the packet
clientcopyfiletoServer.txt
Server listening.. ....
```

1.2: UDP_GO_BACK_N_CLIENT :

Job of this module is to transfer the file packets to UDP server and also makes sure that within the time limit if ACK is not received for the packet sent current window packets are retransmitted. Following are the steps to be followed to run the UDPClient

1. Click on the Run and Debug icon on the IDE
2. Select **ClientApp<UDP_GO_BACK_N_CLIENT>** from the launch config file.
3. As the you select and run new terminal will pop there
 - Enter the server HostName as localhost if the server is running with in the server if not please pass valid hostname (eg : localhost)
 - Enter Server port number (eg: 9093)
 - Enter the window size (eg: 5)

- Enter the Max Segment size (< 2001) (eg: 2000)

```
C:\Users\I353721\git\UDP_Go_Back_N-Protocol> cd c:\Users\I353721\git\UDP_Go_Back_N-Protocol && c:\Users\I353721\.vscode\extensions\vscjava.vscode-java-debug-0.26.0\scripts\launcher.bat "C:\Program Files\Java\jdk1.8.0_181\bin\java.exe" -agentlib:jdwp=transport=dt_socket,server=n,suspend=y,address=localhost:58214 -Dfile.encoding=UTF-8 -cp C:\Users\I353721\git\UDP_Go_Back_N-Protocol\UDP_GO_BACK_N_CLIENT\bin com.java.client.ClientApp
Enter the server hostname
localhost
Enter the server port number
9093
Enter the file name with extension
clientsidefile.txt
Enter the window size
5
Enter the Max Segment size
2000
```

****Note : observe the terminal for packet transmission and ACK ****

1.3: Output:

At the end of file transmission you can find file created in the UDP_GO_BACK_N_SERVER/resources/serverfiles/<filename that you gave> with data in it.

2: UDP SELECTIVE REPEAT:

There are two Subfolders associated with UDP SELECTIVE REPEAT

1. UDP_SELECTIVE_REPEAT_CLIENT
2. UDP_SELECTIVE_REPEAT_SERVER

Always run server first and then run the client

2.1: UDP_SELECTIVE_REPEAT_SERVER :

The job of this module is to accept packet and store it in the file and also send ACK back for the packet received. Following are the step to be followed to run the UDP_SELECTIVE_REPEAT_SERVER

1. Click on the Run and Debug icon on the IDE.
2. Select **ServerApp<UDP_SELECTIVE_REPEAT_SERVER>** from the launch config file.
3. As the you select and run new terminal will pop. In the terminal you can observe the packets getting received.

```
C:\Users\I353721\git\UDP_Go_Back_N-Protocol> cd c:\Users\I353721\git\UDP_Go_Back_N-Protocol && c:\Users\I353721\.vscode\extensions\vscjava.vscode-java-debug-0.26.0\scripts\launcher.bat "C:\Program Files\Java\jdk1.8.0_181\bin\java.exe" -agentlib:jdwp=transport=dt_socket,server=n,suspend=y,address=localhost:60523 -Dfile.encoding=UTF-8 -cp C:\Users\I353721\git\UDP_Go_Back_N-Protocol\UDP_SELECTIVE_REPEAT_SERVER\bin com.java.selectiverepeat.server.ServerApp 9091 clientcop
y 0.1 5
Server listening.. ....
[]
```

2.2: UDP_SELECTIVE_REPEAT_CLIENT :

Job of this module is to transfer the file packets to UDP server and also makes sure that within the time limit if ACK is not received for the packet sent the packets lost are retransmitted. Following are the step to be followed to run the UDPclient

1. Click on the Run and Debug icon on the IDE
2. Select **ClientApp<UDP_SELECTIVE_REPEAT_CLIENT>** from the launch config file.
3. As the you select and run new terminal will pop. In the terminal you can observe the packets getting transferred.

```
c:\Users\I353721\.vscode\extensions\vscjava.vscode-java-debug-0.26.0\scripts\launcher.bat "C:\Program Files\Java\jdk1.8.0_181\bin\java.exe" -agentlib:jdwp=transport=dt_socket,server=n,suspend=y,address=localhost:60344 -Dfile.encoding=UTF-8 -cp C:\Users\I353721\git\UDP_Go_Back_N-Protocol\UDP_SELECTIVE_REPEAT_CLIENT\bin com.java.selectiverepeat.client.ClientApp localhost 9091 clientfile 5 2000
```

****Note : observe the terminal for packet transmission and ACK ****

Output:

At the end of file transmission you can find file created in the UDP_SELECTIVE_REPEAT_SERVER/resources/serverfiles/<filename that you gave in arguments> with data in it.

3: Standard TCP and UDP Implementation

3.1.1: TCP Standard

There are two subfolders associated with TCP - Standard

1. TCP_STANDARD_CLIENT
2. TCP_STANDARD_SERVER

Always run server first and then run the client

TCP_STANDARD_SERVER:

The job of this module is to accept a filename from the request and serve the file in response to the request. Following are the steps to be followed to run the TCP_STANDARD_SERVER:

1. Click on the Run and Debug icon on the IDE.
2. Select <TCP_STANDARD_SERVER> from the launch config file.
3. As you select and run, a new terminal will pop. You can see that the server is now serving files in the resources folder in the directory TCP_STANDARD_SERVER.

TCP_STANDARD_CLIENT:

The job of this module is to request for a file from the server and accept the file received as response and store it.

Following are the steps to be followed to run the TCP_STANDARD_CLIENT:

1. Click on the Run and Debug icon on the IDE.
2. Select <TCP_STANDARD_CLIENT> from the launch config file.
3. As you select and run, a new terminal will pop. You can see that the client is requesting for a file 'demo_file.txt' from the server.

3.1.2: Output:

At the end of file transmission you can find the file transferred and written into the 'received' directory as 'received_file.txt'

Screenshots - TCP

Server:

```
C:\Users\I353257\Desktop\UDP_Go_Back_N-Protocol> c:\Users\I353257\.vscode\extensions\vscjava.vscode-java-debug-0.26.0\scripts\launcher.bat "C:\Program Files\Java\jdk1.8.0_181\bin\java.exe" -agentlib:jdwp=transport=dt_socket,server=n,suspend=y,address=localhost:58195 -Dfile.encoding=UTF-8 -cp C:\Users\I353257\Desktop\UDP_Go_Back_N-Protocol\TCP_STANDARD_SERVER\bin com.java.standard.tcp.server.ServerApp 9094
Serving directory 'C:\Users\I353257\Desktop\UDP_Go_Back_N-Protocol\TCP_STANDARD_SERVER\bin\..\resources' on port 9094...
Accepted connection : Socket[addr=/127.0.0.1,port=58206,localport=9094]
Sending demo_file.txt...
Done.
```

Client:

```
C:\Users\I353257\Desktop\UDP_Go_Back_N-Protocol> c:\Users\I353257\.vscode\extensions\vscjava.vscode-java-debug-0.26.0\scripts\launcher.bat "C:\Program Files\Java\jdk1.8.0_181\bin\java.exe" -agentlib:jdwp=transport=dt_socket,server=n,suspend=y,address=localhost:58203 -Dfile.encoding=UTF-8 -cp C:\Users\I353257\Desktop\UDP_Go_Back_N-Protocol\TCP_STANDARD_CLIENT\bin com.java.standard.tcp.client.ClientApp localhost 9094 demo_file.txt
File demo_file.txt downloaded successfully
```

3.2.1: UDP Standard

There are two subfolders associated with TCP - Standard

1. UDP_STANDARD_CLIENT
2. UDP_STANDARD_SERVER

Always run server first and then run the client

UDP_STANDARD_SERVER:

The job of this module is to accept a filename from the request and serve the file in response to the request. Following are the steps to be followed to run the UDP_STANDARD_SERVER:

1. Click on the Run and Debug icon on the IDE.
2. Select <UDP_STANDARD_SERVER> from the launch config file.
3. As you select and run, a new terminal will pop. You can see that the server is now serving files in the resources folder in the directory UDP_STANDARD_SERVER.

UDP_STANDARD_CLIENT:

The job of this module is to request for a file from the server and accept the file received as response and store it.

Following are the steps to be followed to run the UDP_STANDARD_CLIENT:

1. Click on the Run and Debug icon on the IDE.
2. Select <UDP_STANDARD_CLIENT> from the launch config file.
3. As you select and run, a new terminal will pop. You can see that the client is requesting for a file 'demo_file.txt' from the server.

3.2.2: Output:

At the end of file transmission you can find the file transferred and written into the 'received' directory as 'received_file.txt'

Screenshots - UDP

Server:

```
C:\Users\I353257\Desktop\UDP_Go_Back_N-Protocol> cd c:\Users\I353257\Desktop\UDP_Go_Back_N-Protocol && c:\Users\I353257\.vscode\extensions\vscjava.vscode-java-debug-0.26.0\scripts\launcher.bat "C:\Program Files\Java\jdk1.8.0_181\bin\java.exe" -agentlib:jdwp-transport=dt_socket,server=n,suspend=y,address=localhost:50994 -Dfile.encoding=UTF-8 -cp C:\Users\I353257\Desktop\UDP_Go_Back_N-Protocol\UDP_STANDARD_SERVER\bin com.java.standard.udp.server.ServerApp 9095
Serving directory 'C:\Users\I353257\Desktop\UDP_Go_Back_N-Protocol\UDP_STANDARD_SERVER\resources' on port 9095...
Sending C:\Users\I353257\Desktop\UDP_Go_Back_N-Protocol\UDP_STANDARD_SERVER\resources\demo_file.txt...
Done.
```

Client:

```
C:\Users\I353257\Desktop\UDP_Go_Back_N-Protocol> c:\Users\I353257\.vscode\extensions\vscjava.vscode-java-debug-0.26.0\scripts\launcher.bat "C:\Program Files\Java\jdk1.8.0_181\bin\java.exe" -agentlib:jdwp-transport=dt_socket,server=n,suspend=y,address=localhost:65457 -Dfile.encoding=UTF-8 -cp C:\Users\I353257\Desktop\UDP_Go_Back_N-Protocol\UDP_STANDARD_CLIENT\bin com.java.standard.udp.client.ClientApp localhost 9095 demo_file.txt
File demo_file.txt downloaded successfully
```