

# Org-mode and Pandoc for Technical Writing

Tomáš Kruliš

21. 04. 2021



# Contents

|   |           |
|---|-----------|
| <b>List of Tables</b>   | <b>5</b>  |
| <b>List of Figures</b>  | <b>7</b>  |
| <b>List of Listings</b>   | <b>9</b>  |
| <b>Acronyms</b>   | <b>11</b> |
| <b>1 Introduction</b>   | <b>13</b> |
| 1.1 Tools I recommend and rationale why to use them . . . . .                     | 13        |
| <b>2 Basics of Version Control with Git</b>                                       | <b>15</b> |
| 2.1 git in a nutshell . . . . .   | 15        |
| 2.2 How to get git . . . . .  | 17        |
| 2.3 Basic setup . . . . .   | 17        |
| 2.4 First git repository . . . . .  | 18        |
| 2.5 Working with git repository . . . . .   | 19        |
| 2.6 Checking file status in git repository . . . . .                              | 19        |
| 2.7 Adding files to git tracking . . . . .  | 20        |
| 2.8 Staging and committing modified files in git . . . . .                        | 20        |
| 2.9 Setting ignored files to git . . . . .  | 21        |
| 2.10 File operations in git repository . . . . .                                  | 21        |
| 2.11 Disclaimer . . . . .   | 21        |
| <b>3 Export from org-mode to L<sup>A</sup>T<sub>E</sub>X – basics</b>             | <b>23</b> |
| 3.1 Customizing export from org-mode to L <sup>A</sup> T <sub>E</sub> X . . . . . | 23        |
| 3.2 Resources . . . . .   | 25        |
| <b>Glossary</b>   | <b>27</b> |
| <b>Index</b>  | <b>29</b> |
| <b>Reference</b>  | <b>31</b> |



## List of Tables



# List of Figures

|            |   |    |
|------------|---|----|
| Figure 2.1 | git storing data as snapshots of the project over time, source: Pro Git Book, [2]     | 16 |
| Figure 2.2 | Main parts of git project repository, source: Pro Git Book, [2]                       | 16 |
| Figure 2.3 | git workflow and file status changes as you work with them, source: Pro Git Book, [2] | 19 |





# List of Listings

|                                 |    |
|---------------------------------|----|
| Bash shell listing 1 . . . . .  | 17 |
| Bash shell listing 2 . . . . .  | 17 |
| Bash shell listing 3 . . . . .  | 17 |
| Bash shell listing 4 . . . . .  | 17 |
| Bash shell listing 5 . . . . .  | 17 |
| Bash shell listing 6 . . . . .  | 18 |
| Bash shell listing 7 . . . . .  | 18 |
| Bash shell listing 8 . . . . .  | 18 |
| Bash shell listing 9 . . . . .  | 18 |
| Bash shell listing 10 . . . . . | 18 |
| Bash shell listing 11 . . . . . | 18 |
| Bash shell listing 12 . . . . . | 19 |
| Bash shell listing 13 . . . . . | 19 |
| Bash shell listing 14 . . . . . | 20 |
| Bash shell listing 15 . . . . . | 20 |
| Emacs lisp listing 1 . . . . .  | 23 |
| Emacs lisp listing 2 . . . . .  | 23 |
| Emacs lisp listing 3 . . . . .  | 24 |
| Bash shell listing 16 . . . . . | 24 |



# Acronyms

| <hr/>    |                                    |
|----------|------------------------------------|
| Notation | Description                        |
| <hr/>    |                                    |
| CVCS     | centralized version control system |
| <hr/>    |                                    |
| DVCS     | distributed version control system |
| <hr/>    |                                    |



# 1 Introduction

Technical writing is an art in its own. When writing a manual, technical writer has to be the middle ground between software developers and users. As a technical writer you have to bring the subject matter, the software you are writing about, closer to its users. Very often you will have to cooperate directly with software developers and using version control tools such as `git` [1]. I found it beneficial to use efficient tools that help you get the task done, and are also extensible to accommodate any need should arise from writing process.

That is why I have decided to make this basic blog, suitable for beginners trying to find good workflow setup for their writing.

## 1.1 Tools I recommend and rationale why to use them

As noted above, I prefer to use tools that are extensible and allow a lot of options to meet any requirements that I may be facing during writing. The con is, as you might have guessed from the blog title, that these tools are often very complex. Also, I prefer to use open source tools whenever possible.

What does a technical writer need to do his job? For starters, it would be an *text editor*. That is a program that allows you to write text. Simple as that.

I would advise against writing in binary formats like `docx` [3] and `odt` [4] (which are in fact archives of multiple files). The reason being is that it is actually more challenging to maintain consistent document structure and look with writing in those formats. From my experience, it is much more efficient to focus on content as a writer, and leave upholding the formatting and overall consistency on another application.

For choosing a text editor, well, the name of this blog is "Org-mode and Pandoc for Technical Writing," and `org-mode` [5] is a markup format native to program `GNU/Emacs` [6] (further referred to simply as `emacs`). Because `org-mode` is just a markup format, you can actually use any text editor to write text in `org-mode` markup. However, `emacs` has the best support for it. If you insist on using different text editor than `emacs`, some alternatives would be `vim` [7] or `neovim` [8], `atom` [9] or `notepad++` [10]. In that case, you can skip chapters `chapter references to chapters about emacs and doom emacs command shortcuts`, which are focused on specifics of working with `emacs`. But for the full span of these blog posts, I will assume that you are using `emacs` as a text editor.

I have chosen `org-mode` as format for technical writing because it allows great workflow management and is tightly integrated into `emacs`. But it is a markup format that is best used for documentation source, not its "presentation" form.

Nowadays most documentation has to be accessible from web, or must be compatible with web-based applications, which means we need our documentation in html format. Often is very handy having access to offline documentation, for which is best choice the pdf format. I personally have been facing requirements to provide documentation also in `.docx` or `.odt` formats.



## 2 Basics of Version Control with Git

When you start a technical writing project, you can easily go by with an folder in your PC and thats it. But as the project grows, or you meet with more requirements from the client (maybe like to add another document format), you might wish to be able to test things out, or to comfortably revert from one state of things to another. That can be managed within folders, but sooner or later it will become clumsy and error prone. Other thing is, that client might straight from the beginning want you to contribute to some versioning system, to keep the manual in sync with current version of the software.

For those cases, you will have to use a version control system. Nowadays, the absolutely most used one is `git`. `git` is by definition "distributed version control system (DVCS) " [2] . How does it work? Software acting as version control is checking your files each time it is invoked, storing changes that have been made to those files in its own database. That way, you can revert to any previously recorded state of those files.

Now the "distributed" part means that the whole system does not have a central server (like it is with cetralized version control system (CVCS) ), but everything from the repository is mirrored to client local PC, even file history. This decentralized model brings more reliability, since if the server would went out of operation, the full repository can be revived from another clone. Also, these systems cope very well with multiple repository instances, so you can collaborate on your project easily with more people.

One of those DVCS is `git`. It is one of the most used DVCS today, maybe even THE most used DVCS . Especially in open source development.

### 2.1 `git` in a nutshell

Little contrary to previous description of the version control systems, `git` does not store changes to a file in time. Instead, `git` is taking snapshots of the whole repository filesystem in each commit. If there were no changes to an particular file compared to previous commit, `git` just stores reference to that file. `git` have uses hashes. Everything in `git` is checksummed with SHA-1 hash. SHA-1 hash is 40 character string consisting of hexadecimal characters (0 – 9 and a – f) and calculated based on the file contents. All of `git` actions only add data. It takes an effort to make `git` erase any data.

`git` recognizes three states of files: *modified*, *staged* and *committed*.

- modified means that you have changed the file but have not committed it to your database yet.
- staged means that you have marked a modified file in its current version to go into your next commit snapshot
- committed means that the data is safely stored in your local database

`git` representation of the project has three main parts:

- working directory (project files currently on local PC)
- staging area (file that stores information about staged files)

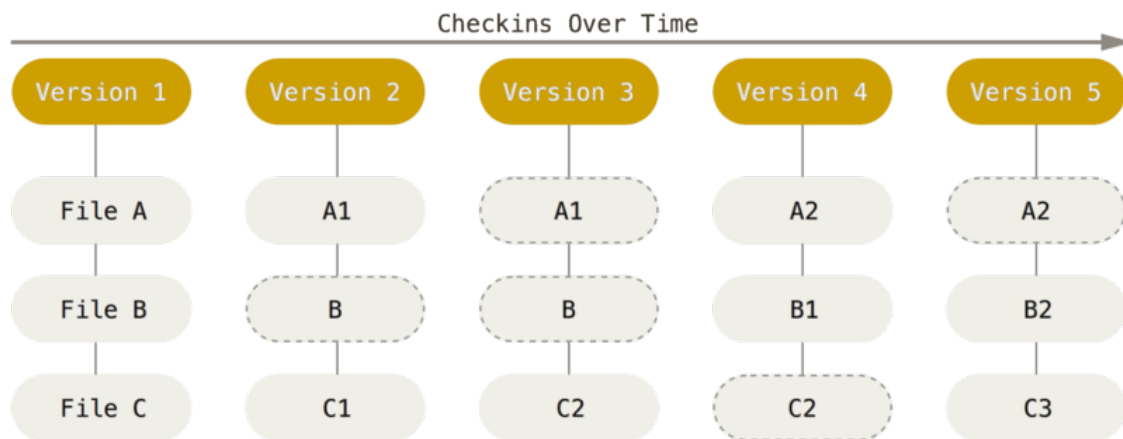


Figure 2.1: `git` storing data as snapshots of the project over time, source: Pro Git Book, [2]

- `.git` directory (stores database of all the objects in your project)

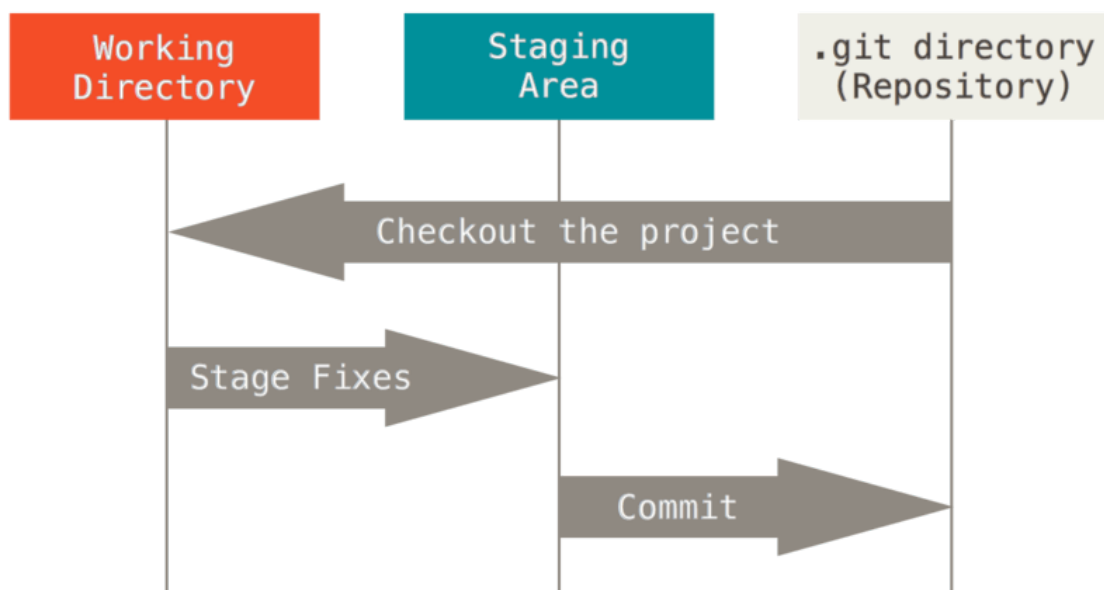


Figure 2.2: Main parts of `git` project repository, source: Pro Git Book, [2]

Basic `git` workflow can be something like this:

1. You modify files in your working directory (working tree)
2. you selectively stage those changes that you want to be part of your next commit. Only those changes are added to the staging area
3. you commit those changes

Committing clears the staging area and uses its content to create new snapshot of your working tree. This snapshot is stored in your `.git` directory.



## 2.2 How to get git

For getting `git` on GNU/Linux I would recommend using your distribution package manager. The package will be most probably named "git," so for example with `apt` package manager on Ubuntu or other debian based GNU/Linux distribution the command would be:

Bash shell listing 1

bash

```
1 sudo apt-get install git
```

The other installation option is compiling `git` from source code, but that could be for a little bit advanced users.

After the installation you can check whether `git` is working or not. As with most programs, you can use following command:

Bash shell listing 2

bash

```
1 git --version
```

If you get `git` version info on the terminal without any error, you are good to go.

## 2.3 Basic setup

`git` has its own tool for configuring. You can execute it with command `git config`. `git` configuration is divided in three layers: *system*, *global* and *local*.

1. *system*: located in `/etc/gitconfig` file, requires admin rights to allow any modification. It is accessed via command:

Bash shell listing 3

bash

```
1 git config --system
```

2. *global*: located in `~/.gitconfig` or in `~/.config/git/config` files is configuration for current user. It is accessed via command:

Bash shell listing 4

bash

```
1 git config --global
```

3. *local*: located in `.git/config` file in project repository. It is accessed via command:

Bash shell listing 5

bash

```
1 git config --local
```

You can view your current settings with this command:

### Bash shell listing 6

**bash**

```
1 git config --list --show-origin
```

or you can view value of specific configuration variable with command:

### Bash shell listing 7

**bash**

```
1 git config <variable.name>
```

If you didn't set any `git` configuration variables before, it might return nothing. You can set `git` configuration variables with those commands:

### Bash shell listing 8

**bash**

```
1 git config --global user.name "John Doe"
```

List of all `git` configuration variables can be accessed via `--help` flag:

### Bash shell listing 9

**bash**

```
1 git config --help
```

## 2.4 First git repository

You can get a `git` repository in two ways:

- *clone* an already *existing* repository using its web url address, for example like so:  
**přidat git clone odkaz na repositář projektu**  
which is actually the repository of this blog and full book releases of this blog.
- you can *create one* yourself on your local PC. To do that, go into your project folder and type command

### Bash shell listing 10

**bash**

```
1 git init
```

Using any of these options you get `.git` folder added to your project folder. This folder contains all of the `git` files necessary to maintain version control over your project. But only by initializing `git` repository doesn't make anything tracked by `git`. There are more steps to achieve that.

First, you have to add files, that you want to have tracked, to the initialized repository. For example:

### Bash shell listing 11

**bash**

```
1 git add *.org
```

which adds to initialized `git` repository all `.org` files for version control. By issuing `git add` command, those files get only into staging area (as described in previous section). After adding the files, you have to commit them:

## Bash shell listing 12

bash

```
1 git commit -m "Initial commit."
```

That also means, that you can have in the project folder also files that are not tracked by `git`. `git` doesn't mind. Until you *add* them to `git` tracking that is.

## 2.5 Working with git repository

Basic workflow with `git` could be described as follows:

As you work with your project files, you modify them. If you have added them to `git` tracking, `git` sees them as *modified*, because you changed them from last commit. When you want to make another "version," or project snapshot, you can selectively add each modified file with `git add`, or you can use `--all` flag to add all modified files to `git` staging area. `git add` command is multipurpose command, so you will definitely use it a lot. Finally, you *commit* all the staged files to `git` with `git commit -m "Informative message."` to create new snapshot of files tracked by `git`.

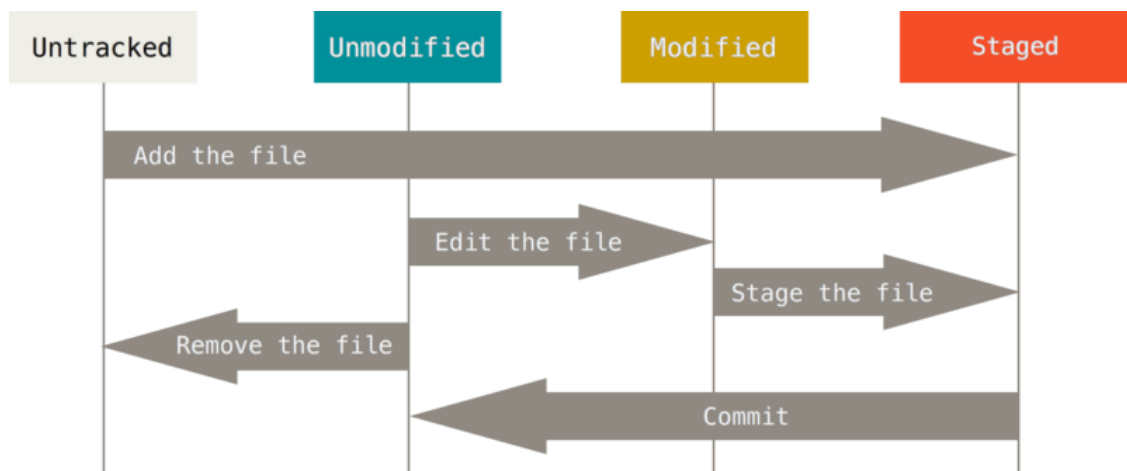


Figure 2.3: `git` workflow and file status changes as you work with them, source: Pro Git Book, [2]

## 2.6 Checking file status in git repository

The main command to find out status of all the files in your repository, that means whether they are *untracked*, *modified*, *staged*, or in-sync with `git` repository snapshot; as defined above.

## Bash shell listing 13

bash

```
1 git status
```

Output message of this command should inform you which branch you are using, about its state compared to the *default branch* and about state of files in repository – whether there are any *staged*, or *modified* files that can be staged or *untracked* files that are not managed by `git`.

There is also short form of the `git status` report, that is invoked with command `git status --short` or `git status -s` that outputs abbreviated information about your `git` repository. In front of every file name is status identifier for staging area and current worktree. These identifiers have following meaning:

- `??` : signals that file is not tracked by `git`, therefore its state is unknown to `git`
- `A` : means tht file was added to the staging area
- `M` : file was modified

For example, identifier `MM` means that file was modified, staged and then modified again before committing previous changes.

### 2.7 Adding files to git tracking

In order to begin tracking new file you have to *add* it to `git` tracking list via `git add` command. For example, if you want to start tracking file `test.org`, you would issue following command in terminal:

Bash shell listing 14

bash

```
1 git add test.org
```

If you run `git status` command again in the repository, you get information about new file being added to `git` tracking in output, section "Changes to be committed." If you specify directory name to `git add` command all the files in the directory are added recursively to `git` tracking.

### 2.8 Staging and committing modified files in git

Modify a file that is already tracked by `git` and check output of `git status` command output:

Nejllepší by bylo zde dát příklad.

`git` informs you that there is a modified file that is not staged for commit. Let's remedy that by putting it into staging area with command `git add`. As was stated already, `git add` command has multiple use cases. All of them lead to adding file in its current state to `git` staging area. If the file is *untracked*, after commit it is part of next and following project snapshots, until removed. If *added* file is already *tracked*, `git` puts its contents again into staging area for next commit.

Bash shell listing 15

bash

```
1 git add test.org
```

After adding file to the next future repository snapshot you have to create that snapshot with `git commit` command.

## 2.9 Setting ignored files to git

It might happen that you don't want to have some type of files tracked by `git`, for example some log files or files that are created during your build process and are not part of the final release. When we get to talking about  $\text{\LaTeX}$ , you will notice that  $\text{\LaTeX}$  generates pretty big number of build files that are needed to create resulting pdf, but that are not needed for reading it. For this occasion there is `.gitignore` file.

**Záložka: str. 31**

## 2.10 File operations in git repository

## 2.11 Disclaimer

This chapter was written with heavy support of Pro Git book, see [2]



## 3 Export from org-mode to L<sup>A</sup>T<sub>E</sub>X – basics

– any text –

### 3.1 Customizing export from org-mode to L<sup>A</sup>T<sub>E</sub>X

– any introductive text –

I like to use KOMA-script classes, because they have a lot more customization features and very accessible documentation. However, exporting to KOMA-script classes from `org-mode` is not supported out of the box. To be able to use this document class you have to modify `org-latex-classes` defined in `ox-latex.el`. In standard Emacs, it would be done with this function `napiš něco lepšího než tuhle větu`:

Emacs lisp listing 1

Elisp

```
1 (with-eval-after-load 'ox-latex
2   (add-to-list 'org-latex-classes
3     '("scrbook
4       "\\documentclass{scrbook}"
5       [NO-DEFAULT-PACKAGES]
6       [PACKAGES]
7       [EXTRA] "
8         ("\\chapter{%s}" . "\\chapter*{%s}")
9         ("\\section{%s}" . "\\section*{%s}")
10        ("\\subsection{%s}" . "\\subsection*{%s}")
11        ("\\subsubsection{%s}" . "\\subsubsection*{%s}")
12        ("\\paragraph{%s}" . "\\paragraph*{%s}")
13        ("\\subparagraph{%s}" . "\\subparagraph*{%s}")))))
```

Doom Emacs requires only slight modification to this by using `after!` `?macro?` instead of `with-eval-after-load` function, so code in our personal `~/.doom.d/config.el` will be:

Emacs lisp listing 2

Elisp

```
1 (after! 'ox-latex
2   (add-to-list 'org-latex-classes
3     '("scrbook
4       "\\documentclass{scrbook}"
5       [NO-DEFAULT-PACKAGES]
6       [PACKAGES]
7       [EXTRA] "
8         ("\\chapter{%s}" . "\\chapter*{%s}")
9         ("\\section{%s}" . "\\section*{%s}")
10        ("\\subsection{%s}" . "\\subsection*{%s}")
```

```

11      ("\\subsubsection{%s}" . "\\subsubsection*{%s}")
12      ("\\paragraph{%s}" . "\\paragraph*{%s}")
13      ("\\subparagraph{%s}" . "\\subparagraph*{%s}")))))

```

– testing the function interactively –

Now, when we have working interactive export setup, we can move to incorporating that in our `makefile`. This will give us the opportunity to automate whole exporting process. Emacs has nice feature, that allows to run it in batch mode, that is non-interactively, just for evaluating some elisp:

### Emacs lisp listing 3

Elisp

```
1 emacs --batch --eval="(require 'foo)"
```

This can be used to evaluate exporting function defined in `ox-latex.el` that governs export from org-mode to L<sup>A</sup>T<sub>E</sub>X – `org-latex-export-to-latex`:

– upravit název org-mode souboru –

### Bash shell listing 16

bash

```

1  emacs test.org --batch -f org-latex-export-to-latex --kill
2
3  \end{elisplistingbox}
4
5  \%\\%bliže vysvětlit \highlight{\texttt{-f} }a \highlight{\texttt{-}-kill}
6  → }flags\\%\\%
7
8  However, with Doom Emacs there is additional hoop to be overtaken, that is, Doom
9  → Emacs make it a~little bit harder to run Emacs in batch mode, because in
10 → batch mode Doom Emacs doesnt load any user configuration. That means you
11 → have to load it manually:
12
13 \begin{elisplistingbox}
14
15 If you try to do this with your current
16 → \highlight{\texttt{\textasciitilde{}/.doom.d/config.el}}, you probably end
17 → up with some kind of error about unknown function, in my case it was
18 → \highlight{\texttt{after!} } \highlight[red]{?macro?}. I~have found that the
19 → easiest option is actually to put this "batch mode configuration" into
20 → separate file. Lets name it \highlight{\texttt{latexExportConfig.el} }and
21 → put it to our other Doom Emacs configuration files into
22 → \highlight{\texttt{\textasciitilde{}/.doom.d} }folder.
23
24 Now we can simply load this file instead of our full Doom Emacs config:
25
26 \begin{bashlistingbox}

```



```
20
21 emacs --batch -l ~/.doom.d/latexExportConfig.el -f org-latex-export-to-latex
   ↪ --kill
```

and %%it **should** work (TM) :)%%

## 3.2 Resources

- Emacs Wiki: odkaz na Batch mode na Emacs Wiki
- various Stack Exchange questions and answers: Odkaz na general Stack Exchange a na Emacs Stack Exchange



# Glossary

## C

### **centralized version control system**

Centralized version control system is version control software that used one central server as main project repository. Clients commit to this one central copy through site connection (web or local).

## D

### **distributed version control system**

Distributed version control system is version control software, that mirrors complete project, including its full history, on every clients computer. This model gives good support of branching, allows to work offline and every clients mirror is also a backup of project, which increases reliability of the system.



# Index

## C

CVCS, 15

## D

DVCS, 15



# Bibliography

## Versioning Software References

- [1] Linus Torvalds. *Git official Webpage*. URL: <https://git-scm.com/> (visited on 03/27/2021) (cit. on p. 13).
- [2] Scott Chacon and Ben Straub. *Pro Git*. 2020 (cit. on pp. 15, 16, 19, 21).

## WSIWYG Office Tools

- [3] Microsoft Corp. *Microsoft Word Homepage*. URL: <https://www.microsoft.com/en-us/microsoft-365/word> (visited on 03/27/2021) (cit. on p. 13).
- [4] The Document Foundation. *Libre Office Project Homepage*. URL: <https://www.libreoffice.org/> (visited on 03/27/2021) (cit. on p. 13).

## Markup Formats suitable for Technical Writing

- [5] Bastien Guerry. *Org-mode Official Webpage*. URL: <https://orgmode.org/> (visited on 03/28/2021) (cit. on p. 13).

## Text Editors

- [6] Richard Stallman. *GNU/Emacs Official Webpage*. URL: <https://www.gnu.org/software/emacs/> (visited on 03/28/2021) (cit. on p. 13).
- [7] Bram Molenaar. *Vim Official Webpage*. URL: <https://www.vim.org/> (visited on 03/31/2021) (cit. on p. 13).
- [8] Justin M. Keyes. *Neovim Official Webpage*. URL: <https://neovim.io/> (visited on 03/31/2021) (cit. on p. 13).
- [9] Community Developed. *Atom Text Editor Official Webpage*. URL: <https://atom.io/> (visited on 03/31/2021) (cit. on p. 13).
- [10] Don Ho. *Notepad++ Official Webpage*. URL: <https://notepad-plus-plus.org/> (visited on 03/31/2021) (cit. on p. 13).