

# QUIZ 1 - My Website

---

- Mohammed Fachry Dwi Handoko | 5025201159
- *HTML / Tailwind CSS / GSAP*

## 1.1. <head>

```
<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title> Q-1 | 5025201159 </title>
  <link rel="stylesheet" href="./styles/style.css">
  <script src="https://cdn.tailwindcss.com"></script>
  <script>
    tailwind.config = {
      theme: {
        extend: {
          colors: {
            clifford: '#da373d',
            unn: '#5b92e5',
            mcrn: '#6A180F',
          }
        }
      }
    }
  </script>
  <style type="text/tailwindcss">
    @layer utilities {
      .content-auto {
        content-visibility: auto;
      }
    }
  </style>
</head>
```

- The <head> element is equal in all HTML files, consisting of a <link> element to connect the style.css file, as well as CDNs, particularly for Tailwind and its configuration files, and layerbase styling to implement the framework throughout.

## 1.2. <Modal>


- Minimalist design | standard theme | mobile responsive



```
<div class="min-h-screen py-6 flex flex-col justify-center text-center sm:text-left sm:py-12">
  <div class="relative py-3 sm:max-w-xl sm:mx-auto">
    <div
      class="absolute inset-0 bg-gradient-to-r from-blue-300 to-blue-600 shadow-lg
      transform -skew-y-6 sm:skew-y-0 sm:-rotate-6 sm:rounded-3xl">
    </div>
    <div class="relative px-4 py-10 bg-white shadow-lg sm:rounded-3xl sm:p-20">
      <div class="max-w-md mx-auto">
        <div>
          <h1 class="text-2xl font-semibold"> Mohammed Fachry Dwi Handoko </h1>
        </div>
        <div class="divide-y divide-gray-200">
          <div class="py-8 text-base leading-6 space-y-8 text-gray-700 sm:text-lg sm:leading-7">
            <div class="relative">
              <h1 class="text-2xl font-semibold"> 5 0 2 5 2 0 1 1 5 9 </h1>
            </div>
            <div class="relative">
              <h3 class="text-xl font-thin"> Informatics 2020 </h3>
            </div>
            <div class="relative">
              <a href="profile.html">
                <button class="bg-blue-500 hover:scale-120
                hover:transition-all hover:text-blue-200
                text-gray-100 rounded-md px-6 py-2">
                  Get to Know Me
                </button>
              </a>
            </div>
          </div>
        </div>
      </div>
    </div>
  </div>
</div>
```


- The index.html page is composed of a few components, primarily a Modal containing div containers for 2 <h1> titles for my Name and NRP, <h3> subtitle for my Department Name, and a hyperlinked (<a>) CTA button to the main page. This page is designed as a mock login page.

## 2. <Navbar>

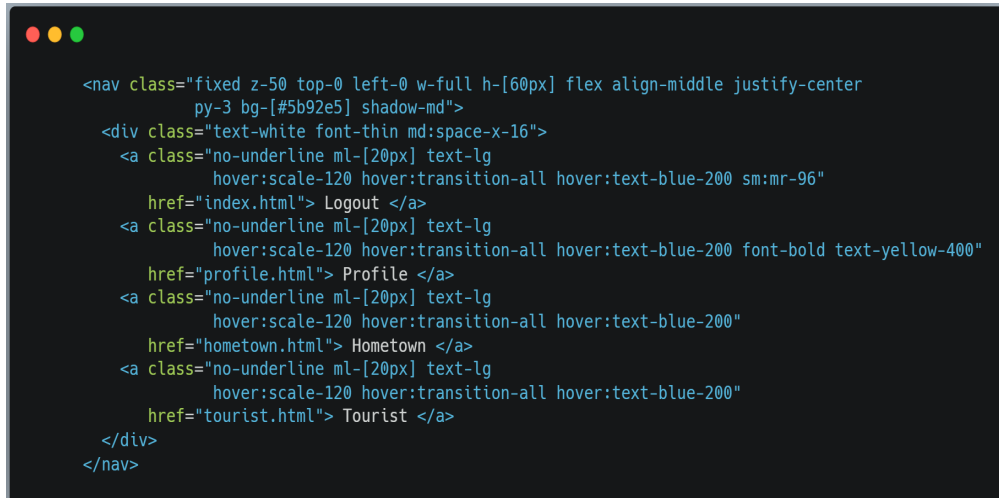

- The Navbar is represented as a fixed component with all item positioning centered and padded by 0.75 rem, holding four <a> hyperlinks to the routes: index, profile, hometown, tourist; these links are highlighted depending on the routes selected. It also has a medium shadow and a blue background (represented by hex code).


## 3. <Parallax>

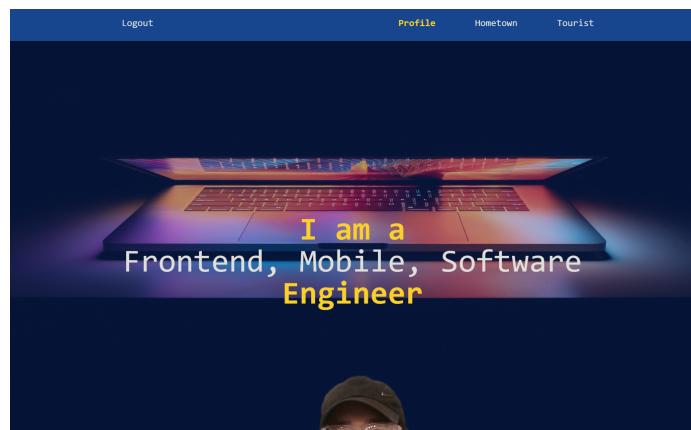

- The main header section is composed of a <section> covering two sub elements, <div> and <h1>, the former has a fixed absolute background but *lower* z-index, but the latter is positioned relative to the background and contains a centered text with *higher* z-index.

## 4. <Divider>


```
<section class="relative max-w-full h-[300px] bg-gray-900 justify-center align-middle z-20">
  <div class="relative flex flex-col w-full h-full justify-center align-start
    text-white text-left text-2xl space-y-8">
    >
    <h1> Mohammed Fachry Dwi Handoko </h1>
    <h5>
      5 0 2 5 2 0 1 1 5 9
    <br />
    <br />
    <span class="text-yellow-400"> Informatics 2020 </span>
    </h5>
  </div>
</section>
```

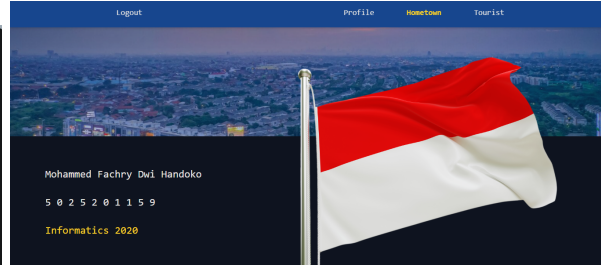

- The divider component is composed of a primary section set to relative positioning, and its children elements are a <div> container for the contents as <h1> and <h5>. The <img> element is absolute and positioned to bottom-0 and right-20.

## 5. <Card>

```
<section class="relative p-2">
  <div class="grid h-screen items-center antialiased text-gray-900">
    <div>
      <div class="grid h-screen items-center antialiased text-gray-900">
        <div>
          
        </div>
        <div class="relative px-4 -mt-16">
          <div class="bg-white p-6 rounded-lg shadow-lg">
            <div class="flex items-baseline">
              <span class="bg-[#f1f3f7] text-yellow-400 text-xs px-2 inline-block
                rounded-full uppercase font-sans font-weight-normal tracking-wide">
                Let's Connect
              </span>
            </div>
            <div class="mt-4 text-gray-600 uppercase text-xs font-sans font-weight-normal tracking-wide">
              <a href="https://github.com/delos343" target="_blank"
                class="text-gray-600 hover:text-gray-900 transition-all">
                Github
              </a>
              <a href="https://www.linkedin.com/in/fachry-dwi-handoko" target="_blank"
                class="text-gray-600 hover:text-purple-600 transition-all">
                LinkedIn
              </a>
            </div>
            <div>
              <div class="my-3 text-xl font-bold uppercase leading-tight">
                There is no tourism in <span class="line-through">Ba-Sing-S</span> Bekasi
              </div>
              <p class="text-gray-700">
                NO, BUT
                <span class="text-gray-600"> FR THO </span>
              </p>
              <div class="mt-4">
                <span class="text-gray-700 text-sm font-sans font-weight-normal"> If there were, it's </span>
                <span class="text-orange-600"> miniscule. </span>
              </div>
            </div>
          </div>
        </div>
      </div>
    </div>
  </div>
</section>
```

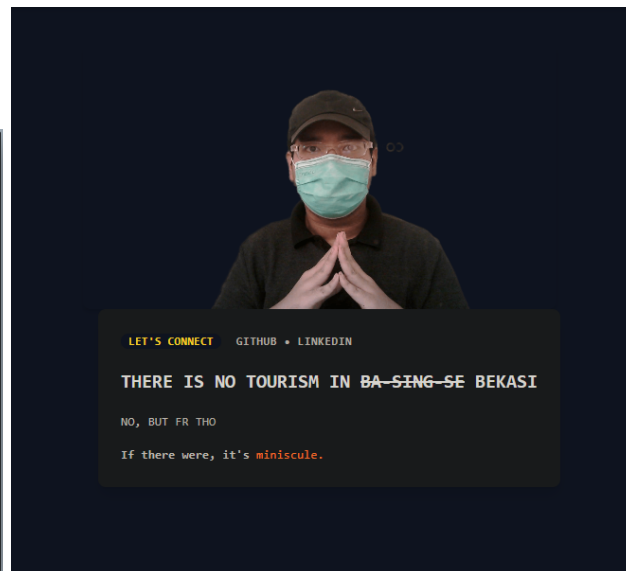

- The card component is composed of a primary section set to relative positioning with a padding of 2em, with a parent and child div container with grid (column) layout containing the attributes: centered items and text antialiased to grayscale. A child <img> element is used for the profile photo that covers the <div> and positioned to focus on the center of the image, with the edges given a smooth border-radius and medium shadow effect - its background is also transparent.
- For sub components, a <div> container contains a row of one <p> element and two <a> hyperlinks with a blank target. The middle <h4> denotes the main title. The two final texts are <p> elements with a <span> to style the last word ('miniscule').

By the name of Allah (God) Almighty, herewith, I pledge  
and truly declare that I have solved quizt by myself,  
didn't do any cheating by any means, didn't do any plagiarisms  
and didn't ~~do any~~ accept anybody's help by any means.  
I am going to accept all of the consequences by any means  
if it has been proven that I have done any cheating and  
or plagiarism.

Surabaya, 02 March 2023



Melamed Fakhry Dwi Handoko

5025201159