DELPHI WEB STUDIO PRO

Complete Workflow

From the first idea to a saved project and a locally reviewed website

Follow one website through the whole editing process. This walkthrough explains how the decisions fit together, so you can create a useful first version, return to it later and prepare files for hosting without losing the editable original.

Windows desktop edition
Last changed November 10, 2026

Illustrated explanations and examples for the Win32 and Win64 desktop editions.


Contents

Begin with a manageable first version....3
Start a project or return to an existing one....3
Choose pages before polishing individual sections....4
Build the page from sections and independent objects....5
Write readable content and connect it to destinations....6
Import media and keep the collection organized....7
Make navigation and shared details consistent....8
Add documents events and staff information....8
Choose site settings and review online features....9
Preview the whole site and save a confirmed version....10
Export a website and inspect it locally....11
Continue with imports code or deployment when needed....11

Begin with a manageable first version

A website is easier to build when its first version has a clear purpose. For the Riverside Community example, visitors need a welcome, current events, useful documents and contact information. That is enough to establish a structure without deciding every color or photograph at the outset. You can add an archive or more detailed pages once those basic destinations work well.

Delphi Web Studio Pro keeps the editable project separate from the generated website. The project is what you return to when content changes; the export is what a web server eventually serves. Keep recognizable names for the project, its independent backup and the website ZIP so you can tell them apart months later.

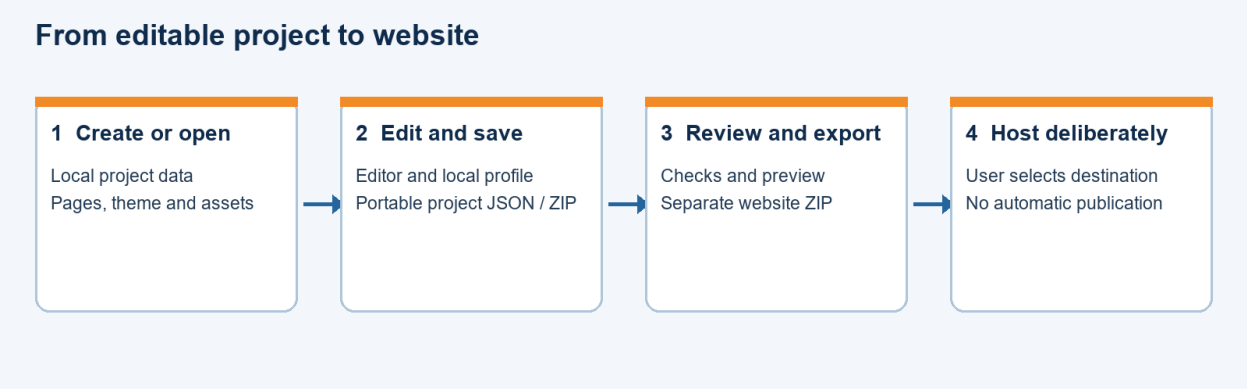


The work moves from an editable project through preview and local export. Hosting is a separate decision.

Run the Windows app with its editor folder and matching WebView2 loader beside the executable. The WebView2 Runtime must be available on the computer. The local app can edit and export without a published website or a Vite development server.

Start a project or return to an existing one

On the Dashboard, choose a starter when you want an initial arrangement to adapt, or start blank when you already know the structure you want. The description box can select a local starter from your brief; it does not by itself send that brief to an AI service. Replace the starter wording with your own content rather than treating it as finished copy.

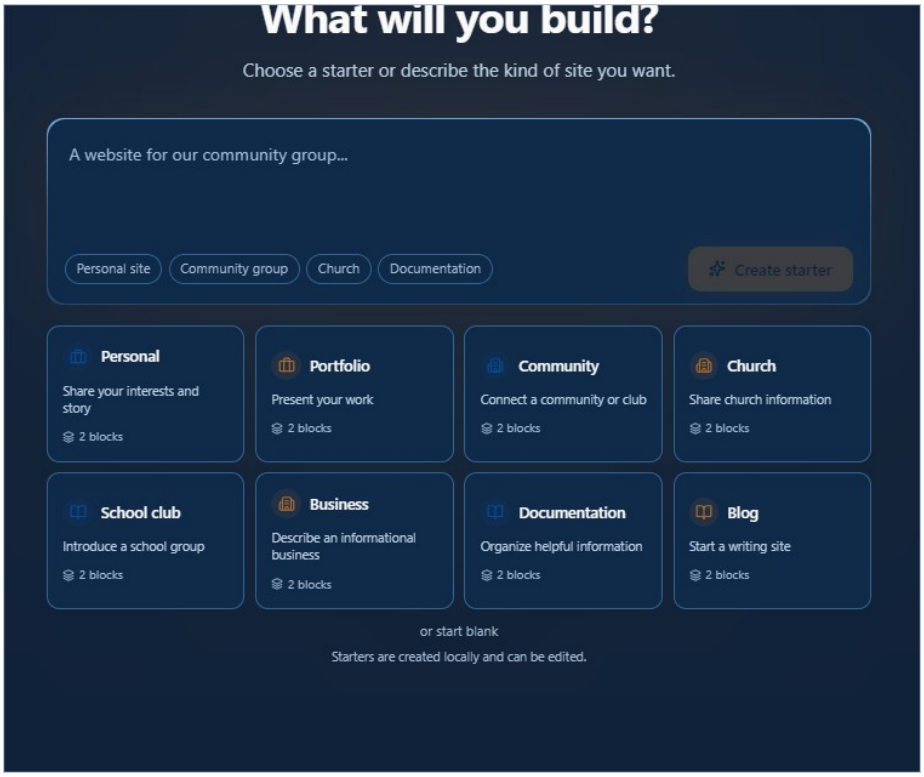

Use the Dashboard to begin with a starter, start blank or reopen a project.


For existing work, choose Open project and select the saved JSON or project ZIP. The editor checks its contents before activating it. Opening the same saved version can reuse the matching local draft and preserve newer local edits, while a different saved snapshot can remain separate. If a file is rejected, retain it and read the message before trying any repair.

1. Create Riverside Community from the Community starter, or open a practice copy of a saved site.
2. Look through the existing pages and media before changing the design. Confirm which page is Home and which sections are shared.
3. Save an initial project file in a folder you control. Use a separate filename if you want the earlier design to remain available.

Dashboard cards are local drafts tied to this application profile. They are useful for resuming work, but an independently saved project is the dependable way to move the site to another computer.

Choose pages before polishing individual sections

Create the destinations visitors will need before filling the Navbar. For the example, add About at /about, Events at /events, Documents at /documents and Contact at /contact. Page names identify tabs in the editor; their addresses become link destinations. Keep addresses short and distinct, and remember that the current Home route / is protected from ordinary address editing.

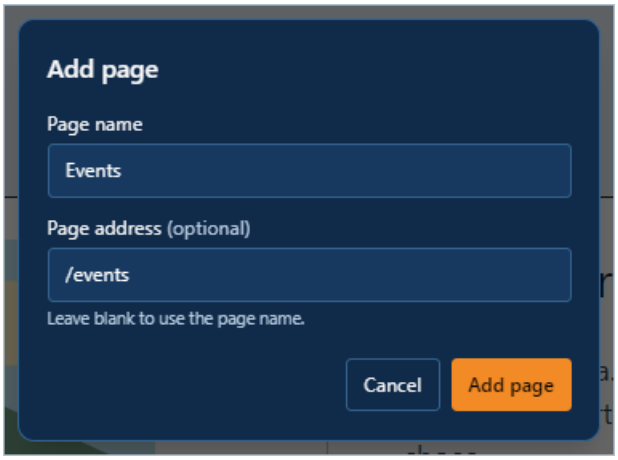


Create a named destination first, then connect it to the visitor menu.

The page tabs stay grouped, with a fixed command group beside Add page. Use Go to page when the strip has more tabs than you can see. Search details changes page-specific titles and descriptions, while Change address can update supported internal references. Check custom code and any outside links separately after changing a route.

Plan pages offers a reviewed selection of common additions. It can help with a first structure, but you still decide which pages belong on this site. Before removing a page, review its known incoming links and make a saved checkpoint if the change affects a large part of the site.

Build the page from sections and independent objects

Think of a block as a section of the page and a section object as an item you can arrange within it. A Hero can introduce the site, a Content block can hold an article, and a divided block can give an image and a portrait card their own areas. This keeps related content together when the layout becomes narrower.

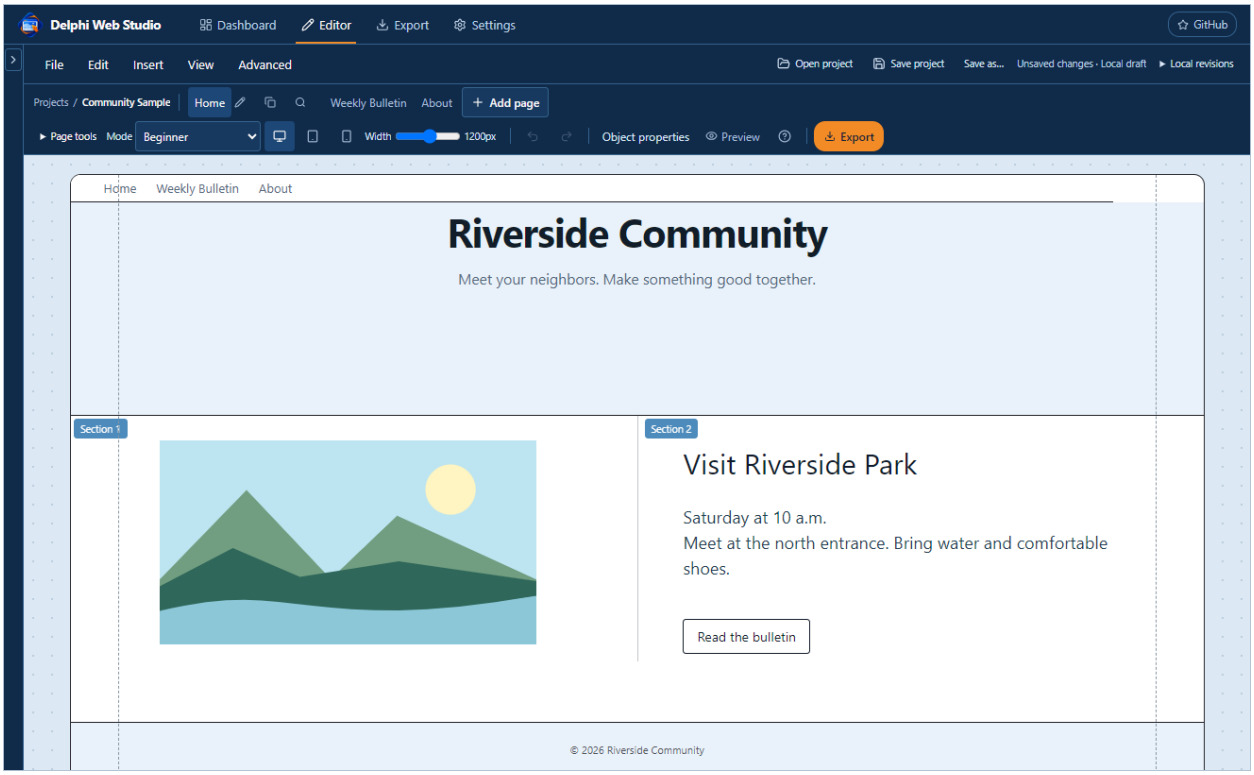

The canvas shows the active page, while Elements and Layers help you add and find its parts.

Use Elements to add a block, then choose one to four sections when the content needs columns. Drag a vertical divider to change the balance between them. Add text, an image, a panel or a button inside the chosen section, using handles for size and the move cursor for position. Click once to select an item and double-click to edit its words.

For a practical Home feature, make the first of two sections wider and place a landscape photograph there. In the second, add a light panel with a portrait, name and short introduction. Verify that attached items follow the panel when it moves. Layers and Alt-click help you reach a panel when text or another object covers it.

Open Properties for the item you actually want to change. Use Section or Block Properties when the surrounding container needs a new fill, dimension or section count. A Space strip can add breathing room or hold a thin divider without relying on empty paragraphs.

Write readable content and connect it to destinations

Add a text box wherever a heading, label or paragraph belongs. Give a long heading enough width before reducing its font, and leave useful space around it. Double-click to edit, highlight the intended words, and apply font, color, size or emphasis. Paragraph breaks let you center a heading while leaving the following body text left aligned or justified.


For an article, a Content block with Wide prose can offer a comfortable reading area and justified paragraphs when there is sufficient width. For a positioned caption or a sentence over a panel, an independent text box gives more control. Move the whole text object when transferring its formatting to another section.

Any supported rich-text selection can become a link. Highlight “Read our history,” choose Link or Ctrl+K, then select the History page or enter its route. For a jump within the page, name the target first and use its #anchor destination. A route plus a fragment, such as /events#volunteer, opens the page at that named section.

After creating the link, leave editing and click it in Preview. A working hover appearance alone does not prove that navigation works, so test with an ordinary click and confirm the page or target that opens.

Import media and keep the collection organized

Use Manage Media for organization and the Media library for placement. Create folders such as Events, Bulletins and Historical Photos before importing a large collection, or move existing entries into them later. Folder changes preserve asset IDs, portable paths and bytes, so existing page references remain connected.

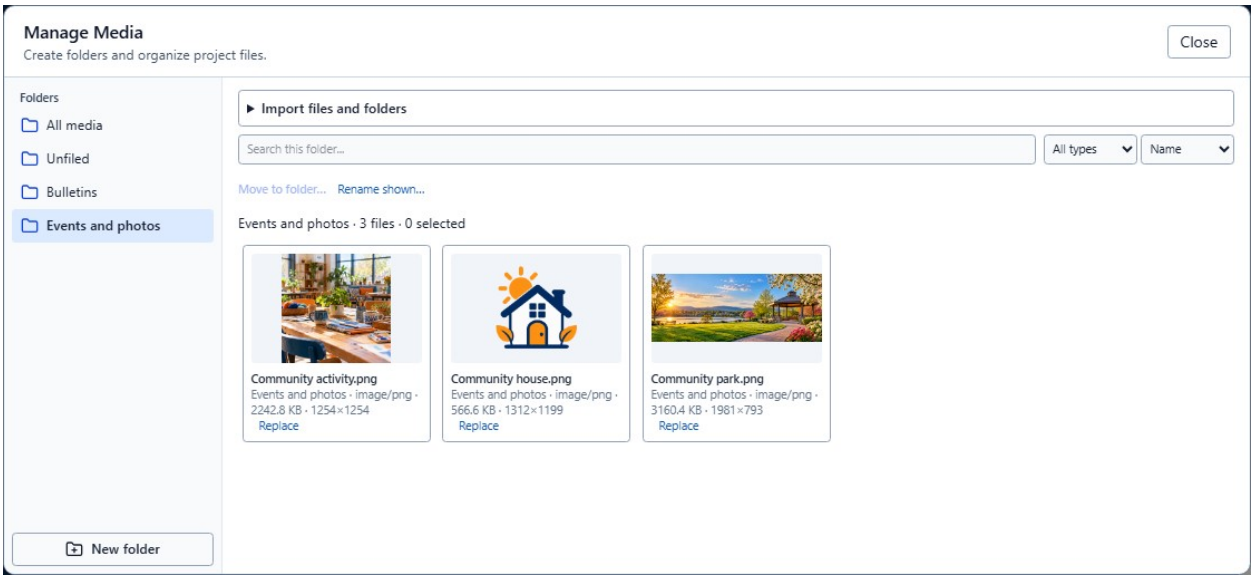

Manage Media keeps large collections organized without changing the files already referenced by pages.


Import individual files or folders and choose how matching files should be handled. Reuse avoids a redundant stored copy, Keep separate copies creates independent entries, and Skip omits the match. Read the failures report when some items are rejected. Cancelled batches can be resumed while the application stays open; pending input lists are not retained after closing.

To place a picture, open the picker, narrow the collection by folder or search, select a thumbnail and choose Add to page. From an existing property, Choose file returns the selected asset to that field. Use Replace only when you intend to update an asset that other page elements may also use.

Save a project ZIP after importing so the original media travels with the editable project. The source files on disk remain unchanged, and a website export later includes the media referenced by its exported pages.

Make navigation and shared details consistent

Once the pages exist, create the visitor Navbar in the order you want people to read it. Add Home, Events, Documents, Contact and About, selecting each destination from the page list where available. If About has child pages, keep its label linked to /about and add History or Photos underneath the separate dropdown arrow.

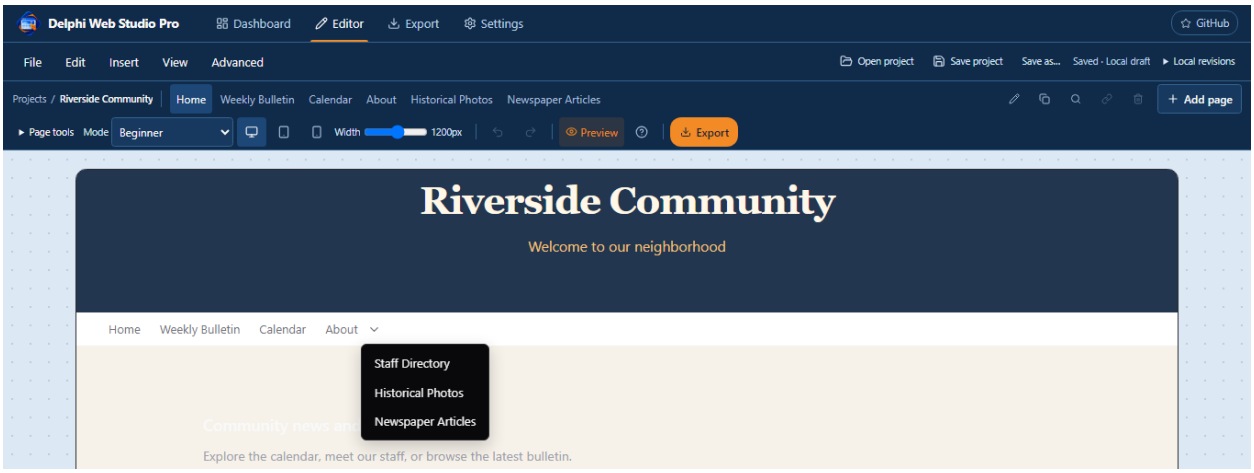

A parent destination and its submenu have separate controls, so About can remain clickable.

Expand one Navigation Links row to edit that entry, then collapse it before working on another. Reorder links with their handles or arrows. In Preview, try the parent label and the dropdown separately, and press Escape to check that the open submenu closes and focus returns to its arrow.

Use Share across pages when a Navbar or Footer should remain consistent. Reusable sections are different: they insert independent copies that can later diverge. Check which relationship you intend before changing a section used on many pages.

For the Footer, enter the real organization name, address and useful links, leaving unwanted logo fields blank. A resource layout can hold linked images and buttons. Check the result at narrow widths so the grouping remains clear when it wraps.

Add documents events and staff information

Choose a document library when visitors need a list of files, and a PDF Viewer when they should read a document within the page. Give entries descriptive titles rather than relying on filenames alone. The ordinary library searches titles and descriptions; a PDF text search requires an actual text layer and will not recognize words that exist only in a scanned image.

The Weekly Bulletin variant presents the current issue and up to four earlier PDFs. Add older issues before the newest during initial setup, because a newly chosen file moves to the first position. Open the current edition in Preview, test zoom and scrolling, and check how the exported link opens in the visitor browser.


For Calendar, enter events through Manage events while editing and use Preview to check the month controls and dated list. For Team Directory, set each portrait, name, role and biography. Longer

biographies remain behind a short card preview with a separate reader, keeping a single long entry from dominating the directory.

A gallery is useful for an archive that grows over time. Use responsive images, add captions and descriptions, and verify the enlarged view. Tall newspaper clippings can instead be placed as individual Image blocks in reading order, with dates and context above them.

Choose site settings and review online features

Site design establishes backgrounds, text hierarchy, accents and typefaces. Use the Base background for exposed page margins and custom block or panel fills for deliberate color areas. Explicitly formatted text keeps its own color, so review selected headings as well as the theme after a broad design change.

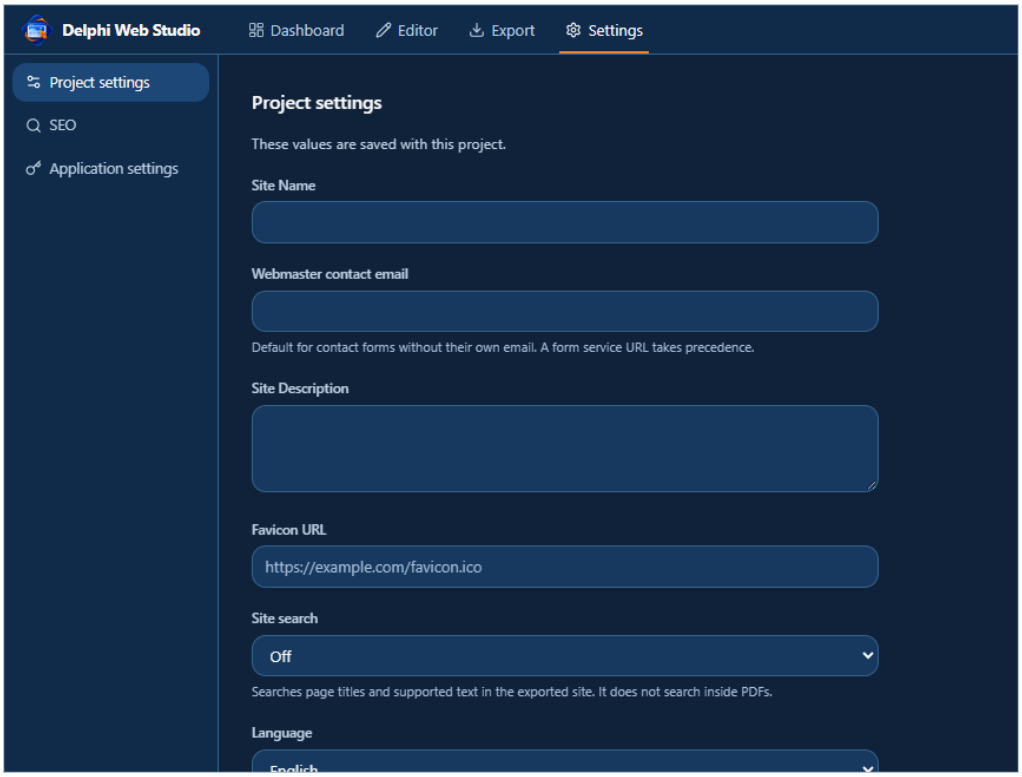

Project settings provide site identity and search information. Application settings handle the Windows account connection.

Enter the site name, description and webmaster contact email in Settings. The webmaster address becomes the default for Contact blocks without an override. A form still needs an appropriate HTTPS service or the supported visitor email-draft behavior. Preview lets you examine the form without sending; do not use a real recipient for an accidental test.


If site search, article metadata or a public site URL is enabled, review what the generated pages will expose. Draft articles stay in the project and are omitted from the site export. Imported source, unpublished content and unused media can remain in an editable project, so inspect that project before sharing it with someone else.

AI is optional. A desktop Gemini key can be saved for the current Windows account through Credential Manager, while cloud consent is enabled separately for the session. Local AI requires compatible

runtime and model files. In either case, review the proposal before applying it and check the resulting text yourself.

Preview the whole site and save a confirmed version

Visit every important page in Preview and use actual clicks on its links. Check Desktop, Tablet and Mobile, then move the width slider between them. A layout that looks balanced on a wide display can need a different reading order on a phone, especially when several items overlap or when a portrait sits beside a long paragraph.

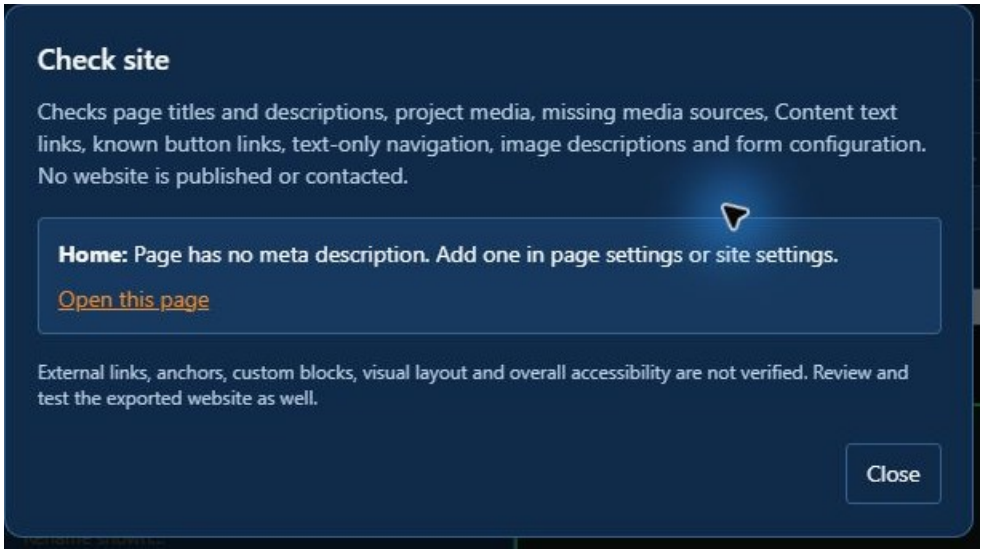

Check site helps locate supported problems. Preview remains the place to judge reading order and visitor interactions.

Run Check site after the main destinations and media are in place. Resolve the reported issues that apply, then manually inspect long text, image descriptions, button wording, calendars, biographies and PDFs. The checker is not a complete assessment of visual quality, every external link or accessibility.

Save the project and wait for a confirmed Saved status. On a new file or Save as, choose the name and location deliberately; on an ordinary Save, the known project path is updated. If work changes during preparation, save again so the latest version reaches disk. Reopen the resulting project to confirm its pages and media before relying on it as the master.




An editable save, a local revision and an independent backup provide different kinds of protection.

A clean project should close without asking to save again. If unsaved work remains, Yes waits for a successful save, No leaves without another update and Cancel returns to editing. A failed or cancelled save should leave the editor available so the work can be saved elsewhere.

Export a website and inspect it locally

Export creates the visitor files from the current model. Choose Review files to inspect the generated set, then download the website ZIP. Keep its directory structure intact when extracting it, including index.html, other page files and assets. This output is a snapshot, so a later project edit requires another export.

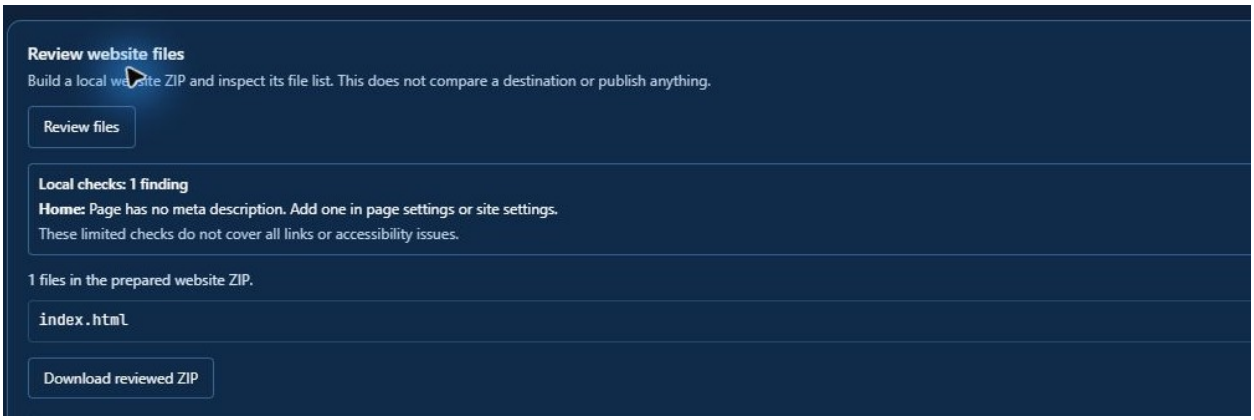

The export review lists local website output before any upload is considered.

Use Open reviewed site in browser where available to serve the output locally over HTTP. That is particularly useful for the bundled PDF viewer, because browsers can restrict modules opened from a file address. Follow the same navigation you tested in Preview and check that nested-page images and documents still resolve.

Static hosting must serve those generated files and routes. A custom domain can be a separate hosting configuration, while a contact backend or externally hosted video has its own requirements. Saving a project, reviewing its export or opening the software repository does not create or publish a website.

When finished with the local review, end the preview and remove disposable extracted test output you no longer need. Keep the editable master and any intentionally retained backup. Avoid keeping many nearly identical review folders when disk space is limited.


Continue with imports code or deployment when needed

HTML and WordPress imports are best approached as conversions to review. Select the supported source, inspect its pages and reference issues, and create a separate imported project. Keep the original material while rebuilding anything the converter does not support, including themes, scripts or server features. The retained source can be inspected through the code tools where available.

Professional mode exposes project JSON and additive page-specific HTML, CSS and JavaScript. Save a practice copy before editing those structures, use the validation messages, and verify generated output

separately. Custom code can behave differently from native blocks and is not fully represented by the desktop's isolated HTML preview.

SFTP is a separate path for a deliberately configured hosting destination. Connection testing, scanning, destination backup and file review prepare information for a later upload. Inspect the destination and recovery arrangements before using Publish; an interrupted transfer can leave partial changes that need to be investigated from its receipt.

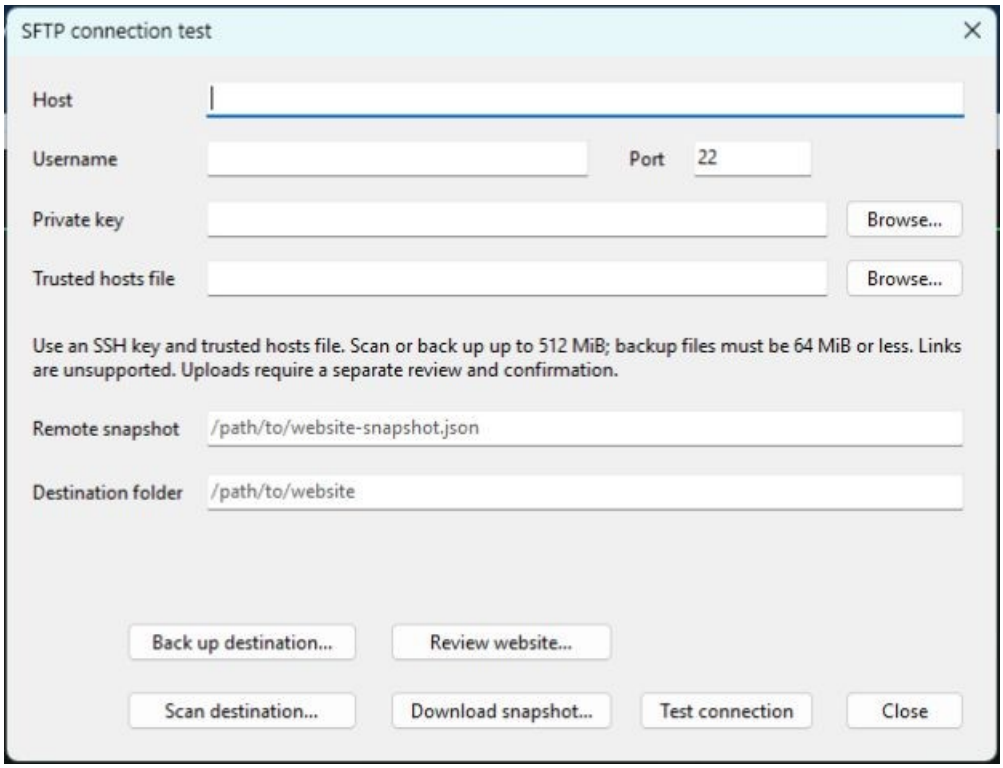

Connection checks and destination review prepare an SFTP operation. Upload remains a separate decision.

To resume ordinary editing later, reopen the saved project, verify that you have the intended version and continue with a small update. Historical milestone records and individual tests describe what was checked at the time, rather than proving every machine or hosting environment. Clean-Windows and real publication acceptance remain separate from the local editing work described here.