



IBM Developer  
SKILLS NETWORK

# Winning Space Race with Data Science

Marcus Moeng  
12<sup>th</sup> March 2023

Internal Use



# Outline

---

- Executive Summary
- Introduction
- Methodology
- Results
- Conclusion
- Appendix

# Executive Summary

---

- Summary of methodologies
  - Data Collection through API
  - Data Collection with Web Scraping
  - Data Wrangling
  - Exploratory Data Analysis with SQL
  - Exploratory Data Analysis with Data Visualization
  - Interactive Visual Analytics with Folium
  - Machine Learning Prediction
- Summary of all results
  - Exploratory Data Analysis result
  - Interactive analytics in screenshots
  - Predictive Analytics result

# Introduction

---


- Project background and context

Falcon 9 rocket launches from Space X are advertised on the company website for a price of \$62 million, while similar launches from other suppliers cost upwards of \$165 million apiece. This price difference is mostly attributable to Space X's ability to reuse the first stage. Consequently, the cost of a launch may be estimated if we know whether or not the first stage will land. This data can be utilized by competitors of space X who wish to submit bids for rocket launches. The purpose of this project is to build a machine learning pipeline to determine the likelihood of a successful first-stage landing.

- Problems you want to find answers

- How do you know if the rocket will safely land?
- The complex interplay between the factors that ultimately decide a landing's success.
- What kinds of operational circumstances must be met for a landing program to be effective?



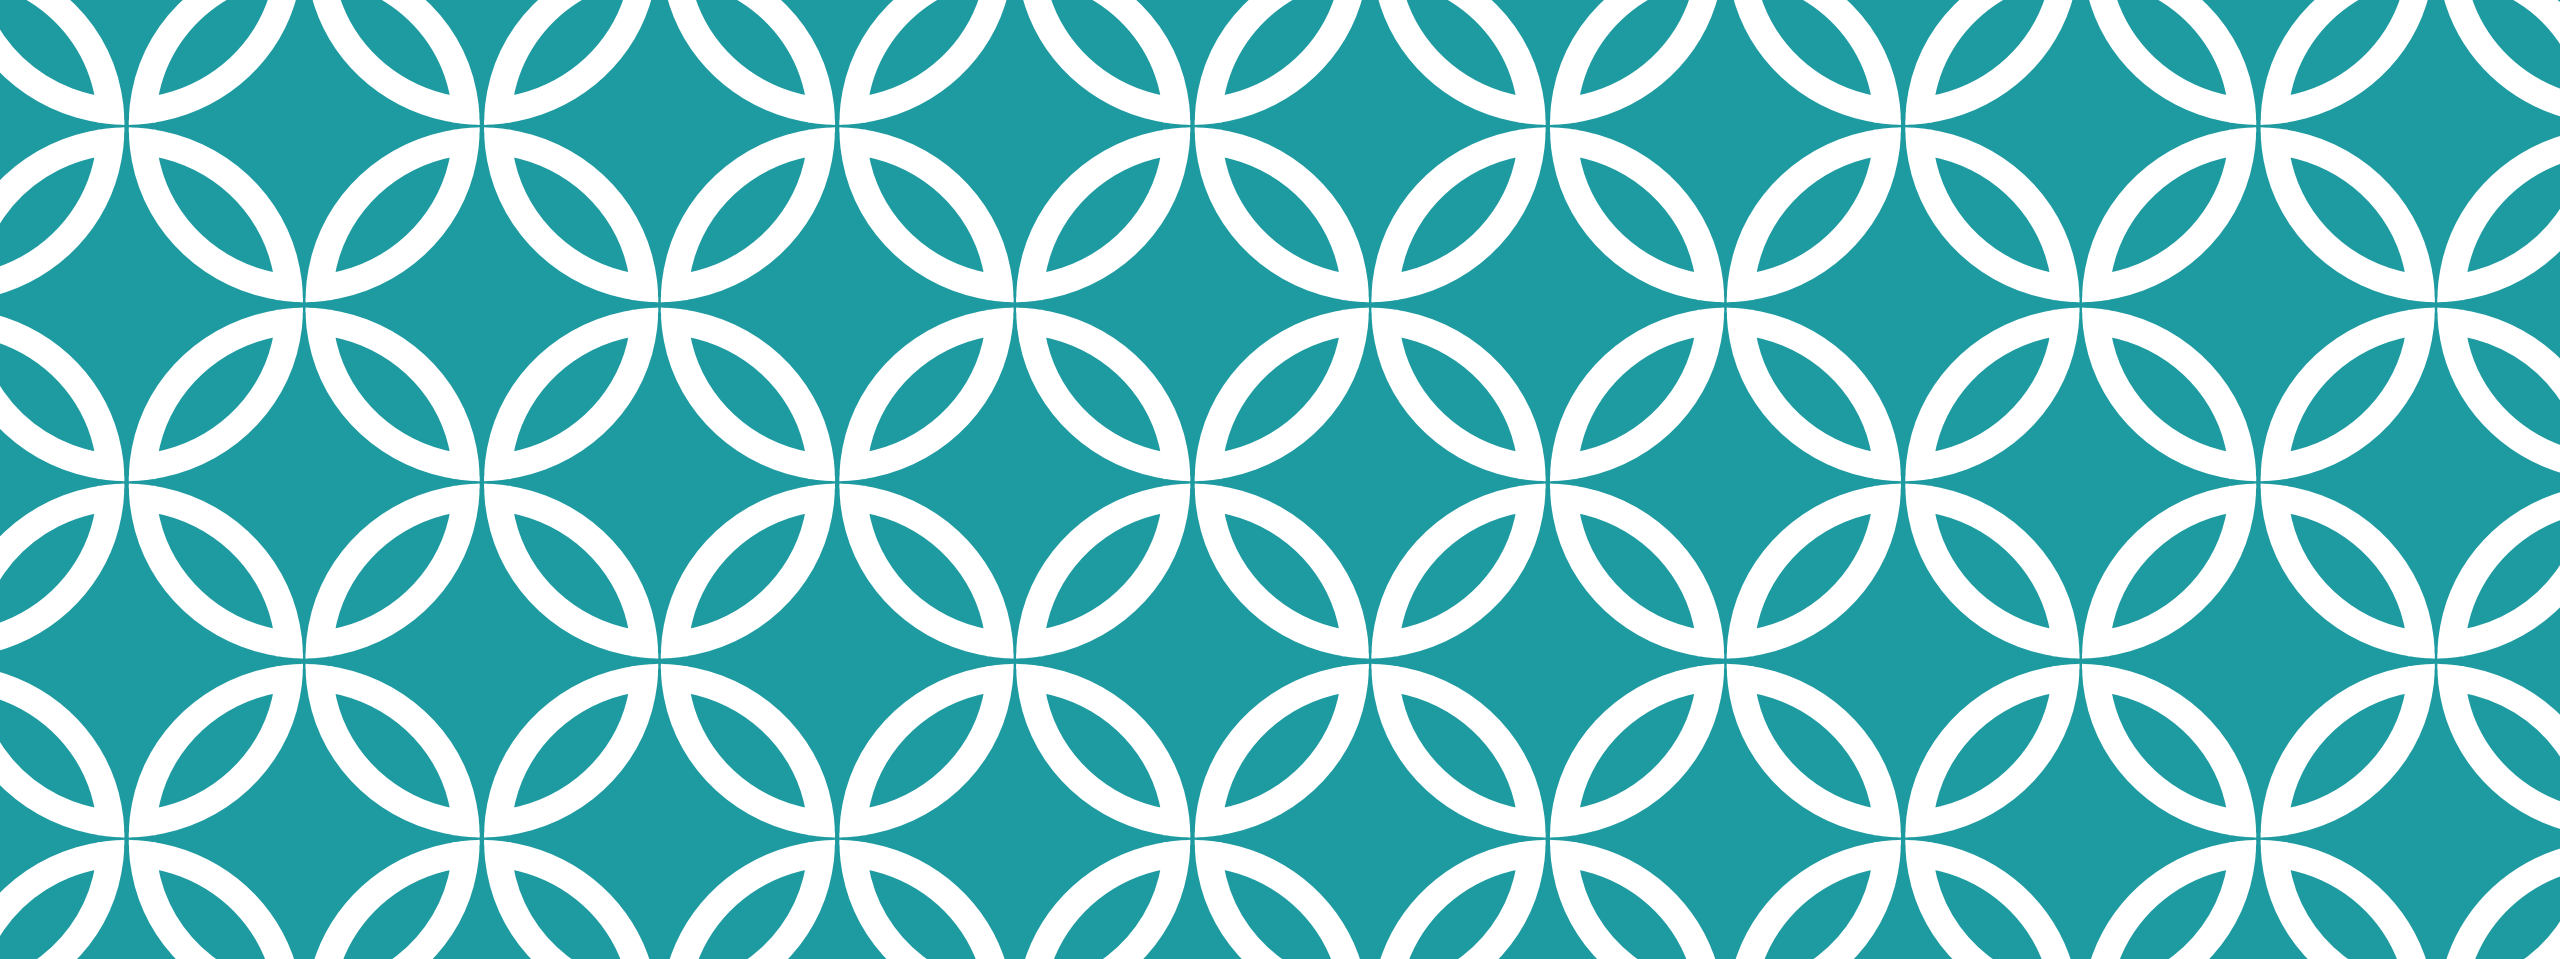

Internal Use

# Methodology

---

## Executive Summary

- Data collection methodology:
  - Information was gathered from the SpaceX API and Wikipedia web scraping.
- Perform data wrangling
  - One-hot encoding was applied to categorical features
- Perform exploratory data analysis (EDA) using visualization and SQL
- Perform interactive visual analytics using Folium and Plotly Dash
- Perform predictive analysis using classification models
  - How to build, tune, evaluate classification models

# Data Collection

---

The data was collected using various methods

- Data collection was done using get request to the SpaceX API.
- Next, we decoded the response content as a Json using `.json()` function call and turn it into a pandas dataframe using `.json_normalize()`.
- We then cleaned the data, checked for missing values and fill in missing values where necessary.
- In addition, we performed web scraping from Wikipedia for Falcon 9 launch records with BeautifulSoup.
- The goal was to extract the launch records as an HTML table, parse the table, and then transform the table into a dataframe for later analysis.

# Data Collection – SpaceX API

I used the get request to the SpaceX API to collect data, clean the requested data and did some basic data wrangling and formatting.

The link to the notebook is  
[https://github.com/Demarco90/IBM-Data-Science-Capstone/blob/main/DataCollection\\_API.ipynb](https://github.com/Demarco90/IBM-Data-Science-Capstone/blob/main/DataCollection_API.ipynb)

1. Get request for rocket launch data using API

```
In [6]: spacex_url="https://api.spacexdata.com/v4/launches/past"
```

```
In [7]: response = requests.get(spacex_url)
```

2. Use json\_normalize method to convert json result to dataframe

```
In [12]: # Use json_normalize method to convert the json result into a dataframe  
# decode response content as json  
static_json_df = res.json()
```

```
In [13]: # apply json_normalize  
data = pd.json_normalize(static_json_df)
```

3. We then performed data cleaning and filling in the missing values

```
In [30]: rows = data_falcon9['PayloadMass'].values.tolist()[0]  
  
df_rows = pd.DataFrame(rows)  
df_rows = df_rows.replace(np.nan, PayloadMass)  
  
data_falcon9['PayloadMass'][0] = df_rows.values  
data_falcon9
```



# Data Collection - Scraping

We applied web scrapping to webscrap Falcon 9 launch records with BeautifulSoup

We parsed the table and converted it into a pandas dataframe.

The link to the notebook is

<https://github.com/Demarco90/IBM-Data-Science-Capstone/blob/main/DataCollectionWebscrapping.ipynb>

```
1. Apply HTTP Get method to request the Falcon 9 rocket launch page

In [4]: static_url = "https://en.wikipedia.org/w/index.php?title=List_of_Falcon_9_and_Falcon_Heavy_launches&oldid=1027686922"

In [5]: # use requests.get() method with the provided static_url
        # assign the response to a object
        html_data = requests.get(static_url)
        html_data.status_code

Out[5]: 200

2. Create a BeautifulSoup object from the HTML response

In [6]: # Use BeautifulSoup() to create a BeautifulSoup object from a response text content
        soup = BeautifulSoup(html_data.text, 'html.parser')

        Print the page title to verify if the BeautifulSoup object was created properly

In [7]: # Use soup.title attribute
        soup.title

Out[7]: <title>List of Falcon 9 and Falcon Heavy launches - Wikipedia</title>

3. Extract all column names from the HTML table header


In [10]: column_names = []

        # Apply find_all() function with 'th' element on first_launch_table
        # Iterate each th element and apply the provided extract_column_from_header() to get a column name
        # Append the Non-empty column name ('if name is not None and len(name) > 0') into a list called column_names

        element = soup.find_all('th')
        for row in range(len(element)):
            try:
                name = extract_column_from_header(element[row])
                if (name is not None and len(name) > 0):
                    column_names.append(name)
            except:
                pass

4. Create a dataframe by parsing the launch HTML tables
5. Export data to csv
```

# Data Wrangling

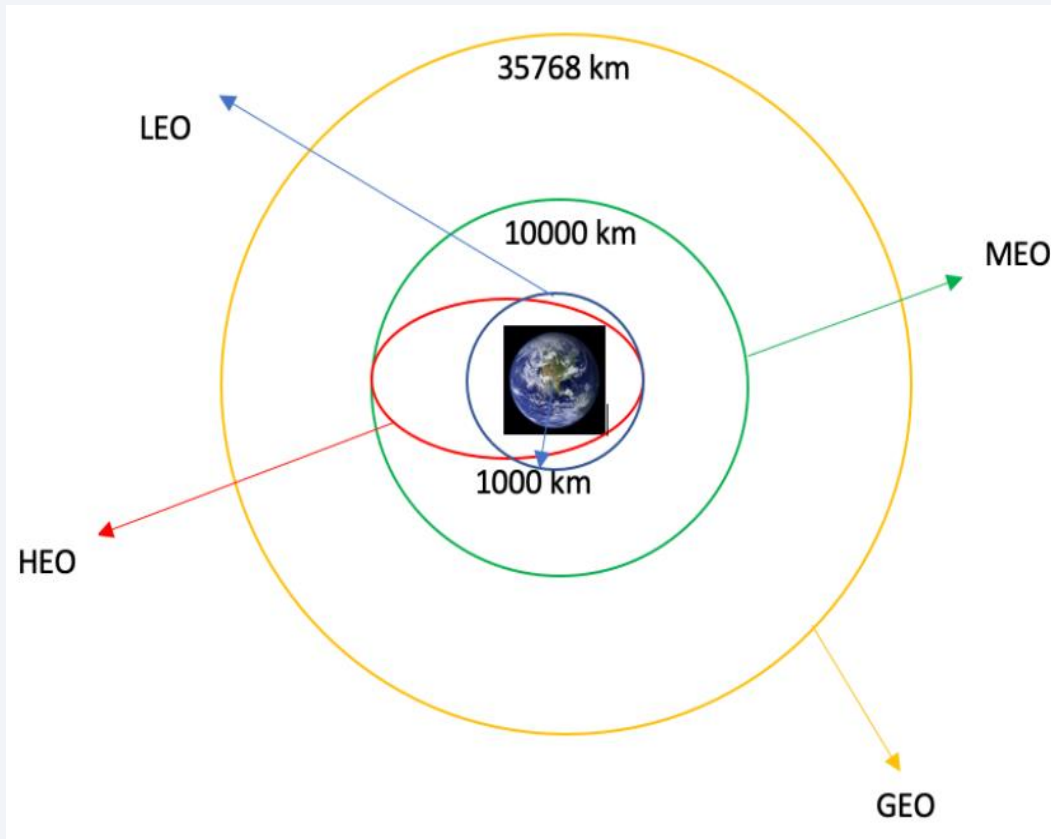

We performed exploratory data analysis and determined the training labels.


We calculated the number of launches at each site, and the number and occurrence of each orbits

We created landing outcome label from outcome column and exported the results to csv.

The link to the notebook is

<https://github.com/Demarco90/IBM-Data-Science-Capstone/blob/main/DataWrangling.ipynb>

# EDA with Data Visualization

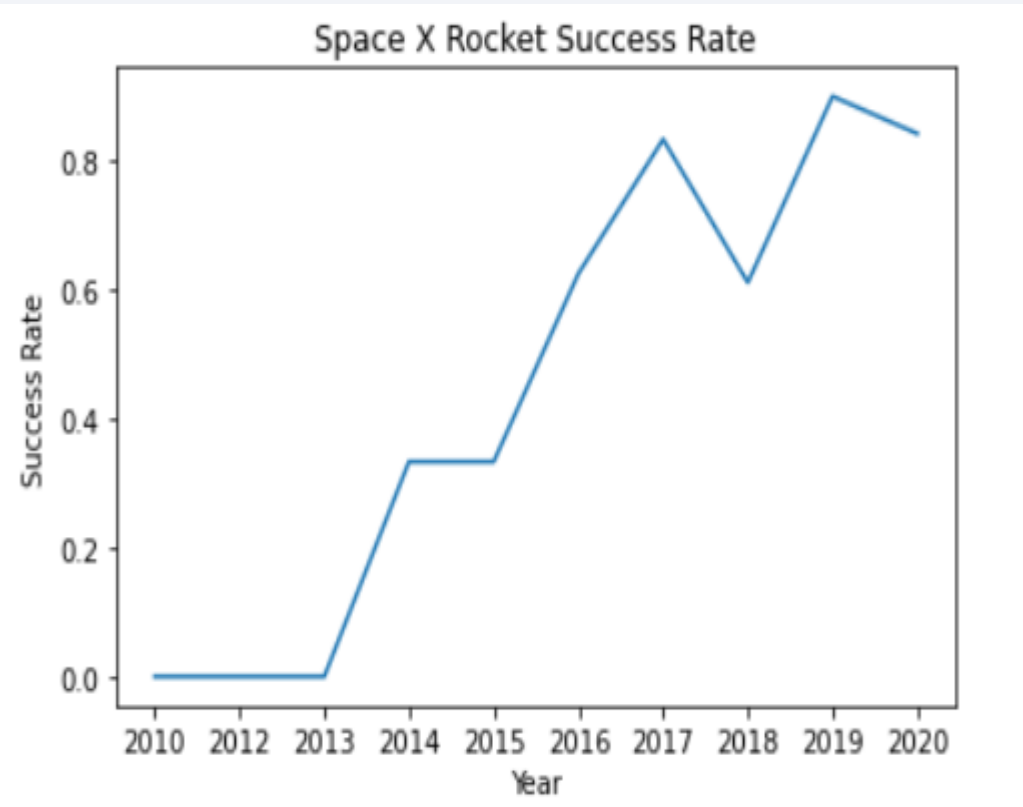

We explored the data by visualizing the relationship between flight number and launch Site, payload and launch site, success rate of each orbit type, flight number and orbit type, the launch success yearly trend.

- The link to the notebook is

[https://github.com/Demarco90/IBM-Data-Science-Capstone/blob/main/EDA\\_DataVisualization.ipynb](https://github.com/Demarco90/IBM-Data-Science-Capstone/blob/main/EDA_DataVisualization.ipynb)

# EDA with SQL

---

Without leaving the Jupyter notebook, the SpaceX dataset was loaded into a PostgreSQL database.

We applied EDA with SQL to get insight from the data. We wrote queries to find out for instance:

- The names of unique launch sites in the space mission.
- The total payload mass carried by boosters launched by NASA (CRS)
- The average payload mass carried by booster version F9 v1.1
- The total number of successful and failure mission outcomes
- The failed landing outcomes in drone ship, their booster version and launch site names.

The link to the notebook is [https://github.com/Demarco90/IBM-Data-Science-Capstone/blob/main/EDA\\_SQL.ipynb](https://github.com/Demarco90/IBM-Data-Science-Capstone/blob/main/EDA_SQL.ipynb)

# Build an Interactive Map with Folium

---

Using the folium map, we identified every launch point and added map elements like markers, circles, and lines to indicate whether a launch was successful or unsuccessful for each location.

I categorize feature launch results (success or failure) into classes 0 and 1. 0 represents failure while 1 represents success. The launch sites with a comparatively high success rate were determined using the color-labeled marker clusters.

I measured the separations between a launch facility and its environs.

I also responded to various queries, such as:

- Are launch sites near railways, highways and coastlines.
- Do launch sites keep certain distance away from cities.

# Build a Dashboard with Plotly Dash

---

I built an interactive dashboard with Plotly dash

I plotted pie charts showing the total launches by a certain sites

I plotted scatter graph showing the relationship with Outcome and Payload Mass (Kg) for the different booster version.

The link to the notebook is [https://github.com/Demarco90/IBM-Data-Science-Capstone/blob/main/spacex\\_dash\\_app.py](https://github.com/Demarco90/IBM-Data-Science-Capstone/blob/main/spacex_dash_app.py)



# Predictive Analysis (Classification)

---

Using Numpy and Pandas, I loaded the data, transformed it, and divided it into training and testing sets. Using GridSearchCV, I constructed various machine learning models and tuned various hyperparameters. The model was measured by accuracy, and it was enhanced through feature engineering and algorithm tweaking. The most effective classification model was discovered.

The link to the notebook is <https://github.com/Demarco90/IBM-Data-Science-Capstone/blob/main/Machine%20Learning%20Prediction.ipynb>

# Results

---

- Exploratory data analysis results
- Interactive analytics demo in screenshots
- Predictive analysis results





Section 2

# Insights drawn from EDA



# Flight Number vs. Launch Site


From the plot, we found that the larger the flight amount at a launch site, the greater the success rate at a launch site.



## Payload vs. Launch Site




The greater the payload mass for launch site CCAFS SLC 40 the higher the success rate for the rocket.

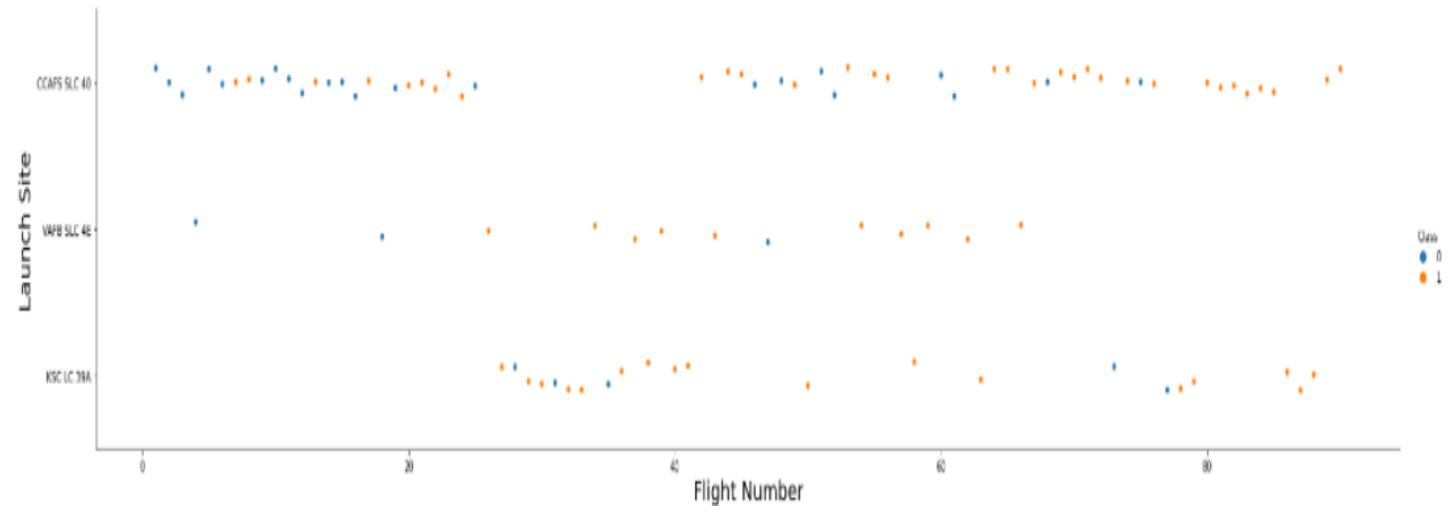

# Success Rate vs. Orbit Type


From the plot, we can see that ES-L1, GEO, HEO, SSO, VLEO had the most success rate.

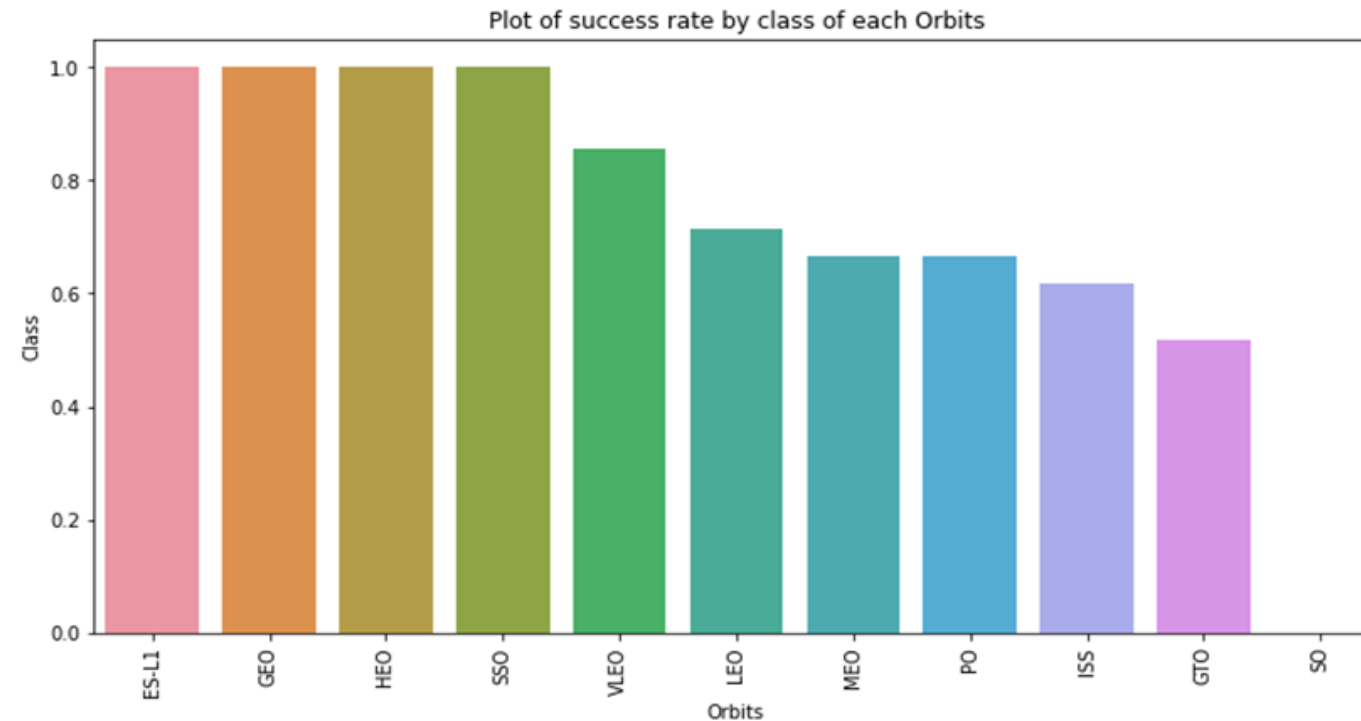




# Flight Number vs. Orbit Type

The plot below shows the Flight Number vs. Orbit type. We observe that in the LEO orbit, success is related to the number of flights whereas in the GTO orbit, there is no relationship between flight number and the orbit.

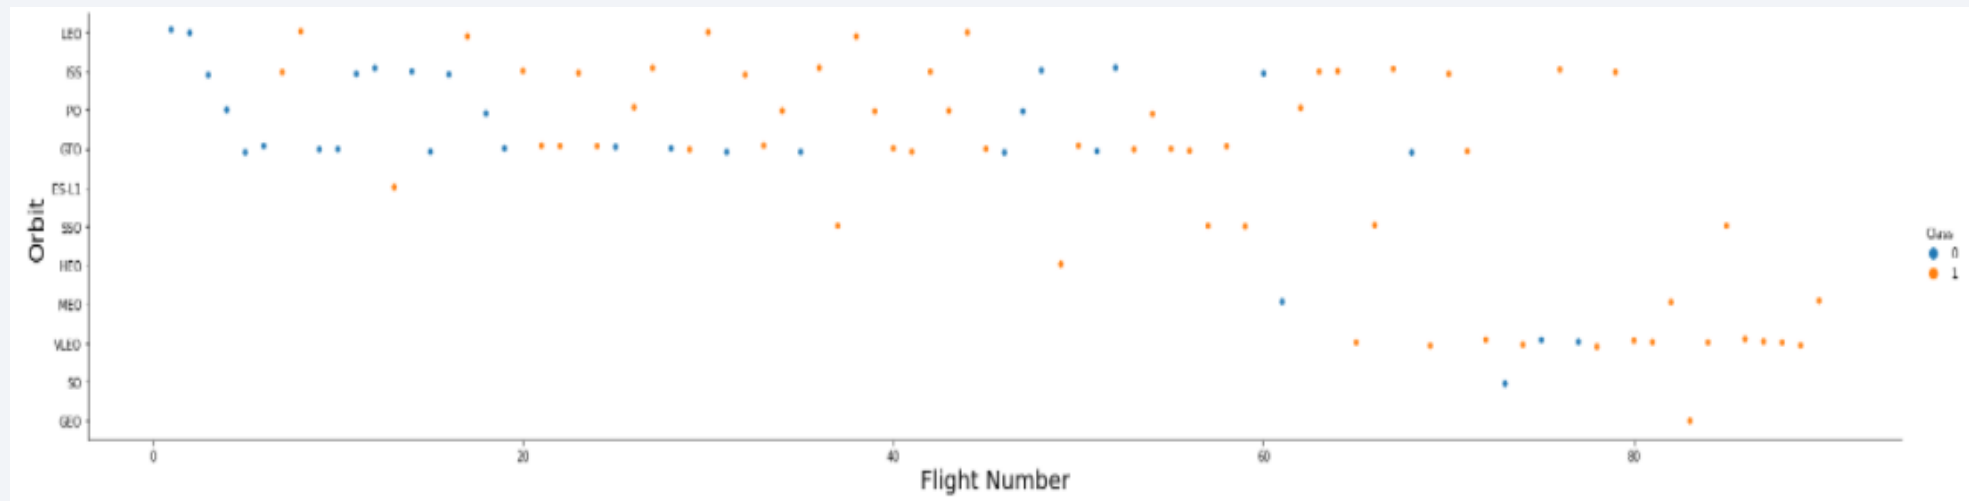


# Payload vs. Orbit Type

We can observe that with heavy payloads, the successful landing are more for PO, LEO and ISS orbits.

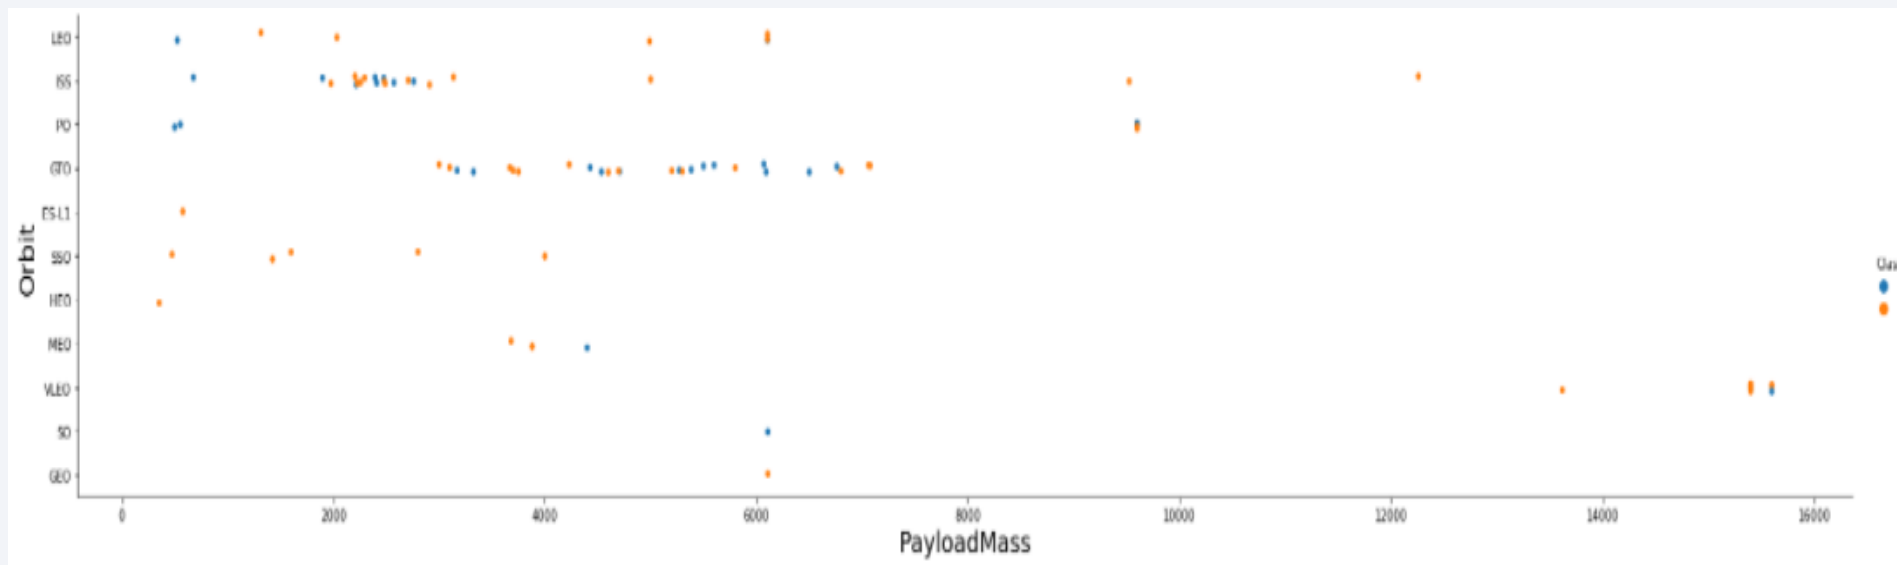

# Launch Success Yearly Trend

As seen on the plot, one can observe that success rate has been increasing since the year 2013 up until the year 2020.

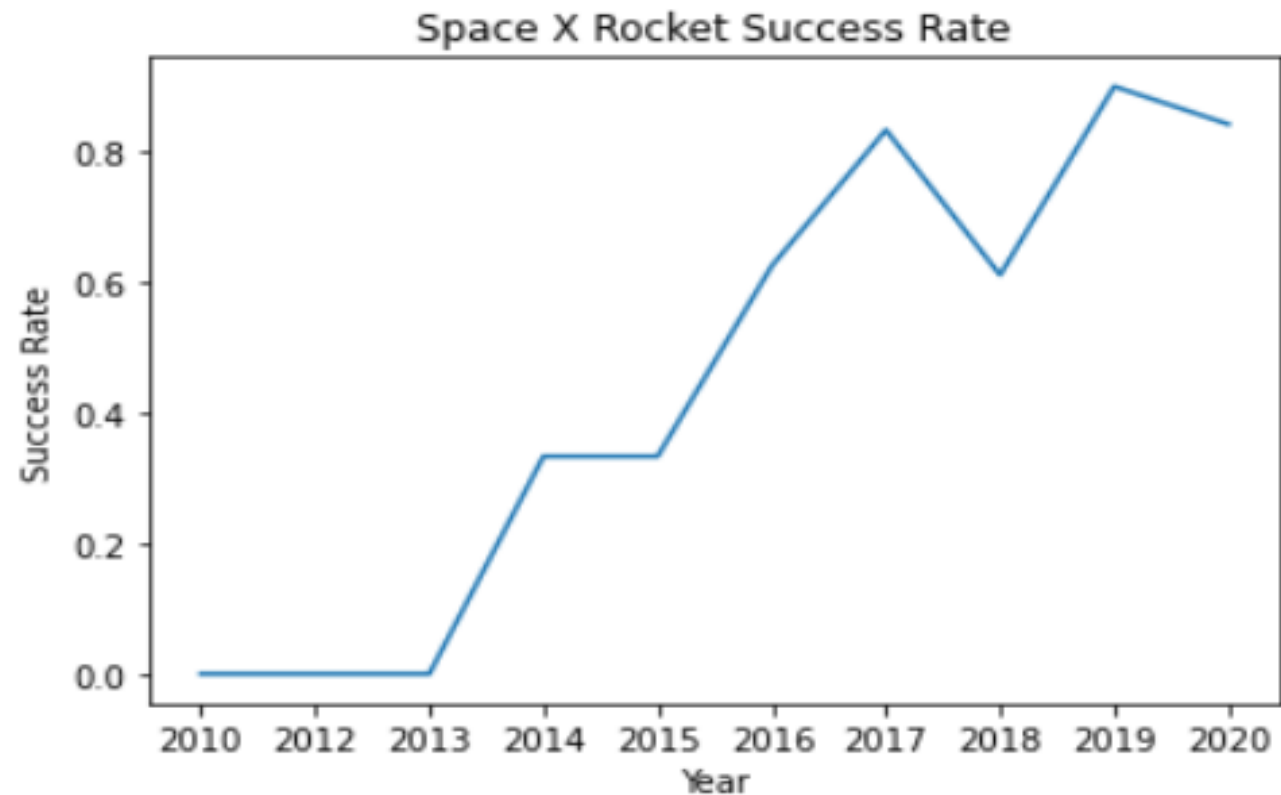

# All Launch Site Names

We used the key word **DISTINCT** to show only unique launch sites from the SpaceX data.

Display the names of the unique launch sites in the space mission

```
In [10]: task_1 = '''
          SELECT DISTINCT LaunchSite
          FROM SpaceX
          ...
          create_pandas_df(task_1, database=conn)
```

```
Out[10]:
```

	launchsite
0	KSC LC-39A
1	CCAFS LC-40
2	CCAFS SLC-40
3	VAFB SLC-4E

# Launch Site Names Begin with 'CCA'

Display 5 records where launch sites begin with the string 'CCA'

In [11]:

```
task_2 = '''
SELECT *
FROM SpaceX
WHERE LaunchSite LIKE 'CCA%'
LIMIT 5
'''

create_pandas_df(task_2, database=conn)
```

Out[11]:

	date	time	boosterversion	launchsite	payload	payloadmasskg	orbit	customer	missionoutcome	landingoutcome
0	2010-04-06	18:45:00	F9 v1.0 B0003	CCAFS LC-40	Dragon Spacecraft Qualification Unit	0	LEO	SpaceX	Success	Failure (parachute)
1	2010-08-12	15:43:00	F9 v1.0 B0004	CCAFS LC-40	Dragon demo flight C1, two CubeSats, barrel of...	0	LEO (ISS)	NASA (COTS) NRO	Success	Failure (parachute)
2	2012-05-22	07:44:00	F9 v1.0 B0005	CCAFS LC-40	Dragon demo flight C2	525	LEO (ISS)	NASA (COTS)	Success	No attempt
3	2012-08-10	00:35:00	F9 v1.0 B0006	CCAFS LC-40	SpaceX CRS-1	500	LEO (ISS)	NASA (CRS)	Success	No attempt
4	2013-01-03	15:10:00	F9 v1.0 B0007	CCAFS LC-40	SpaceX CRS-2	677	LEO (ISS)	NASA (CRS)	Success	No attempt

# Total Payload Mass

We calculated the total payload carried by boosters from NASA as 45596 using the query below

Display the total payload mass carried by boosters launched by NASA (CRS)

```
In [12]: task_3 = '''
          SELECT SUM(PayloadMassKG) AS Total_PayloadMass
          FROM SpaceX
          WHERE Customer LIKE 'NASA (CRS)'
          '''
          create_pandas_df(task_3, database=conn)
```

Out[12]:

	total_payloadmass
0	45596



# Average Payload Mass by F9 v1.1

Display average payload mass carried by booster version F9 v1.1

In [13]:

```
task_4 = '''
    SELECT AVG(PayloadMassKG) AS Avg_PayloadMass
    FROM SpaceX
    WHERE BoosterVersion = 'F9 v1.1'
    '''

create_pandas_df(task_4, database=conn)
```

Out[13]:

	avg_payloadmass
0	2928.4

# First Successful Ground Landing Date

It can be observed that the dates of the first successful landing outcome on ground pad was 22<sup>nd</sup> December 2015

In [14]:

```
task_5 = '''
    SELECT MIN(Date) AS FirstSuccessfull_landing_date
    FROM SpaceX
    WHERE LandingOutcome LIKE 'Success (ground pad)'
    '''

create_pandas_df(task_5, database=conn)
```

Out[14]:

	<u>firstsuccessfull_landing_date</u>
--	--------------------------------------

0	2015-12-22
---	------------

# Successful Drone Ship Landing with Payload between 4000 and 6000

```
In [15]: task_6 = '''
          SELECT BoosterVersion
          FROM SpaceX
          WHERE LandingOutcome = 'Success (drone ship)'
             AND PayloadMassKG > 4000
             AND PayloadMassKG < 6000
          ...
          create_pandas_df(task_6, database=conn)
```

```
Out[15]:
```

	boosterversion
0	F9 FT B1022
1	F9 FT B1026
2	F9 FT B1021.2
3	F9 FT B1031.2

We used the **WHERE** clause to filter for boosters which have successfully landed on drone ship and applied the **AND** condition to determine successful landing with payload mass greater than 4000 but less than 6000

# Total Number of Successful and Failure Mission Outcomes

List the total number of successful and failure mission outcomes

In [16]:

```
task_7a = '''
    SELECT COUNT(MissionOutcome) AS SuccessOutcome
    FROM SpaceX
    WHERE MissionOutcome LIKE 'Success%'
    '''

task_7b = '''
    SELECT COUNT(MissionOutcome) AS FailureOutcome
    FROM SpaceX
    WHERE MissionOutcome LIKE 'Failure%'
    '''

print('The total number of successful mission outcome is:')
display(create_pandas_df(task_7a, database=conn))
print()
print('The total number of failed mission outcome is:')
create_pandas_df(task_7b, database=conn)
```

The total number of successful mission outcome is:

	successoutcome
0	100

The total number of failed mission outcome is:

Out[16]:

	failureoutcome
0	1

# Boosters Carried Maximum Payload

We determined the booster that have carried the maximum payload using a subquery in the **WHERE** clause and the **MAX()** function.

List the names of the booster\_versions which have carried the maximum payload mass. Use a subquery

```
In [17]: task_8 = '''
          SELECT BoosterVersion, PayloadMassKG
          FROM SpaceX
          WHERE PayloadMassKG = (
                                SELECT MAX(PayloadMassKG)
                                FROM SpaceX
                                )
          ORDER BY BoosterVersion
          '''
          create_pandas_df(task_8, database=conn)
```

```
Out[17]:
```

	boosterversion	payloadmasskg
0	F9 B5 B1048.4	15600
1	F9 B5 B1048.5	15600
2	F9 B5 B1049.4	15600
3	F9 B5 B1049.5	15600
4	F9 B5 B1049.7	15600
5	F9 B5 B1051.3	15600
6	F9 B5 B1051.4	15600
7	F9 B5 B1051.6	15600
8	F9 B5 B1056.4	15600
9	F9 B5 B1058.3	15600
10	F9 B5 B1060.2	15600
11	F9 B5 B1060.3	15600

# 2015 Launch Records

We used a combinations of the **WHERE** clause, **LIKE**, **AND**, and **BETWEEN** conditions to filter for failed landing outcomes in drone ship, their booster versions, and launch site names for year 2015

List the failed landing\_outcomes in drone ship, their booster versions, and launch site names for in year 2015

```
In [18]: task_9 = '''
          SELECT BoosterVersion, LaunchSite, LandingOutcome
          FROM SpaceX
          WHERE LandingOutcome LIKE 'Failure (drone ship)'
             AND Date BETWEEN '2015-01-01' AND '2015-12-31'
          ...
          create_pandas_df(task_9, database=conn)
```

```
Out[18]:
```

	boosterversion	launchsite	landingoutcome
0	F9 v1.1 B1012	CCAFS LC-40	Failure (drone ship)
1	F9 v1.1 B1015	CCAFS LC-40	Failure (drone ship)



# Rank Landing Outcomes Between 2010-06-04 and 2017-03-20

Rank the count of landing outcomes (such as Failure (drone ship) or Success (ground pad))

```
In [19]: task_10 = '''
          SELECT LandingOutcome, COUNT(LandingOutcome)
          FROM SpaceX
          WHERE DATE BETWEEN '2010-06-04' AND '2017-03-20'
          GROUP BY LandingOutcome
          ORDER BY COUNT(LandingOutcome) DESC
          '''
          create_pandas_df(task_10, database=conn)
```

```
Out[19]:
```

	landingoutcome	count
0	No attempt	10
1	Success (drone ship)	6
2	Failure (drone ship)	5
3	Success (ground pad)	5
4	Controlled (ocean)	3
5	Uncontrolled (ocean)	2
6	Precluded (drone ship)	1
7	Failure (parachute)	1

We selected Landing outcomes and the **COUNT** of landing outcomes from the data and used the **WHERE** clause to filter for landing outcomes **BETWEEN** 2010-06-04 to 2010-03-20.

We applied the **GROUP BY** clause to group the landing outcomes and the **ORDER BY** clause to order the grouped landing outcome in descending order.




Section 4

# Launch Sites Proximities Analysis

# All launch sites global map markers




# Markers showing launch sites with color labels

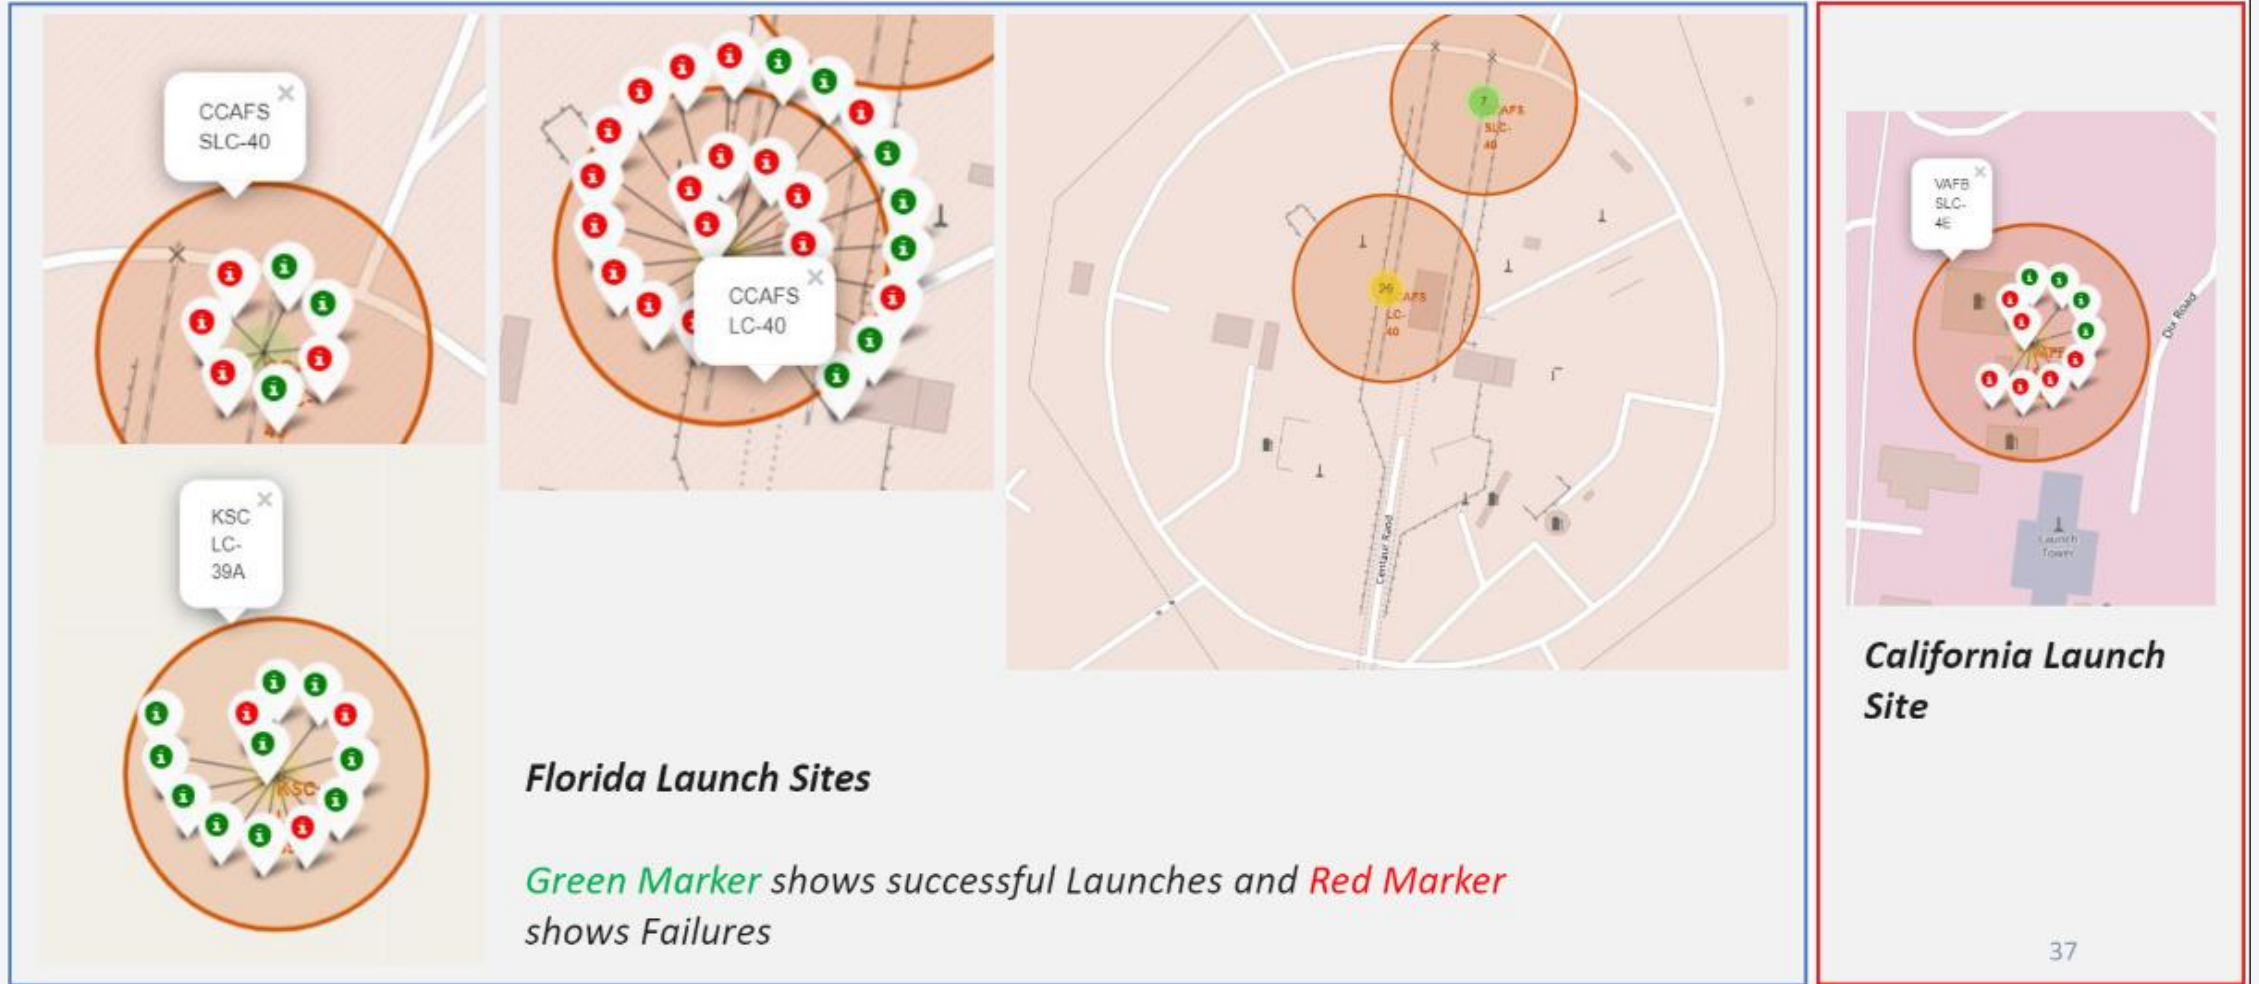



# Launch Site distance to landmarks

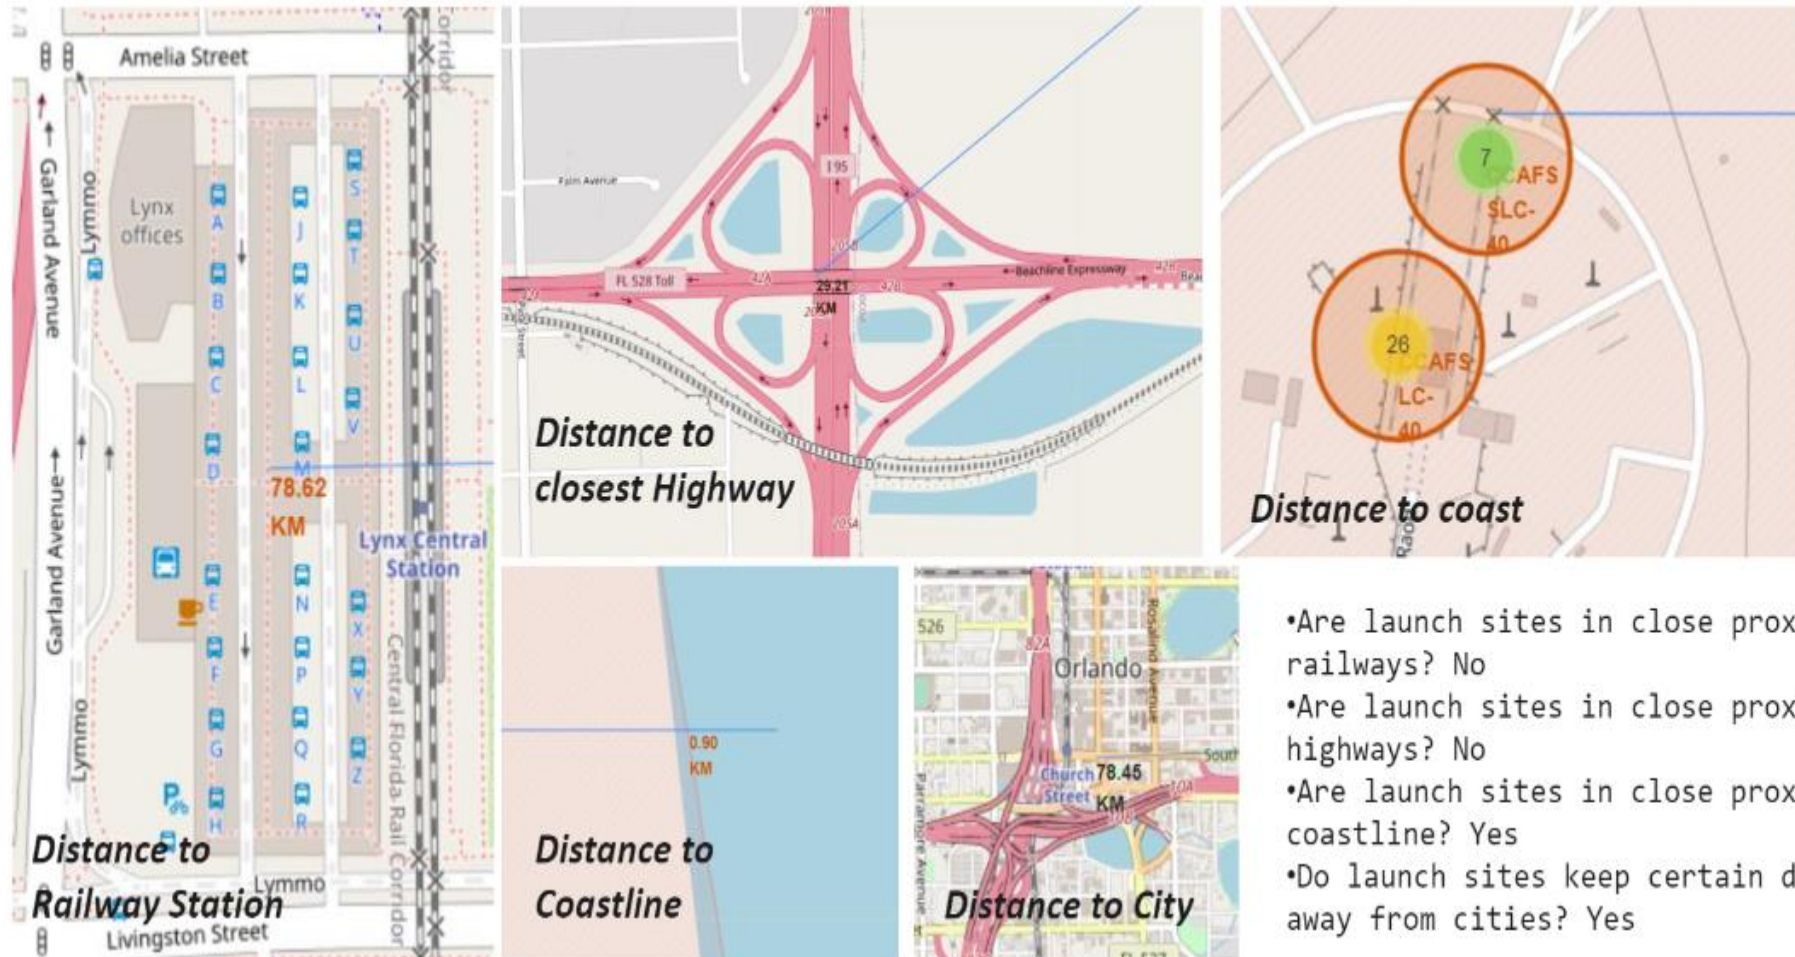

- Are launch sites in close proximity to railways? No
- Are launch sites in close proximity to highways? No
- Are launch sites in close proximity to coastline? Yes
- Do launch sites keep certain distance away from cities? Yes




Section 5

# Build a Dashboard with Plotly Dash




## Pie chart showing the success percentage achieved by each launch site

Total Success Launches By all sites

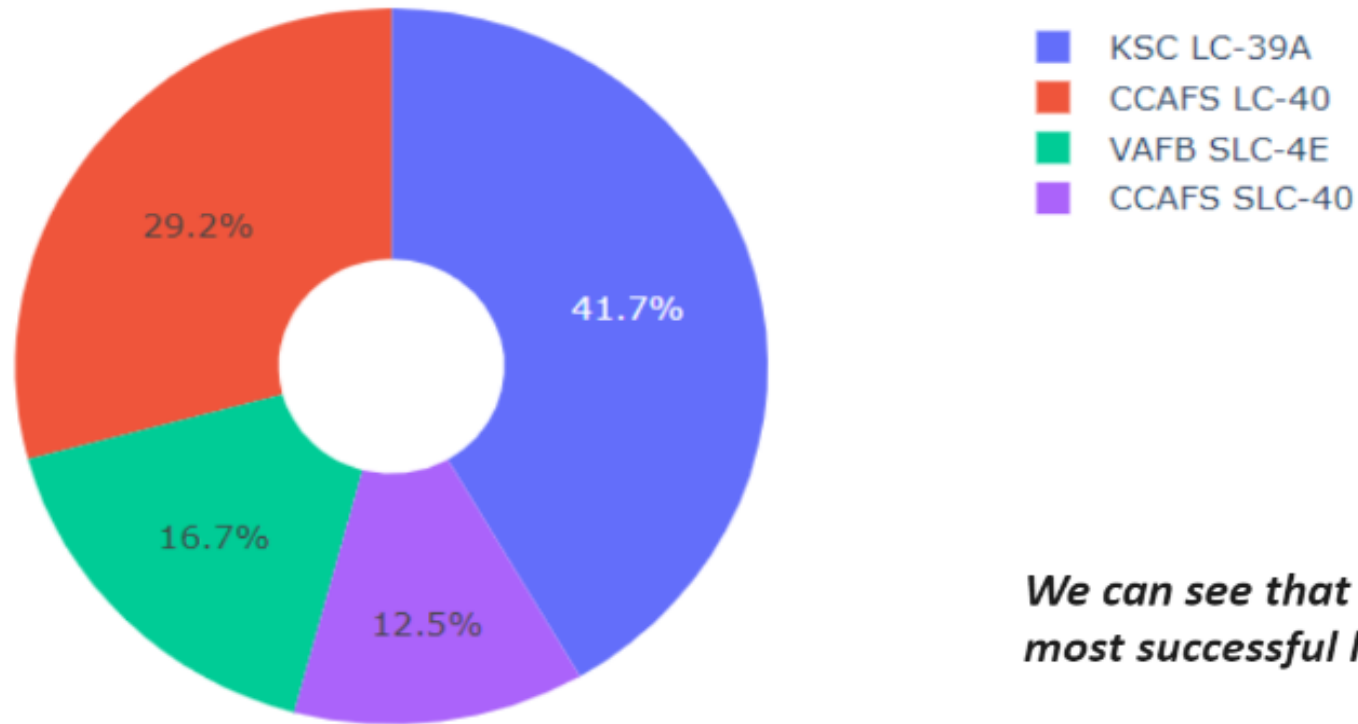

***We can see that KSC LC-39A had the most successful launches from all the sites***


Pie chart showing the Launch site with the highest launch success ratio

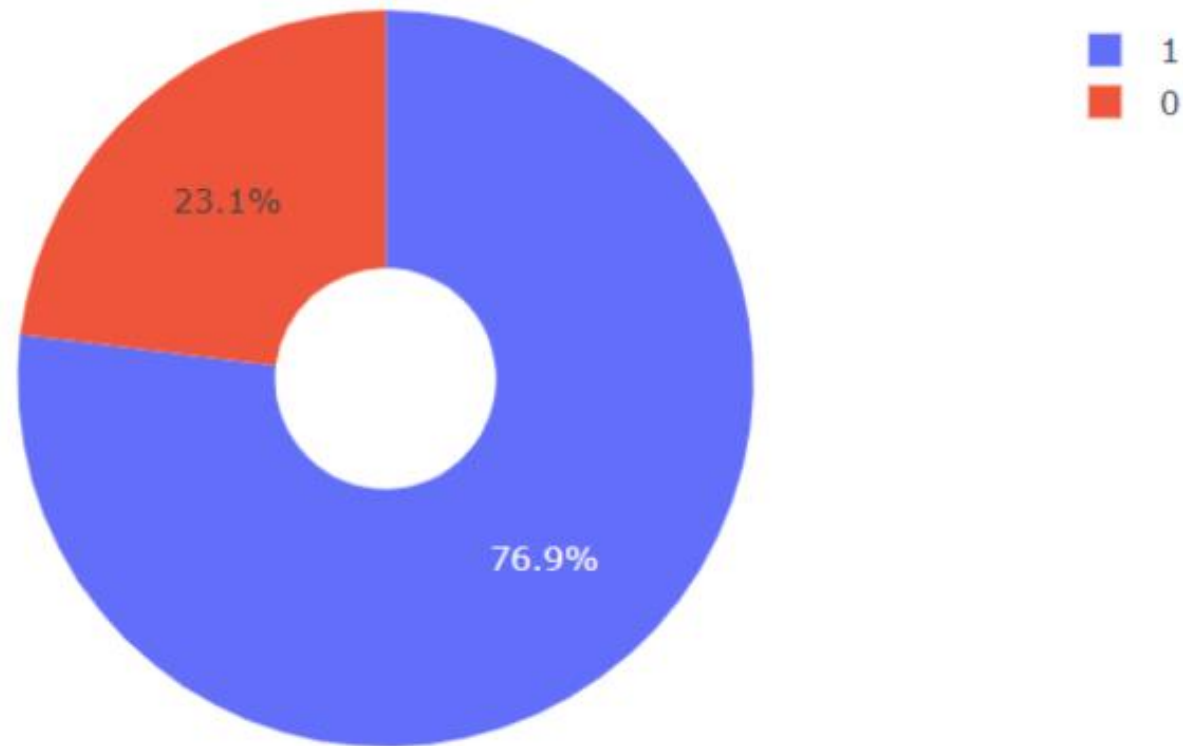

***KSC LC-39A achieved a 76.9% success rate while getting a 23.1% failure rate***



## Scatter plot of Payload vs Launch Outcome for all sites, with different payload selected in the range slider

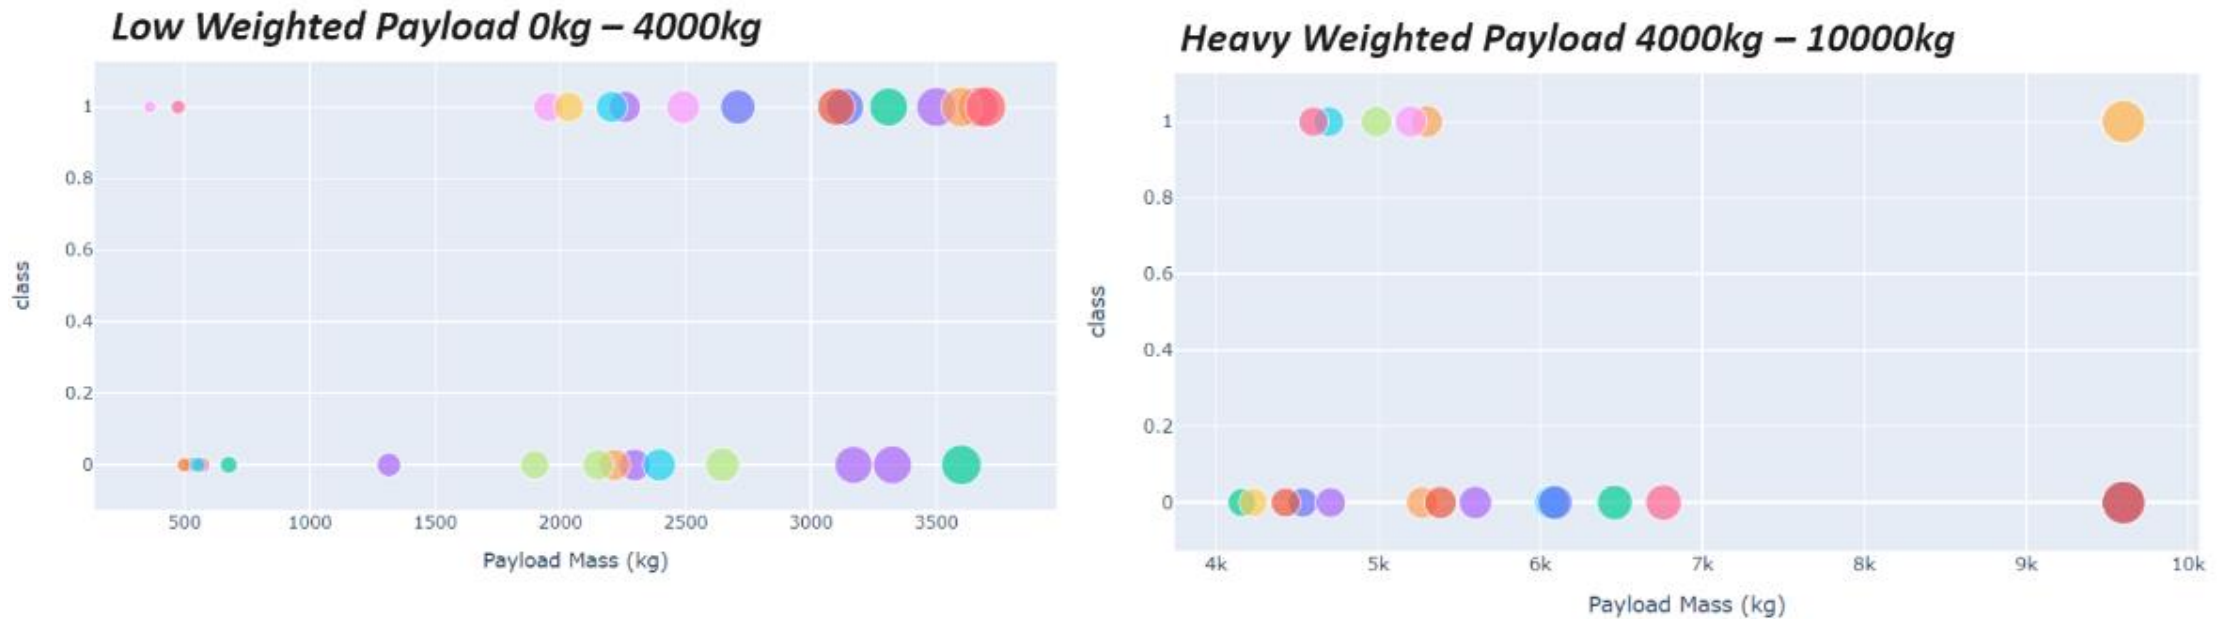

*We can see the success rates for low weighted payloads is higher than the heavy weighted payloads*



Section 6

# Predictive Analysis (Classification)

# Classification Accuracy

The decision tree classifier is the model with the highest classification accuracy

```
models = {'KNeighbors':knn_cv.best_score_,
          'DecisionTree':tree_cv.best_score_,
          'LogisticRegression':logreg_cv.best_score_,
          'SupportVector': svm_cv.best_score_}


bestalgorithm = max(models, key=models.get)
print('Best model is', bestalgorithm,'with a score of', models[bestalgorithm])
if bestalgorithm == 'DecisionTree':
    print('Best params is :', tree_cv.best_params_)
if bestalgorithm == 'KNeighbors':
    print('Best params is :', knn_cv.best_params_)
if bestalgorithm == 'LogisticRegression':
    print('Best params is :', logreg_cv.best_params_)
if bestalgorithm == 'SupportVector':
    print('Best params is :', svm_cv.best_params_)
```

Best model is DecisionTree with a score of 0.8732142857142856

Best params is : {'criterion': 'gini', 'max\_depth': 6, 'max\_features': 'auto', 'min\_samples\_leaf': 2, 'min\_samples\_split': 5, 'splitter': 'random'}

# Confusion Matrix

The confusion matrix for the decision tree classifier shows that the classifier can distinguish between the different classes. The major problem is the false positives .i.e., unsuccessful landing marked as successful landing by the classifier.

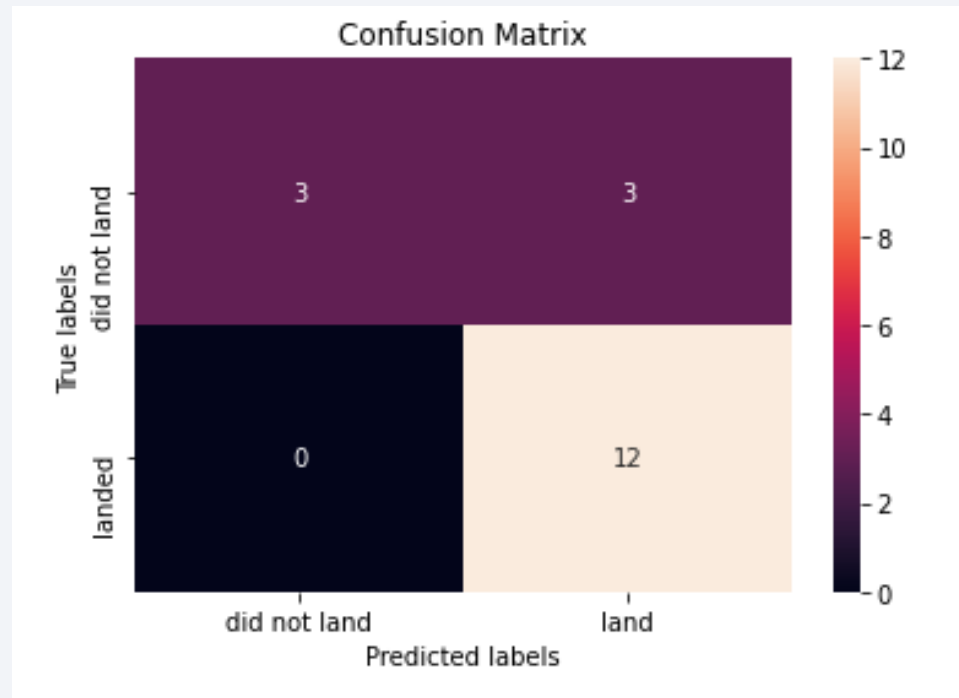

# Conclusions

---

We can conclude that:

The larger the flight amount at a launch site, the greater the success rate at a launch site.

Launch success rate started to increase in 2013 till 2020.

Orbits ES-L1, GEO, HEO, SSO, VLEO had the most success rate.

KSC LC-39A had the most successful launches of any sites.

The Decision tree classifier is the best machine learning algorithm for this task.



Thank you!

