

DEMETERIO'S NOTEBOOK INJECTOR (NI)

Modder Documentation



DOCUMENT INFORMATION	
Guide version	v1.3
Guide revision date	July 19, 2026
Core release since	1.3.1
Core ABI since	1
Mod Changelog	github.com/Demeterio/Notebook-Injector/latest
Language	English

Official Contacts, Downloads, and Support



Creator	Demeterio
Official website / Tumblr	demeterio.tumblr.com
Discord community	discord.gg/mPyRPScgeS
GitHub repository	github.com/Demeterio/Notebook-Injector/latest
Mod The Sims page	modthesims.info/downloads/all/?u=10304233
SimFileShare folder	simfileshare.net/folder/273451/
Support / bug reports	Use the official Mod The Sims thread or the appropriate GitHub repository.

DOWNLOAD SAFETY

Use only the official links listed on this page. Do not redistribute, repackage, mirror, or bundle the Notebook Injector core files with an addon unless explicit written permission is granted. Addon authors must instruct their players to download Notebook Injector themselves from these legitimate official sources.

Terminology

This section defines the technical terms and notation used throughout the guide. Read it before following the XML examples, especially if you are new to Sims 4 tuning.

Term	Meaning
EA	Electronic Arts. “Native EA” means original game systems, classes, tuning, formats, or UI behavior.
UI	User Interface: the visual Notebook screens, icons, rows, tooltips, counters, and player-facing elements.
Base Game	Content available without an expansion, game pack, stuff pack, or kit.
Pack requirement	Any pack required because an addon references its Recipe, Object Definition, snippet, participant, icon, or tuning.
STBL	String Table resource containing localized text. Every language uses its own STBL and the same string keys.
Tuning ID	Positive numeric instance ID of a tuning resource. The XML header normally uses decimal notation in <code>s="..."</code> .
Resource key	A Type:Group:Instance reference, such as a PNG key.
Variant	A Native EA TunableVariant represented by a <code><V></code> block. The selected branch changes the nested structure.
NotebookEntryType	Native EA enum class controlling Subcategory presentation formats such as <code>EXPANDABLE_DATA</code> .

PACK REQUIREMENTS

Notebook Injector generic resources are designed for Base Game use.

Your addon becomes dependent on every pack whose game objects, Recipes, snippets, participants, tuning, or other resources it references.

Clearly list those packs for players.

Contents

Official Contacts, Downloads, and Support	2
Terminology.....	3
Contents	4
1. Introduction, Installation, Archives, and Prerequisites	6
1.1 Intended audience.....	6
1.2 Official Notebook Injector Archives.....	6
1.3 Installing Notebook Injector	6
1.4 Required Release Files and Addon Package Naming	7
1.5 Recommended structure for your addon download.....	7
1.6 External knowledge required	7
1.7 Naming hierarchy	8
1.8 Identifier quick reference	8
2. Notebook Architecture and Documentation Conventions.....	10
2.1 Reference codes used in this guide.....	10
3. Category Snippet Contract (CAT)	11
4. Subcategory Contract and Native EA Formats (SUB)	13
4.1 category_target Variant structures (SUB-02).....	14
4.2 Complete custom-target XML (SUB).....	15
4.3 Native EA display formats (SUB-09).....	15
5. Entry Assignment Contract and Target Variants (ASN)	17
5.1 subcategory_target Variant structures (ASN-02)	17
5.2 Complete custom-target Assignment XML (ASN)	17
5.3 What the sanitizer checks	18
6. Shared NotebookInjectorEntry Contract (ENT).....	19
6.1 Shared Authored Fields (ENT)	19
6.2 Implemented Entry Kinds (ENT-01).....	21
7. Native EA Entry Kinds.....	21
7.1 DEFAULT.....	21
7.1.1 Minimal DEFAULT XML	22
7.2 BAIT.....	22
7.3 RECIPE	22
7.4 ANIMAL_FEED	22
7.5 COUNTRY_ITEM	22
7.6 GARDENING_PLANT	23
7.7 Native classes currently blocked	23
8. CUSTOM Entry Kind (CEX / CNT / CID / CTT).....	24
8.1 CUSTOM with EXPANDABLE_DATA (CEX)	24
8.1.1 EXPANDABLE_DATA content block (CNT)	25
8.1.2 Simplified display order.....	26
8.2 CUSTOM with ICON_DESCRIPTION_DATA (CID)	27
8.3 custom_tooltip block (CTT).....	28

9. Loot Variants and Runtime Data	30
9.1 create_new_entry LootActions (Native EA Variant Pattern).....	30
10. Localized Strings and HTML Formatting.....	31
11. Icons, Recommended Sizes, and Package Resources	32
11.1 Pixel sizes observed in Native EA resources	32
11.2 Ingredient and list-row images	32
12. Logs and Error Reports	34
12.1 Files to inspect before a bug report	34
12.2 What an actionable error contains	34
13. Cheat Commands	35
14. Enum Compatibility	36
15. Troubleshooting and Bug Reports	37
15.1 Information to collect before asking for help	37
Guide Changelog	38
Sims 4 Modding Resources and References	39
Final Contacts, Credits, Copyright, and Disclaimer	40
Copyright and permissions	40
Electronic Arts and The Sims 4 disclaimer.....	40
No warranty.....	40

1. Introduction, Installation, Archives, and Prerequisites

Notebook Injector lets tuning modders add Notebook Categories, Subcategories, and Entries without overriding EA's global Notebook mapping. It also provides validation, automatic enum allocation, diagnostic logs, runtime guards, and testing cheats.

1.1 Intended audience

- Tuning modders who can create XML and String Table resources in Sims 4 Studio.
- Modders who need new Notebook content but do not want to maintain a separate Python Script Mod.
- Advanced modders using Native EA runtime data such as Recipes, fishing data, gardening participants, or Object Definitions.

1.2 Official Notebook Injector Archives

Two official ZIP archives are provided. The Modder archive includes development resources, examples, the testing package, and the versioned PDF guide. The Player archive contains only installation files and instructions needed by players.

Demeterio_NotebookInjector_MODDER_vX/	
└ Demeterio_NotebookInjector_Script_vX.ts4script	required
└ Demeterio_NotebookInjector_Generic_vX.package	required
└ Demeterio_NotebookInjector_Debuglog.package	optional (for debug purpose)
└ Demeterio_NotebookInjector_TestingCustom_vX.package	optional (for testing purpose)
└ Demeterio_NotebookInjector_ModUpdateChecker_vX.package	highly recommended for update notification
└ Demeterio_NotebookInjector_Installation_vX.txt	
└ Demeterio_NotebookInjector_Compatibility_vX.txt	
└ XML_Examples/	
└ Documentation/	
└ Demeterio_NotebookInjector_Modder_Guide_vX.pdf	
Demeterio_NotebookInjector_PLAYER_vX/	
└ Demeterio_NotebookInjector_Script_vX.ts4script	required
└ Demeterio_NotebookInjector_Generic_vX.package	required
└ Demeterio_NotebookInjector_Debuglog_.package	optional (for debug purpose)
└ Demeterio_NotebookInjector_ModUpdateChecker_vX.package	highly recommended for update notification
└ Demeterio_NotebookInjector_Installation_vX.txt	
└ Demeterio_NotebookInjector_Compatibility_vX.txt	

OFFICIAL ARCHIVES

Use the Modder ZIP for addon development and the Player ZIP for a normal game installation. Install only one archive type at a time, keep all files from the same release together, and never mix old and new core files. Remove all previous version.

1.3 Installing Notebook Injector

Documents/Electronic Arts/The Sims 4/Mods/Demeterio_NotebookInjector/

1. Remove all previous version of the mod. Create the folder shown above inside the game Mods folder.
2. Place the Notebook Injector Script `.ts4script` file and Generic `.package` directly in that folder.
The optional Debuglog package and ModUpdateChecker package belongs in the same folder. See the `.txt` Installation for more information about those.
3. Do not place the `.ts4script` in a deeper subfolder. The recommended structure keeps it only one folder below `Mods`.
4. In The Sims 4 options, enable **Custom Content and Mods** and **Script Mods Allowed**, then restart the game.
5. Before launching the game for the first time after an installation or update,
delete `Documents/Electronic Arts/The Sims 4/localthumbcache.package`.

RECOMMENDED FOLDER DEPTH

Keep all Notebook Injector core files together in the single Player or Modder folder you installed. Do not create an additional nested folder for the `.ts4script`.

1.4 Required Release Files and Addon Package Naming

File pattern	Purpose	Required?
<code>Demeterio_NotebookInjector_Script_vX.ts4script</code>	Loads Python injection, validation, logs, runtime guards, and cheats.	Required
<code>Demeterio_NotebookInjector_Generic_vX.package</code>	Shared tuning, notifications, fallback images, and language-neutral resources.	Required
<code>ModderName_NotebookInjector_ModName_FeatureName_vX.package</code>	Your addon: snippets, Entries, LootActions, STBL resources, and optional PNG resources.	Required
<code>Demeterio_NotebookInjector_Debuglog.package</code>	Enables verbose DEBUG logging for development, debugging, and bug reports.	Development only
<code>Demeterio_NotebookInjector_Testing_Cats_vX.package</code>	Provides internal test tunings and preview content for addon development. Not include in player addon download.	Modder/testing only

VERSION NUMBERS

For the Script and Generic files, `vX` is the Notebook Injector release version.

For your addon package, `vX` is your addon's own version.

The XML `min_version` field is the required Core ABI integer and is not the same as either filename version.

DISABLING DEBUG LOGGING

To stop verbose DEBUG logging, delete the Debuglog package, move it outside the Mods folder, or rename its extension so the game no longer loads it (e.g.: `_Debuglog_.package`). Keep the file only while developing or preparing a bug report.

1.5 Recommended structure for your addon download

Your addon should contain only your own files and instructions. Do not include or redistribute the Notebook Injector Script, Generic package, Debuglog package, documentation, or original assets.

```
ModderName_ModName/
├─ ModderName_NotebookInjector_ModName_FeatureName_vX.package
├─ README_AND_INSTALLATION_FOR_NOTEBOOKINJECTOR.txt
├─ REQUIRED_DEPENDENCY.txt
└─ Optional screenshots or translation notes
```

REQUIRED DEPENDENCY INSTRUCTIONS

Tell players that Notebook Injector is a separate required dependency. Direct them to the official Mod The Sims, SimFileShare or GitHub download listed on the Contact page. Do not bundle the core files inside your addon archive.

Recommended text for your `REQUIRED_DEPENDENCY.txt`:

```
REQUIRED: Demeterio's Notebook Injector
Download the current Player release yourself from an official link (Mod The Sims, SimFileShare, GitHub).
When updating, remove the old Notebook Injector folder and replace it with the complete new folder.
Do not keep duplicate or mixed-version copies of the Script and Generic files.
If this addon requires a newer Core ABI than the installed release, Notebook Injector displays an in-game
outdated-core notification to the player.
```

1.6 External knowledge required

- Creating transparent PNG resources and importing them into Sims 4 Studio.
- Generating unique tuning instance IDs and resource hashes.
- Creating STBL resources for every supported language and reusing the same string keys across languages.
- Reading current EA tuning and TDESC references for Native EA Notebook Entries and NotebookEntryLootOp variants.
- Identifying whether a referenced game object or tuning belongs to Base Game or a specific pack.

EXTERNAL DOCUMENTATION

This guide explains the Notebook Injector public contract. It does not replace Sims 4 Studio tutorials, TDESC documentation, or current EA tuning references. Native EA tuning can change with game patches. A curated resource list is provided near the end of this guide.

1.7 Naming hierarchy

The recommended hierarchy groups related resources when Sims 4 Studio sorts tuning names alphabetically. Generate each tuning instance ID from the full unique tuning name.

Resource	Recommended pattern and example
Addon package	Pattern: ModderName_NotebookInjector_ModName_FeatureName_vX.package Example: Demeterio_NotebookInjector_Occult_MyRecipes_v1.0.package
Category tuning	Pattern: ModderName:NotebookInjector_ModName_CategoryName Example: Demeterio:NotebookInjector_Occult_MyRecipes
Category key	Pattern: ModderNameModNameCategoryName Example: DemeterioOccultMyRecipes
Subcategory tuning	Pattern: ModderName:NotebookInjector_ModName_CategoryName_SubcategoryName Example: Demeterio:NotebookInjector_Occult_MyRecipes_Rituals
Subcategory key	Pattern: ModderNameModNameCategoryNameSubcategoryName Example: DemeterioOccultMyRecipesRituals
Assignment tuning	Pattern: ModderName:NotebookInjector_ModName_CategoryName_SubcategoryName_Assignment Example: Demeterio:NotebookInjector_Occult_MyRecipes_Rituals_Assignment
Entry tuning	Pattern: ModderName:NotebookInjector_ModName_CategoryName_SubcategoryName_Entry_XX Example: Demeterio:NotebookInjector_Occult_MyRecipes_Rituals_Entry_01
Loot tuning	Pattern: ModderName:NotebookInjector_ModName_Loot_Description Example: Demeterio:NotebookInjector_Occult_Loot_UnlockRitualEntries

CUSTOM KEY FORMAT

`category_key` and `subcategory_key` are literal custom enum names, not hashes. They must begin with an uppercase A-Z letter and may then contain letters, numbers, or underscores. Do not use spaces, hyphens, or colons. Existing Native EA Category and Subcategory enum names may contain spaces. Copy the exact EA value shown by current tuning references, for example Cottage Living.

SUGGESTED HASH WORKSHEET

Consider keeping a project table with every custom tuning name, its FNV64 High Bit decimal and hexadecimal IDs, resource type, and XML references. Sims 4 Studio's current hash tools are safer than inventing or manually retyping numbers.

1.8 Identifier quick reference

Identifier	How to record and use it
Custom tuning	Source: full tuning name ID: FNV64 with High Bit enabled (decimal in tuning XML) XML: <code>s="DECIMAL_TUNING_ID"</code> Keep both decimal and hexadecimal values in your project worksheet.
Tuning reference	Source: existing tuning resource XML: <code><T>DECIMAL_TUNING_ID</T></code> Use decimal for Notebook Entry IDs, Loot IDs, Object Definitions, and integer tuning references.
LocalizedString	Source: STBL entry ID: FNV32 / 32-bit key (hexadecimal) XML: <code><T n="field">0x00000000</T></code> Create the same key in every language STBL.
PNG image	Type: 2F7D0004 Group: 00000000 Instance: FNV64 with High Bit enabled (16-digit hexadecimal) XML: <code>2F7D0004:00000000:0000000000000000</code>

Identifier	How to record and use it
Custom key	Type / format: <code>str</code> Source: literal enum name Hash: none XML: <code><T n="___key">Demeterio0ccultMyRecipes</T></code>
Object Definition	Source: EA/custom Object Definition tuning XML: <code><T n="object_definition">DECIMAL_ID</T></code> If your source displays the tuning ID in hexadecimal, convert it to decimal with Sims 4 Studio before placing it in this integer field.

FIGURE 1: Naming, hashes, and decimal conversion

Local Tunings

```

17995844661942986890 <!--Demeterio:Notebookinjector_ModName_CatsMax-->
9691902167726056836 <!--Demeterio:Notebookinjector_ModName_CatsMax_Sub1-->
15287987458547803290 <!--Demeterio:Notebookinjector_ModName_CatsMax_Sub1_Assignment-->
9274632668890891931 <!--Demeterio:Notebookinjector_ModName_CatsMax_Sub1_Entry_1-->
9274632668890891928 <!--Demeterio:Notebookinjector_ModName_CatsMax_Sub1_Entry_2-->
9274632668890891929 <!--Demeterio:Notebookinjector_ModName_CatsMax_Sub1_Entry_3-->
14048390089338440485 <!--Demeterio:Notebookinjector_ModName_CatsMax_Sub2-->
16822565750125503491 <!--Demeterio:Notebookinjector_ModName_CatsMax_Sub2_Assignment-->
11665633513855489536 <!--Demeterio:Notebookinjector_ModName_CatsMax_Sub2_Entry_1-->
11665633513855489539 <!--Demeterio:Notebookinjector_ModName_CatsMax_Sub2_Entry_2-->
11024869632403588123 <!--Demeterio:Notebookinjector_ModName_CatsMin-->
14048390089338440486 <!--Demeterio:Notebookinjector_ModName_CatsMin_All-->
13642603614446645724 <!--Demeterio:Notebookinjector_ModName_CatsMin_All_Assignment-->
9761984916360281942 <!--Demeterio:Notebookinjector_ModName_CatsMin_All_Entry_1-->
9761984916360281941 <!--Demeterio:Notebookinjector_ModName_CatsMin_All_Entry_2-->
10983016394681584791 <!--Demeterio:Notebookinjector_ModName_Loot_AllEntries-->
13707261369167412271 <!--Demeterio:Notebookinjector_ModName_Loot_SomeEntries-->

```

Hash Générateur

Autre Nombre:

Décimal: 9274632668890891931

Hexadécimal: 80B61D45F379869B

Hash texte:

Texte: erio:Notebookinjector_ModName_CatsMax_Sub1_Entry_1

FNV24: 804655DE

FNV32: E54655BB

FNV56: 80B61D45F379869B

FNV64: 80B61D45F379869B

Mode: ☒ Hexadécimal ☐ Décimal

Case-sensitive: ☐ High Bit: ☒

Object Game Content

Category: Tous

Game Pack: Base Game

Recherche: yarn

Mesh Groups: bu ☒ Show Debug Items

Type	Groupe	Instance	Taille d
Rig	00000000	BF27BDD0291EB380	0B
Slot	00000000	BF27BDD0291EB380	0B
DST Image	00000000	C42F40ECBED690C8	0B
DST Image	00000000	E74F83FC9D68F9C2	0B
DST Image	00000000	B8DC309F57A24C	0B
Model LOD	00000000	B89E9850AE669552	0B
Model LOD	00010000	B89E9850AE669552	0B
Model LOD	00010001	B89E9850AE669552	0B
Light	00000000	B89E9850AE669552	0B
Model	00000000	B89E9850AE669552	0B
Footprint	00000000	BEE3BDD028E4D374	0B
Object Definition	00000000	00000000000003D198	0B
Object-Catalog	00000000	00000000000003D198	0B
Cutout Info Table	00000000	370881C33E24D12D	0B

ObjectDefinitionResource: CODBSAE7-00000000-000000000003D198

Données Texte

EnvironmentScoreEmotionTags_32

EnvironmentScores

Footprint

Icon

IsBaby

Key

Group

Instance

InstanceDecimal

Type

MaterialVariant

Model

Name

NegativeEnvironmentScore

PositiveEnvironmentScore

Rig

SimulationPrice

10

XML Code

```

<L n="ingredients">
  <U>
    <T n="object_definition">250264<!--base game object yarnBallPet 0x3D198--></T>
    <T n="required_count">2</T>
  </U>
  <U>
    <T n="object_definition">65854<!--base game object firewood 0x1013E--></T>
    <T n="required_count">1</T>
  </U>
</L>

```

2. Notebook Architecture and Documentation Conventions

```

LootAction
  | unlocks
  v
Notebook Entry
  | listed by
  v
Entry Assignment
  | targets
  v
Subcategory
  | belongs to
  v
Category
  | rendered by
  v
Native EA Notebook UI

```

Part	Responsibility
Category	The large Notebook section shown in the Category picker.
Subcategory	A page or section inside a Category. It selects the Native EA display format and UI options.
Notebook Entry	The unlockable record. The <code>entry_kind</code> field controls how Notebook Injector builds its data.
Entry Assignment	With an Entry Assignment, a modder can place existing Notebook Entry tuning IDs into either a Native EA Subcategory or a custom Notebook Injector Subcategory. This is how an addon can add Entries to an EA Notebook section without redefining its Category or Subcategory.
LootAction	Unlocks the Entry and may supply runtime data such as a Recipe, participant, fish, or Object Definition.

IMPORTANT DISTINCTION

`entry_kind` is Notebook Injector build logic.

`format_type` is Native EA Notebook presentation selected in the Subcategory tuning.

The Assignment validator checks whether they are compatible.

NATIVE EA CROSS-REFERENCES

See [section 4](#) for `NotebookEntryType` formats, [sections 6 and 7](#) for Entry kinds, and [section 9](#) for Loot variants.

Notebook Injector forwards supported data into Native EA systems rather than redefining every original class or Loot option.

2.1 Reference codes used in this guide

Code family	Used for
CAT	Category fields
SUB	Subcategory fields
ASN	Entry Assignment fields
ENT	Shared Notebook Entry fields
CEX	CUSTOM EXPANDABLE Entry fields
CNT	CUSTOM content fields
CID	CUSTOM ICON_DESCRIPTION fields
CTT	CUSTOM tooltip fields

EXAMPLE

CAT-03 identifies `category_name` in the field table, annotated XML, and screenshot callout.

CLEAN XML FILES

The official archive includes complete `.xml` copies without documentation comments. Use clean files for copy/paste and annotated files to understand each field.

3. Category Snippet Contract (CAT)

Public class: `NotebookInjectorCategory`. Resource type: Snippet. A Category callback validates the key and required name, applies fallback images when needed, and registers the Category for later injection.

RECOMMENDED TUNING NAME

`ModderName:NotebookInjector_ModName_CategoryName`

RECOMMENDED CATEGORY KEY

`ModderNameModNameCategoryName`

Ref.	Field	Contract and effect
CAT-01	<code>min_version</code>	Type: <code>int</code> XML: <code><T n="min_version">1</T></code> Status: OPTIONAL Default: 1 Effect: Minimum Notebook Injector Core ABI integer required by this snippet.
CAT-02	<code>category_key</code>	Type: <code>string</code> XML: <code><T n="category_key">CustomKey</T></code> Status: REQUIRED Effect: Unique literal enum key. See sections 1.7, 1.8 and 14 .
CAT-03	<code>category_name</code>	Type: <code>LocalizedString</code> XML: <code><T n="category_name">0x00000000</T></code> Status: REQUIRED Effect: Name displayed in the Notebook Category picker.
CAT-04	<code>category_description</code>	Type: <code>LocalizedString</code> XML: <code><T n="category_description">0x00000000</T></code> Status: OPTIONAL Default: None Effect: Category description when the Native EA UI displays one.
CAT-05	<code>category_icon</code>	Type: <code>TunableIconAllPacks</code> XML: <code>2F7D0004:00000000:0000000000000000</code> Status: OPTIONAL Default: Core fallback Effect: Small transparent PNG Category icon. See section 11 for supported and recommended pixel sizes.
CAT-06	<code>category_large_icon</code>	Type: <code>TunableIconAllPacks</code> XML: <code>2F7D0004:00000000:0000000000000000</code> Status: OPTIONAL Default: Core fallback Effect: Large transparent PNG artwork. See section 11 for supported and recommended pixel sizes.
CAT-07	<code>display_subcategory_title</code>	Type: <code>bool</code> XML: <code><T n="display_subcategory_title">True</T></code> Status: OPTIONAL Default: False Effect: Shows the selected Subcategory name on the Category page.

LOCALIZATION AND ICONS

Create every `LocalizedString` key in all language STBL resources. For PNG fields, import a transparent PNG, use Type `2F7D0004` and Group `00000000`, then place the 64-bit instance in the resource key. See [sections 10 and 11](#).

```


<?xml version="1.0" encoding="utf-8"?>
<I c="NotebookInjectorCategory" i="snippet" m="notebook_injector.data"
  n="ModderName:NotebookInjector_ModName_CategoryName"
  s="YOUR_CATEGORY_SNIPPET_DECIMAL_ID">
  <T n="min_version">1</T> <!-- CAT-01 -->
  <T n="category_key">ModderNameModNameCategoryName</T> <!-- CAT-02 -->
  <T n="category_name">0x00000000</T> <!-- CAT-03 -->
  <T n="category_description">0x00000000</T> <!-- CAT-04 -->
  <T n="category_icon">2F7D0004:00000000:0000000000000000</T> <!-- CAT-05 -->
  <T n="category_large_icon">2F7D0004:00000000:0000000000000000</T> <!-- CAT-06 -->
  <T n="display_subcategory_title">True</T> <!-- CAT-07 -->
</I>

```

BEFORE REPORTING A BUG

A missing key or name, invalid key format, duplicate/reserved key, or unavailable resource prevents registration. Check the Notebook Injector log path in [section 12](#) before opening a support report.

FIGURE 2: Category in-game result

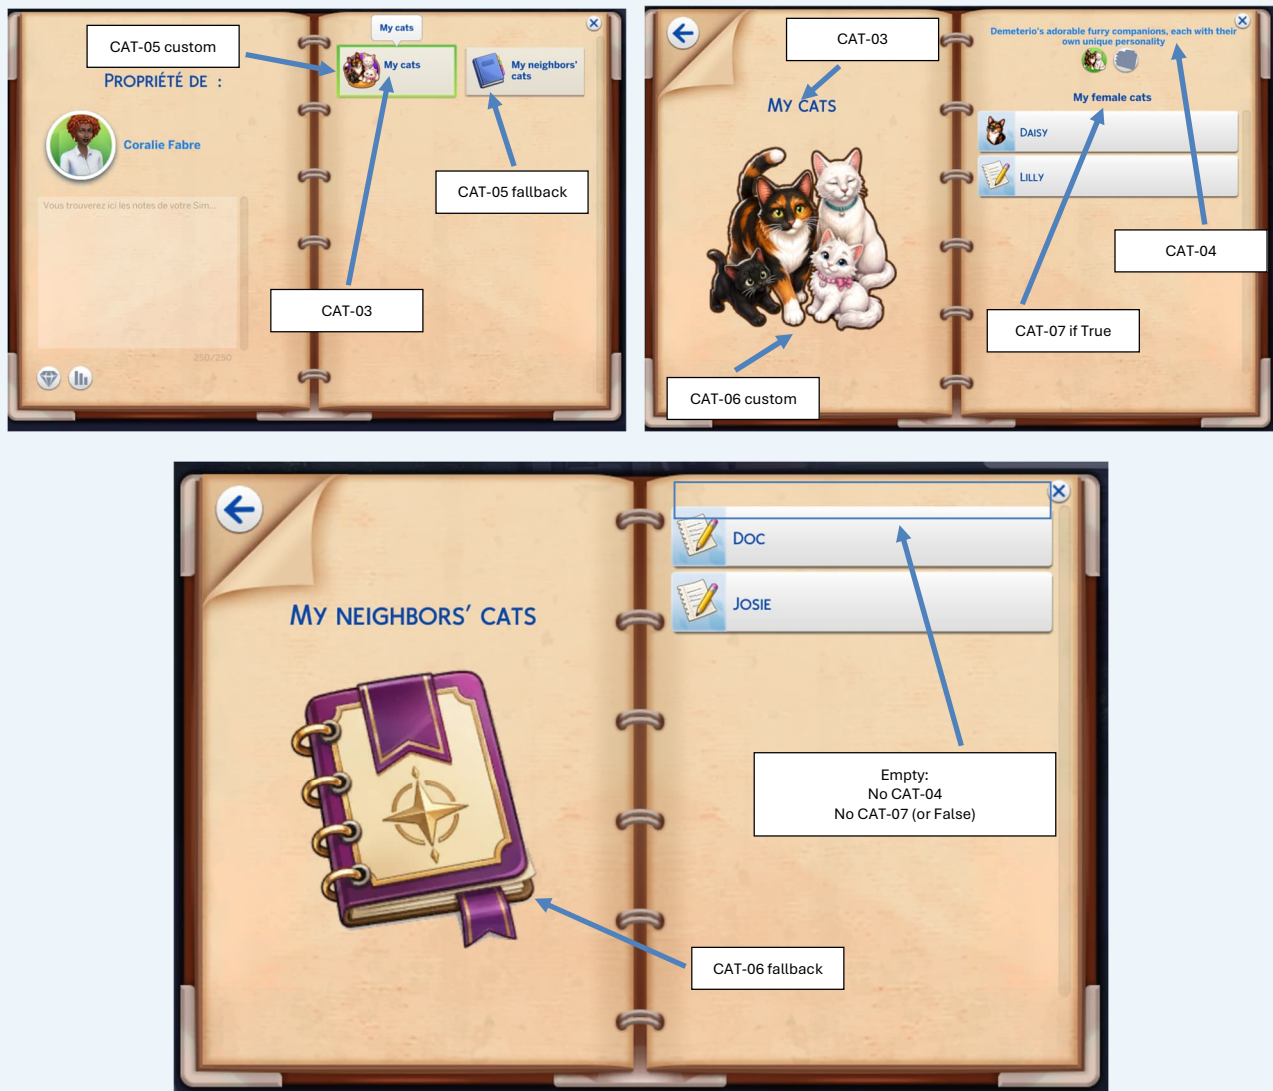

4. Subcategory Contract and Native EA Formats (SUB)

Public class: `NotebookInjectorSubcategory`. A Subcategory may target an existing EA Category or a previously created Notebook Injector Category key. It selects the Native EA display format used by every assigned Entry.

RECOMMENDED TUNING NAME

`ModderName:NotebookInjector_ModName_CategoryName_SubcategoryName`

RECOMMENDED SUBCATEGORY KEY

`ModderNameModNameCategoryNameSubcategoryName`

Ref.	Field	Contract and effect
SUB-01	min_version	Type: <code>int</code> XML: <code><T n="min_version">1</T></code> Status: OPTIONAL Default: 1 Effect: Minimum Core ABI integer required.
SUB-02	category_target	Type: <code>Native EA TunableVariant</code> XML: <code><V n="category_target" ...></code> Status: REQUIRED Effect: Target either a Native EA Category or a Notebook Injector Category created with the CAT contract. The selected Variant branch determines the nested XML structure.
SUB-03	subcategory_key	Type: <code>string</code> XML: <code><T n="subcategory_key">CustomKey</T></code> Status: REQUIRED Effect: Unique literal enum key.
SUB-04	subcategory_name	Type: <code>LocalizedString</code> XML: <code><T n="subcategory_name">0x00000000</T></code> Status: REQUIRED Effect: Displayed Subcategory name.
SUB-05	subcategory_tooltip	Type: <code>LocalizedString</code> XML: <code><T n="subcategory_tooltip">0x00000000</T></code> Status: OPTIONAL Default / fallback: <code>subcategory_name</code> Effect: Mouse-over tooltip for the Subcategory icon. When omitted, the displayed Subcategory name is used as the fallback.
SUB-06	subcategory_icon	Type: <code>TunableIconAllPacks</code> XML: <code>2F7D0004:00000000:0000000000000000</code> Status: OPTIONAL Default: Core fallback Effect: Transparent PNG Subcategory icon. See section 11 for pixel sizes.
SUB-07	list_texts.has_list_text	Type: <code>LocalizedString</code> XML: <code><T n="has_list_text">0x00000000</T></code> Status: OPTIONAL Default: None Effect: Native EA label when an Entry contains a list; CUSTOM may use it as a semantic heading.
SUB-08	list_texts.no_list_text	Type: <code>LocalizedString</code> XML: <code><T n="no_list_text">0x00000000</T></code> Status: OPTIONAL Default: None Effect: Native EA label when an Entry contains no list; CUSTOM may use it as the semantic no-list fallback heading.
SUB-09	format_type	Type: <code>NotebookEntryType enum</code> XML: <code><E n="format_type">EXPANDABLE_DATA</E></code> Status: OPTIONAL Default: <code>EXPANDABLE_DATA</code> Effect: Presentation format for every assigned Entry.
SUB-10	show_max_entries	Type: <code>int</code> XML: <code><T n="show_max_entries">0</T></code> Status: OPTIONAL Default: 0 / disabled Effect: A positive value asks EA to display missing-entry placeholders. During current testing, no visible placeholder result was obtained with DEFAULT or CUSTOM Entries; test this option in your target layout.

Ref.	Field	Contract and effect
SUB-11	is_sortable.enabled	Type: <code>bool</code> XML: <code><T n="enabled">False</T></code> Status: OPTIONAL Default: False Effect: Sorts Entries alphabetically.
SUB-12	is_sortable.include_new_entry	Type: <code>bool</code> XML: <code><T n="include_new_entry">False</T></code> Status: CONDITIONAL Default: False Effect: Requires <code>is_sortable.enabled=True</code> (SUB-11). When enabled, newly unlocked Entries participate in the alphabetical sort instead of remaining in EA's separate new-entry position.

4.1 category_target Variant structures (SUB-02)

VARIANT RULE

`category_target` is a Native EA `TunableVariant` represented by a `<V>` block. The selected branch determines which nested tuple must be present.

```

<!-- Target a Notebook Injector Category key -->
<V n="category_target" t="custom_category">
  <U n="custom_category">
    <T n="custom_category_key">ModderNameModNameCategoryName</T>
  </U>
</V>

<!-- Target an existing Native EA Category enum -->
<V n="category_target" t="existing_category">
  <U n="existing_category">
    <E n="existing_category">EA Subcategory Name</E>
  </U>
</V>

```

WHY THIS MATTERS

A modder may create a new Subcategory inside an existing EA Category without redefining that Category. Select `existing_category` and copy the exact Native EA `NotebookCategories` value, which may include spaces.

4.2 Complete custom-target XML (SUB)

```
<?xml version="1.0" encoding="utf-8"?>
<I c="NotebookInjectorSubcategory" i="snippet" m="notebook_injector.data"
  n="ModderName:NotebookInjector_ModName_CategoryName_SubcategoryName"
  s="YOUR_SUBCATEGORY_SNIPPET_DECIMAL_ID">
  <T n="min_version">1</T> <!-- SUB-01 -->
  <V n="category_target" t="custom_category"> <!-- SUB-02 -->
    <U n="custom_category">
      <T n="custom_category_key">ModderNameModNameCategoryName</T>
    </U>
  </V>
  <T n="subcategory_key">ModderNameModNameCategoryNameSubcategoryName</T> <!-- SUB-03 -->
  <T n="subcategory_name">0x00000000</T> <!-- SUB-04 -->
  <T n="subcategory_tooltip">0x00000000</T> <!-- SUB-05 -->
  <T n="subcategory_icon">2F7D0004:00000000:0000000000000000</T> <!-- SUB-06 -->
  <U n="list_texts">
    <T n="has_list_text">0x00000000</T> <!-- SUB-07 -->
    <T n="no_list_text">0x00000000</T> <!-- SUB-08 -->
  </U>
  <E n="format_type">EXPANDABLE_DATA</E> <!-- SUB-09 -->
  <T n="show_max_entries">0</T> <!-- SUB-10 -->
  <U n="is_sortable">
    <T n="enabled">False</T> <!-- SUB-11 -->
    <T n="include_new_entry">False</T> <!-- SUB-12 -->
  </U>
</I>
```

4.3 Native EA display formats (SUB-09)

Format	Status	Guidance
EXPANDABLE_DATA	SUPPORTED	Default when <code>format_type</code> is omitted in the Subcategory. Common for <code>DEFAULT</code> Entries and <code>CUSTOM</code> expanded content Entries; see section 8.1 .
NUMBERED_DATA	PARTIALLY TESTED NATIVE EA	Notebook Injector forwards data through Native EA behavior. Verify the intended Entry class and UI.
ICON_DESCRIPTION_DATA	SUPPORTED WITH RESTRICTIONS	<code>CUSTOM</code> uses the restricted contract in section 8.2 . The restrictions intentionally hide fields that the Native EA layout did not render during testing, reducing confusing no-effect XML.
EXPANDABLE_SINGLE	PARTIALLY TESTED NATIVE EA	Forwarded to EA; test the intended Native EA Entry class and Loot source.
NOTEBOOK_EXPANDABLE_SECRET_SCANDAL	CURRENTLY BLOCKED	Unavailable at this time because it relies on special secret/scandal behavior.

PARTIALLY TESTED NATIVE EA

Notebook Injector passes supported data to the same Native EA systems while coordinating Entries behind one validation and enum-allocation layer. Not every possible Native EA Entry/Loot/format combination has been tested in game.

BEFORE REPORTING A BUG

Check the Notebook Injector log, current EA tuning references, `lastException.txt`, and `lastUIException.txt`. If the issue remains reproducible, use the support link on the Contact page.

FIGURE 3: Subcategory in-game result



5. Entry Assignment Contract and Target Variants (ASN)

Public class: `NotebookInjectorEntryAssignment`. One Assignment places one or more existing Notebook Entry tuning IDs into either an existing EA Subcategory or a custom Notebook Injector Subcategory.

RECOMMENDED TUNING NAME

`ModderName:NotebookInjector_ModName_CategoryName_SubcategoryName_Assignment`

Ref.	Field	Contract and effect
ASN-01	min_version	Type: <code>int</code> XML: <code><T n="min_version">1</T></code> Status: OPTIONAL Default: 1 Effect: Minimum Core ABI integer required by this Assignment.
ASN-02	subcategory_target	Type: <code>Native EA TunableVariant</code> XML: <code><V n="subcategory_target" ...></code> Status: REQUIRED Effect: Target either an existing Native EA Subcategory or a custom Notebook Injector Subcategory.
ASN-03	entries	Type: <code>List[int]</code> XML: <code><L n="entries"><T>DECIMAL_ID</T></L></code> Status: REQUIRED Effect: One or more positive tuning instance IDs of Notebook Entries resources.

5.1 subcategory_target Variant structures (ASN-02)

```

<!-- Target a Notebook Injector Subcategory key -->
<V n="subcategory_target" t="custom_subcategory">
  <U n="custom_subcategory">
    <T n="custom_subcategory_key">ModderNameModNameCategoryNameSubcategoryName</T>
  </U>
</V>

<!-- Target an existing Native EA Subcategory enum -->
<V n="subcategory_target" t="existing_subcategory">
  <U n="existing_subcategory">
    <E n="existing_subcategory">EA Subcategory Name</E>
  </U>
</V>

```

USE AN EXISTING EA SECTION OR OTHER MODDER SECTION

You do not need to create a custom Category or Subcategory when the destination already exists. Create the Entry, target `existing_subcategory`, and list the Entry tuning IDs in the Assignment.

Native EA enum values may include spaces.

5.2 Complete custom-target Assignment XML (ASN)

```

<?xml version="1.0" encoding="utf-8"?>
<I c="NotebookInjectorEntryAssignment" i="snippet" m="notebook_injector.data"
  n="ModderName:NotebookInjector_ModName_CategoryName_SubcategoryName_Assignment"
  s="YOUR_ASSIGNMENT_SNIPPET_DECIMAL_ID">
  <T n="min_version">1</T> <!-- ASN-01 -->
  <V n="subcategory_target" t="custom_subcategory"> <!-- ASN-02 -->
    <U n="custom_subcategory">
      <T n="custom_subcategory_key">ModderNameModNameCategoryNameSubcategoryName</T>
    </U>
  </V>
  <L n="entries"> <!-- ASN-03: decimal Notebook Entry tuning IDs -->
    <T>YOUR_NOTEBOOK_ENTRY_DECIMAL_ID_1</T>
    <T>YOUR_NOTEBOOK_ENTRY_DECIMAL_ID_2</T>
  </L>
</I>

```

5.3 What the sanitizer checks

- The selected Subcategory exists and registered successfully.
- Every entries value is a positive tuning instance ID of an existing Notebook Entry resource.
- Each `NotebookInjectorEntry` is valid for the target Subcategory format.
- The same Entry tuning ID is not claimed by two accepted Assignments.
- One invalid Assignment is skipped and logged without blocking unrelated Assignments.

BEFORE REPORTING A BUG

Read every Entry-prefixed message in the Assignment error. Check the full Notebook Injector log path in [section 12](#) before opening a support report.

6. Shared NotebookInjectorEntry Contract (ENT)

[DEFAULT](#), [BAIT](#), [RECIPE](#), [ANIMAL_FEED](#), and [CUSTOM](#) use the public [NotebookInjectorEntry](#) XML class shown below. [COUNTRY_ITEM](#) and [GARDENING_PLANT](#) inherit the shared Entry contract but use specialized public classes. [entry_kind](#) selects the builder, while the assigned Subcategory format controls Native EA presentation; see [section 4.3](#).

RECOMMENDED TUNING NAME

ModderName:NotebookInjector_ModName_CategoryName_SubcategoryName_Entry_XX

```
<I c="NotebookInjectorEntry" i="notebook_entry" m="notebook_injector.entry"
  n="ModderName:NotebookInjector_ModName_CategoryName_SubcategoryName_Entry_XX"
  s="YOUR_NOTEBOOK_ENTRY_DECIMAL_ID">
  ...
</I>
```

6.1 Shared Authored Fields (ENT)

Ref.	Field	Contract and effect
ENT-01	entry_kind	Type: NotebookInjectorEntryKind enum XML: <code><E n="entry_kind">CUSTOM</E></code> Status: CONDITIONAL Default: DEFAULT Effect: Selects DEFAULT , BAIT , RECIPE , ANIMAL_FEED , COUNTRY_ITEM , GARDENING_PLANT , or CUSTOM . If you don't need specific Entry, CUSTOM is recommended; see section 8 .
ENT-02	entry_text	Type: LocalizedString XML: <code><T n="entry_text">0x00000000</T></code> Status: KIND-SPECIFIC Default: None Effect: Main title or row text. Required for DEFAULT and CUSTOM ; generated/forbidden for dynamic Native EA kinds.
ENT-03	entry_text_description	Type: LocalizedString XML: <code><T n="entry_text_description">0x00000000</T></code> Status: KIND/FORMAT-SPECIFIC Default: None Effect: Detailed description. Optional for DEFAULT and CUSTOM with EXPANDABLE_DATA subcategory format; forbidden where EA does not display it.
ENT-04	entry_icon	Type: TunableIconAllPacks XML: <code>2F7D0004:00000000:0000000000000000</code> Status: KIND-SPECIFIC Default: Core fallback for DEFAULT and CUSTOM / Generated Effect: Optional for static kinds; dynamic Native EA kinds normally generate it. See section 11 for sizes.
ENT-05	entry_sublist	Type: Native EA TunableList XML: <code><L n="entry_sublist">...</L></code> Status: KIND-SPECIFIC Default: Empty Effect: Static Native EA Object Definition rows.
ENT-06	entry_sublist_sortable	Type: bool XML: <code><T n="entry_sublist_sortable">True</T></code> Status: KIND-SPECIFIC Default: False Effect: Alphabetical sorting metadata for the Native EA sublist.
ENT-07	entry_sublist_include_new	Type: bool XML: <code><T n="entry_sublist_include_new">True</T></code> Status: CONDITIONAL Default: False Effect: Requires entry_sublist_sortable=True .
ENT-08	tooltip_style	Type: Native EA HovertipStyle enum XML: <code><E n="tooltip_style">...</E></code> Status: KIND-SPECIFIC Default: EA default Effect: Used only when the selected kind allows Native EA tooltip_fields . Inspect current EA tuning files and TDESC before choosing a style.

Ref.	Field	Contract and effect
ENT-09	tooltip_fields	Type: Native EA tooltip mapping XML: <L n="tooltip_fields"><U>...</U></L> Status: KIND-SPECIFIC Default: Empty Effect: DEFAULT and COUNTRY_ITEM may author tooltip_fields. ANIMAL_FEED uses dedicated tooltip_title, tooltip_description, tooltip_header, tooltip_subtext, and tooltip_rarity fields; tooltip_subtext and tooltip_rarity are required. CUSTOM uses custom_tooltip.


NATIVE EA FIELDS

entry_sublist, tooltip_style, and tooltip_fields are Native EA XML concepts exposed through Notebook Injector. content and custom_tooltip are Notebook Injector-specific blocks documented in [section 8](#).

NATIVE EA REFERENCE REQUIREMENT

For specialized kinds, inspect the corresponding Native EA Notebook and [NotebookEntryLootOp](#) tuning in current game files. Notebook Injector cannot document every participant, resolver, component, Recipe, or Object Definition requirement.

FIGURE 4: Shared Entry fields

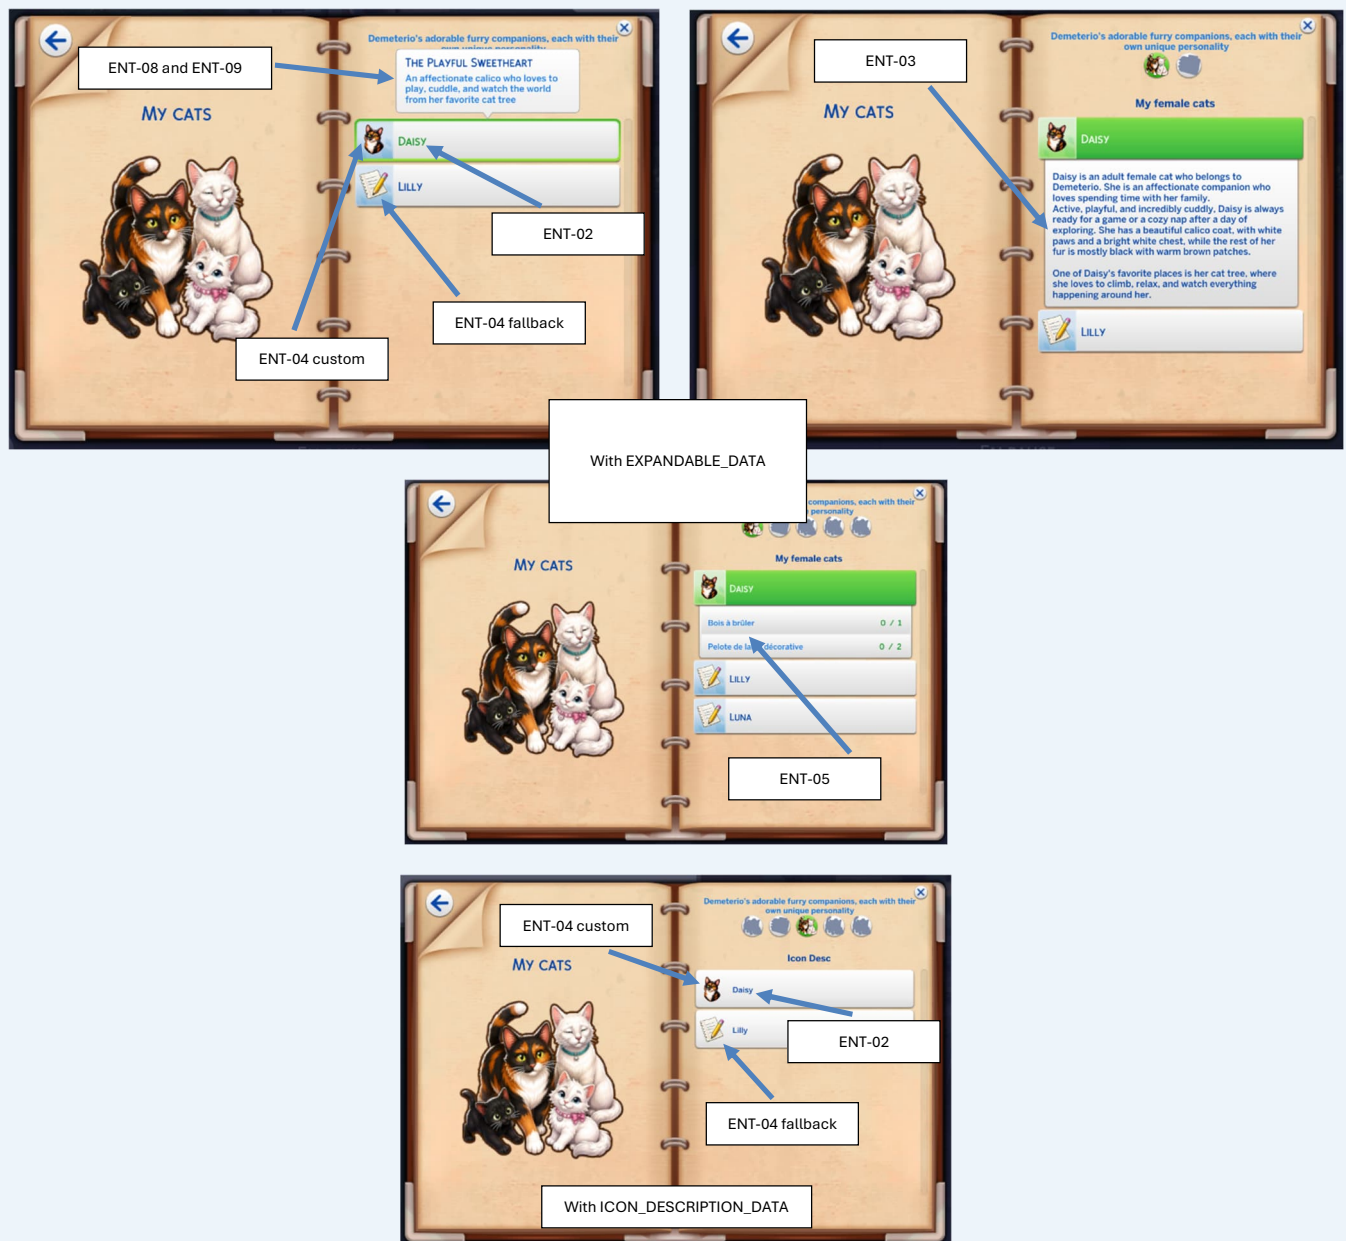

6.2 Implemented Entry Kinds (ENT-01)

Notebook Injector builds these public `entry_kind` options on top of Native EA `NotebookEntry` data and specialized EA runtime workflows. The “EA Model / Data Source” column identifies the original system being reused; it does not create a new EA class.

Kind	EA Model / Data Source	Support / testing note
DEFAULT	EA basis: <code>notebook.notebook_entry.NotebookEntry</code> Data: static XML-authored display data.	Implemented. This is the most common choice for authored text or an Entry with an icon in formats such as <code>EXPANDABLE_DATA</code> or <code>ICON_DESCRIPTION_DATA</code> ; see section 4.3 .
BAIT	EA basis: <code>NotebookEntry</code> plus <code>NotebookCustomTypeTuning.BAIT_NOTEBOOK_ENTRY</code> Data: static fish fallback or Native EA fishing runtime data.	Implemented; runtime resolver combinations require testing.
RECIPE	EA basis: Native EA Recipe notebook workflow Data: a Recipe supplied in the Loot through <code>create_entry_from_recipe</code> .	Implemented; Recipe/final-product combinations require testing.
ANIMAL_FEED	EA basis: Native EA Recipe/final-product workflow Data: Recipe final product plus dedicated <code>tooltip_*</code> helper fields.	Implemented; <code>tooltip_subtext</code> and <code>tooltip_rarity</code> are required, and the final product must provide a numeric price.
COUNTRY_ITEM	EA basis: Native EA Country Living definition-based workflow Data: Object Definition supplied by participant-definition Loot.	Implemented for the definition workflow.
GARDENING_PLANT	EA basis: Native EA gardening participant/root-harvestable workflow Data: root harvestable Object Definition ID resolved from the participant's Gardening Component.	Implemented; complex participant flow requires testing.
CUSTOM	EA basis: <code>NotebookEntry</code> data rendered through the Notebook Injector semantic builder.	Recommended for genuinely custom authored content. Support depends on <code>format_type</code> in the assigned Subcategory: <code>EXPANDABLE_DATA</code> or <code>ICON_DESCRIPTION_DATA</code> only. See sections 4.3 and 8 .

CUSTOM IS THE MAIN CUSTOMIZATION API

`CUSTOM` is recommended when a modder wants new authored Notebook content rather than reproducing a specialized Native EA runtime Entry. See [section 8](#).

WARNING

You need to have one entry for each different entry even if you use `entry_kind=RECIPE` or other with only three lines of XML, and you have to declare it in Assignment. Without, entry can not to be displayed.

7. Native EA Entry Kinds

SCOPE AND TESTING

These Entry kinds use Native EA data structures and runtime sources. Notebook Injector aims to preserve and coordinate EA behavior, but EA exposes many possible combinations. Test on a disposable save and include the logs listed in [section 12](#) when reporting issues.

TEST OBSERVATION WARNING

The descriptions in this section are based on our current tests and observations. They should not be treated as proof that every Native EA combination behaves identically. Test your own addon, verify current EA files, and report reproducible documentation errors so the guide can be corrected.

7.1 DEFAULT

Use `DEFAULT` when the modder authors the complete Entry in XML. `entry_text` is required. `entry_text_description`, `entry_icon`, `entry_sublist`, sorting, and supported Native EA tooltip fields are optional. `DEFAULT` normally unlocks with `create_new_entry` Loot.

WHAT TO RESEARCH

[NotebookEntry](#), the target Subcategory format, and Native EA [TooltipFields](#).

7.1.1 Minimal DEFAULT XML

```
<?xml version="1.0" encoding="utf-8"?>
<I c="NotebookInjectorEntry" i="notebook_entry" m="notebook_injector.entry"
  n="ModderName:NotebookInjector_ModName_Category_Subcategory_Entry_XX"
  s="YOUR_NOTEBOOK_ENTRY_DECIMAL_ID">
  <E n="entry_kind">DEFAULT</E>
  <T n="entry_text">0x00000000</T>
  <T n="entry_text_description">0x00000000</T>
  <T n="entry_icon">2F7D0004:00000000:0000000000000000</T>
</I>
```

7.2 BAIT

[BAIT](#) supports a static mode and Native EA runtime modes. Static mode tunes [bait_fish_definition](#) and optional [bait_snippets](#), then uses [create_new_entry](#) Loot. Runtime mode receives fish or fishing data from the selected Loot variant. Runtime data takes priority.

WHAT TO RESEARCH

Fishing bait snippets, fish Object Definitions, resolver/participant data, and [BAIT_NOTEBOOK_ENTRY](#).

7.3 RECIPE

[RECIPE](#) uses [create_entry_from_recipe](#) Loot. Notebook Injector receives a Recipe, resolves its final product, and builds Native EA title, icon, tooltip, and ingredient rows. The XML must not duplicate generated display data and [final_product](#) needs to be different for each entry.

WHAT TO RESEARCH

Recipe tuning, final product, ingredient requirements, and [create_entry_from_recipe](#) Loot.

7.4 ANIMAL_FEED

[ANIMAL_FEED](#) also uses [create_entry_from_recipe](#) Loot. The final product must provide a numeric price. It does not use the generic [tooltip_fields](#) mapping: [tooltip_subtext](#) and [tooltip_rarity](#) are required, while [tooltip_title](#), [tooltip_description](#), and [tooltip_header](#) are optional.

WHAT TO RESEARCH

Animal-feed Recipe, final product definition, price data, and the corresponding tooltip layout.

7.5 COUNTRY_ITEM

[COUNTRY_ITEM](#) uses [NotebookInjectorCountryItemEntry](#) from [notebook_injector.country_item_entry](#). It receives an Object Definition through [create_entry_from_participant_definition](#) Loot. The definition supplies identity, title, icon, and price. The public Entry requires its documented value, flavor, and description strings.

WHAT TO RESEARCH

Participant-definition resolver, Object Definition data, and Country Living Notebook display.

7.6 GARDENING_PLANT

`GARDENING_PLANT` uses `NotebookInjectorGardeningPlantEntry` from `notebook_injector.gardening_plant_entry`. It receives Native EA gardening participant data and resolves the root harvestable. `create_entry_from_participant_definition` is not compatible with the public `GARDENING_PLANT` workflow. It requires localized factories for rarity, value, and splicing text. Normal and grafting results may differ.

WHAT TO RESEARCH

GardeningTuning, plant/harvestable components, root harvestable resolution, and the interaction Loot source.


7.7 Native classes currently blocked

- `sims.secrets.sim_secrets_notebook_entries.NotebookEntryScandalSecretItem`
- `notebook.country_living_notebook_entries.NotebookEntryCountryItemSansDefinition`

FUTURE SUPPORT

These classes are not available in this version. Support may be reconsidered after dedicated research and testing.

FIGURE 5: Verified Native EA Entry examples

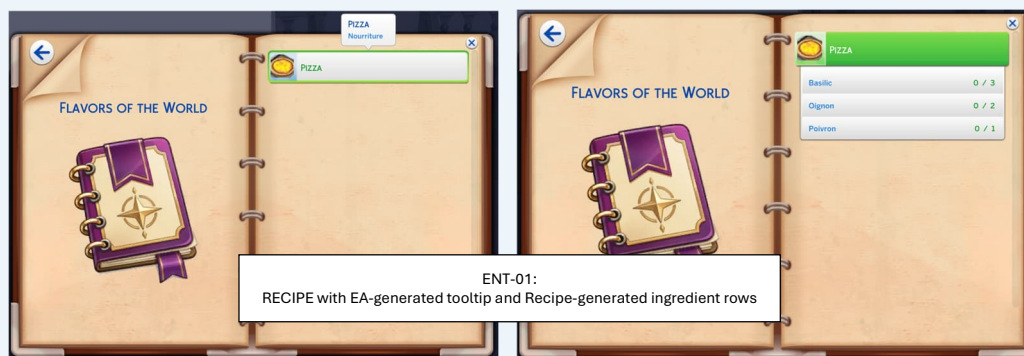

8. CUSTOM Entry Kind (CEX / CNT / CID / CTT)

CUSTOM is an `entry_kind` of `NotebookInjectorEntry`, not a separate public XML class. The allowed field contract is selected by `format_type` in the assigned Subcategory tuning.

RECOMMENDED TUNING NAME

`ModderName:NotebookInjector_ModName_CategoryName_SubcategoryName_Entry_XX`

ALLOWED FORMATS ONLY

CUSTOM support is determined by `format_type` in the assigned Subcategory tuning (SUB-09). It supports `EXPANDABLE_DATA` and `ICON_DESCRIPTION_DATA`. Assignments targeting `NUMBERED_DATA`, `EXPANDABLE_SINGLE`, or `NOTEBOOK_EXPANDABLE_SECRET_SCANDAL` are rejected.

8.1 CUSTOM with EXPANDABLE_DATA (CEX)

This also applies when the Subcategory omits `format_type`, because `EXPANDABLE_DATA` is the default.

Ref.	Field	Contract and effect
CEX-01	<code>entry_kind</code>	Type: <code>NotebookInjectorEntryKind</code> XML: <code><E n="entry_kind">CUSTOM</E></code> Status: REQUIRED Effect: Must be explicitly set to <code>CUSTOM</code> to select the custom builder.
CEX-02	<code>entry_text</code>	Type: <code>LocalizedString</code> XML: <code><T n="entry_text">0x00000000</T></code> Status: REQUIRED Effect: Main Entry title.
CEX-03	<code>entry_text_description</code>	Type: <code>LocalizedString</code> XML: <code><T n="entry_text_description">0x00000000</T></code> Status: OPTIONAL Default: None Effect: Initial expanded description; may satisfy required expanded content by itself.
CEX-04	<code>entry_icon</code>	Type: <code>TunableIconAllPacks</code> XML: <code>2F7D0004:00000000:0000000000000000</code> Status: OPTIONAL Default: Core fallback Effect: Entry icon. See section 11 for sizes.
CEX-05	<code>content</code>	Type: <code>Notebook Injector CUSTOM-specific <U> block</code> XML: <code><U n="content">...</U></code> Status: OPTIONAL Default: Disabled Effect: Semantic text, ingredients, and footer. Meaningful expanded content is required overall. See section 8.1.1 .
CEX-06	<code>custom_tooltip</code>	Type: <code>Notebook Injector CUSTOM-specific <U> block</code> XML: <code><U n="custom_tooltip">...</U></code> Status: OPTIONAL Default: Disabled Effect: Dedicated fixed <code>CUSTOM</code> tooltip API. See section 8.3 .
CEX-07	<code>tooltip_fields / tooltip_style</code>	Type: <code>Native EA tooltip fields</code> Status: FORBIDDEN Effect: <code>CUSTOM</code> uses <code>custom_tooltip</code> instead.
CEX-08	<code>entry_sublist</code>	Type: <code>Native EA sublist XML</code> Status: FORBIDDEN Effect: Use <code>content.ingredients</code> for custom rows. See section 8.1.1 .

8.1.1 EXPANDABLE_DATA content block (CNT)

Ref.	Field	Contract and effect
CNT-01	title	Type: LocalizedString XML: <T n="title">0x00000000</T> Status: OPTIONAL Default: None Effect: Bold and underlined; merged with the first text block when present.
CNT-02	text_blocks	Type: List[LocalizedString] XML: <L n="text_blocks"><T>0x00000000</T></L> Status: OPTIONAL Default: Empty Effect: Semantic text rows. The first row shares the title row when title is tuned.
CNT-03	ingredients_title	Type: LocalizedString XML: <T n="ingredients_title">0x00000000</T> Status: CONDITIONAL Default: Subcategory <code>has_list_text</code> string (SUB-07) if enabled, or None Effect: Centered italic heading before ingredients. May be tuned only when <code>content.ingredients</code> contains at least one item and <code>has_list_text</code> (SUB-07) / <code>no_list_text</code> (SUB-08) are disabled. See section 4 .
CNT-04	display_ingredient_counts	Type: bool XML: <T n="display_ingredient_counts">True</T> Status: OPTIONAL Default: True Effect: Shows current and required inventory counts.
CNT-05	ingredients	Type: List[Notebook Injector tuples] XML: <L n="ingredients"><U>...</U></L> Status: OPTIONAL Default: Empty Effect: Each item uses an Object Definition tuning reference and an optional <code>required_count</code> . The localized display name comes from the referenced Object Definition. The current inventory count is calculated from matching objects in EA's ingredient cache, while the required count comes from the authored <code>required_count</code> field. In this version, the ingredient icon does not display.
CNT-06	footer	Type: LocalizedString XML: <T n="footer">0x00000000</T> Status: OPTIONAL Default: None Effect: Centered footer after text and ingredients.

```

<?xml version="1.0" encoding="utf-8"?>
<I c="NotebookInjectorEntry" i="notebook_entry" m="notebook_injector.entry"
  n="ModderName:NotebookInjector_ModName_Category_Subcategory_Entry_XX"
  s="YOUR_NOTEBOOK_ENTRY_DECIMAL_ID">
  <E n="entry_kind">CUSTOM</E> <!-- CEX-01 -->
  <T n="entry_text">0x00000000</T> <!-- CEX-02 -->
  <T n="entry_text_description">0x00000000</T> <!-- CEX-03 -->
  <T n="entry_icon">2F7D0004:00000000:0000000000000000</T> <!-- CEX-04 -->
  <U n="content"> <!-- CEX-05 -->
    <T n="title">0x00000000</T> <!-- CNT-01 -->
    <L n="text_blocks"> <!-- CNT-02 -->
      <T>0x00000000</T>
      <T>0x00000000</T>
    </L>
    <T n="ingredients_title">0x00000000</T> <!-- CNT-03 -->
    <T n="display_ingredient_counts">True</T> <!-- CNT-04 -->
    <L n="ingredients"> <!-- CNT-05 -->
      <U>
        <T n="object_definition">OBJECT_DEFINITION_DECIMAL_ID</T>
        <T n="required_count">2</T>
      </U>
    </L>
    <T n="footer">0x00000000</T> <!-- CNT-06 -->
  </U>
</I>

```


INGREDIENT OBJECT DEFINITIONS

The `object_definition` field is an integer tuning reference. If TDESC or Sims 4 Studio shows the Object Definition in hexadecimal, convert it to decimal before placing it in XML. The localized display name comes from the referenced Object Definition. The current inventory count is calculated from matching objects in EA's ingredient cache, while the required count comes from the authored `required_count` field. In this version, the ingredient icon does not display.

8.1.2 Simplified display order

1. The optional Entry description appears first.
2. The optional content title and first text block share one row.
3. Additional text blocks follow as separate rows.
4. The ingredient heading and Native EA ingredient rows appear next. The heading falls back to the assigned Subcategory `has_list_text` (SUB-07) if enabled; when there are no ingredients, the no-list fallback comes from `no_list_text` (SUB-08) if enabled.
5. The footer appears last.

FIGURE 6: CUSTOM EXPANDABLE_DATA layout

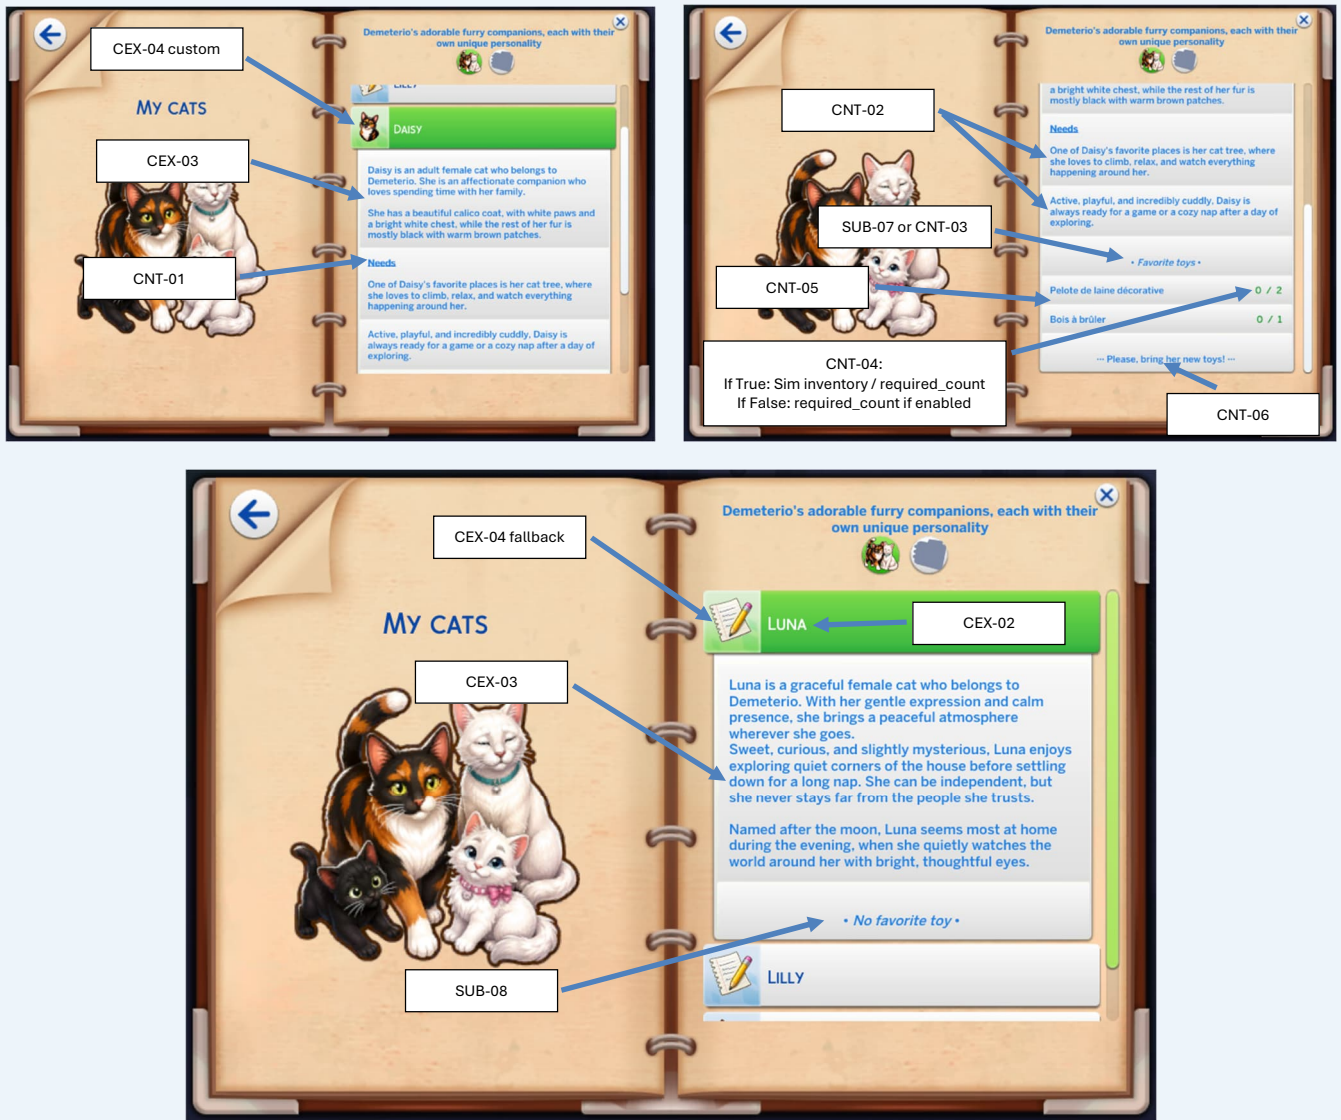

8.2 CUSTOM with ICON_DESCRIPTION_DATA (CID)


Ref.	Field	Contract and effect
CID-01	entry_kind	Type: <code>NotebookInjectorEntryKind</code> XML: <code><E n="entry_kind">CUSTOM</E></code> Status: REQUIRED Default: DEFAULT Effect: Must be explicitly set to <code>CUSTOM</code> to select the custom builder.
CID-02	entry_text	Type: <code>LocalizedString</code> XML: <code><T n="entry_text">0x00000000</T></code> Status: REQUIRED Effect: Main visible text.
CID-03	entry_icon	Type: <code>TunableIconAllPacks</code> XML: <code>2F7D0004:00000000:0000000000000000</code> Status: OPTIONAL Default: Core fallback Effect: Visible icon. See section 11 for sizes.
CID-04	custom_tooltip	Type: <code>Notebook Injector CUSTOM-specific <U> block</code> XML: <code><U n="custom_tooltip">...</U></code> Status: OPTIONAL Default: Disabled Effect: Recommended when the Entry needs extra explanation. See section 8.3 .
CID-05	entry_text_description	Type: <code>LocalizedString</code> Status: FORBIDDEN Effect: Native EA does not display it in this layout.
CID-06	content	Type: <code>Notebook Injector <U> block</code> Status: FORBIDDEN Effect: This layout does not display semantic expanded content.
CID-07	tooltip_fields / tooltip_style	Type: <code>Native EA tooltip fields</code> Status: FORBIDDEN Effect: Notebook Injector custom Entries do not use Native EA <code>tooltip_fields</code> or <code>tooltip_style</code> . Tune <code>custom_tooltip</code> instead. See section 8.3 .
CID-08	entry_sublist	Type: <code>Native EA sublist XML</code> Status: FORBIDDEN Effect: The <code>ICON_DESCRIPTION_DATA</code> layout does not support this option for <code>CUSTOM</code> .

```

<I c="NotebookInjectorEntry" i="notebook_entry" m="notebook_injector.entry"
  n="ModderName:NotebookInjector_ModName_Category_Subcategory_Entry_XX"
  s="YOUR_NOTEBOOK_ENTRY_DECIMAL_ID">
  <E n="entry_kind">CUSTOM</E> <!-- CID-01 -->
  <T n="entry_text">0x00000000</T> <!-- CID-02 -->
  <T n="entry_icon">2F7D0004:00000000:0000000000000000</T> <!-- CID-03 -->
  <U n="custom_tooltip"> <!-- CID-04 -->
    <T n="title">0x00000000</T>
    <T n="subtext">0x00000000</T>
  </U>
</I>

```

FIGURE 7: CUSTOM ICON_DESCRIPTION_DATA layout

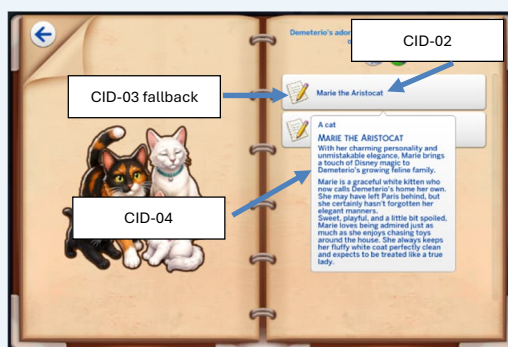

8.3 custom_tooltip block (CTT)


`custom_tooltip` is Notebook Injector-specific XML. Omitting the entire block disables the tooltip. When present, at least one field must be authored, but no individual field—including `title`—is mandatory.

Ref.	Field	Contract and effect
CTT-01	header	Type: <code>LocalizedString</code> XML: <code><T n="header">0x00000000</T></code> Status: OPTIONAL Default: None Effect: Small text above the main title.
CTT-02	title	Type: <code>LocalizedString</code> XML: <code><T n="title">0x00000000</T></code> Status: OPTIONAL Default: None Effect: Main tooltip title.
CTT-03	subtitle	Type: <code>LocalizedString</code> XML: <code><T n="subtitle">0x00000000</T></code> Status: OPTIONAL Default: None Effect: Subtitle near the title.
CTT-04	accent_primary	Type: <code>LocalizedString</code> XML: <code><T n="accent_primary">0x00000000</T></code> Status: OPTIONAL Default: None Effect: First emphasized line.
CTT-05	accent_secondary	Type: <code>LocalizedString</code> XML: <code><T n="accent_secondary">0x00000000</T></code> Status: OPTIONAL Default: None Effect: Second emphasized line.
CTT-06	accent_tertiary	Type: <code>LocalizedString</code> XML: <code><T n="accent_tertiary">0x00000000</T></code> Status: OPTIONAL Default: None Effect: Third emphasized line.
CTT-07	subtext	Type: <code>LocalizedString</code> XML: <code><T n="subtext">0x00000000</T></code> Status: OPTIONAL Default: None Effect: Lower tooltip section.
CTT-08	footer	Type: <code>LocalizedString</code> XML: <code><T n="footer">0x00000000</T></code> Status: OPTIONAL Default: None Effect: Bottom tooltip text.

BEFORE REPORTING A BUG

Check the assigned Subcategory format, the Notebook Injector log, `lastException.txt`, and `lastUIException.txt`. Use the support link when the behavior is reproducible. See [section 12](#).

FIGURE 8: CUSTOM tooltip zones

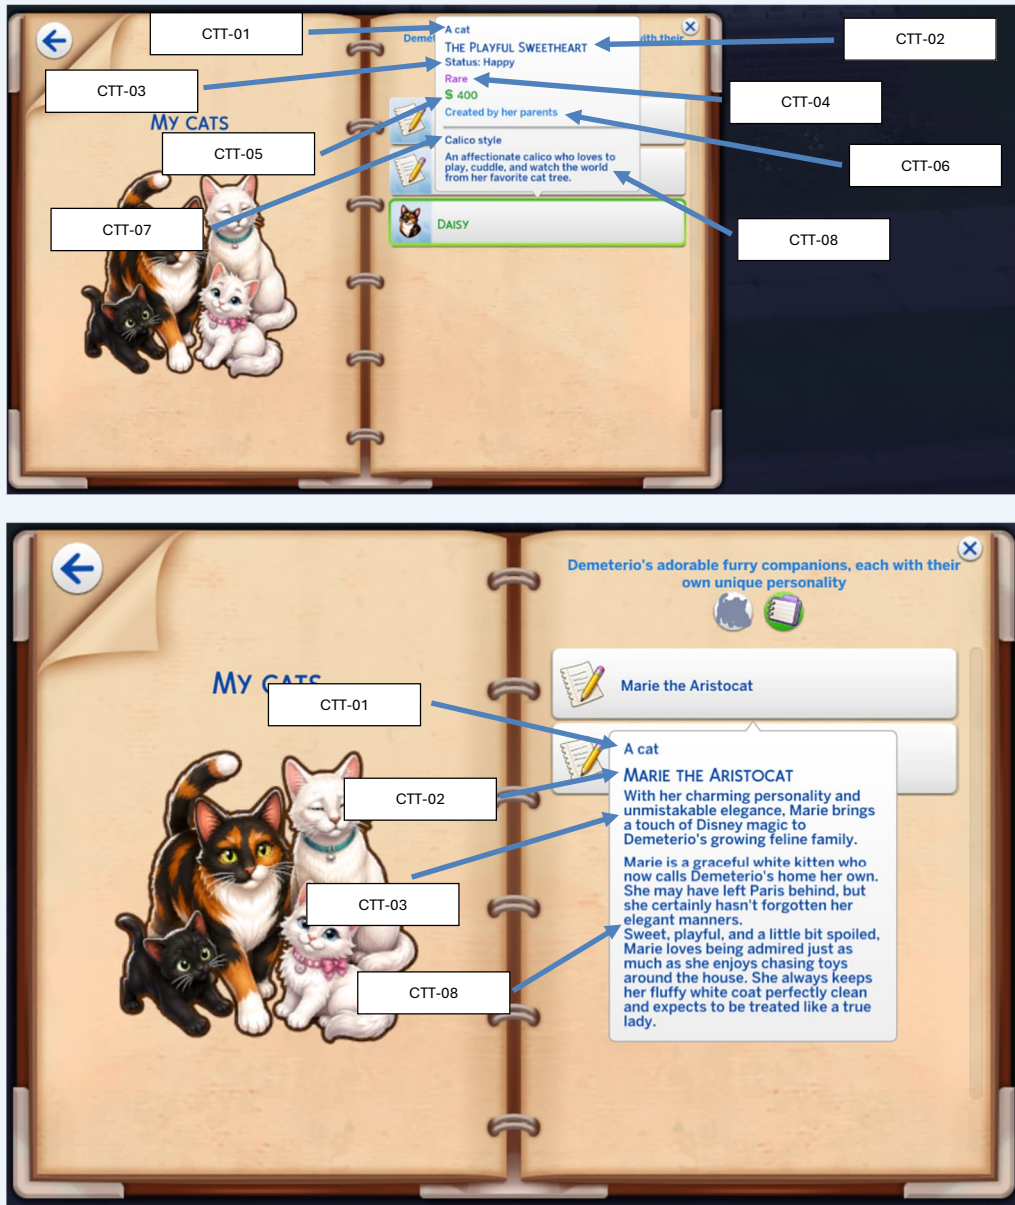

9. Loot Variants and Runtime Data

`NotebookEntryLootOp` and its `notebook_entry` TunableVariant are original Native EA tuning structures. Notebook Injector does not change that XML shape; it validates the data required by each `entry_kind` and blocks invalid Entries before they are added to the Sim's Notebook.

Loot Variant	Known compatible kinds	Testing guidance
<code>create_new_entry</code>	<code>DEFAULT</code> , <code>CUSTOM</code> , static <code>BAIT</code>	Instantiates the referenced Entry without runtime source data. Use it for <code>DEFAULT</code> , <code>CUSTOM</code> , or <code>BAIT</code> Entries with a static source.
<code>create_entry_from_recipe</code>	<code>RECIPE</code> , <code>ANIMAL_FEED</code>	Verify the Recipe, final product, ingredient requirements, interaction, and pack requirements.
<code>create_entry_from_participant</code>	Runtime <code>BAIT</code> ; <code>GARDENING_PLANT</code> through Native EA flow	Participant type and components are EA-specific. Test the actual interaction.
<code>create_entry_from_participant_definition</code>	Runtime <code>BAIT</code> , <code>COUNTRY_ITEM</code>	Resolves the selected participant and passes its Object Definition ID to the Entry. Verify the participant, resolver, Object Definition, and pack requirements.
<code>create_entry_from_fishing_data</code>	Runtime <code>BAIT</code>	Selects a fish through Native EA Fishing Data and passes the fish Object Definition ID to the Entry.

9.1 create_new_entry LootActions (Native EA Variant Pattern)

The following example contains one complete `LootActions` tuning with one `NotebookEntryLootOp` action. Replace the `LootActions` tuning name and ID, then replace the decimal Notebook Entry ID. To unlock several Notebook Entries with the same `LootActions` tuning, duplicate the complete `<V t="notebook_entry">...</V>` action for each additional Entry.

`create_new_entry` instantiates the referenced Notebook Entry without supplying additional runtime source data. It is suitable for `DEFAULT`, `CUSTOM`, and `BAIT` Entries that provide their static source fields. Dynamic Entries must use the appropriate Native EA Loot variant described in the table above.

```
<?xml version="1.0" encoding="utf-8"?>
<I c="LootActions" i="action" m="interactions.utils.loot"
  n="ModderName:NotebookInjector_ModName_Unlock_NotebookEntry"
  s="YOUR_LOOT_ACTION_DECIMAL_ID">
  <L n="loot_actions">
    <V t="notebook_entry">
      <U n="notebook_entry">
        <V n="notebook_entry" t="create_new_entry">
          <U n="create_new_entry">
            <T n="notebook_entry">YOUR_NOTEBOOK_ENTRY_DECIMAL_ID</T>
          </U>
        </V>
      <U n="notifications">
        <V n="unlocked_failed_notification" t="disabled"/>
        <V n="unlocked_success_notification" t="disabled"/>
      </U>
      <E n="subject">Actor</E>
    </U>
  </V>
</L>
</I>
```

COPY THE SURROUNDING EA STRUCTURE

This example documents only the `NotebookEntryLootOp` `notebook_entry` Variant. Clone a current Native EA `LootActions` tuning or use TDESC/Sims 4 Studio for the outer action structure; do not invent surrounding Tunables.

NATIVE EA PASS-THROUGH

Notebook Injector coordinates supported Loot and Entry data through Native EA behavior. It does not guarantee every EA Loot configuration. Consult current EA tuning for participants, resolvers, Recipes, fishing data, and Object Definitions.

RUNTIME GUARD

When runtime data is missing or invalid, the Entry is blocked and the reason is written to the log. See [section 12](#).

BEFORE REPORTING A COMPATIBILITY BUG

Check the Notebook Injector log, [lastException.txt](#), and [lastUIException.txt](#). If another Notebook mod appears involved, report the reproducible case through the support link. See [section 12](#).

10. Localized Strings and HTML Formatting

Notebook text is normally authored in STBL resources. Create the same key in every supported language STBL. Simple rich-text tags can be used when the active Native EA text field supports them.

Markup	Current status	Use
...	TESTED	Bold text.
<i>...</i>	TESTED	Italic text.
<u>...</u>	TESTED	Underlined text.
... ...	TESTED	Bullet point list.
...	TESTED IN CUSTOM ROWS	Centers compatible CUSTOM text rows.
...	TEST IT IN YOUR ADDON	Changes font color in compatible text fields.
...	TEST IT IN YOUR ADDON	Changes font size in compatible text fields.
\n	TESTED	Line break.
\n\n	TESTED	Blank line between sections.
Unicode symbols	EA FONT DEPENDENT	The active EA font may replace a glyph or display it at an unexpected size.

LOCALIZATION

A [LocalizedString](#) field expects a hexadecimal STBL key such as [0x1234ABCD](#). Create the same key in every language String Table and translate the value. See [section 1.8](#).

KEEP FORMATTING SIMPLE

The same tag may behave differently in another Native EA UI field. Test every formatted STBL in your own addon. Prefer simple punctuation over decorative Unicode unless the active font has been verified.

```
<b>Bold title</b>
<i>Italic note</i>
<u>Underlined label</u>
<p align="center">Centered line</p>
<font color="#3366CC">Colored text</font>
<font size="18">Larger text</font>
First paragraph\n\nSecond paragraph
```

11. Icons, Recommended Sizes, and Package Resources

When a public Notebook Injector field accepts an icon, enter the image resource key directly. Use transparent PNG resources.

```
<T n="category_icon">2F7D0004:00000000:0000000000000000</T>
<T n="subcategory_icon">2F7D0004:00000000:0000000000000000</T>
<T n="entry_icon">2F7D0004:00000000:0000000000000000</T>
```

Component	Expected value	Guidance
Type	2F7D0004	The Sims 4 PNG resource type.
Group	00000000	Use 00000000 for custom content and mod resources in the documented direct icon key.
Instance	16-digit 64-bit hexadecimal ID	Generate and record the unique image resource instance and place it after the second colon.
Image	Transparent PNG	Use transparency and verify the result in the target Notebook field.

11.1 Pixel sizes observed in Native EA resources

Field	Observed pixel sizes	Recommended size
Category icon	40×40, 50×50, 128×128	128×128
Category large icon	128×128, 240×240	240×240
Subcategory icon	26×26, 28×28, 30×30, 32×32, 40×40, 128×128	128×128
Entry icon	28×28, 128×128	128×128

SIZE GUIDANCE

Sizes are pixels. The bold/largest size in each observed list is the recommended authoring size because it gives the UI the most source detail before EA scales it. These are practical observations, not a guarantee that every Native EA field uses identical scaling.

11.2 Ingredient and list-row images

DEFINITION-SOURCED DISPLAY DATA

Custom ingredient rows use the referenced Object Definition for the localized name and inventory matching/counts. They do not reuse `entry_icon`, and their row icon does not display in this version. Native EA Object Definition lists may still obtain images through their own native layout. Tune `object_definition` with the decimal Object Definition ID. Convert hexadecimal IDs to decimal before placing them in integer XML fields.

IDENTIFIER REFERENCE

A direct icon field is `Type:Group:Instance`, not a decimal tuning ID or STBL key. See [section 1.8](#).

SIMS 4 STUDIO KNOWLEDGE REQUIRED

Import a transparent PNG, verify Type `2F7D0004`, set Group `00000000`, record the Instance, and test the final resource key in game. This guide does not replace a full image-import tutorial.

FALLBACK BEHAVIOR

Fallback icons prevent an empty or broken UI when an optional icon is omitted. They are not a replacement for your final artwork.

FIGURE 9: PNG resources, image sizes, and definition-sourced display data

Warehouse

Filter:

Type	Group	Instance	Table d	Image	Données
Action Tuning	00000000	8E36F9750A87C3F	1.4KB		
Snapshot Tuning	00000000	790274486644418	15.7B		
String Table	00000000	70170A46728400000	4.0KB		
Notebook Entry Tuning	00000000	87780896A003555	80.9B		
Notebook Entry Tuning	00000000	87780896A003555	80.9B		
Snapshot Tuning	00000000	8A000000F13A85A00	36.4B		
Snapshot Tuning	00000000	8056440A4A0071DC	95.6B		
Snapshot Tuning	00000000	708E1597C30A80A	80.9B		
Snapshot Tuning	00000000	827099A02A00200	7.9B		
Snapshot Tuning	00000000	02F050A0C000000	0.0B		
Notebook Entry Tuning	00000000	00001E497270880	2.1KB		
Notebook Entry Tuning	00000000	00001E497270880	1.7KB		
Snapshot Tuning	00000000	820007002800488	7.9B		
Snapshot Tuning	00000000	8370C2000000000	80.9B		
Notebook Entry Tuning	00000000	A14441040090000	80.9B		
Notebook Entry Tuning	00000000	A14441040090000	80.9B		
PDF Image	00000000	9F580C518684CD0	56.4KB		
PDF Image	00000000	9F580C518684CD0	24.2KB		
PDF Image	00000000	F30003070000000	21.5KB		
PDF Image	00000000	8AD311C8352E667	21.5KB		
Notebook Entry Tuning	00000000	00001E497270880	80.9B		
Action Tuning	00000000	00000300F000000	2.8KB		
String Table	00000000	01170A467284000	4.0KB		
String Table	00000000	01170A467284000	4.0KB		
String Table	00000000	01170A467284000	4.0KB		
String Table	00000000	01170A467284000	4.0KB		
String Table	00000000	01170A467284000	4.0KB		

Données

Filter:

Displayname: DTS 240x240

Key: 00000000-00000000-9F580C518684CD0

Group: 00000000

Instance: 9F580C518684CD0

InstanceDescription: 11432960030473716000

Type: 00000000

XML **Données**

```

1 <?xml version="1.0" encoding="utf-8"?>
2 <I c="NotebookInjectorEntry" i="notebook_entry" m="notebook_injector.entry" n="Demetrio:NotebookInjector_ModName_CatsMax_Sub1_Entry_1" s="9274632688908"
3 <E n="entry_kind">CUSTOM</E>
4 <T n="entry_text">0x65955890<!--Daisy--></T>
5 <T n="entry_text_description">0x87D8EC68<!--Daisy is an adult female cat who belongs to Demetrio. She is an affectionate companion who loves spending
6 \n\n
7 She has a beautiful calico coat, with white paws and a bright white chest, while the rest of her fur is mostly black with warm brown patches.--></T>
8 <T n="entry_icon">2F7D0004:00000000:BAD311C8352E667</T>
9 <U n="content">
10 <T n="title">0xE8D96CED<!--Needs--></T>
11 <L n="text_blocks">
12 <T>0xBF4EEA3C<!--One of Daisy's favorite places is her cat tree, where she loves to climb, relax, and watch everything happening around her.--></T>
13 <T>0x181A6E26<!--Active, playful, and incredibly cuddly, Daisy is always ready for a game or a cozy nap after a day of exploring.--></T>
14 </L>
15 <T n="display_ingredient_counts">True</T>
16 <!-- <T n="ingredients_title">0x</T-->
17 <L n="ingredients">
18 <U>
19 <T n="object_definition">250264<!--base game object yarnBallPet 0x3D198--></T>
20 <T n="required_count">2</T>
21 </U>
22 <U>
23 <T n="object_definition">65854<!--base game object firewood 0x1013E--></T>
24 <T n="required_count">1</T>
25 </U>
26 </L>
27 <T n="footer">0xAF008D85<!--Please, bring her new toys!--></T>
28 </U>
29 <U n="custom_tooltip">
30 <T n="header">0x79EE6C08<!--A cat--></T>
31 <T n="title">0xB8172EAC<!--The Playful Sweetheart--></T>
32 <T n="subtitle">0x80A4573D<!--Status: Happy--></T>
33 <T n="accent_primary">0x4072082F<!--Rare--></T>
34 <T n="accent_secondary">0x8D5988E7<!--$ 400--></T>
35 <T n="accent_tertiary">0x393D451F<!--Created by her parents--></T>
36 <T n="subtext">0x5B0AE8AD<!--Calico style--></T>
37 <T n="footer">0x717BAADF<!--An affectionate calico who loves to play, cuddle, and watch the world from her favorite cat tree.--></T>
38 </U>

```

Local Tunings

Exporter
Importer

12. Logs and Error Reports

The Notebook Injector log is the first file to check whenever a Category, Subcategory, Assignment, Entry, Loot test, or enum check fails. In the paths below, `<installed Notebook Injector folder>` means the Player or Modder folder currently installed in Mods.

```
Documents/Electronic Arts/The Sims 4/Mods/<installed Notebook Injector folder>/demeterio_notebookinjector_log.txt
Documents/Electronic Arts/The Sims 4/Mods/<installed Notebook Injector folder>/demeterio_notebookinjector_log.1.txt
```

Level / mode	What modders usually see
INFO — normal mode	Startup information, cheat execution, version reports, and successful high-level operations.
WARNING / ERROR — normal mode	Missing references, rejected snippets, skipped Assignments, invalid fields, runtime failures, and enum conflicts.
DEBUG — Debuglog <code>.package</code> installed	Detailed registration data, enum snapshots/allocations, builder steps, tuning names, IDs, and validation flow.

12.1 Files to inspect before a bug report

File	Generic path
Notebook Injector log	Documents/Electronic Arts/The Sims 4/Mods/<installed Notebook Injector folder>/demeterio_notebookinjector_log.txt Documents/Electronic Arts/The Sims 4/Mods/<installed Notebook Injector folder>/demeterio_notebookinjector_log.1.txt
Last Exception	Documents/Electronic Arts/The Sims 4/lastException.txt
Last UI Exception	Documents/Electronic Arts/The Sims 4/lastUIException.txt

12.2 What an actionable error contains

- Source tuning name and decimal tuning instance ID.
- Category or Subcategory key.
- Notebook Entry tuning ID when applicable.
- Exact missing, forbidden, or incompatible field.
- Operation being performed, such as Assignment sanitization, runtime preparation, or a cheat command.

```
Invalid Notebook Injector entry assignment skipped.
Assignment: 15287987458547803290
Tuning: ModderName:NotebookInjector_ModName_Category_Subcategory_Assignment
Subcategory: ModdernameModnameCategorySubcategory
Errors:
- Entry 9274632668890891928: <specific validation message>
```

BUG REPORTS

Before asking for help, include the complete Debuglog output, `lastException.txt` and `lastUIException.txt` when present, game version, Notebook Injector release, affected XML files, required packs, and clear reproduction steps.

13. Cheat Commands

Enter the following commands through The Sims 4 cheat command interface. These Notebook Injector commands do not require `testingcheats on`. To activate the cheat console, do `ctrl + shift + c`.

EA cheat command	Purpose / warning
<code>demeterio.ni_version</code>	Displays Script release and Core ABI information, then writes addon version requirements to the log.
<code>demeterio.ni_getlist</code>	Writes registered custom Categories and Subcategories to the Notebook Injector log.
<code>demeterio.ni_getenums</code>	Runs enum compatibility checks and writes the diagnostic report to the log.
<code>demeterio.ni_clearcat <CATEGORY_KEY_OR_VALUE></code>	Removes every Notebook Entry in that Category from the active Sim.
<code>demeterio.ni_clearsubcat <SUBCATEGORY_KEY_OR_VALUE></code>	Removes every Notebook Entry in that Subcategory from the active Sim.
<code>demeterio.ni_loot <LOOT_TUNING_ID></code>	Applies the LootAction with that decimal tuning ID to the active Sim.


SAVE WARNING

`clearcat` and `clearsubcat` remove every matching Notebook Entry from the active Sim, including Native EA Entries and Entries created by other addons. Use a disposable save.

WHERE RESULTS APPEAR

Each command shows a short immediate result. Detailed lists, versions, enum diagnostics, and errors are written to the log. See [section 12](#).

FIGURE 10: Cheat command examples and log

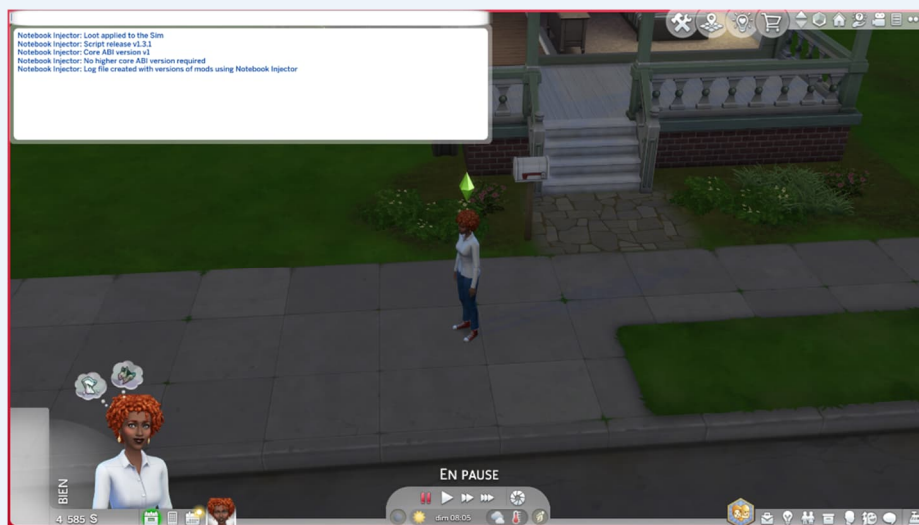

```

2026-07-19 17:08:46,257 DEBUG [ver.py:ver:after_loading_screen:104] Function: Display notifications after loading screen
2026-07-19 17:08:46,257 DEBUG [ver.py:ver:after_loading_screen:106] Start...
2026-07-19 17:08:46,257 DEBUG [compatibility.py:compatibility:check_and_log:27] Function: Validate notebook enums after loading
2026-07-19 17:08:46,257 DEBUG [compatibility.py:compatibility:check_and_log:29] Start...
2026-07-19 17:08:46,257 DEBUG [compatibility.py:compatibility:check_and_log:48] ...No critical late notebook enum conflict detected.
2026-07-19 17:08:46,257 DEBUG [compatibility.py:compatibility:check_and_log:53] ...Completed

2026-07-19 17:08:46,257 DEBUG [ver.py:ver:after_loading_screen:121] ...Completed

2026-07-19 17:10:33,858 INFO [cheat.py:cheat:log_cheat_start:32] Cheatcode: demeterio.ni_loot 10983016394681584791
2026-07-19 17:10:33,858 INFO [cheat.py:cheat:log_cheat_start:35] Start...
2026-07-19 17:10:33,860 INFO [cheat.py:cheat:demeterio_notebookinjector_loot:295] Loot 10983016394681584791 applied to the Sim
2026-07-19 17:10:33,860 INFO [cheat.py:cheat:_complete_cheat:46] Succeed: True
2026-07-19 17:10:33,860 INFO [cheat.py:cheat:_complete_cheat:49] ...Completed

2026-07-19 17:10:45,22 INFO [cheat.py:cheat:log_cheat_start:32] Cheatcode: demeterio.ni_version
2026-07-19 17:10:45,22 INFO [cheat.py:cheat:log_cheat_start:35] Start...
2026-07-19 17:10:45,22 INFO [cheat.py:cheat:_complete_cheat:46] Succeed: True
2026-07-19 17:10:45,23 INFO [cheat.py:cheat:_complete_cheat:49] ...Completed

```

14. Enum Compatibility

Notebook Categories and Subcategories are Native EA enums. Notebook Injector manages custom names and numeric values automatically so modders do not manually choose values or override the global Notebook mapping.

Rule	Behavior
Automatic allocation range	Custom values are allocated between 10 and 8191 for each managed enum type.
EA protection	Native EA names and occupied values are detected before custom allocation.
Notebook Injector addons	Unique keys receive compatible deterministic allocation through the shared core.
Known external mods	Known Category/Subcategory names and values can be reserved so Notebook Injector avoids mods that may load later. See the compatibility text shipped with the mod.
Late conflict detection	After initialization, Notebook Injector lists late-added names/values, including unknown mods that may be incompatible or may cause collisions.

NO MANUAL ENUM ID

Author unique `category_key` and `subcategory_key` names. Do not assign custom Category or Subcategory numbers in XML.

UNKNOWN OR INCOMPATIBLE MODS

The enum diagnostic can reveal Notebook mods not present in the known compatibility list. Modders may be asked to migrate their addon to Notebook Injector, or users can report the mod so its reservations and compatibility can be investigated.

CHEAT COMMAND

`demeterio.ni_getenums` then read the report in the log. See [section 12](#).

15. Troubleshooting and Bug Reports

FIRST STEP EVERY TIME

Open the log before changing XML. Also inspect `lastException.txt` and `lastUIException.txt` when the game or UI reports an error. See [section 12](#).

Symptom	First checks
Category or Subcategory does not appear	Check callback error, <code>min_version</code> , key format, duplicate/reserved key, target Variant, STBL, PNG resource, and required packs.
Entry does not appear	Check Assignment error, target Subcategory, Entry tuning ID, <code>entry_kind</code> , <code>format_type</code> , and Loot source. You need to have one Entry for each entry and to list each in Assignment.
Entry appears empty	The selected Native EA format may not display the authored field. Confirm the field contract for that kind and format.
Icon does not appear	Verify transparent PNG, Type 2F7D0004, Group 00000000, Instance, source dimensions, XML key, and whether a dynamic kind generates its own icon.
Tooltip is missing	<code>DEFAULT</code> and <code>COUNTRY_ITEM</code> use Native EA <code>tooltip_fields</code> ; <code>ANIMAL_FEED</code> uses dedicated <code>tooltip_*</code> fields; <code>CUSTOM</code> uses <code>custom_tooltip</code> ; <code>BAIT</code> and <code>RECIPE</code> normally generate tooltip data.
Whole Assignment is skipped	Read every Entry-prefixed error. One invalid Entry rejects that Assignment; unrelated Assignments continue.
Loot cheat succeeds but nothing is saved	The runtime guard may have blocked missing Recipe, participant, fish, gardening, or definition data.
Symbols look wrong	The Native EA font substituted the glyph. Use tested punctuation or remove decoration.
Another Notebook mod breaks	Run the enum diagnostic cheat, inspect the log, and report the other mod through the support link.

15.1 Information to collect before asking for help

- Complete Notebook Injector Debuglog output.
- `lastException.txt` and `lastUIException.txt` when present.
- Game version, Notebook Injector release, and installed packs.
- Affected Category, Subcategory, Entry, Assignment, and Loot XML files.
- Decimal tuning IDs, resource keys, and custom enum keys involved.
- Screenshot and exact reproduction steps on a disposable save.
- Name and download link of any other Notebook-related mod involved.

SUPPORT DESTINATION

Use the official support/download thread listed on the Contact page. Reproducible reports help determine whether the issue is an addon error, a Native EA limitation, or a compatibility reservation that should be added.

Guide Changelog

Version	Content
2026-07-19 – v1.3	Public documentation release

Sims 4 Modding Resources and References

These external resources are useful for learning Sims 4 tuning, inspecting current schemas, finding EA references, and requesting creator help. External sites may change independently of Notebook Injector.

Resource	Author	Why it is useful	Link
Tutorials and Resources for Modders	<i>Demeterio</i>	Curated Sims 4 modding resources and tutorials.	Open resource
S4Studio Software	<i>Sims 4 Studio</i>	Software for editing and creating XML tuning and package.	Open resource
Forum	<i>Sims 4 Studio</i>	Package editing, tuning, STBL and image-resource workflows.	Open resource
Creator Help	<i>Sims 4 Studio</i>	Creator support forum for Sims 4 Studio workflows.	Open resource
Tuning Builder	<i>Lot51</i>	Current searchable tuning descriptions and schemas.	Open resource
SimDex	<i>Lot51</i>	Modding tools, tutorials, game concepts, and reference links.	Open resource
Core Library	<i>Lot51</i>	Reusable tuning and scripting capabilities for modders.	Open resource
Sims 4 Modding Discussion	<i>Mod The Sims</i>	Technical modding discussion, research, and help threads.	Open resource
Sims 4 Toolkit	<i>Frankk</i>	Package and tuning tools.	Open resource
Sims 4 Tuning 101	<i>LeRoiDeTout (Dominic M)</i>	Detailed articles explaining tuning generation and Python/tuning relationships.	Open resource
Python 3.7 documentation	<i>Python</i>	Language and standard-library reference for Sims 4 Script Mods targeting Python 3.7.	Open resource

REFERENCE PRIORITY

For Notebook Injector-specific behavior, this guide and the release files remain the primary public contract. For Native EA classes, tunables, participants, and Loot behavior, consult current TDESC and game tuning references.

Final Contacts, Credits, Copyright, and Disclaimer



Contact	Information
Creator	Demeterio
Official website / Tumblr	demeterio.tumblr.com
Discord community	discord.gg/mPyRPSceS
GitHub repository	github.com/Demeterio/Notebook-Injector/latest
Mod The Sims page	modthesims.info/downloads/all/?u=10304233
SimFileShare folder	simfileshare.net/folder/273451/
Support / bug reports	Use the official Mod The Sims thread or the appropriate GitHub repository.

Copyright and permissions

© 2026 Demeterio – All rights reserved. Notebook Injector source code, original documentation, original XML examples, original branding, and original assets are the work of their respective author(s). No permission is granted to copy, modify, redistribute, repackage, mirror, sell, or republish those materials except where a separate written license or explicit permission states otherwise.

Third-party modders retain rights to their own original addon packages, text, code, translations, images, and other original work. Using Notebook Injector does not transfer ownership of a modder's addon to the Notebook Injector author. Modders remain responsible for respecting the licenses and rights of any third-party materials they include.

Electronic Arts and The Sims 4 disclaimer

The Sims 4, Electronic Arts, EA, Maxis, and all related names, logos, characters, UI, game code, tuning, classes, assets, and trademarks are the property of Electronic Arts Inc. and/or their respective rights holders. Notebook Injector is an unofficial fan-made modification and documentation project. It is not endorsed by, sponsored by, or affiliated with Electronic Arts Inc. No ownership is claimed over Native EA content. References to EA systems are provided only to explain interoperability and modding behavior.

No warranty

This mod and documentation are provided “as is,” without warranty. Game patches, other mods, load order, missing packs, unsupported tuning, or user modifications may change behavior. Always keep backups and test development builds on a disposable save.