

№11

Emacs

25 . .
2026

, ,



-
- -01-25
-
- 1032252476@rudn.ru





Linux


Emacs.



- Emacs
- lab11.sh
-
-
- ,

Emacs

Emacs

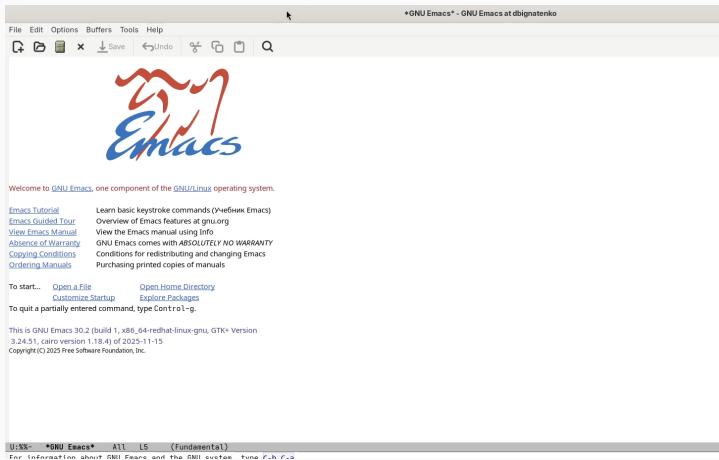


lab11.sh

lab11.sh

C-x C-f

lab11.sh.

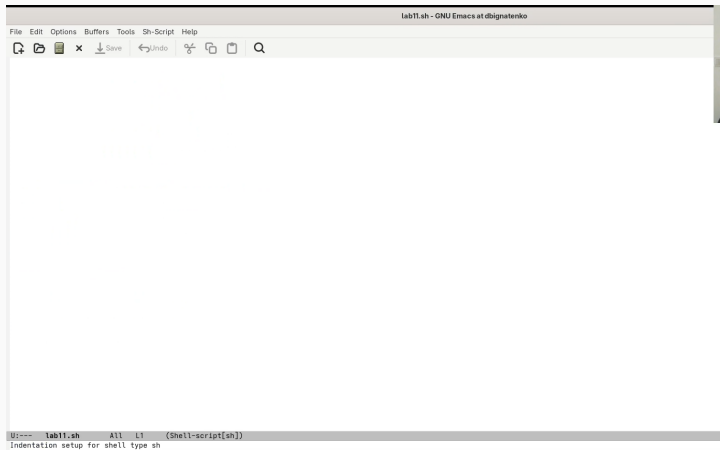


. 2:

lab11.sh



C-x C-s.

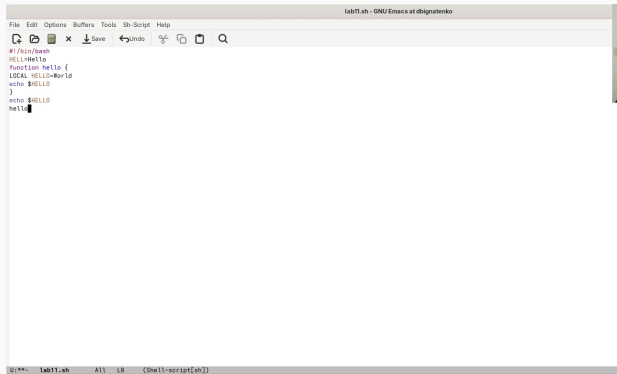

```
#!/bin/bash
HELLO=Hello
function hello {
  LOCAL HELLO=World
  echo $HELLO
}
echo $HELLO
hello
```


. 3:



```
#!/bin/bash
```



C-k, C-y, C-space, M-w, C-w, C-/.

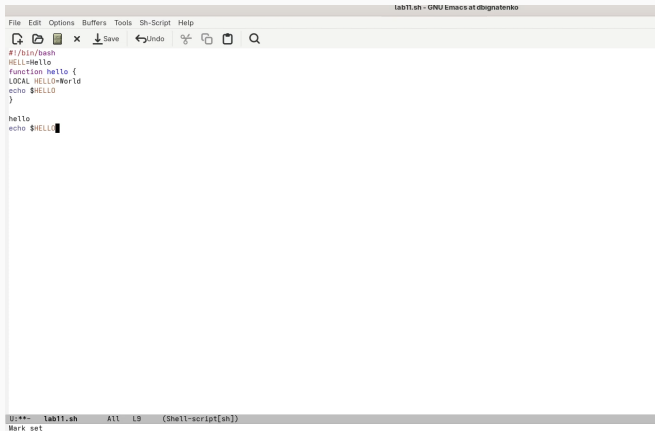

```
lab11.sh - GNU Emacs at dbignatenko
File Edit Options Buffers Tools Sh-Script Help
[Icons: Undo, Redo, Save, Undo, Copy, Paste, Find]
#!/bin/bash
HELL=Hello
function hello {
  LOCAL HELLO=World
  echo $HELLO
}

hello
echo $HELLO
```

U:++- lab11.sh All LS (Shell-script[sh]) Mark set



C-a, C-e, M-<, M->

```
#!/bin/bash
HELL=Hello
function hello {
  LOCAL HELLO=World
  echo $HELLO
}

hello
echo $HELLO
#!/bin/b
```

00:00 Lab11.sh All L1 (Shell-script[sh])
Undo


. 6:

```
#!/bin/bash
HELL=Hello
function hello {
  LOCAL HELLO=World
  echo $HELLO
}
```




C-x C-b

C-x b

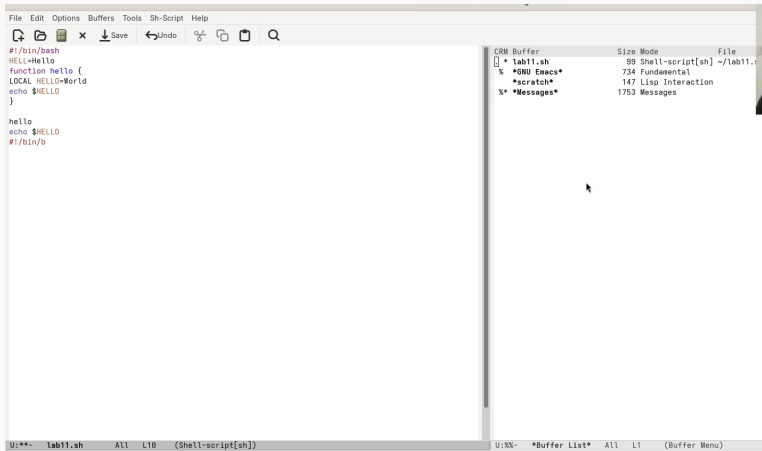



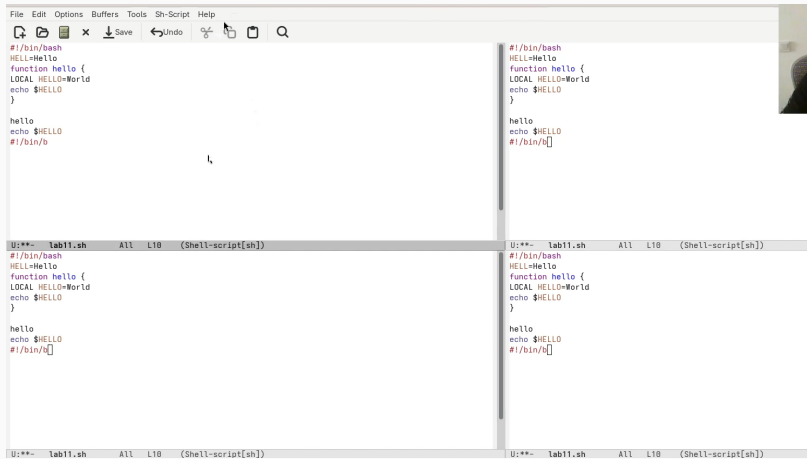



C-s

M-%.

U:**~ *scratch* All L2 (Lisp Interaction ElDoc)

```
#!/bin/bash
HELL=Hello
function hello {
  LOCAL HELLO=World
  echo $HELLO
}
```

```
hello
echo $HELLO
#!/bin/b
```

U:**~ lab11.sh All L3 (Shell-script[sh] Isearch)

Wrapped I-search: hello

. 12:

U:**~ *scratch* All L2 (Lisp Interaction ElDoc)

```
#!/bin/bash
HELL=Hello
function hello {
  LOCAL HELLO=World
  echo $HELLO
}
```

M-s o

M-s o

The screenshot shows the Emacs editor interface with a search window open. The search window title is "match for 'new\$' in buffer: lab11.sh". The search results show a single match: "9:echo \$HELLO_NEW". The main editor window shows the contents of the file "lab11.sh", which includes a shell script with a function "hello" and a call to "hello". The status bar at the bottom indicates the search was successful, finding 1 match for "new\$".

```

Какой-то текст
[]

U:*** *scratch* All L2 (Lisp Interaction ElDoc)
#!/bin/bash
HELL=Hello
function hello {
  LOCAL HELLO=World
  echo $HELLO
}

hello
echo $HELLO_NEW
#!/bin/b█

U:*** lab11.sh All L18 (Shell-script[sh])
Searched 1 buffer; 1 match for "new$"

[] match for "new$" in buffer: lab11.sh
9:echo $HELLO_NEW

U:*** *Occur* All L1 (Occur)
Mark saved where search started
Quit
Mark saved where search started
C-M-g is undefined
Mark saved where search started
s-% is undefined
funcall-interactively: Text is read-only
Quit
Mark set
Replaced 1 occurrence
funcall-interactively: Text is read-only [12 times]
Searched 1 buffer; 6 matches for "hello"
Searched 1 buffer; no matches for "$func"
Mark set
Searched 1 buffer; 1 match for "new$"
Auto-saving...
[]

U:*** *Messages* Bot L92 (Messages)

```



- Emacs
-
- , ,
- ,