

WHAT I WISH I KNEW BEFORE STARTING WITH NUXT 3

Vue.js Meetup Hamburg

Hamburg, 16.04.2025

Denis Lugowski

Senior Full Stack Developer 

- Nuxt user since 2020 (Nuxt 2)
- Early adopter of Nuxt 3



OUR JOURNEY

- Proxying
- Modularization
- Server-side Rendering
- Nuxt Ecosystem

PROXYING

- Same-Origin Policy (SOP) disallows browser scripts reaching out to different origin
- Ways to overcome:
 - Cross-Origin Resource Sharing (CORS)
 - Proxy

PROXYING - DEVPROXY

```
nuxt.config.ts

1 {
2   nitro: {
3     devProxy: {
4       '/proxy/example': { target: 'https://example.com', changeOrigin: true }
5     }
6   }
7 }
```




PROXYING - ROUTERULES



PROXYING - RUNTIME PROXY

```
server/api/[...].ts

1 import type { H3Event } from 'h3'
2 import { joinURL } from 'ufo'
3
4 export default defineEventHandler((event: H3Event) => {
5   const { exampleUrl } = useRuntimeConfig().public // https://prod.example.com
6   const path = event.path.replace(/^\/api\/$/, '') // /api/... -> /...
7   const target = joinURL(exampleUrl, path) // https://prod.example.com/...
8
9   return proxyRequest(event, target)
10 })
```



(YT Video @TheAlexLichter)

MODULARIZATION

1. Vue Plugin
 2. Nuxt Module
 3. Nuxt Layer
- All in common:
 - Encapsulation of code
 - Share code between applications


VUE PLUGIN




```
1 import type { App, Plugin } from 'vue'
2 import MyComponent from './components/MyComponent.vue'
3
4 const myPlugin: Plugin = {
5   install(vue: App, options: any) {
6     vue.provide('i18n', options.i18n)
7     vue.component('MyComponent', MyComponent)
8   }
9 }
10
11 export { myPlugin }
```

NEXT MODULE

```
$ npx nuxi init -t module my-nuxt-module
```

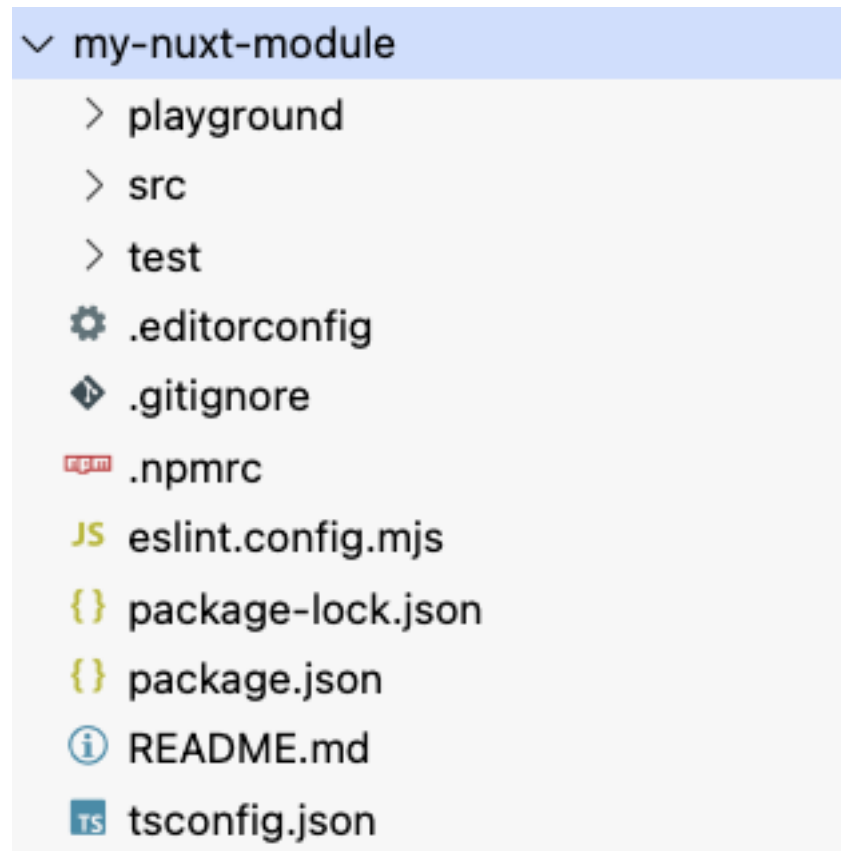

NEXT MODULE

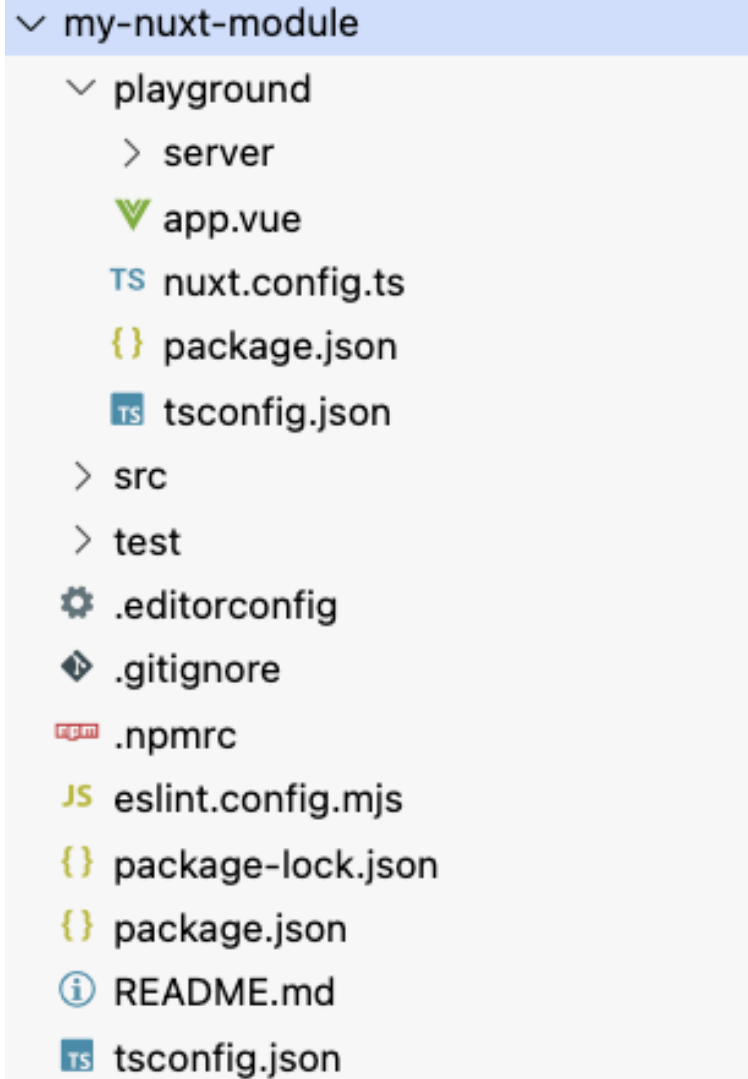

A file explorer view showing the structure of a Nuxt module project named 'my-nuxt-module'. The root directory is expanded, showing a 'playground' subdirectory and several configuration files. The 'playground' directory is further expanded, showing a 'server' subdirectory and a list of files including 'app.vue', 'nuxt.config.ts', 'package.json', 'tsconfig.json', 'src', 'test', '.editorconfig', '.gitignore', '.npmrc', 'eslint.config.mjs', 'package-lock.json', 'package.json', 'README.md', and 'tsconfig.json'.

- ✓ my-nuxt-module
 - ✓ playground
 - > server
 - ▼ app.vue
 - TS nuxt.config.ts
 - { } package.json
 - TS tsconfig.json
 - > src
 - > test
 - ⚙ .editorconfig
 - 🔒 .gitignore
 - 📄 .npmrc
 - JS eslint.config.mjs
 - { } package-lock.json
 - { } package.json
 - 📖 README.md
 - TS tsconfig.json

Nuxt MODULE

- Control almost every aspect of Nuxt
- Technical limitations were a dealbreaker

```
[ERROR] No matching export in  
      "node_modules/.pnpm/unicorn-magic@0.1.0/node_modules/  
      unicorn-magic/default.js" for import "toPath"
```

NUXT LAYER

- Nuxt Layer are partial Nuxt apps
- Proxies easily added inside server directory (runtime proxy 🤗)
- Layer + Auto-Import = usages harder to track

SERVER-SIDE RENDERING

- useFetch(), useAsyncData() composables are your friends



```
1 const { data, status, error, refresh, clear } = await useAsyncData(  
2   'chuckNorrisJoke',  
3   () => $fetch('https://api.chucknorris.io/jokes/random')  
4 )
```

SERVER-SIDE RENDERING

- Issue that data was fetched twice even with useAsyncData 🤔



```
1 await useAsyncData(async () => {  
2   await subscriptionMasterDataStore.load()  
3 })
```

SERVER-SIDE RENDERING

- Issue that data was fetched twice even with `useAsyncData` 🤔

Commit 8a200d92  authored Sep 22, 2023, 14:20 by  Lugowski, Denis (OTE-E)

```
54    49    await useAsyncData(async () => {  
55    50        try {  
56    51            await subscriptionMasterDataStore.load()  
52    52    +     return true  
53    53    +   } catch (e) {  
54    54    +     console.error(e)  
55    55    +   }  
56    56    + })
```

SERVER-SIDE RENDERING

Commit 9da77db

Beta Give feedback Browse files

MaxKostenko authored on Sep 28, 2023 ✓ 3 / 3 · Verified

docs: extend description of handler for useAsyncData (#23389)

main (#23389) · v3.14.0 ... v3.8.0

1 parent c54719e commit 9da77db

Filter files...

docs/3.api/1.composables


use-async-data.md

1 file changed +1 -1 lines changed


```
docs/3.api/1.composables/use-async-data.md
@@ -51,7 +51,7 @@ type AsyncDataRequestStatus = 'idle' | 'pending' | 'success' | 'error'
51 51 ## Params
52 52
53 53 * key: a unique key to ensure that data fetching can be properly de-duplicated across
    requests. If you do not provide a key, then a key that is unique to the file name and line number
    of the instance of [useAsyncData](/docs/api/composables/use-async-data) will be generated for
    you.
54 - * handler: an asynchronous function that returns a value
+ * handler: an asynchronous function that must return a truthy value (for example, it should
+   not be undefined or null) or the request may be duplicated on the client side
55 55 * options:
56 56   * _server: whether to fetch the data on the server (defaults to true)
57 57   * _lazy: whether to resolve the async function after loading the route, instead of blocking
    client-side navigation (defaults to false)
```

Comments 0


ECOSYSTEM

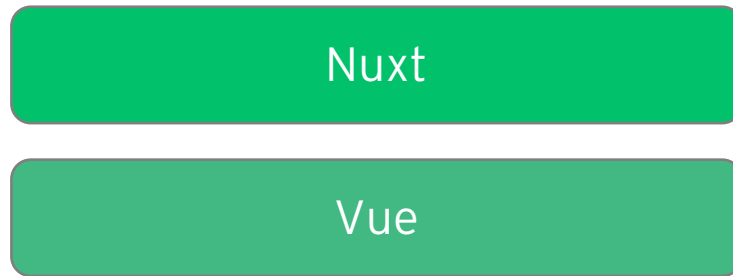

Core Modules

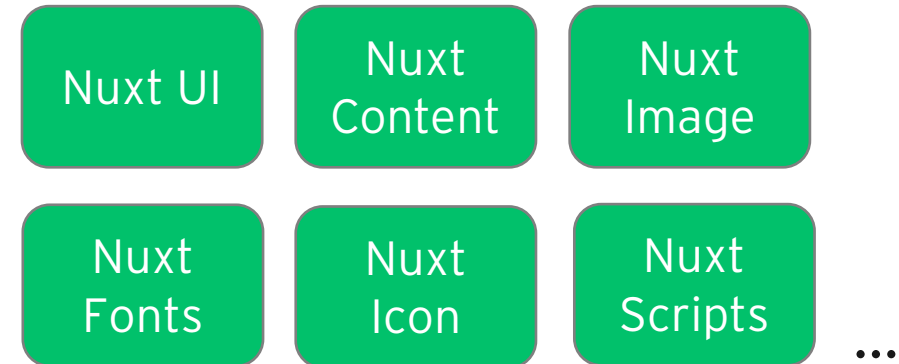


Community/3rd Party Modules

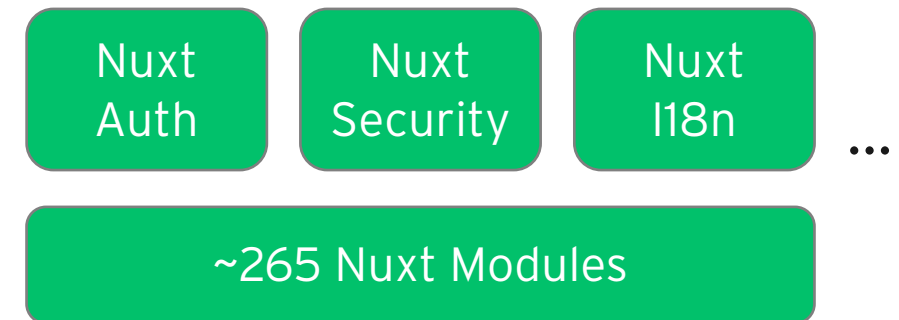


ECOSYSTEM




Core Modules

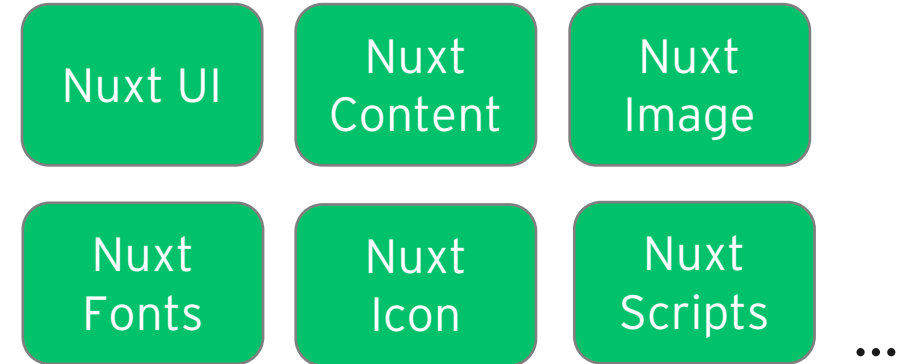


Community/3rd Party Modules

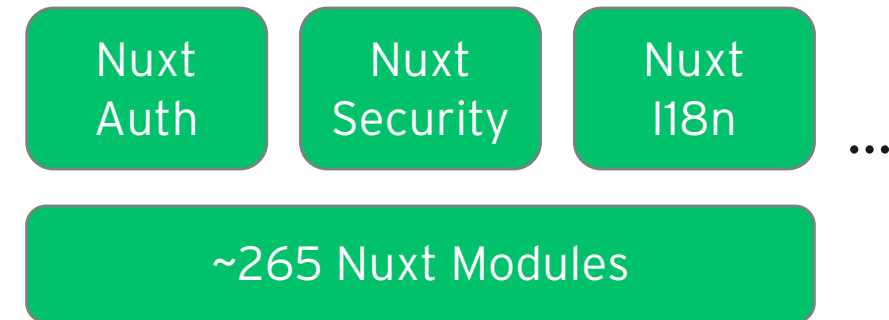


ECOSYSTEM

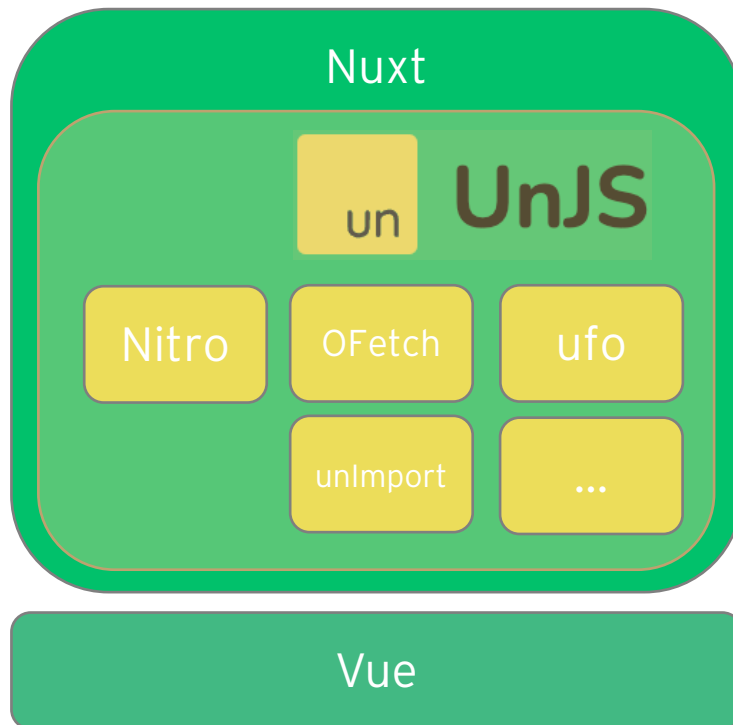

Core Modules

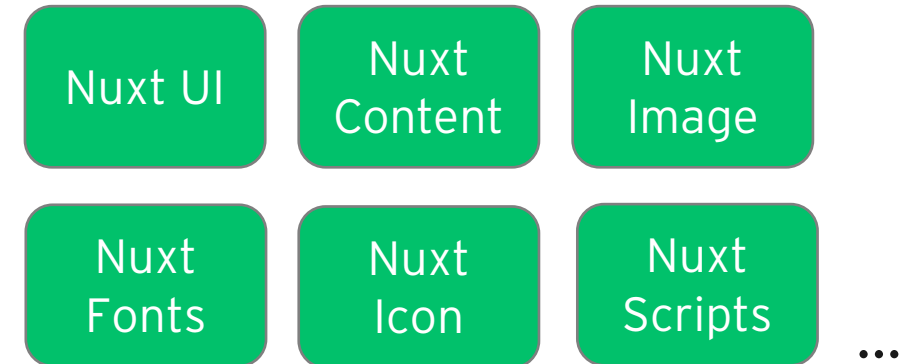

Community/3rd Party Modules

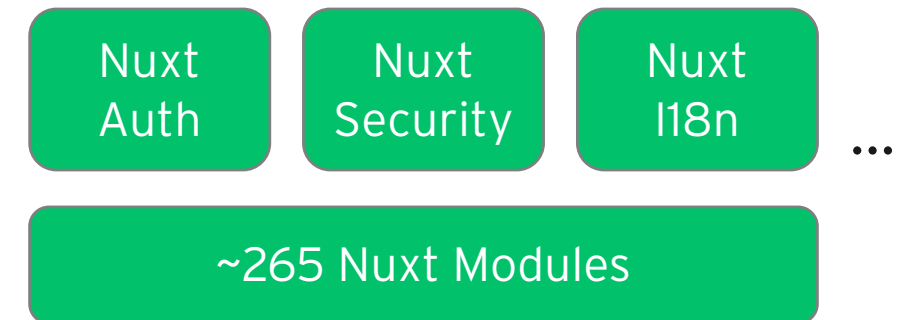

YOUR TAKE-AWAYS

- Pick from devProxy, routeRules, runtime proxy
- Nuxt Layers > Nuxt Modules > Vue Plugin
- Reading docs is where we aim, but diving in code reveals the game
- Nuxt's ecosystem is huge - make use of it

QUESTIONS? 🙋🙋

