

DevClub

# Руководство по настройке автоматического создания мероприятия на сайте eventbrite.com

Денис Жадан  
19.5.2024

## Оглавление

Настройка Телеграм канала .....	2
Создание бота в Telegram.....	2
Добавление бота в Telegram-канал .....	2
Узнать ID Телеграм канала.....	2
Настройка «Actions secrets» .....	3

## Настройка Телеграм канала

### Создание бота в Telegram

Найдите чат с ботом @BotFather и напишите ему сообщение командой /newbot.

Введите имя для бота.

Введите username (строчными буквами, должно заканчиваться на **\_bot**).

Получите токен, который потребуется для его настройки.

### Добавление бота в Telegram-канал

Откройте в меню «управление каналом» в Telegram.


Выберите «Подписчики»

Выберите “Добавить участников”.

Введите название бота через символ “@” в поиске.

Выберите бота из списка и подтвердите добавление, нажав на кнопку "Да"

Установите необходимые права для бота в канале:

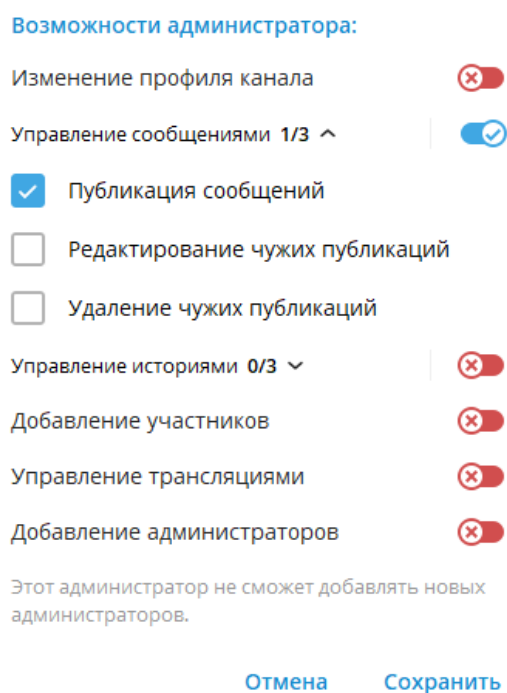

### Узнать ID Телеграм канала

Перешлите боту @userinfobot сообщение из вашего канала, и он предоставит вам сводку о ссылке, ID Телеграм канала.

## Настройка «Actions secrets»

На странице репозитория перейдите в раздел “Settings”.

В боковом меню выберите “Secrets and variables”.

Нажмите кнопку “New repository secret”.

Укажите имя секрета и его значение, затем нажмите “Add secret”.

Список необходимых секретов:

- ❖ EVENTBRITE\_API\_TOKEN
- ❖ EVENTBRITE\_ORGANIZATION\_ID
- ❖ TELEGRAM\_API\_TOKEN
- ❖ TELEGRAM\_CHAT\_ID

The screenshot shows the GitHub repository settings page for 'Actions secrets and variables'. The left sidebar contains a navigation menu with categories: General, Access, Code and automation, Security, and Integrations. The 'Secrets and variables' section is expanded, showing 'Actions' as the selected option. The main content area is titled 'Actions secrets and variables' and includes a description of secrets and variables, tabs for 'Secrets' and 'Variables', and two sections: 'Environment secrets' (showing 'This environment has no secrets.') and 'Repository secrets' (showing a list of secrets).

**Actions secrets and variables**

Secrets and variables allow you to manage reusable configuration data. Secrets are **encrypted** and are used for sensitive data. [Learn more about encrypted secrets](#). Variables are shown as plain text and are used for **non-sensitive** data. [Learn more about variables](#).

Anyone with collaborator access to this repository can use these secrets and variables for actions. They are not passed to workflows that are triggered by a pull request from a fork.

Secrets Variables

**Environment secrets**

This environment has no secrets.

[Manage environment secrets](#)

**Repository secrets** [New repository secret](#)

Name ↕	Last updated
EVENTBRITE_API_TOKEN	1 minute ago <a href="#">edit</a> <a href="#">delete</a>
EVENTBRITE_ORGANIZATION_ID	1 minute ago <a href="#">edit</a> <a href="#">delete</a>
TELEGRAM_API_TOKEN	1 minute ago <a href="#">edit</a> <a href="#">delete</a>
TELEGRAM_CHAT_ID	now <a href="#">edit</a> <a href="#">delete</a>